



Pushing Performance



People | Power | Partnership

HARTING Industrial Connectors Han®

Contents	Chapter
Industrial Connectors Technical characteristics	00
Han A® Slim Construction Size (up to 16 amperes)	01
Han D® / DD® / Han® DDD up to 216 contacts	02
Han E® / Han® ES/ESS/EE/EEE for 16 amperes	03
Han Hv E® / Han® Hv ES for higher voltages	04
Han-Com® Combination Connectors	05
Han-Modular® modular connectors	06
Han® HsB for higher currents	07
Han® AV Terminal Block Connectors	08
Staf® for low voltages	09
Han-Snap® for the use in switch cabinets	11
Han-Port® Interface for power and signals	12
Han® Q compact connectors	13
Han® HC-Modular High Current Connectors	14
Han-Power® Energy Bus Components	15
Han® HMC for High Mating Cycles	16
Han® High Temp for high temperatures	17
Han-Brid® Industrial Bus Interface	19
Han® PCB termination	20
Han-Yellok®	25
Han-Eco®	29
Han® Hoods and Housings with metric thread	31
Han® Thermocouple	41
Han® GND	42
Accessories	80
Tools	90

Economic and Reliable Connections

Specifications

DIN EN 60664-1 (VDE 0110-1)
Principles,
requirements and tests

DIN EN 61984 (VDE 0627)
Connectors,
Safety requirements and tests

Note:

The connectors included in this catalogue should not be coupled or decoupled under electrical load unless otherwise stated.

The connector must not be powered-up in the un-mated condition. This is also true if the connector is closed with a protection cover, unless otherwise stated.

The provision of protection against electric shock is the responsibility of the user. Protection can be achieved by the use of HARTING hoods and housings coupled with/or alternatively appropriate installation methods provided by the user.

Connectors of the same or different series being mounted side by side may be protected against incorrect mating by the use of coding options.

Standard

DIN EN 175301-801

Approvals

UL File No. E 235076 (www.ul.com)

CSA File No. LR 18753, SEV
for inserts

GL certificate No. 61754 - 14 HH



Certified according to EN ISO 9001
in design/development, production,
installation and servicing

General information

It is the customer's responsibility to check whether the components illustrated in this catalogue also comply with different regulations from those stated in special fields of applications.

We reserve the right to modify designs or substance of content in order to improve quality, keep pace with technological advancement or meet particular requirements in production.

No part of this catalogue may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed by means of electronic systems without the prior written consent of HARTING Electric GmbH & Co. KG, Espelkamp. We are bound by the German version only.

Terminations

- Screw terminal
- Crimp terminal
- Cage-clamp terminal
- Wrap terminal
- Solder terminal
- Axial-screw terminal
- Rapid terminal
- IDC termination

Inserts

- Leading protective ground
- Polarised for correct mating
- Interchangeability of male and female inserts in hoods and housings
- Captive fixing screws
- Can be used with hoods and housings, or for rack and panel applications

Hoods/Housings

- Standard Hoods/Housings
- Hoods/Housings for harsh environmental requirements
- Hoods/Housings for intrinsically safe plant
- Degree of protection IP 65
- Electrical connection with protective ground
- High mechanical strength and vibration-resistance ensured by locking levers
- Spring-loaded covers in shockproof thermoplastic or metal covers, both lockable

Accessories

- Extensive range of cable protection and sealing accessories
- Protective covers available
- Coding options for incorrect mating protection

For "non standard applications" we can manufacture designs to match your requirements. Please discuss requirements with us.

HARTING components help you to construct top quality products – economically and in line with market requirements.

Transforming customer wishes into concrete solutions



The HARTING Technology Group is skilled in the fields of electrical, electronic and optical connection, transmission and networking technology, as well as in manufacturing, mechatronics and software creation. The Group uses these skills to develop customized solutions and products such as connectors for energy and data-transmission/data-networking applications, including, for example, mechanical engineering, rail technology, wind energy plants, factory automation and the telecommunications sector. In addition, HARTING also produces electro-magnetic components for the automobile industry and offers solutions in the field of housing technology and shop systems.

The HARTING Group currently comprises 58 sales companies and production plants worldwide employing a total of about 5,000 staff.



We aspire to top performance.

Connectors ensure functionality. As core elements of electrical and optical termination, connection and infrastructure technologies, they are essential in enabling the modular construction of devices, machines and systems across an extremely wide range of industrial applications. Their reliability is a crucial factor guaranteeing smooth functioning in the manufacturing area, telecommunications, applications in medical technology – in short, connectors are at work in virtually every conceivable application area. Thanks to the ongoing development of our technologies, our customers enjoy investment security and benefit from durable, long-term functionality.

Wherever our customers are, we're there.

Increasing industrialization is creating growing markets that are characterized by widely diverging demands and requirements. What these markets all share in common is the quest for perfection, increasingly efficient processes and reliable technologies. **HARTING** is providing these technologies – in Europe, the Americas and Asia. In order to implement customer requirements in the best possible manner, the **HARTING** professionals at our international subsidiaries engage in up-close, partnership-based interaction with our customers, right from the very early product development phase.

Our on-site staff form the interface to the centrally coordinated development and production departments. In this way, our customers can rely on consistently high, superior product quality – worldwide.

Our claim: Pushing Performance.

HARTING provides more than optimally attuned components. In order to offer our customers the best possible solutions, on request **HARTING** contributes a great deal more and is tightly integrated into the value-creation process.

From ready-assembled cables through to control racks or ready-to-go control desks. Our aim is to generate maximum benefit for our customers – with no compromises!

Quality creates reliability – and warrants trust.

The **HARTING** brand stands for superior quality and reliability – worldwide. The standards we set are the result of consistent, stringent quality management that is subject to regular certifications and audits.

EN ISO 9001, the EU Eco-Audit and ISO 14001:2004 are key elements here. We take a proactive stance towards new requirements, which is why **HARTING** is the first company worldwide to have obtained the new IRIS quality certificate for rail vehicles.



HARTING technology creates added value for customers. Technologies by **HARTING** are at work worldwide. **HARTING's** presence stands for smoothly functioning systems powered by intelligent connectors, smart infrastructure solutions and sophisticated network systems. Over the course of many years of close, trust-based cooperation with its customers, the **HARTING** Technology Group has become one of the leading specialists globally for connector technology. We offer individual customers specific and innovative solutions that go beyond the basic standard functionalities. These tailored solutions deliver sustained results, ensure investment security and enable customers to achieve significant added value.

Opting for HARTING opens up an innovative, complex world of concepts and ideas.

In order to develop and produce connectivity and network solutions serving an exceptionally wide range of connector applications in a professional and cost-effective manner, **HARTING** not only commands the full array of conventional tools and basic technologies. Above and beyond these capabilities, **HARTING** is constantly harnessing and refining its broad base of knowledge and experience to create new solutions that also ensure continuity. To secure its lead in know-how, **HARTING** draws on a wealth of sources from its in-house research and applications.

Salient examples of these sources of innovative knowledge include microstructure technologies, 3D design and connection technolo-

gy, high-temperature and ultrahigh-frequency applications that are finding use in telecommunications and automation networks, in the automotive industry, or in industrial sensor and actuator applications, RFID and wireless technologies, in addition to packaging and housing made of plastics, aluminum and stainless steel.

HARTING overcomes technological limitations.

Drawing on the comprehensive resources of the group's technology pool, **HARTING** devises practical solutions for its customers. Whether this involves industrial networks for manufacturing automation, or hybrid interface solutions for wireless telecommunication infrastructures, 3D circuit carriers with microstructures, or cable assemblies for high-temperature applications in the automotive industry – **HARTING** technologies offer not only components, but comprehensive solutions attuned to individual customer requirements and preferences. The range of cost-effective solutions covers ready-to-use cable configurations, completely assembled backplanes and board system carriers, as well as fully wired and tested control panels.

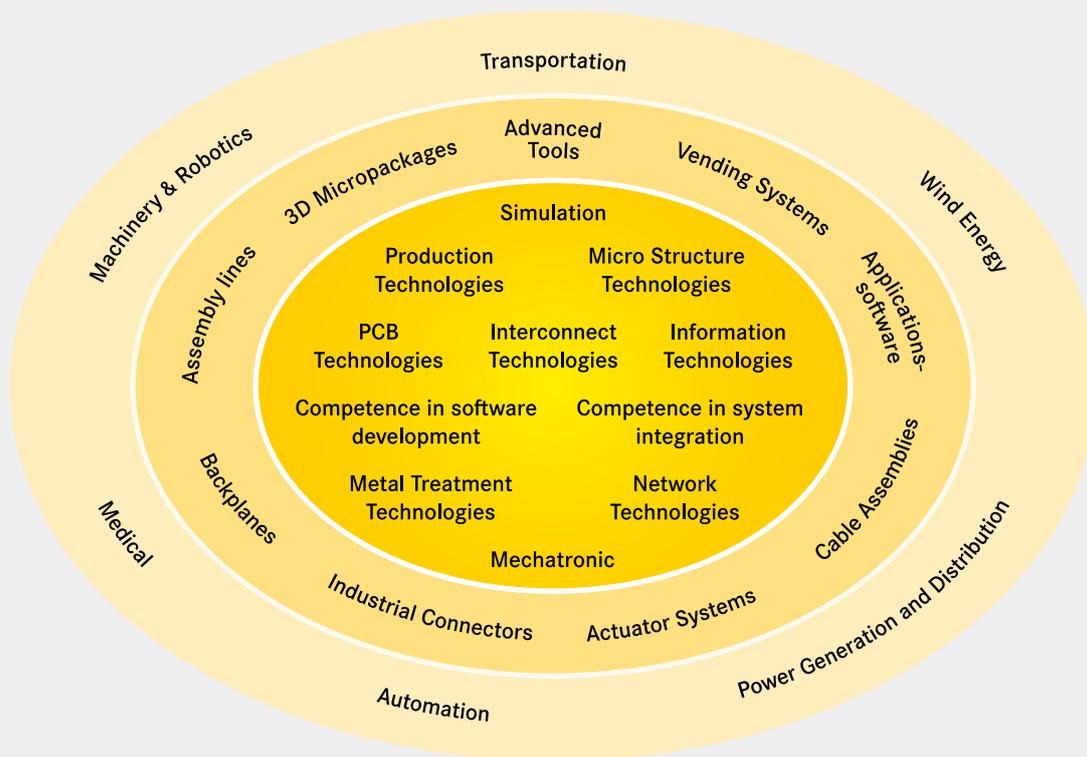
In order to ensure the future-proof design of RF and EMC-compatible interface solutions, the central **HARTING** laboratory (certified to EN 45001) employs simulation tools, as well as experimental, testing and diagnostics facilities all the way to scanning electron microscopes. In addition to product and process suitability considerations, lifecycle and environmental aspects play a key role in the selection of materials and processes.



HARTING's knowledge is practical know-how that generates synergy effects.

HARTING commands decades of experience with regard to the applications conditions involved in connections in telecommunications, computer, network and medical technologies, as well as industrial automation technologies, e.g. in the mechanical engineering and plant engineering areas, in addition to the power generation industry and the transportation sector. HARTING is highly

conversant with the specific application areas in all of these technology fields. In every solution approach, the key focus is on the application. In this context, uncompromising, superior quality is our hallmark. Every new solution found invariably flows back into the HARTING technology pool, thereby enriching our resources. And every new solution we go on to create will draw on this wealth of resources in order to optimize each and every individual solution. HARTING is synergy in action.





The **HARTING eCatalogue / eShop** can be found on our homepage at www.HARTING.com or at the direct link www.eCatalogue.HARTING.com.

The HARTING e-Catalogue is your platform for conveniently selecting individual products as well as configuring complete solutions. Our comprehensive product pages provide you with all necessary technical information and CAD files in various formats for downloading. You may also contact our technical sales department directly.

Find out about **product innovations and news** on the start page of the HARTING e-Catalogue or go directly to www.product-news.HARTING.com.

Registered users can take advantage of MyHARTING to check on availability or prices, and to place or track their orders. Here, your customized „HARTING history“ provides you with a list of your inquiries, quotations and more.

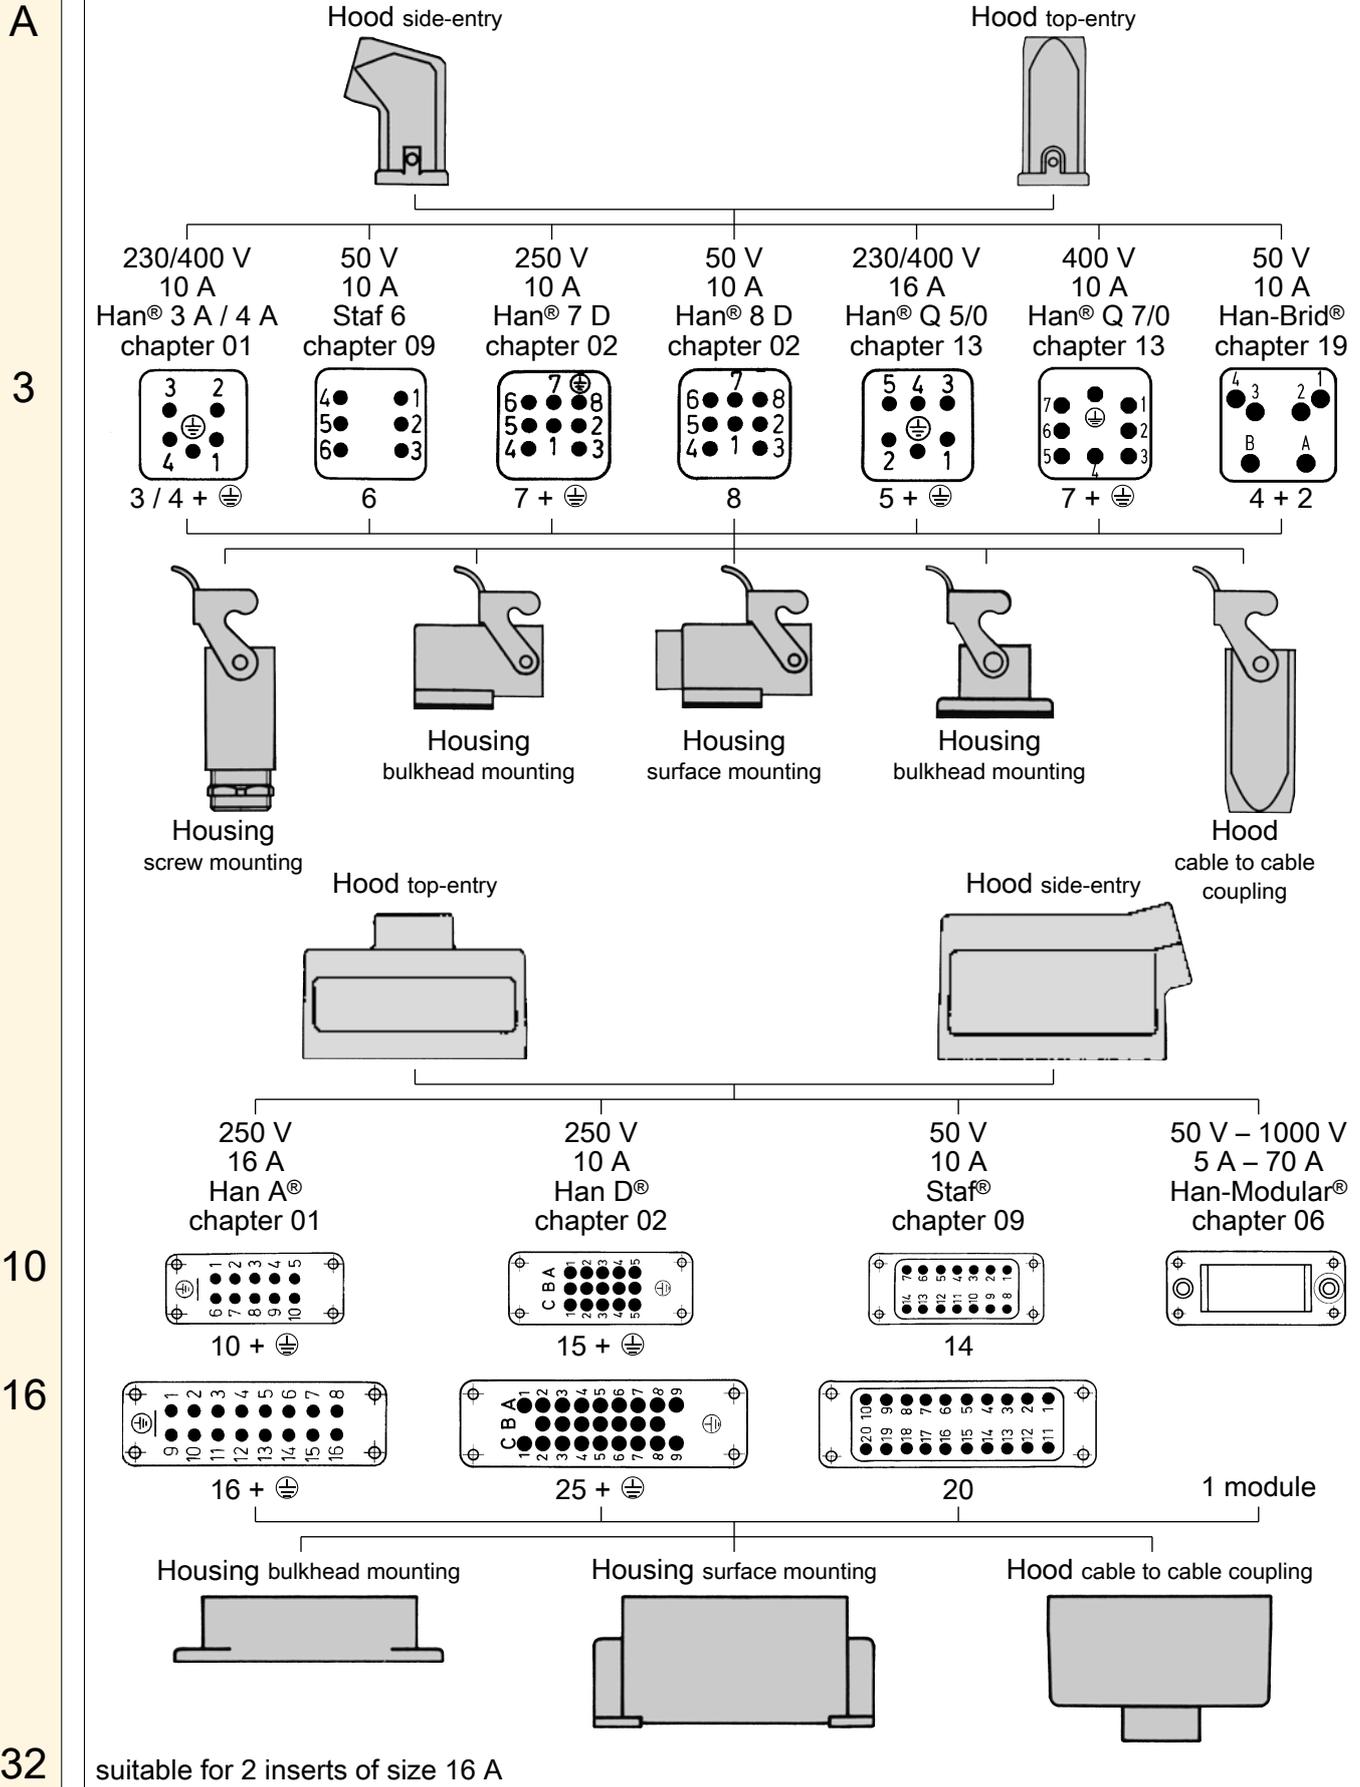
Sign up now for your free e-Catalogue account at HARTING!

www.eShop.HARTING.com

Contents	Page
Summary Han®-sizes	Info 00.2
How to order connectors	Info 00.4
Hoods/Housings connector insert protection	Info 00.5
Types of hood/housing	Info 00.6
Locking systems	Info 00.8
Connection technology	Info 00.9
Electrical engineering data	Info 00.18
Current carrying capacity	Info 00.21
Metric cable thread	Info 00.23
Declaration of Conformity	Info 00.24

Info


Size Description




Info
00
·
2

Size Description

B




Hood side-entry




Hood top-entry

250 V 10 A Han D® chapter 02	250 V 10 A Han DD® chapter 02	500 V 16 A Han E® Han® ES chapter 03	500 V 16 A Han® EE Han® EEE chapter 03	400/690 V 35 A Han® HsB chapter 07	830 V 16 A Han Hv E® Han® Hv ES chapter 04	160 V – 690 V 10 A – 100 A Han-Com® chapter 05	50 V – 5000 V 5 A – 200 A Han- Modular® chapter 06
---------------------------------------	--	--	--	---	--	---	--


6




24 + ⚡



6 + ⚡




10 + ⚡




2 modules


10




42 + ⚡




10 + ⚡




18 + ⚡



3 + ⚡




4/4 + ⚡
8/24 + ⚡




3 modules


16




40 + ⚡




72 + ⚡




16 + ⚡




40 + ⚡
32 + ⚡




6 + ⚡



6 + ⚡




6/36 + ⚡
4/2 + ⚡




4 modules


24



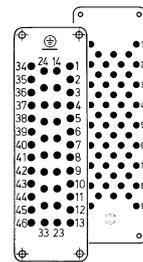
64 + ⚡




108 + ⚡




24 + ⚡




64 + ⚡
46 + ⚡



16 + ⚡
10 + ⚡

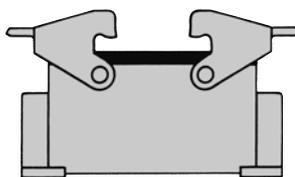


4/8 + ⚡
6/6 + ⚡

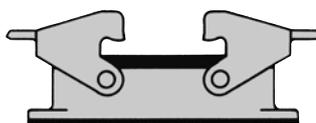


6 modules

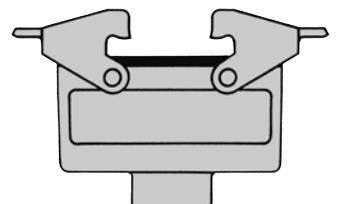
Housing surface mounting



Housing bulkhead mounting



Hood cable to cable coupling



32

suitable for 2 inserts of size 16 B

48

suitable for 2 inserts of size 24 B

Info

For a complete connector components may be ordered from the following sub headings

Cable entry protection

- Universal cable glands
- Special cable clamp with strain relief, bell mouthed cable fitting and anti-twist devices
- Cable gland with normal or multiple seal
- Extensive range of accessories

Hoods

- low or high construction
- top or side cable entry
- 1 or 2 locking levers

Male insert with

- screw terminal or crimp terminal (order contacts separately) or cage-clamp terminal

Female insert with

- screw terminal or crimp terminal (order contacts separately) or cage-clamp terminal


Housings

- Housing (bulkhead mounting) with or without thermoplastic or metal covers
- 1 or 2 locking levers
- Housing (surface mounting) low or high construction with or without thermoplastic or metal covers
- 1 or 2 locking levers
- 1 or 2 cable entries
- Hood (cable to cable) low or high construction for cable to cable connections

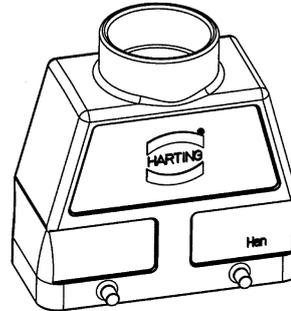
Accessories

- Protective covers available
- Code and guide pins for coding
- Special insert fixing screws for use without hoods and housings
- Label according to CSA-approval

Suitable hoods and housings will be found on the same page.



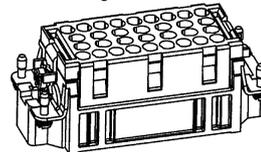
Cable clamp



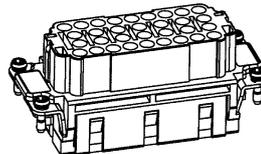
Hood



Male contacts



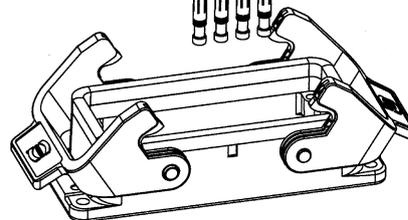
Male insert



Female insert



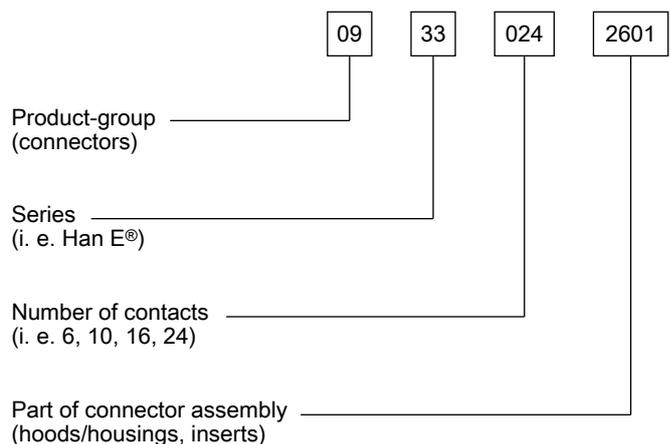
Female contacts



Housing

Part number explanation

Our computerized ordering system uses the following code:



Info

Info
00
·
4

The connector's housing, sealing and locking mechanism protect the connection from external influences such as mechanical shocks, foreign bodies, humidity, dust, water or other fluids such as cleansing and cooling agents, oils, etc. The degree of protection the housing offers is explained in the IEC 60529, DIN EN 60529, standards that categorize enclosures according to foreign body and water protection.

The following table shows the different degrees of protection.

Code letters
(International Protection)

IP

First Index Figure
(Foreign bodies protection)

6

Second Index Figure
(Water protection)

5

Index figure	Degree of protection			Index figure	Degree of protection		
0	No protection		No protection against accidental contact, no protection against solid foreign bodies	0	No protection against water		No protection against water
1	Protection against large foreign bodies		Protection against contact with any large area by hand and against large solid foreign bodies with $\varnothing > 50$ mm	1	Drip-proof		Protection against vertical water drips
2	Protection against medium sized foreign bodies		Protection against contact with the fingers, protection against solid foreign bodies with $\varnothing > 12$ mm	2	Drip-proof		Protection against water drips (up to a 15° angle)
3	Protection against small solid foreign bodies		Protection against tools, wires or similar objects with $\varnothing > 2.5$ mm, protection against small foreign solid bodies with $\varnothing > 2.5$ mm	3	Spray-proof		Protection against diagonal water drips (up to a 60° angle)
4	Protection against grain-shaped foreign bodies		As 3 however $\varnothing > 1$ mm	4	Splash-proof		Protection against splashed water from all directions
5	Protection against injurious deposits of dust		Full protection against contact. Protection against interior injurious dust deposits	5	Hose-proof		Protection against water (out of a nozzle) from all directions
6	Protection against ingress of dust		Total protection against contact. Protection against penetration of dust	6	Strong hose-proof		Protection against strong water (out of a nozzle) from all directions
				7	Protected against immersion		Protected against temporary immersion
				8	Water-tight		Protected against water pressure
				9K*	Protected against high-pressure		Protected against water from high-pressure / steam jet cleaners

Description according to IEC 60529
* ... IPX9K acc. to ISO 20653

Info

Standard hoods/housings for industrial connectors

Field of application	For excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
Distinguishing feature	Hoods/housings colour-coded grey (RAL 7037)
Material of hoods/housings	Die-cast light alloy
Locking levers	Han-Easy Lock®
Cable entry protection	Optional special cable clamp for hoods with strain relief, bell mouthed cable fitting and anti-twist devices



Han® M hoods/housings for more demanding environmental requirements

Field of application	For all applications where aggressive environmental conditions and extreme climatic atmospheres are encountered
Distinguishing feature	Hoods/housings colour-coded black (RAL 9005)
Material of hoods/housings	Die-cast light alloy, corrosion resistant
Locking levers	Corrosion resistant stainless steel
Cable entry protection	Special cable clamp for hoods with strain relief, bell mouthed cable fitting and anti-twist devices



Han® EMC hoods/housings for higher EMC requirements

Field of application	For sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
Distinguishing feature	Electrically conductive surface, internal seal
Material of hoods/housings	Die-cast light alloy
Locking levers	Han-Easy Lock®
Cable entry protection	EMC cable clamp in order to connect the cable shielding to the hood without interruption of the shielding



Han® HPR hoods/housings for harsh outdoor environments

Field of application	For external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
Distinguishing feature	Hoods/housings colour-coded black, internal seal (RAL 9005)
Locking parts	Stainless steel
Material of hoods/housings	Die-cast light alloy, corrosion resistant
Cable entry protection	Optional universal cable clamp for hoods with strain relief, or special cable clamp with bell mouthed cable fitting and anti-twist devices (use of adapter is necessary)



Han-INOX® hoods/housings for harsh environments

Field of application	For excellent mechanical and electrical protection in demanding environments, for example, in the food, automobile and mechanical engineering industries also for process and regulation control applications
Distinguishing feature	Matt-finished metal surface
Material of hoods/housings	Stainless steel
Locking levers	Stainless steel
Cable entry protection	Standard cable gland (stainless steel)



Han-Eco® – Lightweight hood/housing made of high-performance plastic

Field of application	Industrial environments, outdoor applications
Distinguishing feature	Black plastic hoods / housings
Material of hoods/housings	Polyamide (glass-fibre reinforced)
Locking levers	Double locking lever / single locking lever (10 A / 16 A) (polyamide, glass-fibre reinforced)
Cable entry protection	Integrated plastic cable gland (optional) for sizes 6 B, 10 B, 16 B, 24 B / 10 A, 16 A



Han-Yellok® – Compact hood/housing in a shapely design

Field of application	Industrial environments (e.g. in robotics, machinery)
Distinguishing feature	Internal locking mechanism, push-buttons, two-part hood
Material of hoods/housings	Zinc die-cast, aluminum
Locking parts	Stainless steel and polyamide
Cable entry protection	Standard cable gland (with metric threads M20 / M25 / M32 / M40) for hoods with strain relief or special cable glands



Recommended tightening torque for housings, bulkhead mounting

Series	Number of screws	Size of screws	Recommended Tightening torque (Nm)	Remarks
Han® 3 A	2	M 3	0.8 ... 1.0	Gasket
Han® 10 A / 16 A	4	M 3	0.8 ... 1.0	Gasket
Han® 10 EMV / 16 EMV	4	M 3	min. 1.0	O-ring
Han® 32 A	4	M 4	0.8 ... 1.0	Gasket
Han® 6 B / 10 B / 16 B / 24 B	4	M 4	0.8 ... 1.0	Gasket
Han® 32 B	4	M 5	min. 2.5	O-ring
Han® 48 B	4	M 6	min. 3.0	O-ring
Han® 3 HPR	2	M 4	min. 1.0	O-ring
Han® 6 / 10 / 16 / 24 HPR	4	M 6	min. 3.0	O-ring
Han® 48 HPR	4	M 8	min. 5.0	O-ring

To offer safe protection the surface condition for mounting panel should be according to DIN 4766:

- Waviness ≤ 0.2 mm on 200 mm distance
- Roughness $R_a \leq 16$ μm

General remark for assembling

During assembly and handling of the connector, any kind of damage to the surface of the housing must be avoided to guarantee the correct surface protection.

Info

Housing with 2 levers Han-Easy Lock®

- easy operation
- high degree of pressure tightness
- reliable locking guaranteed by 4 locking points
- space saving mounting
- ideal for mounting side by side
- cable to cable connection is possible
- high seal force

Details of Han-Easy Lock® see chapter 31



Housing with 1 lever Han-Easy Lock®

- easily accessible, even with side entry
- possibility to lock protective covers on the housing
- cable to cable connection is possible
- 2 locking points on the longitudinal axis



1 lever in central position

- easily accessible, even with side entry
- 2 locking points on the lateral axis
- space saving mounting
- ideal for mounting side by side
- single hand operation



Screw locking / toggle locking

- hexagon nuts tightened with spanner
- highest degree of pressure tightness
- easily accessible, also with side entry
- use of tools avoids access by unauthorized persons



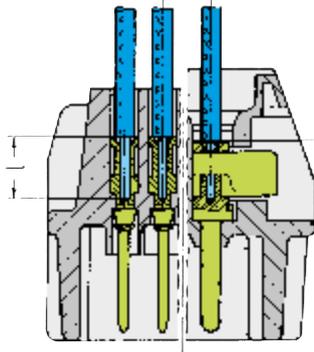
Hood with 2 levers Han-Easy Lock®

- easy operation
- high degree of pressure tightness
- ideal for mating to housings with protection cover
- high seal force

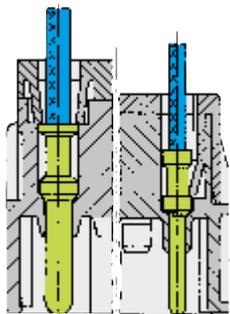
Details of Han-Easy Lock® see chapter 31



Crimp connection



Han DD®
 Han D®
 R 15
 Han-Modular® (10 A)
 Han E®
 Han A®
 Han Hv E®



Han-Com® (40 A)
 Han-Modular® (40 A)
 Han E®
 Han A®
 Han Hv E®
 Han® EE
 Han® EEE
 Han-Modular® (16 A)
 Han® Q

A perfect crimp connection is gastight, therefore corrosion free and amounts to a cold weld of the parts being connected. For this reason, major features in achieving high quality crimp connections are the design of the contact crimping parts and of course the crimping tool itself. Wires to be connected must be carefully matched with the correct size of crimp contacts. If these basic requirements are met, users will be assured of highly reliable connections with low contact resistance and high resistance to corrosive attack.

The economic and technical advantages are:

- Constant contact resistance as a result of precisely repeated crimp connection quality
- Corrosion free connections as a result of cold weld action
- Pre-preparation of cable forms with crimp contacts fitted
- Optimum cost cable connection

Requirements for crimp connectors are laid down in DIN EN 60352-2 as illustrated in the table.

Pull out force of stranded wire

The main criterion by which to judge the quality of a crimp connection is the retention force achieved by the wire conductor in the terminal section of the contact. DIN EN 60352-2 defines the extraction force in relation to the cross-section of the conductor. When fitted using HARTING crimping tools and subject to their utilization in an approved manner, our crimp connectors comply with the required extraction forces.

Crimping tools


Crimping tools (hand operated or automatic) are carefully designed to produce with high pressure forming parts a symmetrical connection of the crimping part of the contact and the wire being connected with the minimum increase in size at the connection point. The positioner automatically locates the crimp and wire at the correct point in the tool.

A ratchet in the tool performs 2 functions:


- It prevents insertion of the crimp into the tool for crimping before the jaws are fully open
- It prevents the tool being opened before the crimping action is completed

Identical, perfectly formed, connections can be produced using this crimping system.

Crimp-cross section



HARTING-crimp profile



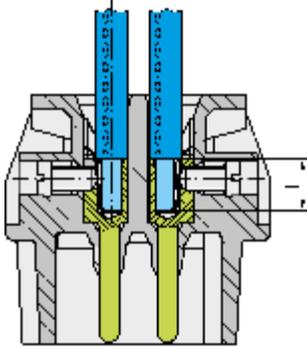
BUCHANAN crimp profile

Tensile strength of crimped connections
 (Table 1 of the DIN EN 60352-2)

Conductor cross-section		Tensile strength
mm ²	AWG	N
0.05	30	6
0.08	28	11
0.12	26	15
0.14		18
0.22	24	28
0.25		32
0.32	22	40
0.5	20	60
0.75		85
0.82	18	90
1.0		108
1.3	16	135
1.5		150
2.1	14	200
2.5		230
3.3	12	275
4.0		310
5.3	10	355
6.0		360
8.4	8	370
10.0		380

Wire gauge		Internal diameter Ø (mm)	Stripping length l (mm)		
(mm ²)	AWG		Han® DD Han® D R15 Han-Modular® (10 A)	Han E® Han A® Han Hv E®	Han® C
0.14 ... 0.37	26 ... 22	0.9	8	-	-
0.5	20	1.15	8	7.5	-
0.75	18	1.3	8	7.5	-
1	18	1.45	8	7.5	-
1.5	16	1.75	8	7.5	9.5
2.5	14	2.25	6	7.5	9.5
4	12	2.85	-	7.5	9.5
6	10	3.5	-	-	9.5
10	8	4.3	-	-	12-18

Screw terminal



Screw terminals meet VDE 0609 /EN 60 999. Dimensions and tightening torques for testing are shown in following table.


Screw dimensions and tightening torque for screw terminals

Wire gauge (mm ²)	1.5	2.5	4	6	10	16
Screw thread	M3	M3	M3.5	M4	M4	M6
Test moment of torque (Nm)	0.5	0.5	0.8	1.2	1.2	1.2*
min. pull-out for stranded wire (N)	40	50	60	80	90	100

* for screws without heads


The relevant regulations state that in the case of

- Terminals with wire protection



the use of ferrules is not necessary. Series Han E[®], Han[®] HsB, Han Hv E[®], Han[®] K 6/12, Han[®] K 6/6

- Terminals without wire protection



The insulation is first stripped and then a wire ferrule must be used.

Series Han[®] K 4/x, Han A[®], Staf[®]

Screw terminal

Inserts	Wire protection		min. wire gauge		max. wire gauge*		Stripping length mm
	Yes	No	mm ²	AWG	mm ²	AWG	
Han [®] 3 A, Han [®] 4 A		X	0.75	18	1.5	16	4.5
Han [®] 10 A, 16 A, 32 A		X	0.75	18	2.5	14	7.5
Han E [®] , Hv E [®]	X		0.75	18	2.5	14	7.5
Han [®] HsB	X		1.5	16	6	10	11.5
Han [®] K 6/6, K 6/12 (signal contacts)	X		0.2	24	2.5	14	7.5
Han [®] K 4/2, K 4/8 (signal contacts)		X	0.5	20	2.5	14	7.5
Han [®] K 4/0, K 4/2, K 4/8 (power contacts)		X	1.5	16	16	6	14
Han E [®] AV, Han D [®] AV	X		0.2	24	2.5	14	8 ... 11
Staf [®]		X	0.5	18	1.5	16	4.5

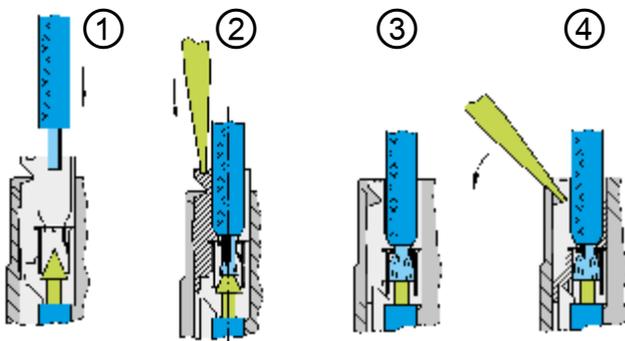


* Rated wire gauge according to DIN EN 60 999-1

Recommended screw drivers and tightening torques

Screw size	Connector type	Tightening torque (Nm)	Tightening torque (lbft)	Recommended screw driver
M2.5	Cover / cable clamp screws: Han® Megabit, Han® Gigabit, Han® Shielded Module	0.40	0.30	PH 1
M3	Screw terminals: Han® 3 A, Han® 4 A, Han® Q 5/0 (PE), Staf®	0.25	0.20	slotted 0.4 x 2.5
M3	Screw terminals: Han D® AV, Han E® AV, Han® K 6/6, Han® K 6/12 (signal)	0.50	0.40	slotted 0.5 x 3.0
M3	Screw terminals: Han® 10A ... 32A, Han® E, Han Hv E®, Han® HsB	0.50	0.40	slotted 0.6 x 3.5 or PH 1
M3	Screw terminals: Han® E High Temp, Han® Thermocouple	0.50	0.40	slotted 0.6 x 3.5
M3	Cable clamp screws: Han-Quintax®, Han-Quintax® High Density, Han® D Coax, Han® E Coax	0.70	0.50	slotted 0.6 x 3.5
M3	Cable clamp screws: Han® D-Sub, USB Module	0.50	0.40	slotted 0.6 x 3.5 or PH 1
M3	Fixing screws: Connectors sizes 10 A, 16 A	0.50	0.40	slotted 0.6 x 3.5 or PH 1
M3	Fixing screws: Connectors sizes 6 B ... 24 B	0.50	0.40	slotted 0.6 x 3.5 or PH 2
M3	Ground terminals: Han-Modular® Hinged frames 1 ... 2.5 mm ²	0.80	0.60	slotted 0.6 x 3.5 or PH 2
M3	Han® guiding pins and bushes	0.50	0.40	slotted 1 x 6.0
M3.5	Ground terminals: Han® 10 A, Han® 16 A, Han 15 D®, Han 25 D®	0.80	0.60	slotted 0.6 x 3.5 or PH 1
M4	Screw terminals: Han® HsB	1.20	0.90	slotted 0.6 x 3.5 or PH 1
M4	Fixing screws: Han-Yellock®	1.20	0.90	slotted 0.8 x 4.5 or PH 2
M4	Ground terminals: Han-Modular® Hinged frames 4 ... 10 mm ²	1.20	0.90	slotted 0.6 x 3.5 or PH 2
M4	Ground terminals: Han E®, Han® ES, Han® ESS, Han® ES Press, Han Hv E®, Han® Hv ES, Han E® High Temp, Han 40 D®, Han 64 D®, Han DD®, Han® K 8/24, Han® K 4/X, Han® K 6/12, Han® K 6/36	1.20	0.90	slotted 0.8 x 4.5 or PH 2
M5	Ground terminals: Han® HsB, Han® K12/2, Han® K4/X, Han® K6/12, Han® K6/36	2.00	1.40	slotted 0.8 x 4.5 or PH 2
M6	Screw terminals: Han® K power contacts, Han-Eco® PE module	for Han® K see chapter 05, Han-Eco® PE module (1.2-3 Nm)		slotted 0.8 x 4.5

Increasing the tightening torque does not improve considerably the contact resistances. The torque moments were determined when optimum mechanical, thermal and electrical circumstances were given. If the recommended figures are considerably exceeded the wire or the termination can be damaged.

Han-Quick Lock® termination technique



This new termination technique from HARTING combines the reliability and the simple operation of the cage clamp termination with the low space requirements of crimp technology.

Han-Quick Lock® is ideally suited to high contact densities and is considerably superior over other termination techniques. No other technology is so simple, space saving and fast. For this vibration safe termination, no special tools are necessary.

- Fast, simple and robust termination technique
- Field assembly without a special tool
- Compatible also to inserts with other termination technologies
- Combines high contact density similar to crimp termination with the simple connection like a cage clamp terminal
- For stranded wire according to IEC 60228 Class 5

Insert connectors:

- Han® 3 A
- Han® 4 A
- Han® 7 D
- Han® 8 D
- Han® Q 4/2
- Han® Q 5/0
- Han® Q 8/0
- Han® Q 12/0
- Han® EE modules
- Han® DD modules
- Han® PushPull Power 4/0

Technical characteristics:

Material

Isolation body	Polycarbonate
Active termination element	Polycarbonate
Quick-Lock spring	Stainless steel
Contact	Copper alloy

Blue slide

Terminal cross-section
0.5 ... 2.5 mm² / AWG 20 ... 14

Black slide

Terminal cross-section
0.25 ... 1.5 mm² / AWG 23 ... 16

Stripping length

10 mm

Insulating resistance

> 10¹⁰ Ohm

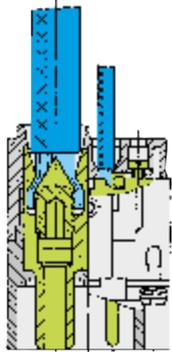
Flammability

according to UL 94 V 0

Termination tool

Screwdriver
0.4 x 2.5 mm bzw. 0.5 x 3.0 mm

Axial screw terminal



This termination combines the benefits of screw and crimp terminations:

- Less space required
- Easy handling
- No special tools

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Background:

According to DIN EN 60 228 for cables and insulated wires the wire gauge will be determined by conductance (Ω/km) and maximum wire diameter. A minimum cable diameter is not specified! (Example: nominal wire gauge = 95 mm^2 → real, geometric wire gauge = 89 mm^2)

Recommendation:

If you want to apply the axial screw technique in combination with cables that have cross sections extremely deviating from the nominal value, this must be checked separately.

Strain relief:

In order to ensure that the contact is protected against radial stress, you must fix the cable at an adequate distance from the terminal.

Details for professional strain relief design can be found in the standard DIN VDE 0100-520: 2003-06 (see enclosed table).

Outer cable diameter (mm)	Maximum fixing distance (mm)	
	horizontal	vertical
$D \leq 9$	250	400
$9 < D < 15$	300	400
$15 < D < 20$	350	450
$20 < D < 40$	400	550

Cables:

The axial screw technology is developed for wires according to DIN EN 60 228 class 5 (see table: Wire assembly according to DIN EN 60 228). Deviating cable assemblies have to be tested separately.

Assembly remarks:

Before starting the assembly the user must ensure that the axial cone is screwed fully downward to completely open the contact chamber.

After stripping the cable insulation the strands must not be twisted and the maximum cable insulation must not exceed the recommended dimension.

Insert the wire completely into the contact chamber until the copper strands reach the bottom. Keep the cable in position while applying the recommended tightening torque.

Maintenance of the axial screw termination:

In order to avoid damage to individual cable strands you must re-apply the tightening torque only once after the initial assembly of the application.

Wire gauge (mm ²)	Stranded wires DIN EN 60228 class 2	Fine stranded wires DIN EN 60228 class 5	Super fine stranded wires DIN EN 60228 class 6			
			28 x 0.15	64 x 0.10	131 x 0.07	256 x 0.05
0.5	7 x 0.30	16 x 0.20	28 x 0.15	64 x 0.10	131 x 0.07	256 x 0.05
0.75	7 x 0.37	24 x 0.20	42 x 0.15	96 x 0.10	195 x 0.07	384 x 0.05
1	7 x 0.43	32 x 0.20	56 x 0.15	128 x 0.10	260 x 0.07	512 x 0.05
1.5	7 x 0.52	30 x 0.25	84 x 0.15	192 x 0.10	392 x 0.07	768 x 0.05
2.5	7 x 0.67	50 x 0.25	140 x 0.15	320 x 0.10	651 x 0.07	1280 x 0.05
4	7 x 0.85	56 x 0.30	224 x 0.15	512 x 0.10	1040 x 0.07	
6	7 x 1.05	84 x 0.30	192 x 0.20	768 x 0.10	1560 x 0.07	
10	7 x 1.35	80 x 0.40	320 x 0.20	1280 x 0.10	2600 x 0.07	
16	7 x 1.70	128 x 0.40	512 x 0.20	2048 x 0.10		
25	7 x 2.13	200 x 0.40	800 x 0.20	3200 x 0.10		
35	7 x 2.52	280 x 0.40	1120 x 0.20			
50	19 x 1.83	400 x 0.40	705 x 0.30			
70	19 x 2.17	356 x 0.50	990 x 0.30			
95	19 x 2.52	485 x 0.50	1340 x 0.30			
120	37 x 2.03	614 x 0.50	1690 x 0.30			
150	37 x 2.27	765 x 0.50	2123 x 0.30			
185	37 x 2.52	944 x 0.50	1470 x 0.40			
240	61 x 2.24	1225 x 0.50	1905 x 0.40			

Wire assembly according to DIN EN 60 228

Info

Insert	Wire gauge	Stripping length		Tightening torque		Max. cable insulation diameter	Size hexagon recess	Insert dimension for cable indication (ISK)
	(mm ²)	(mm)		(Nm)		(mm)	(SW)	(mm)
Han® K 4/4 finger safe	6 ... 16	6 mm ² :	11+1	6 mm ² :	2	8.9	2.5	7.4 PE: 8.9
		10 mm ² :	11+1	10 mm ² :	3			
16 mm ² :		11+1	16 mm ² :	4				
	10 ... 22	10 mm ² :	11+1	10 mm ² :	3	8.9 8.9 11	2.5	7.4 7.4 5.4 PE: 8.9
		16 mm ² :	11+1	16 mm ² :	4			
		22 mm ² :	11+1	22 mm ² :	4			
Han® K 4/4	6 ... 16	6 mm ² :	11+1	6 mm ² :	2	8.9	2.5	7.4 PE: 8.9
		10 mm ² :	11+1	10 mm ² :	3			
16 mm ² :		11+1	16 mm ² :	4				
	10 ... 22	10 mm ² :	11+1	10 mm ² :	3	8.9 8.9 11	2.5	7.4 7.4 5.4 PE: 8.9
		16 mm ² :	11+1	16 mm ² :	4			
		22 mm ² :	13+1	22 mm ² :	4			
Han® K 6/12	2.5 ... 8	2.5 mm ² :	5+1	2.5 mm ² :	1.5	6.2	2	7.4
		4 mm ² :	5+1	4 mm ² :	1.5			
6 mm ² :		8+1	6 mm ² :	2				
8 mm ² :		8+1	8 mm ² :	2				
	6 ... 10	6 mm ² :	8+1	6 mm ² :	2	6.2	2	4.7
		8 mm ² :	8+1	8 mm ² :	2			
		10 mm ² :	8+1	10 mm ² :	2			
Han® K 6/6	10 ... 25	10 mm ² :	13+/-1	10 mm ² :	6	11.4	4	4.9
		16 mm ² :	13+/-1	16 mm ² :	6			
25 mm ² :		13+/-1	25 mm ² :	7				
	16 ... 35	16 mm ² :	13+/-1	16 mm ² :	6	11.4	4	4.9
		25 mm ² :	13+/-1	25 mm ² :	7			
		35 mm ² :	13+/-1	35 mm ² :	8			
Han® K 8/0	10 ... 25	10 mm ² :	13+/-1	10 mm ² :	6	11.4	4	4.75
		16 mm ² :	13+/-1	16 mm ² :	6			
25 mm ² :		13+/-1	25 mm ² :	7				
Han® Q 2/0 Han® Q 2/0 High Voltage	2.5 ... 10	2.5 mm ² :	8+1	2.5 mm ² :	1.8	7.3	2	5.6
		4 mm ² :	8+1	4 mm ² :	1.8			
		6 mm ² :	8+1	6 mm ² :	1.8			
		10 mm ² :	8+1	10 mm ² :	1.8			
Han® Q 4/2 Han® Q 4/2 with Han-Quick Lock®	4 ... 10	4 mm ² :	8+1	4 mm ² :	1.8	7.3	2	5.6
		6 mm ² :	8+1	6 mm ² :	1.8			
		10 mm ² :	8+1	10 mm ² :	1.8			
Han® 200 A module without PE Han® 200 A module with PE	25 ... 40	25 mm ² :	16	25 mm ² :	8	12 16	5	0
		40 mm ² :	16	40 mm ² :	8			
	40 ... 70	40 mm ² :	16	40 mm ² :	9	12 16	5	0
		70 mm ² :	16	70 mm ² :	10			
Han® 100 A module	6 ... 10	6 mm ² :	13+/-1	6 mm ² :	4	11.4	2.5	4.9
		8 mm ² :	13+/-1	8 mm ² :	4			
10 mm ² :		13+/-1	10 mm ² :	4				
	10 ... 25	10 mm ² :	13+/-1	10 mm ² :	6	11.4	4	4.9
		16 mm ² :	13+/-1	16 mm ² :	6			
		25 mm ² :	13+/-1	25 mm ² :	7			
	16 ... 35	16 mm ² :	13+/-1	16 mm ² :	6	11.4	4	4.9
		25 mm ² :	13+/-1	25 mm ² :	7			
35 mm ² :		13+/-1	35 mm ² :	8				
	38	38 mm ² :	13+/-1	38 mm ² :	8	11.4	4	4.9
Han® 70 A module	6 ... 16	6 mm ² :	11+1	6 mm ² :	2	8.9	2.5	7.4
		10 mm ² :	11+1	10 mm ² :	3			
16 mm ² :		11+1	16 mm ² :	4				
	14 ... 22	14 mm ² :	12.5+1	14 mm ² :	4	10	2.5	5.9
		16 mm ² :	12.5+1	16 mm ² :	4			
		22 mm ² :	12.5+1	22 mm ² :	4			
Han® 40 A module	2.5 ... 8	2.5 mm ² :	5+1	2.5 mm ² :	1.5	4 4 6 10.5	2	4.7
		4 mm ² :	5+1	4 mm ² :	1.5			
		6 mm ² :	8+1	6 mm ² :	2			
		8 mm ² :	11+1	10 mm ² :	2			
	6 ... 10	6 mm ² :	8+1	6 mm ² :	2	6 10.5	2	4.7
		10 mm ² :	11+1	10 mm ² :	2			

Info
00
·
14

Insert	Wire gauge	Stripping length		Tightening torque		Max. cable insulation diameter	Size hexagon recess	Insert dimension for cable indication (ISK)
	(mm ²)	(mm)		(Nm)		(mm)	(SW)	(mm)
Han® C module with axial screw terminal	2.5 ... 8	2.5 mm ² :	5+1	2.5 mm ² :	1.5	4	2	5.2
		4 mm ² :	5+1	4 mm ² :	1.5	4		
6 mm ² :		8+1	6 mm ² :	2	6			
8 mm ² :		8+1	8 mm ² :	2	8.2			
	6 ... 10	6 mm ² :	8+1	6 mm ² :	2	6	2	5.2
		10 mm ² :	11+1	10 mm ² :	2	8.2		
Han® K3/0 straight	25 ... 40	25 mm ² :	22	25 mm ² :	8	15	5	8.2
		40 mm ² :	22	40 mm ² :	8			
	35 ... 70	35 mm ² :	22	35 mm ² :	8	15	5	8.2
		50 mm ² :	22	50 mm ² :	9			
		70 mm ² :	22	70 mm ² :	10			
Han® K3/0 angled	25 ... 40	25 mm ² :	22	25 mm ² :	8	15	5	9
		40 mm ² :	22	40 mm ² :	8			
	35 ... 70	35 mm ² :	22	35 mm ² :	8	15	5	9
		50 mm ² :	22	50 mm ² :	9			
		70 mm ² :	22	70 mm ² :	10			
Han® K3/2 straight	35 ... 70 PE: 25 ... 40	35 mm ² :	22	35 mm ² :	8	power: 15	5	power: 8.2
		50 mm ² :	22	50 mm ² :	9			
		70 mm ² :	22	70 mm ² :	10	PE: 10		PE: 7.2
		PE:	14					
Han® K3/2 angled	25 ... 40	25 mm ² :	22	25 mm ² :	8	power: 15	5	power: 9.0
		40 mm ² :	22	40 mm ² :	8			
	35 ... 70 PE: 25 ... 40	35 mm ² :	22	35 mm ² :	8	power: 15	5	power: 9.0
		50 mm ² :	22	50 mm ² :	9			
		70 mm ² :	22	70 mm ² :	10			
		PE:	14					
Han® HC Modular 350	20 ... 35	20 mm ² :	19+1	20 mm ² :	8	19.5	5	13
		35 mm ² :	19+1	35 mm ² :	8			
	35 ... 70	35 mm ² :	19+1	35 mm ² :	8	19.5	5	13
		50 mm ² :	19+1	50 mm ² :	10			
		70 mm ² :	19+1	70 mm ² :	12			
	95 ... 120	95 mm ² :	19+1	95 mm ² :	14	19.5	5	13
		120 mm ² :	19+1	120 mm ² :	16			
Ground contact for Han® HC Modular	35 ... 70	35 mm ² :	19+1	35 mm ² :	8	-	5	-
	60 ... 70	50 mm ² :	19+1	50 mm ² :	10			
		70 mm ² :	19+1	70 mm ² :	12			
Han® HC Modular 650	70 ... 120	60 mm ² :	23+2	60 mm ² :	12	27	8	28
		70 mm ² :	23+2	70 mm ² :	12			
		95 mm ² :	23+2	95 mm ² :	14			
	150 ... 185	120 mm ² :	23+2	120 mm ² :	16	26.5	8	28
		150 mm ² :	23+2	150 mm ² :	17			
		185 mm ² :	23+2	185 mm ² :	18			

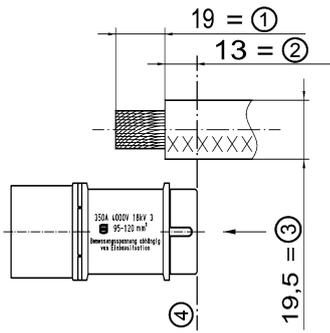
Overview inserts with axial screw terminal

Insulating base dimension for the cable marking (ISK)

Marking the proper cable position for the axial screw connection contact point:

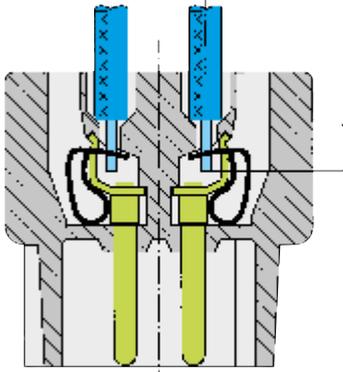
By marking the cable sheathing you can specify the proper point for tightening the axial screw on the connecting cable. If the cable is pushed into the insulating base up to the marker (where the marker is flush with the upper edge of the insulating base), then the cable is in the correct position for being connected. The following figure (on the next page) illustrates this process when using the Han® HC Modular 350 contact. The marker and the upper edge of the insulating base are at the same level (as indicated by the dashed line).

Info



- ① stripping length
- ② insulator dimension (ISK dimension)
- ③ max. cable insulation diameter
- ④ sink line

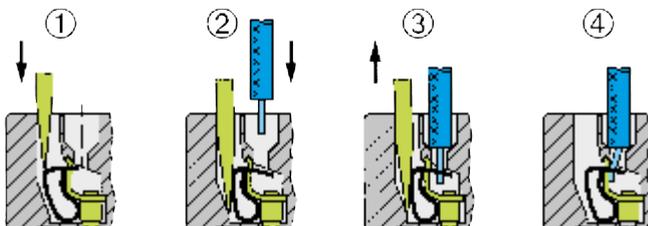
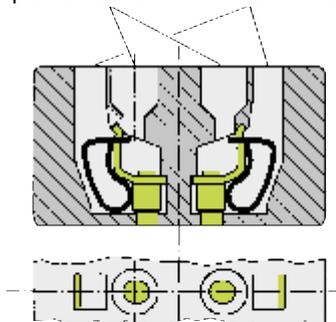
Cage-clamp terminal



This termination method requires very little preparation of the wire and no special tools, leading to a low installed cost and a high degree of mechanical security.

- For all stranded and solid wires with a cross section 0.14 to 2.5 mm².
- Ease of termination. Conductor and screwdriver are in same plane.
- No special preparation of stripped conductor.
- The larger the conductor the higher the clamping force.
- The termination is vibration-proof.
- Guaranteed constant low resistance connection of the cage-clamp terminal.
- The cage-clamp system is internationally approved. VDE, CSA, UL, ÖVE, SEMKO, LCIE (France), Germanischer Lloyd, DET Norske Veritas

One conductor per termination Slot for screwdriver



Screwdriver width: 0.6 x 3.5 mm

Kontakteinsätze	max. Leiterquerschnitt		Abisolierlänge l (mm)
	(mm ²)	AWG	
Han® ES, Han® Hv ES	0.14 ... 2.5	26 ... 14	7 ... 9
Han® ESS	0.14 ... 2.5	26 ... 14	9 ... 11
Han® ES Press	0.14 ... 2.5	26 ... 14	9 ... 11
Han® K 4/4	0.14 ... 2.5	26 ... 14	7 ... 9
Han® ES Modul	0.14 ... 2.5	26 ... 14	7 ... 9

Han® ES Press

The circular openings in the insert are used to hold the wire that is being connected. Note that there are two rows of rectangular holes (intended for plug-in jumpers) located between the contact openings of the Han® ES Press insert.

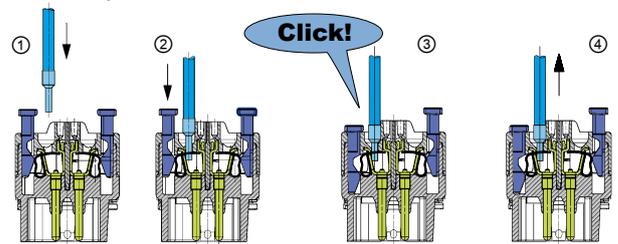
Note: Only one wire per termination point!

Each termination point is, in principle, only suited to hold a single wire. When required, two or more wires may be contacted per termination point; contact HARTING Technical Support first for more information.

Note!

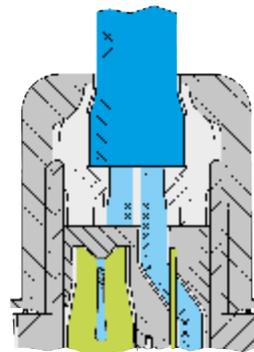
An effective and durable spring clamp connection requires that the wire is properly stripped. The correct stripping lengths for the Han® ES Press contacts are specified in the table below, left side.

Assembly



④ = Gentle test pull!

IDC (Insulation displacement terminal)



Inserts	max. wire gauge	
	(mm ²)	AWG
M8-S/M12-S	0.14 ... 0.34	26 ... 22
Circular connectors M12 angled	0.25 ... 0.50	24 (7/32) ... 22
Circular connectors M12-L	0.34 ... 0.75	22 ... 18
M12-L PROFIBUS	0.25 ... 0.34	24 ... 22
M12-L Ethernet	0.25 ... 0.34	24 ... 22
	0.34 ... 0.5	22 ... 18
Panel feed through Pg 13.5 /M20	0.75 ... 1.50	18 ... 16
Panel feed through Pg 9	0.25 ... 0.50	24 (7/32) ... 22
HARAX® 3 A	0.75 ... 1.5	18 ... 16

General

The choice of connectors entails more than just considering factors such as functionality, the number of contacts, current and voltage ratings. It is equally important to take account of where the connectors are to be used and the prevailing ambient conditions. This in turn means that, dependent on the conditions under which they are to be installed and pursuant to the relevant standards, different voltage and current ratings may apply for the same connectors.

The most important influencing factors and the corresponding electrical characteristics of the associated connectors are illustrated here in greater detail.

Overvoltage category

The overvoltage category is dependent on the mains voltage and the location at which the equipment is installed. It describes the maximum overvoltage resistance of a device in the event of a power supply system fault, e. g. in the event of a lightning strike.

The overvoltage category affects the dimensioning of components in that it determines the clearance air gap. Pursuant to the relevant standards, there are 4 overvoltage categories.

Equipment for industrial use, such as fall HARTING heavy duty Han connector, fall into Overvoltage Category III.

Extract from DIN VDE 0110-1 and IEC 60 664-1, Para. 2.2.2.1.1

Equipment of overvoltage category IV is for use at the origin of the installation.

Note 1: Examples of such equipment are electricity meters and primary overcurrent protection equipment.

Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements.

Note 2: Examples of such equipment are switches in the fixed installation and equipment for industrial use with permanent connection to the fixed installation.

Equipment of overvoltage category II is energy-consuming equipment to be supplied from the fixed installation.



Note 3: Examples of such equipment are appliances, portable tools and other household equipment with similar loads.

If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies.

Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level.

Note: Examples are protected electronic circuits.

Rated impulse voltages (Table B2 of DIN EN 60 664-1)

Voltage line-to-neutral derived from nominal voltages A.C. or D.C. up to and including	Nominal voltages presently used in the world (= Rated insulation voltage of equipment)				Rated impulse voltage for equipment			
	Three-phase 4-wire systems with earthed neutral	Three-phase 3-wire systems earthed or un-earthed	Single-phase 2-wire systems A.C. or D.C.	Single-phase 3-wire systems A.C. or D.C.	Overvoltage category			
					I Special protected levels	II Level for electrical equipment (household and others)	III Level for distribution supply systems	IV Input level
V	V	V	V	V	V	V	V	V
50			12.5 24 25 30 42 48	30 ... 60	330	500	800	1500
100	66/115	66	60		500	800	1500	2500
150	120/208* 127/220	115, 120 127	100** 110, 220	100 ... 200** 110 ... 220 120 .. 240	800	1500	2500	4000
300	220/380, 230/400 240/415, 260/440 277/480	200**, 220 230, 240 260, 277	220	220 ... 440	1500	2500	4000	6000
600	347/600, 380/660 400/690, 417/720 480/830	347, 380, 400 415, 440, 480 500, 577, 600	480	480 ... 960	2500	4000	6000	8000
1000		660 690, 720 830, 1000	1000		4000	6000	8000	12 000

* ... Practice in the U.S.A and in Canada

** ... Practice in Japan

Pollution degree

The dimensioning of operating equipment is dependent on environmental conditions. Any pollution or contamination may give rise to conductivity that, in combination with moisture, may affect the insulating properties of the surface on which it is deposited. The pollution degree influences the design of components in terms of the creepage distance.

The pollution degree is defined for exposed, unprotected insulation on the basis of environmental conditions.

HARTING heavy duty Han connectors are designed as standard for Pollution Degree 3.

Pollution degree 1
in air-conditioned or clean, dry rooms, such as computer and measuring instrument rooms, for example.

Pollution degree 2
in residential, sales and other business premises, precision engineering workshops, laboratories, testing bays, rooms used for medical purposes. As a result of occasional moisture condensation, it is to be anticipated that pollution/contamination may be temporarily conductive.

Pollution degree 3
in industrial, commercial and agricultural premises, unheated storage premises, workshops or boiler rooms, also for the electrical components of assembly or mounting equipment and machine tools.

Pollution degree 4
in outdoor or exterior areas such as equipment mounted on the roofs of locomotives or tramcars.

Extract from DIN EN 60 664-1 (VDE 0110-1), Para. 4.6.2

Pollution degree 1: No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.

Pollution degree 2: Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

Pollution degree 3: Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

Pollution degree 4: Continuous conductivity occurs due to conductive dust, rain or other wet conditions.

Special ruling for connectors

Subject to compliance with certain preconditions, the standard for connectors permits a lower pollution degree than that which applies to the installation as a whole. This means that in a pollution degree 3 environment, connectors may be used which are electrically rated for pollution degree 2.

The basis for this is contained in DIN EN 61 984, Para. 6.19.2.3.

Extract form DIN EN 61 984, Para. 6.19.2.3

For a connector with a degree of protection IP 54 or higher according to IEC 60 529 the insulating parts inside the enclosure may be dimensioned for a lower pollution degree.

This also applies to mated connectors where enclosure is ensured by the connector housing and which may only be disengaged for test and maintenance purposes.

The conditions fulfills,

- a connector which is protected to at least IP 54 as per IEC 60 529,
- a connector which is installed in a housing and which as described in the standard is disconnected for testing and maintenance purposes only,
- a connector which is installed in a housing and which when disconnected is protected by a cap or cover to at least IP 54,
- a connector located inside a switching cabinet to at least IP 54.

These conditions do not extend to connectors which when disconnected remain exposed to the industrial atmosphere for an indefinite period.

It should be noted that pollution can affect a connector from the inside of an installation outwards.

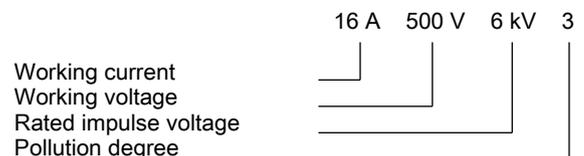
Typical applications in which to choose pollution degree 2 connectors:

- A connector serving a drive motor which is disconnected only for the purpose of replacing a defective motor, even when the plant or system otherwise calls for pollution degree 3.
- Connectors serving a machine of modular design which are disconnected for transport purposes only and enable rapid erection and reliable commissioning. In transit, protective covers or adequate packing must be provided to ensure that the connectors are not affected by pollution/contamination.
- Connectors located inside a switching cabinet to IP 54. In such cases, it is even possible to dispense with the IP 54 housings of the connectors themselves.

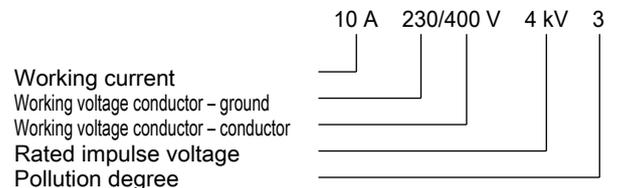
Specifying electrical data

Electrical data for connectors are specified as per DIN EN 61 984.

This example identifies a connector suitable for use in an unearthed power system or earthed delta circuit (see page 00.22, Table B2 of DIN EN 60 664-1):



This example identifies a connector suitable exclusively for use in earthed power systems (see page 00.22, Table B2 of DIN EN 60 664-1):



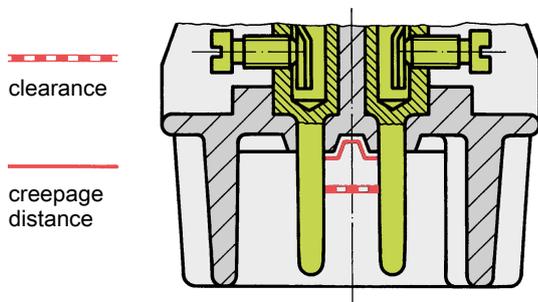
Other terms explained

Clearance air gap

The shortest distance through the air between two conductive elements (see DIN EN 60664-1 (VDE 0110-1), Para. 3.2). The air gaps are determined by the surge voltage withstand level.

Creepage distance

Shortest distance on the surface of an solid insulating material between two conductive elements (see DIN EN 60664-1 (VDE 0110-1), Para. 3.3). The creepage distances are dependent on the rated voltage, the pollution degree and the characteristics of the insulating material.

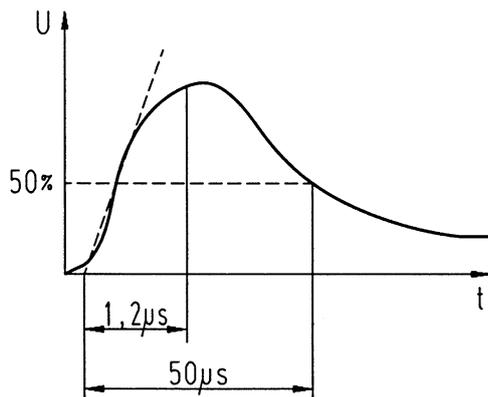


Working voltage

Fixed voltage value on which operating and performance data are based. More than one value for rated voltage or rated voltage range may be specified for the same connector.

Rated impulse voltage

The rated impulse voltage is determined on the basis of the overvoltage category and the nominal power supply voltage. This level in turn directly determines the test voltage for testing the overvoltage resistance of the connector (Waveform voltage in 1.2/50 μ s as per IEC 60060-1).



Working current

Fixed current, preferably at an ambient temperature of 40 °C, which the connector can carry on a permanent basis (without interruption), passing simultaneously through all contacts which are in turn connected to the largest possible conductors, without exceeding the upper temperature limit.

The dependence of the rated current on ambient temperature is illustrated in the respective derating diagrams.

Transient overvoltages

Short-term overvoltage lasting a few milliseconds or less, oscillatory or non-oscillatory, generally heavily damped (see DIN EN 60664-1 (VDE 0110-1, Para. 3.7.2). An overvoltage may occur as a result of switching activities, a defect or lightning surge, or may be intentionally created as a necessary function of the equipment or component.

Power-frequency withstand voltage

A power-frequency overvoltage (50/60 Hz).

Applied for a duration of one minute when testing dielectric strength. For test voltages in association with surge voltage withstand levels, see extract from Table 8, DIN EN 61984.

Test voltages (Extract from Table 8, DIN EN 61984)

Impulse withstand voltage kV (1.2/50 μ s) at an altitude of 2 000 m	RMS withstand voltage kV (50/60 Hz)
0.5	0.37
0.8	0.50
1.5	0.84
2.5	1.39
4	2.21
6	3.31
8	4.26
12	6.6

CTI (Comparative Tracking Index)

This figure gives an indication of the conductivity of insulating materials and affects the specified creepage distances. The influence of the CTI value on the creepage distance is as follows: the higher the index value, the shorter the creepage distance. The CTI is used to divide plastics into insulation groups.

Breakdown of insulation groups:

- I 600 \leq CTI
- II 400 \leq CTI < 600
- IIIa 175 \leq CTI < 400
- IIIb 100 \leq CTI < 175

Protection levels as per IEC 60529

The protection level describes the leak-proof character of housing, e. g. for electrical equipment. It ranges from IP 00 to IP 68. HARTING heavy duty Han connectors feature a standard protection level of IP 65 (see page 00.5, table based on DIN EN 60529, IEC 60529).

Derating diagram as per DIN EN 60512-5-2

These diagrams are used to illustrate the maximum current carrying capacity of components. The illustration follows a curve which shows the current in relation to ambient temperature. Current carrying capacity is limited by the thermal characteristics of contacts and insulating elements which have an upper temperature limit which should not be exceeded.

Info

Info
00
·
20

Current carrying capacity

The current carrying capacity is determined in tests which are conducted on the basis of the DIN EN 60512-5-2. The current carrying capacity is limited by the thermal properties of materials which are used for inserts as well as by the insulating materials. These components have a limiting temperature which should not be exceeded.

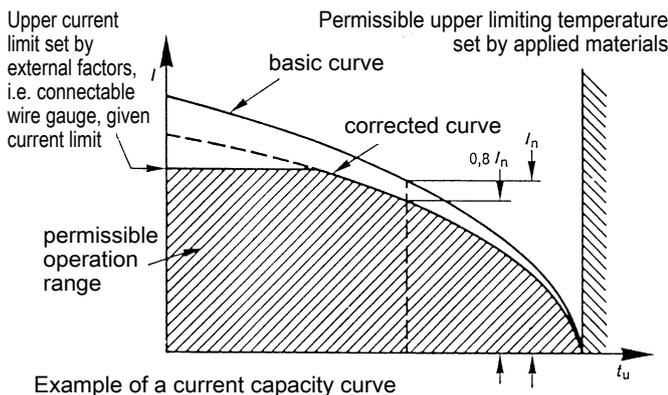
The relationship between the current, the temperature rise (loss at the contact resistance) and the ambient temperature of the connector is represented by a curve. On a linear coordinate system the current lies on the vertical line (ordinate) and the ambient temperature on the horizontal line (abscissa) which ends at the upper limiting temperature.

In another measurement the self-heating (Δt) at different currents is determined.

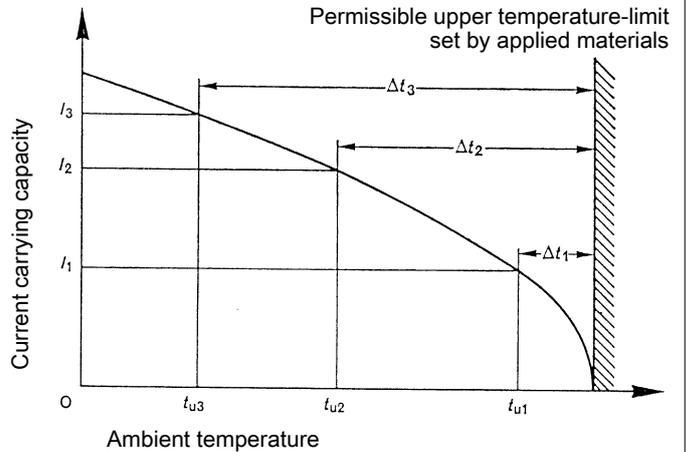
At least 3 points are determined which are connected to a parabolic curve, the basic curve.

The corrected current carrying capacity curve is derived from this basic curve. The reasons for the correction are external factors that bring an additional limitation to the current carrying capacity, i.e. connectable wire gauge or an unequal dispersion of current.

The derating diagrams pictured as curve have been primarily determined with tin-plated cables as well as with physical cross sections close to the respective ISO-cable cross section.



Definition: The rated current is the continuous, not interrupted current a connector can take when simultaneous power on all contacts is given, without exceeding the maximum temperature.



Acc. to DIN EN 61984 the sum of ambient temperature and the temperature rise of a connector shall not exceed the upper limiting temperature. The limiting temperature is valid for a complete connector, that means insert plus housing.

As a result the insert gives the limit for the temperature of a complete connector and thus housings as well.

In practice it is not usual to load all terminals simultaneously with the maximum current. In such a case single contacts can be loaded with a higher current as permitted by the current capacity curve, if less than 20 % of the whole is loaded.

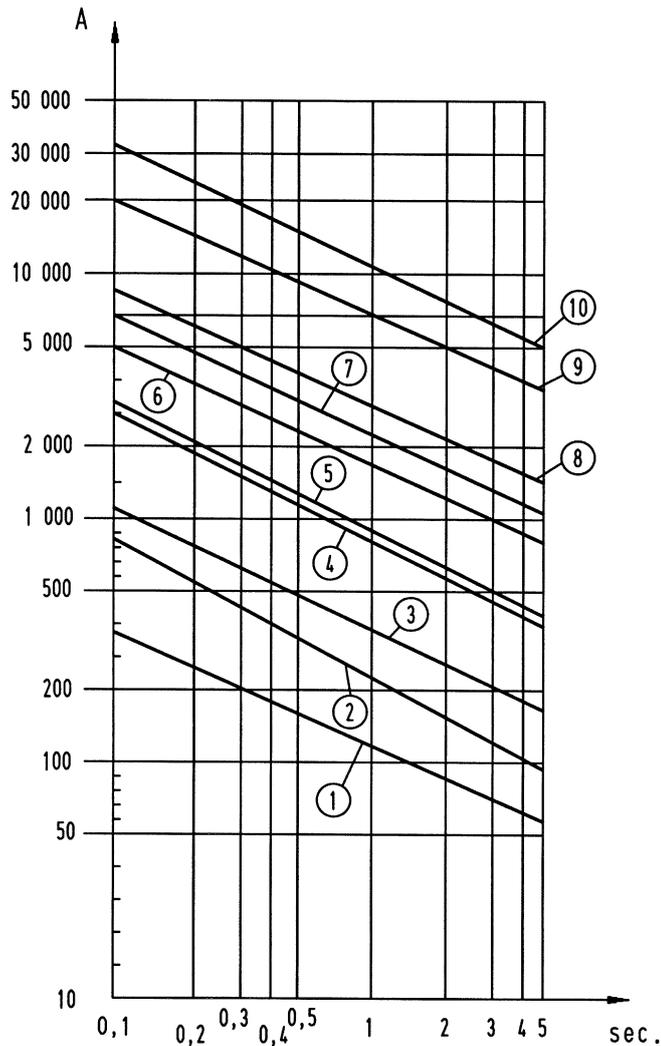
However, for these cases there are no universal rules. The limits have to be determined individually from case to case. It is recommended to proceed in accordance with the relevant rules of the DIN EN 60512-5-2.

Current carrying capacity of copper wires

Diameter [mm ²] of single wires in a three-phase system	0.75	1	1.5	2.5	4	6	10	16	25	35
Type of installation										
B1 Conductors/single core cables in conduit and cable trunking systems	8.6	10.3	13.5	18.3	24	31	44	59	77	96
B2 Cables in conduit and cable trunking systems	8.5	10.1	13.1	17.4	23	30	40	54	70	86
C Cables on walls	9.8	11.7	15.2	21	28	36	50	66	84	104
E Cables on open cable trays	10.4	12.4	16.1	22	30	37	52	70	88	110
Depiction in accordance with DIN EN 60204-1 for PVC-insulated copper wires in an ambient temperature of + 40 °C under permanent operating conditions.										
For different conditions and temperatures, installations, insulation materials or conductors the relevant corrections have to be carried out.										

Transient current carrying capacity

A transient current in circuits can be generated by switching operations such as the starting of a motor or a short circuit in a faulty installation. This can cause thermal stress at the contact. These short and very high increases cannot be dissipated quickly and therefore a local heating effect at the contact is the result. Contact design is an important feature when transient currents are encountered. HARTING contacts are machined from solid material and are therefore relatively unaffected by short overloads when compared to stamped and formed designs. For guidance please see the table below.



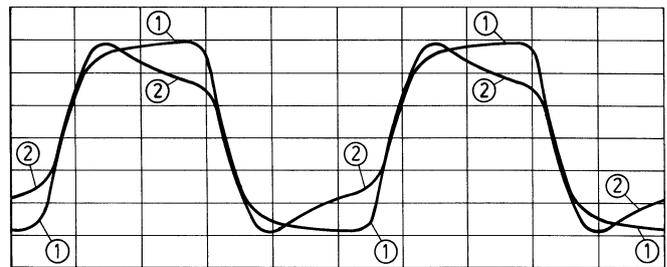
① Han D®	$I_N = 10 \text{ A}$
② Han® 3 A / 4 A	$I_N = 10 \text{ A}$
③ Han A®/ Han E®, Han® ES, EE, Q 5/0	$I_N = 16 \text{ A}$
④ Han® 6 HsB	$I_N = 35 \text{ A}$
⑤ Han® C/K axial	$I_N = 40 \text{ A}$
⑥ Han® K 4/8, Han® 70 A Modul	$I_N = 80 \text{ A}$
⑦ Han® K 6/6	$I_N = 100 \text{ A}$
⑧ Han® K 3/0	$I_N = 200 \text{ A}$
⑨ Han® HC-Modular 350	$I_N = 350 \text{ A}$
⑩ Han® HC-Modular 650	$I_N = 650 \text{ A}$

Short circuit carrying capacity

Low currents and voltages

HARTING's standard contacts have a silver plated surface. This precious metal has excellent conductive properties. In the course of a contact's lifetime, the silver surface generates a black oxide layer due to its affinity to sulphur. This layer is smooth and very thin and is partly interrupted when the contacts are mated and unmated, thus guaranteeing very low contact resistances. In the case of very low currents or voltages small changes to the transmitted signal may be encountered. This is illustrated below where an artificially aged contact representing a twenty year life is compared with a new contact.

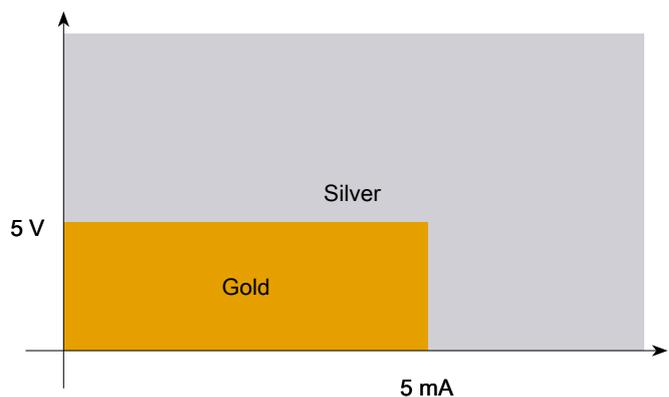
In systems where such a change to the transmitted signal could lead to faulty functions and also in extremely aggressive environments, HARTING recommend the use of gold plated contacts.



Changes to the transmitted signal after artificial ageing

- ① new contact
- ② after ageing

Below is a table derived from actual experiences.



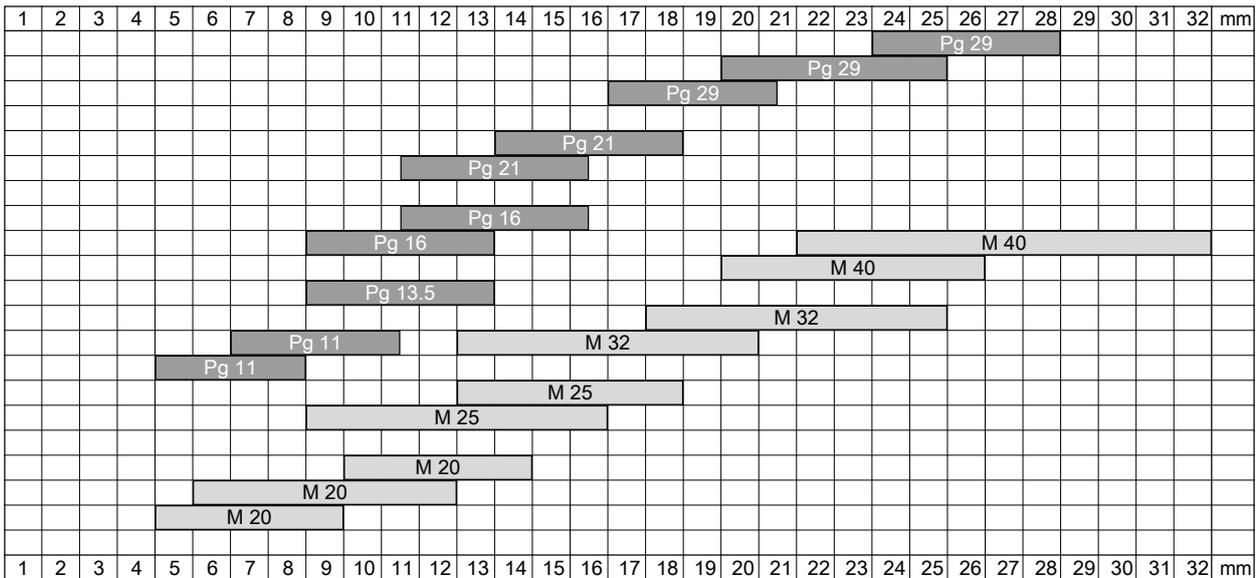
Recommendation

The metric thread is specified in the international DIN EN 50262 standard. The standard describes the metric series M 12 to M 63.

The thread dimension in mm is given by the product type description. E.g. M 20 refers to 20 mm thread diameter.

For easy identification, metric threaded hoods and housings are marked with an **(M)**.

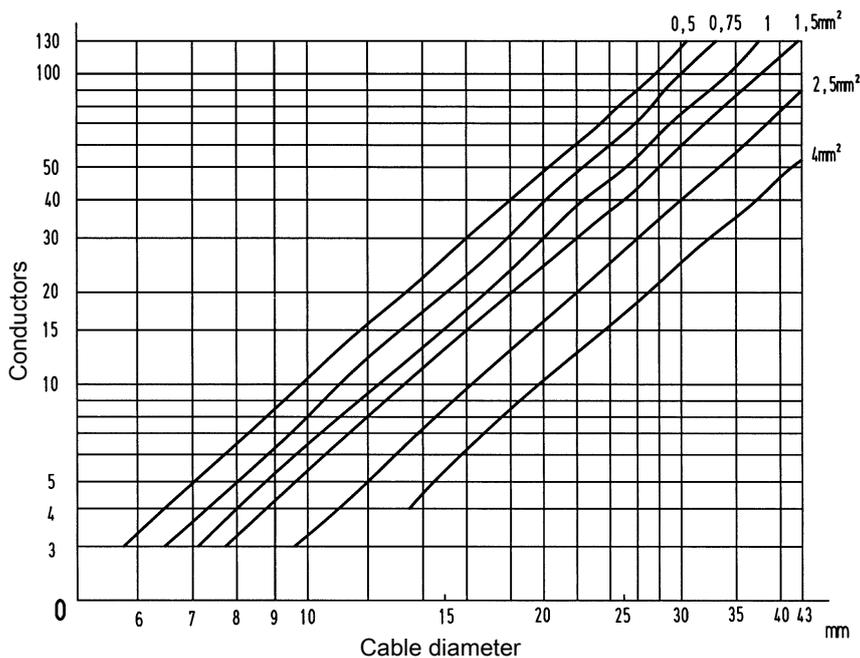
Cable range of metric glands:



Cable

The diagram shows different cable-diameters, being dependent on wire gauges and number of conductors.

All data are averages for commercial cables.



Info

<p>This Declaration of Conformity is suitable to the European Standard EN ISO/IEC 17050-1:2010 "Conformity assessment – supplier's declaration of conformity – Part 1: General requirements (ISO/IEC 17050-1:2004; corrected version 2007-06-15); German and English version EN ISO/IEC 17050-1:2010."</p>	<p>We HARTING Electric GmbH & Co. KG Wilhelm-Harting-Str. 1 32339 Espelkamp</p> <p>declare under our own responsibility that the product series of Heavy Duty Han® Connectors</p> <p>is in conformity with the following standard(s) or other normative documents:</p> <p style="text-align: center;">Connectors - safety requirements and tests IEC 61 984</p> <p>This declaration of conformity refers to the Han®-series</p> <table border="0"> <tr> <td>Han A®</td> <td>Han E®</td> <td>Han® HsB</td> </tr> <tr> <td>Han® B</td> <td>Han E® AV</td> <td>Han® K 3/0</td> </tr> <tr> <td>Han-Brid®</td> <td>Han® EE</td> <td>Han® K 3/2</td> </tr> <tr> <td>Han-Com®</td> <td>Han® EEE</td> <td>Han® M</td> </tr> <tr> <td>Han D®</td> <td>Han® ES</td> <td>Han-Modular®</td> </tr> <tr> <td>Han D® AV</td> <td>Han® ESS</td> <td>Han-Power®</td> </tr> <tr> <td>Han DD®</td> <td>Han® HC Modular 350</td> <td>Han® Q</td> </tr> <tr> <td>Han-Eco®</td> <td>Han® HPR</td> <td>Han-Yellock®</td> </tr> </table> <p>This declaration does not contain a warranty of characteristics. Safety references are to be considered.</p>	Han A®	Han E®	Han® HsB	Han® B	Han E® AV	Han® K 3/0	Han-Brid®	Han® EE	Han® K 3/2	Han-Com®	Han® EEE	Han® M	Han D®	Han® ES	Han-Modular®	Han D® AV	Han® ESS	Han-Power®	Han DD®	Han® HC Modular 350	Han® Q	Han-Eco®	Han® HPR	Han-Yellock®
Han A®	Han E®	Han® HsB																							
Han® B	Han E® AV	Han® K 3/0																							
Han-Brid®	Han® EE	Han® K 3/2																							
Han-Com®	Han® EEE	Han® M																							
Han D®	Han® ES	Han-Modular®																							
Han D® AV	Han® ESS	Han-Power®																							
Han DD®	Han® HC Modular 350	Han® Q																							
Han-Eco®	Han® HPR	Han-Yellock®																							
	<p>Our testing laboratory is accredited and monitored by the German Accreditation Body Technology/ (DAkkS). Reg.-Nr. D-PL-12148-01-01</p>																								
	<p>Our quality system is certified and monitored by DQS in conformity with the standard DIN EN ISO 9001:2008. Cert.-Nr. 2204-QM08</p>																								
<p><u>Espekamp, 23.11.2012</u> Place and Date of publication</p>	 <hr/> Edgar Peter Düning Managing Director																								
<p><u>Espekamp, 23.11.2012</u> Place and Date of publication</p>	 <hr/> Andre Beneke Director Product & Industry Segment Management																								

Info
00
·
24

Contents	Page
Han® 3 A / Han® 4 A	Han 01.2
Han® 10 A / Han® 16 A / Han® 32 A.....	Han 01.5
Contacts	Han 01.11

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- No special tools required
- Suitable for all metal and plastic hoods and housings of the series Han® 3 A
- for currents up to 10 A

Technical characteristics

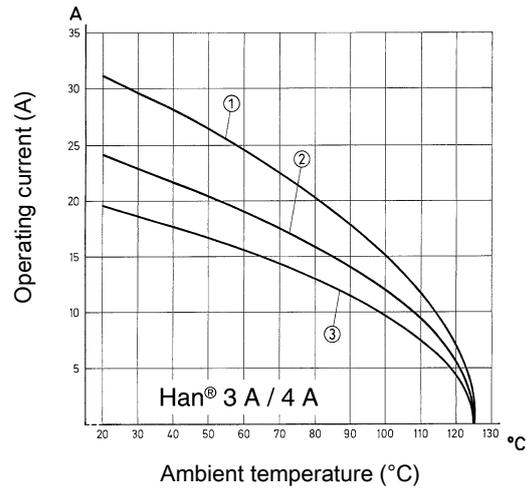
Number of contacts	3, 4
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 1 mm²

Specifications and approvals

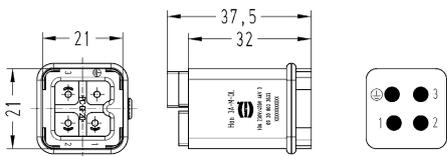
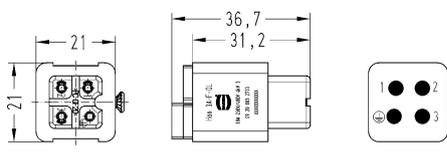
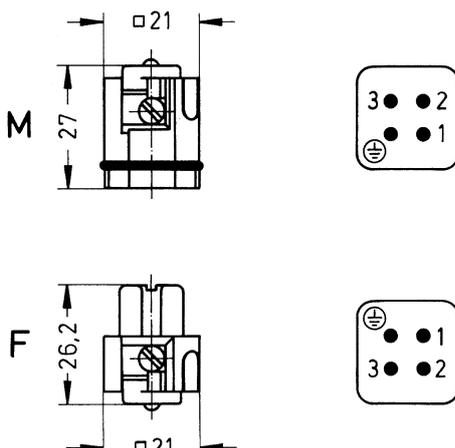
EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

3+

10 A 230/400 V 4 kV 3
10 A 250 V 4 kV 3

Han A

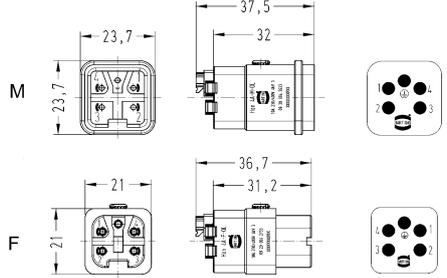
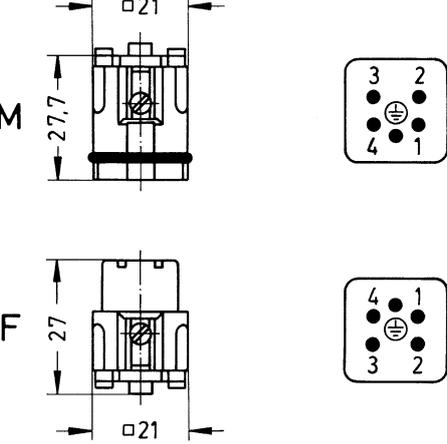
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0.5 ... 2.5	09 20 003 2633	09 20 003 2733	 
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0.25 ... 1.5	09 20 003 2634	09 20 003 2734	
Han A®, Screw termination, Contact surface: Silver plated 	0.75 ... 1.5	09 20 003 2611	09 20 003 2711	 <p> Contact arrangement (view from termination side) Stripping length 4.5 mm Tightening torque 0.25 Nm </p>

Number of contacts

4+

10 A 230/400 V 4 kV 3
10 A 250 V 4 kV 3

Han A

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A®, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Blue slide</p>	0.5 ... 2.5	09 20 004 2633	09 20 004 2733	 <p>Contact arrangement (view from termination side)</p>
<p>Han A®, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Black slide</p>	0.25 ... 1.5	09 20 004 2634	09 20 004 2734	Drawing for black slide is identical to blue slide
<p>Han A®, Screw termination, Contact surface: Silver plated</p> 	0.75 ... 1.5	09 20 004 2611	09 20 004 2711	 <p>Contact arrangement (view from termination side) Stripping length 4.5 mm Tightening torque 0.25 Nm</p>

Features

- Small size
- Available with crimp and screw termination
- Screw termination also available with wire protection

Technical characteristics

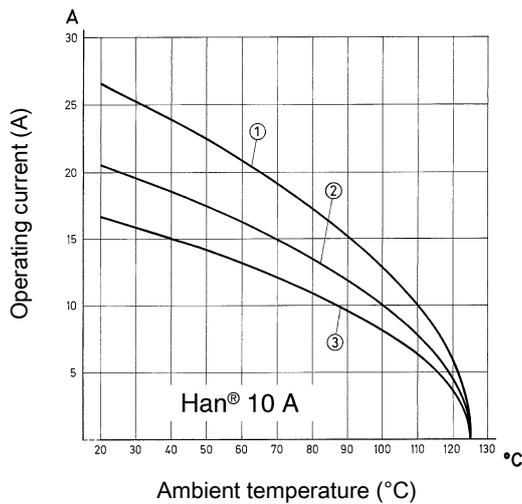
Number of contacts	10, 16, 32
Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

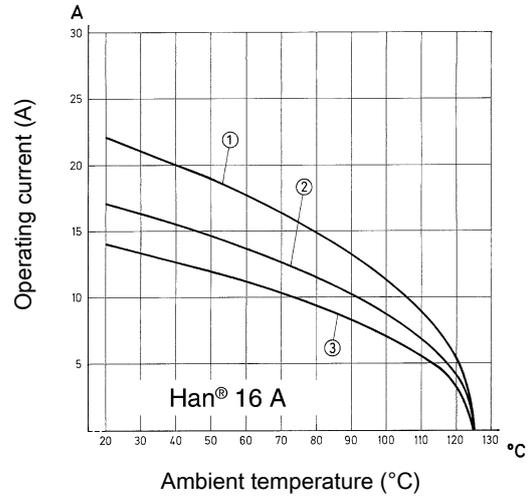
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 1 mm²

Derating



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Number of contacts

10+

16 A 250 V 4 kV 3

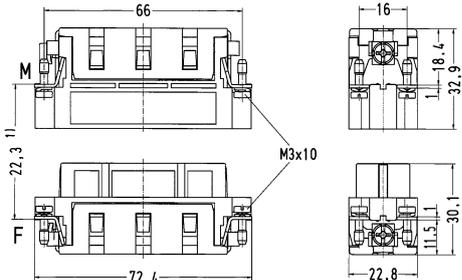
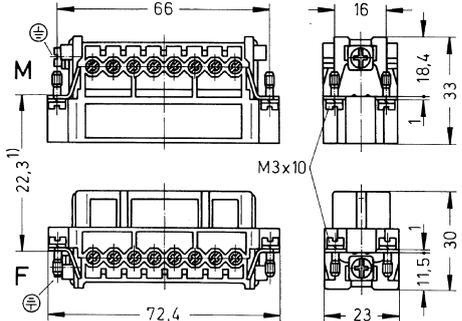

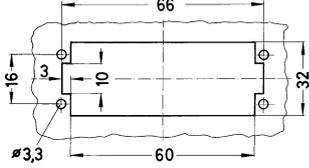
Han A

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A®, Crimp termination</p> <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 20 010 3001	09 20 010 3101	<p>1) Distance for contact max. 24 mm</p>
<p>Han A®, Screw termination, Contact surface: Silver plated</p>	0.75 ... 2.5	09 20 010 2612	09 20 010 2812	<p>1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm</p>
<p>Han A®, Screw termination, With wire protection, Contact surface: Silver plated</p>	0.75 ... 2.5	09 20 010 2614	09 20 010 2814	<p>1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

16+

16 A 250 V 4 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 20 016 3001	09 20 016 3101	 <p>1) Distance for contact max. 24 mm</p>
<p>Han A®, Screw termination, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 20 016 2612	09 20 016 2812	 <p>1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm</p>
<p>Han A®, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 20 016 2614	09 20 016 2814	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

32+

16 A 250 V 4 kV 3

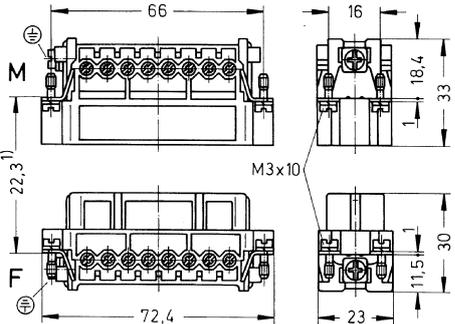
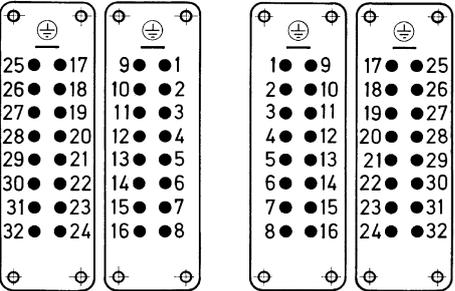
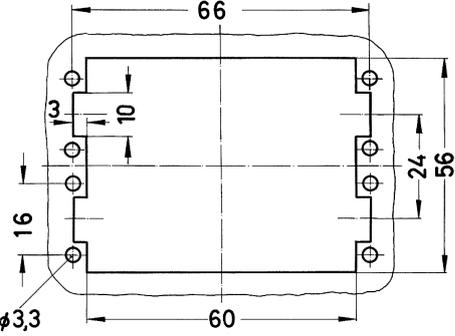
Han A

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A®, Crimp termination, 1 ... 16</p> <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 20 016 3001	09 20 016 3101	<p>1) Distance for contact max. 24 mm</p>
<p>Han A®, Continuing marking, Crimp termination, 17 ... 32</p> <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 20 016 3011	09 20 016 3111	<p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

32+

16 A 250 V 4 kV 3

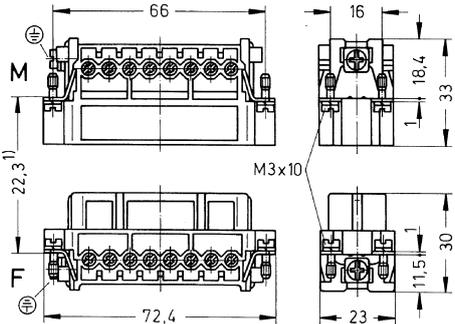
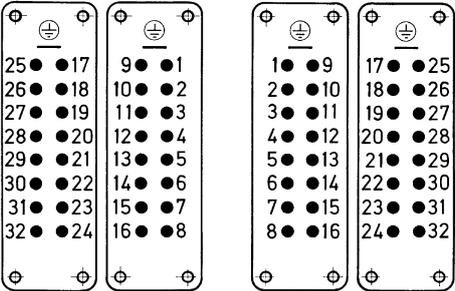
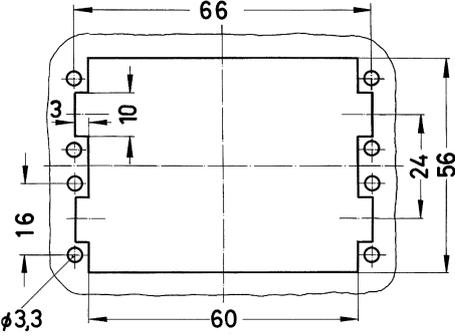
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A®, Screw termination, 1 ... 16 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 20 016 2612	09 20 016 2812	 <p>1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm</p>
<p>Han A®, Continuing marking, Screw termination, 17 ... 32 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 20 016 2613	09 20 016 2813	 <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

32+

16 A 250 V 4 kV 3

Han A

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A®, Screw termination, With wire protection, 1 ... 16</p> <p>Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 20 016 2614	09 20 016 2814	 <p>1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm</p>
<p>Han A®, Continuing marking, Screw termination, With wire protection, 17 ... 32</p> <p>Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 20 016 2615	09 20 016 2815	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

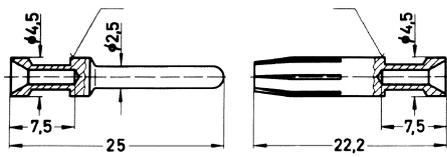
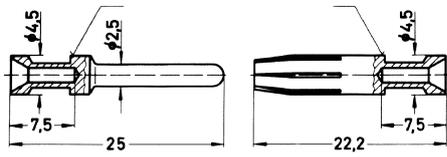
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 33 000 6127	09 33 000 6227	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
	Conductor cross-section	Identification																				
	0.14-0.37 mm ²	AWG 26-22 no groove																				
	0.5 mm ²	AWG 20 no groove																				
	0.75 mm ²	AWG 18 1 groove*																				
	1 mm ²	AWG 18 1 groove																				
	1.5 mm ²	AWG 16 2 grooves																				
	2.5 mm ²	AWG 14 3 grooves																				
	3 mm ²	AWG 12 wide groove																				
	4 mm ²	AWG 12 no groove																				
0.5	09 33 000 6121	09 33 000 6220																				
0.75	09 33 000 6114	09 33 000 6214																				
1	09 33 000 6105	09 33 000 6205																				
1.5	09 33 000 6104	09 33 000 6204																				
2.5	09 33 000 6102	09 33 000 6202																				
3	09 33 000 6106	09 33 000 6206																				
4	09 33 000 6107	09 33 000 6207																				
Han E®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 33 000 6117	09 33 000 6217	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
	Conductor cross-section	Identification																				
	0.14-0.37 mm ²	AWG 26-22 no groove																				
	0.5 mm ²	AWG 20 no groove																				
	0.75 mm ²	AWG 18 1 groove*																				
	1 mm ²	AWG 18 1 groove																				
	1.5 mm ²	AWG 16 2 grooves																				
	2.5 mm ²	AWG 14 3 grooves																				
	3 mm ²	AWG 12 wide groove																				
	4 mm ²	AWG 12 no groove																				
0.5	09 33 000 6122	09 33 000 6222																				
0.75	09 33 000 6115	09 33 000 6215																				
1	09 33 000 6118	09 33 000 6218																				
1.5	09 33 000 6116	09 33 000 6216																				
2.5	09 33 000 6123	09 33 000 6223																				
4	09 33 000 6119	09 33 000 6221																				

Han A



Han
01
·
12

Wind turbine by ENERCON with Han® 3 A – for a fast and reliable installation.

Contents	Page
Han [®] 7 D	Han 02.2
Han [®] 8 D	Han 02.4
Han [®] 15-128 D	Han 02.6
Contacts Han D [®]	Han 02.14
Han DD [®]	Han 02.16
Contacts Han DD [®]	Han 02.25
Han [®] DDD	Han 02.27
Contacts Han [®] DDD	Han 02.31

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- Time saving rapid termination by use of crimping contacts
- for requirements up to 250 V / 10 A
- Gold and silver contacts available
- Suitable for thermo- and 1 mm FO contacts

Technical characteristics

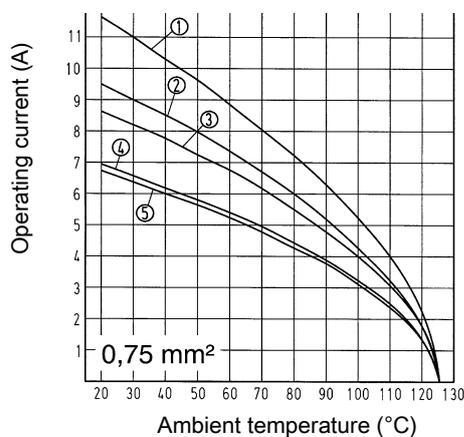
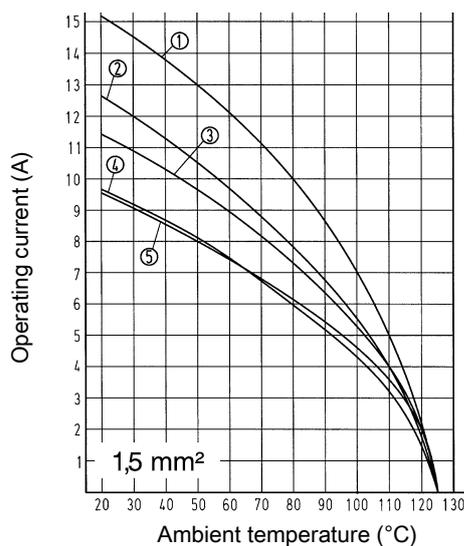
Number of contacts	7
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (seal)	NBR
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0, HB
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 7 D ④ Han® 40 D
 ② Han® 15 D ⑤ Han® 64 D
 ③ Han® 25 D

Specifications and approvals

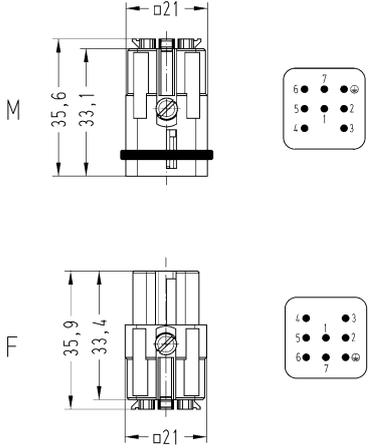
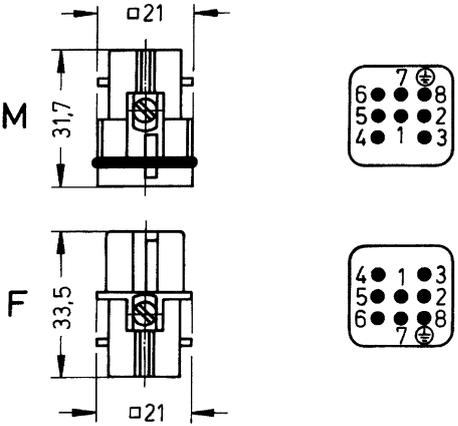
EN 60664-1
 IEC 61984
 EN 175301-801
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

7+

10 A 250 V 4 kV 3

Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Only for thermoplastic hoods / housings</p>	0.25 ... 1.5	09 21 007 2632	09 21 007 2732	 <p>Contact arrangement (view from termination side)</p>
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately. Only for thermoplastic hoods / housings</p>	0.14 ... 2.5	09 21 007 3031	09 21 007 3131	 <p>Contact arrangement (view from termination side)</p>

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available
- Suitable for metal hoods and housings size Han® 3 A
- High density of contacts

Technical characteristics

Number of contacts	8
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	50 V AC, 120 V DC
Rated voltage acc. to UL	50 V
Rated voltage acc. to CSA	50 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (seal)	NBR
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0, HB
RoHS	compliant with exemption

Specifications and approvals

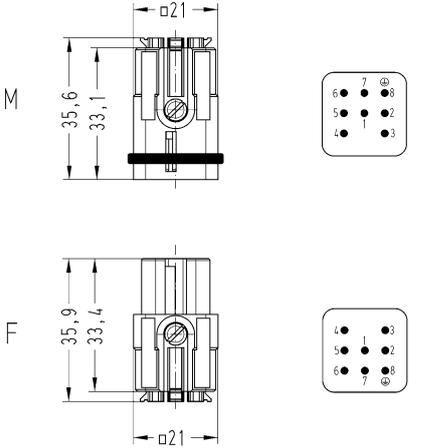
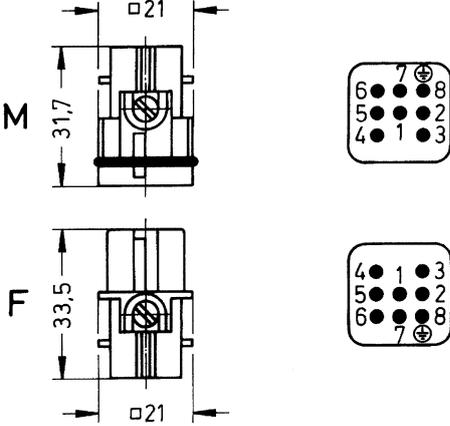
EN 60664-1
 IEC 61984
 EN 175301-801
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

8

10 A 50 V 0,8 kV 3

Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>for thermoplastics and metal hoods/housings</p>	0.25 ... 1.5	09 36 008 2632	09 36 008 2732	 <p>Contact arrangement (view from termination side)</p>
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately. for thermoplastics and metal hoods/housings</p>	0.14 ... 2.5	09 36 008 3001	09 36 008 3101	 <p>Contact arrangement (view from termination side)</p>

Features

- High density of contacts
- for requirements up to 250 V / 10 A
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available
- Suitable for thermo- and 1 mm FO contacts

Technical characteristics

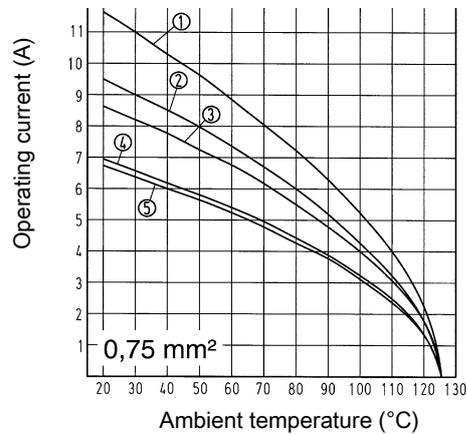
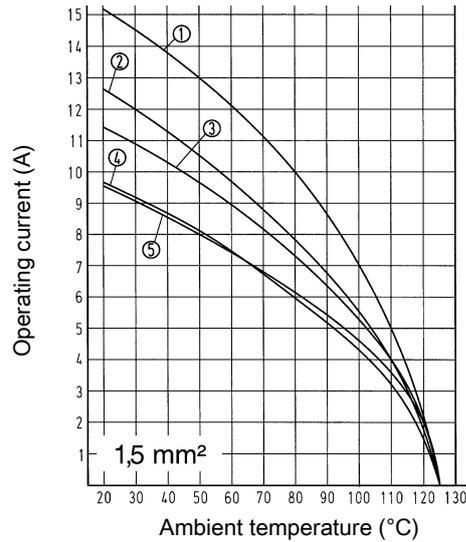
Number of contacts	15, 25, 40, 50, 64, 80, 128
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Dimensions wire wrap post	1 x 1 mm
Termination length	22 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 7 D ④ Han® 40 D
- ② Han® 15 D ⑤ Han® 64 D
- ③ Han® 25 D

Specifications and approvals

EN 60664-1
 IEC 61984
 EN 175301-801
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

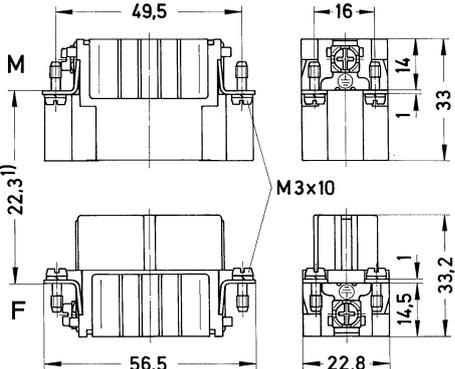
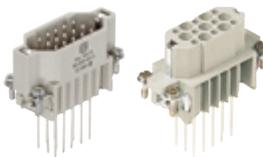


Details

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

Number of contacts

15+

10 A 250 V 4 kV 3

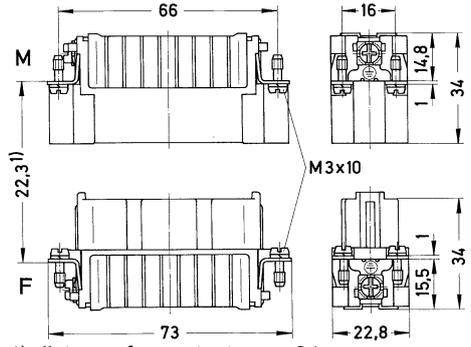

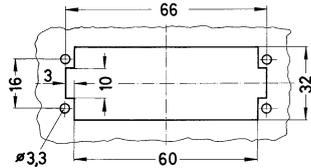
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 21 015 3001	09 21 015 3101	 <p>1) distance for contact max. 24 mm</p>
<p>Han D®, Wrap termination, Contact surface: Silver plated</p> 		09 21 015 2601	09 21 015 2701	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

25+

10 A 250 V 4 kV 3

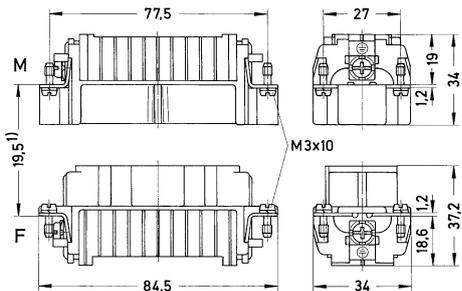

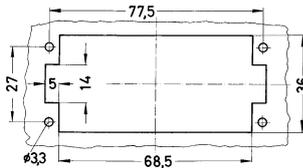
Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 21 025 3001	09 21 025 3101	 <p>1) distance for contact max. 24 mm</p>
Han D®, Wrap termination, Contact surface: Silver plated 		09 21 025 2601	09 21 025 2701	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

40+

10 A 250 V 4 kV 3

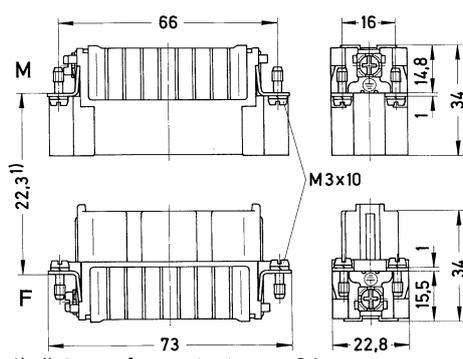
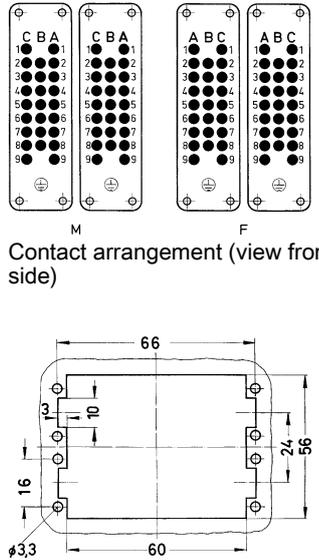
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 21 040 3001	09 21 040 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han D®, Wrap termination, Contact surface: Silver plated</p> 		09 21 040 2601	09 21 040 2701	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

50+

10 A 250 V 4 kV 3

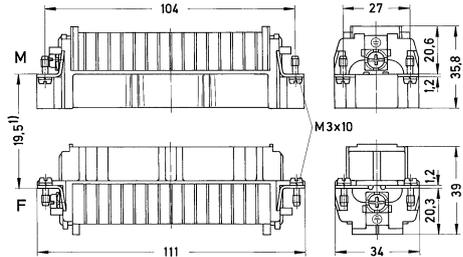
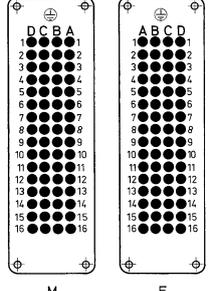
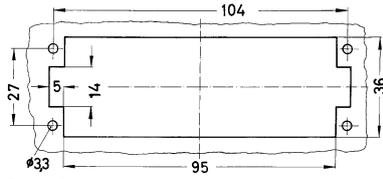
Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 21 025 3001	09 21 025 3101	 <p>1) distance for contact max. 24 mm</p>
<p>Han D®, Wrap termination, Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>		09 21 025 2601	09 21 025 2701	 <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

64+

10 A 250 V 4 kV 3

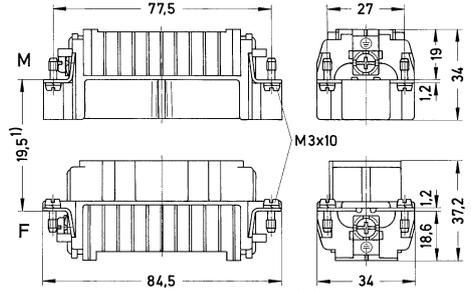
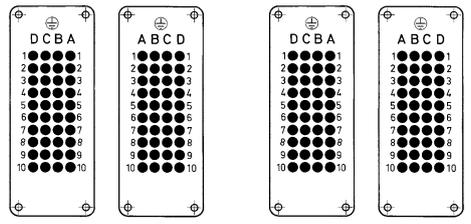
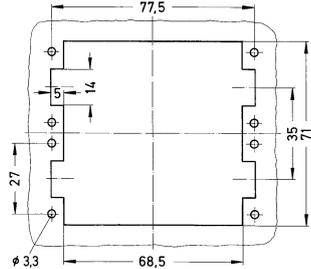
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 21 064 3001	09 21 064 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han D®, Wrap termination, Contact surface: Silver plated</p> 		09 21 064 2601	09 21 064 2701	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

80+

10 A 250 V 4 kV 3

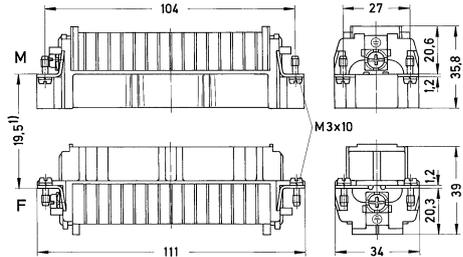
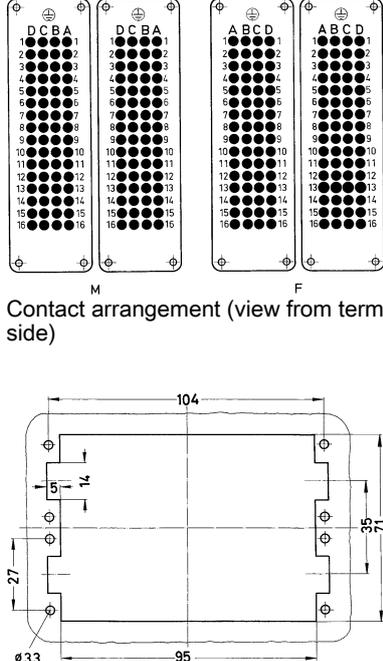
Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 21 040 3001	09 21 040 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han D®, Wrap termination, Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>		09 21 040 2601	09 21 040 2701	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

128+

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D®, Crimp termination</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 21 064 3001	09 21 064 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han D®, Wrap termination, Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>		09 21 064 2601	09 21 064 2701	 <p>Panel cut out for use without Hoods/Housings</p>

Technical characteristics

Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
RoHS	compliant with exemption, compliant

Specifications and approvals

EN 60664-1
IEC 61984

Details

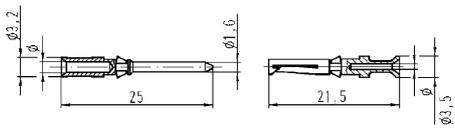
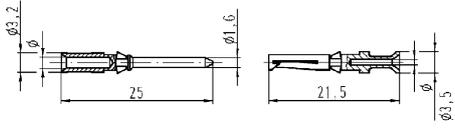
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

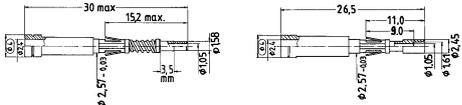
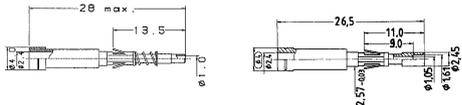
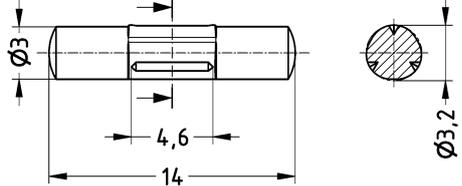
Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 15 000 6104	09 15 000 6204	
	0.5	09 15 000 6103	09 15 000 6203	
	0.75	09 15 000 6105	09 15 000 6205	
	1	09 15 000 6102	09 15 000 6202	
	1.5	09 15 000 6101	09 15 000 6201	
	2.5	09 15 000 6106	09 15 000 6206	
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 15 000 6124	09 15 000 6224	
	0.5	09 15 000 6123	09 15 000 6223	
	0.75	09 15 000 6125	09 15 000 6225	
	1	09 15 000 6122	09 15 000 6222	
	1.5	09 15 000 6121	09 15 000 6221	
	2.5	09 15 000 6126	09 15 000 6226	

Wire gauge	∅	Stripping length
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm
0.5 mm ² AWG 20	1.1 mm	8 mm
0.75 mm ² AWG 18	1.3 mm	8 mm
1 mm ² AWG 18	1.45 mm	8 mm
1.5 mm ² AWG 16	1.75 mm	8 mm
2.5 mm ² AWG 14	2.25 mm	6 mm

Wire gauge	∅	Stripping length
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm
0.5 mm ² AWG 20	1.1 mm	8 mm
0.75 mm ² AWG 18	1.3 mm	8 mm
1 mm ² AWG 18	1.45 mm	8 mm
1.5 mm ² AWG 16	1.75 mm	8 mm
2.5 mm ² AWG 14	2.25 mm	6 mm

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
FO contact, for 1 mm plastic fibre 		20 10 001 3212 20 10 001 3213	20 10 001 3222	 <p>20 10 001 3212 + 20 10 001 3222 for Han® 7 D, Han® 8 D, Han® 40 D, Han® 64 D, Han® 80 D, Han® 128 D</p>  <p>20 10 001 3213 + 20 10 001 3222 for Han® 15 D, Han® 25 D, Han® 50 D</p>
Han D® Han DD® Han® DDD, Coding pin 			09 33 000 9915	
Only for crimp termination With loss of one contact				

Features

- High density of contacts
- for requirements up to 250 V / 10 A
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available
- Suitable for thermo- and 1 mm FO contacts

Technical characteristics

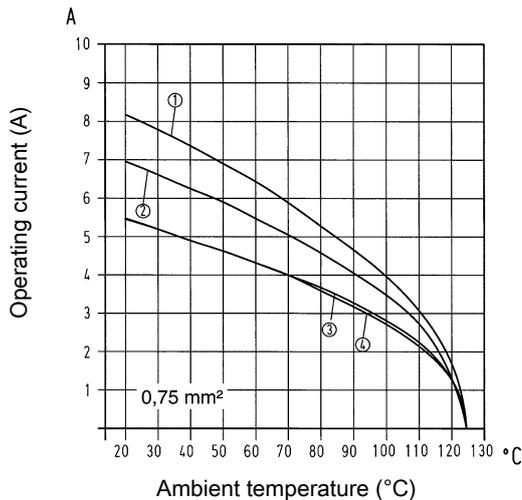
Number of contacts	24, 28, 40, 42, 72, 108, 144, 216
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

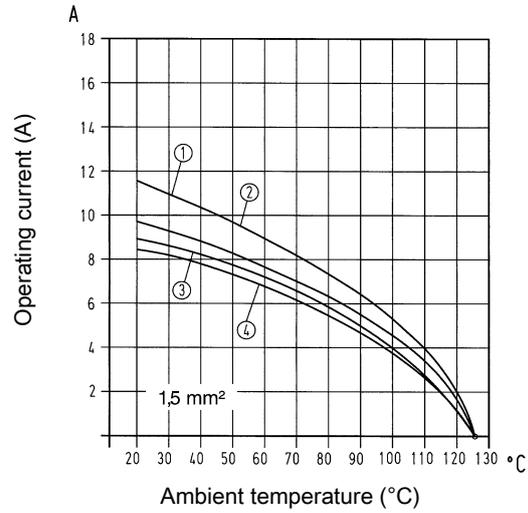
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

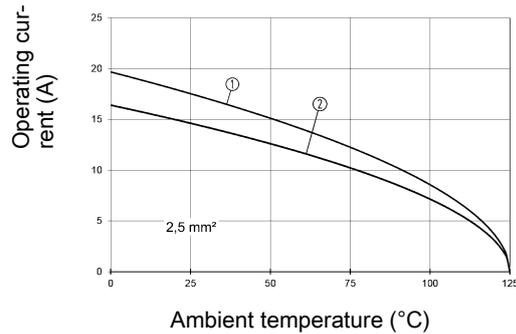


- ① Han® 24 DD
- ② Han® 42 DD
- ③ Han® 72 DD
- ④ Han® 108 DD

Derating



- ① Han® 24 DD
- ② Han® 42 DD
- ③ Han® 72 DD
- ④ Han® 108 DD



- ① Han® 28 DD
- ② Han® 40 DD

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Guide pins and bushes are recommended (see chapter 80).

Number of contacts

24+

10 A 250 V 4 kV 3

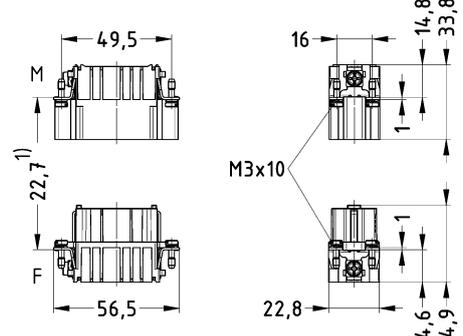
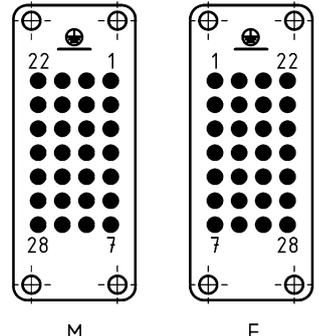
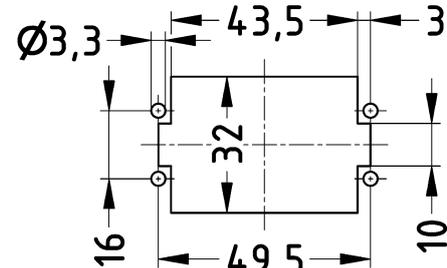
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination</p> <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 024 3001	09 16 024 3101	<p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

28+

10 A 250 V 4 kV 3

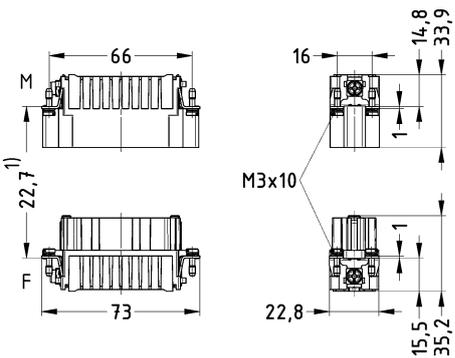
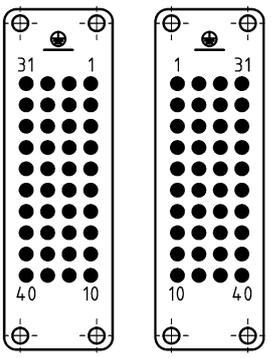
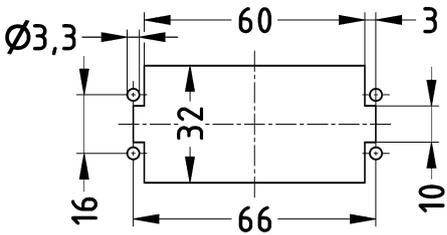
Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 028 3001	09 16 028 3101	 <p>1) distance for contact max. 24 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

40+

10 A 250 V 4 kV 3

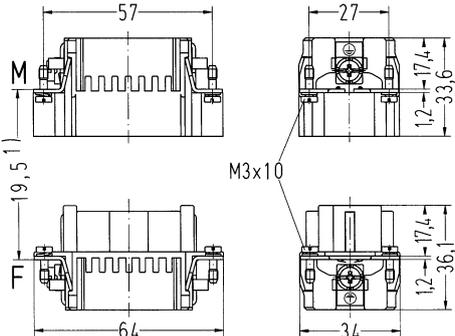


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination  Please order crimp contacts separately.	0.14 ... 2.5	09 16 040 3001	09 16 040 3101	 <p>1) distance for contact max. 24 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

42+

10 A 250 V 4 kV 3

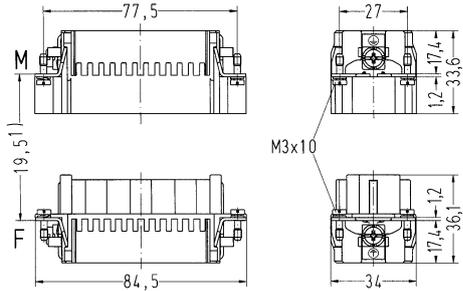

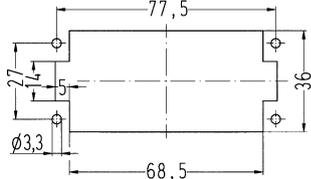
Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 042 3001	09 16 042 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

72+

10 A 250 V 4 kV 3

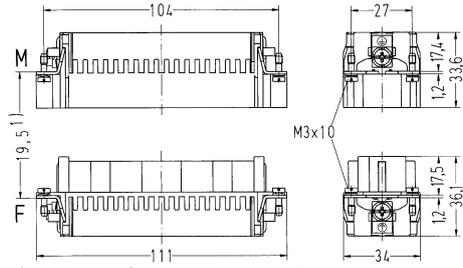
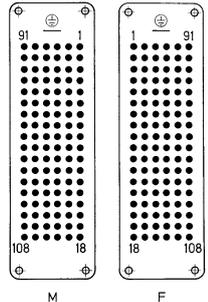
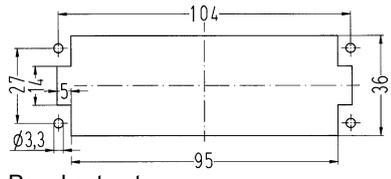
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 072 3001	09 16 072 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

108+

10 A 250 V 4 kV 3

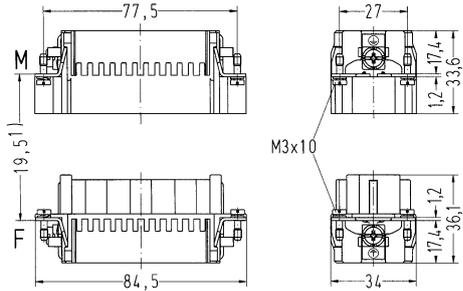
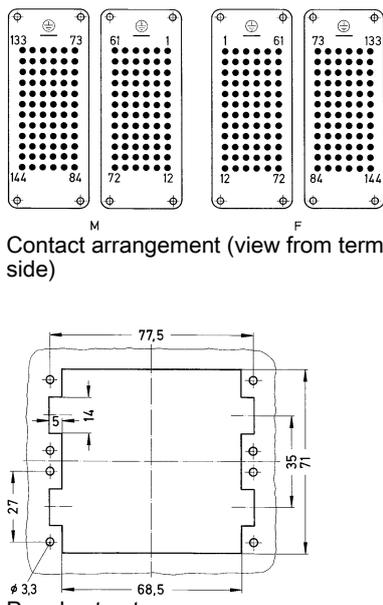
Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 108 3001	09 16 108 3101	 <p>1) distance for contact max. 21 mm</p>  <p>M Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

144+

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination, 1 ... 72</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 16 072 3001	09 16 072 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han DD®, Continuing marking, Crimp termination, 73 ... 144</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 16 072 3011	09 16 072 3111	 <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

216+

10 A 250 V 4 kV 3

Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD®, Crimp termination, 1 ... 108</p> <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 16 108 3001	09 16 108 3101	<p>1) distance for contact max. 21 mm</p>
<p>Han DD®, Continuing marking, Crimp termination, 109 ... 216</p> <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 16 108 3011	09 16 108 3111	<p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Technical characteristics

Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
RoHS	compliant with exemption, compliant

Specifications and approvals

EN 60664-1
IEC 61984

Details

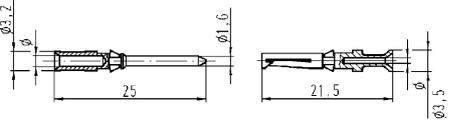
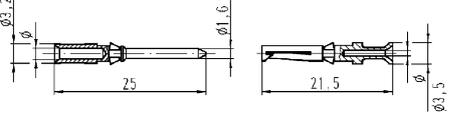

Crimping tools see chapter 90

Remarks on the crimp technique

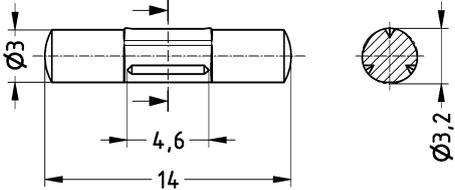
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 15 000 6104	09 15 000 6204	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6103	09 15 000 6203																							
0.75	09 15 000 6105	09 15 000 6205																							
1	09 15 000 6102	09 15 000 6202																							
1.5	09 15 000 6101	09 15 000 6201																							
2.5	09 15 000 6106	09 15 000 6206																							
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 15 000 6124	09 15 000 6224	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6123	09 15 000 6223																							
0.75	09 15 000 6125	09 15 000 6225																							
1	09 15 000 6122	09 15 000 6222																							
1.5	09 15 000 6121	09 15 000 6221																							
2.5	09 15 000 6126	09 15 000 6226																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					

Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® Han DD® Han® DDD, Coding pin  <p>Only for crimp termination With loss of one contact</p>			09 33 000 9915	

Features

- High density of contacts
- for requirements up to 250 V / 10 A
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available

Technical characteristics

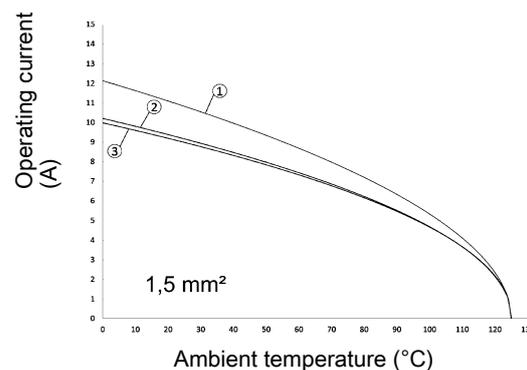
Number of contacts	55, 75, 107
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 55 DDD
- ② Han® 75 DDD
- ③ Han® 107 DDD

Specifications and approvals

IEC 61984

Details

Guide pins and bushes are recommended (see chapter 80).

Number of contacts

55+

10 A 250 V 4 kV 3

Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® DDD, Crimp termination</p> <p>PE connection with a Han D® crimp contact Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 055 2001	09 16 055 2101	<p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

75+

10 A 250 V 4 kV 3

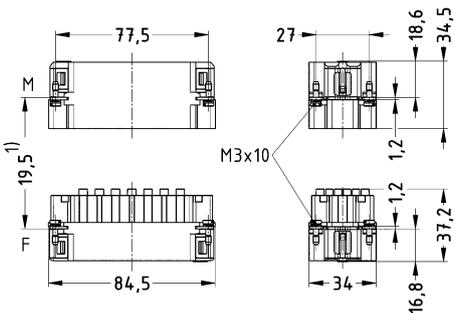
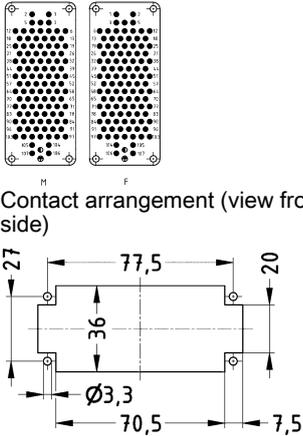
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® DDD, Crimp termination</p> <p>PE connection with a Han D® crimp contact Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 075 2001	09 16 075 2101	<p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

107+

10 A 250 V 4 kV 3

Han D

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® DDD, Crimp termination</p>  <p>PE connection with a Han D® crimp contact Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 107 2001	09 16 107 2101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Technical characteristics

Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
RoHS	compliant with exemption, compliant

Specifications and approvals

EN 60664-1
IEC 61984

Details

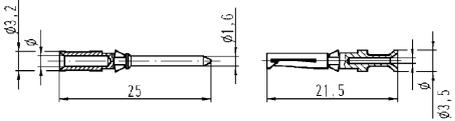
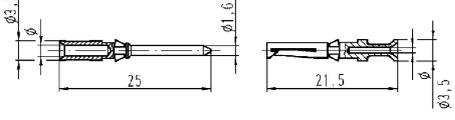
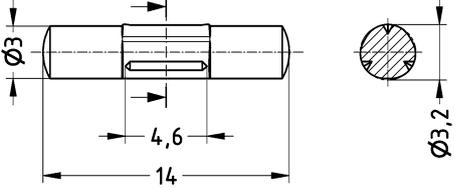
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D [®] , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 15 000 6104	09 15 000 6204	 <table border="1" data-bbox="997 1198 1452 1355"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6103	09 15 000 6203																							
0.75	09 15 000 6105	09 15 000 6205																							
1	09 15 000 6102	09 15 000 6202																							
1.5	09 15 000 6101	09 15 000 6201																							
2.5	09 15 000 6106	09 15 000 6206																							
Han D [®] , Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 15 000 6124	09 15 000 6224	 <table border="1" data-bbox="997 1572 1452 1729"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6123	09 15 000 6223																							
0.75	09 15 000 6125	09 15 000 6225																							
1	09 15 000 6122	09 15 000 6222																							
1.5	09 15 000 6121	09 15 000 6221																							
2.5	09 15 000 6126	09 15 000 6226																							
Han D [®] Han DD [®] Han [®] DDD, Coding pin 			09 33 000 9915																						
Only for crimp termination With loss of one contact																									

Han D

Modified contact arrangement

The connector series Han DD® and Han D® equipped with all contacts may be used for voltages up to 250 V, pollution degree 3. A modified contact loading arrangement permits use up to 500 V also in the same pollution degree.

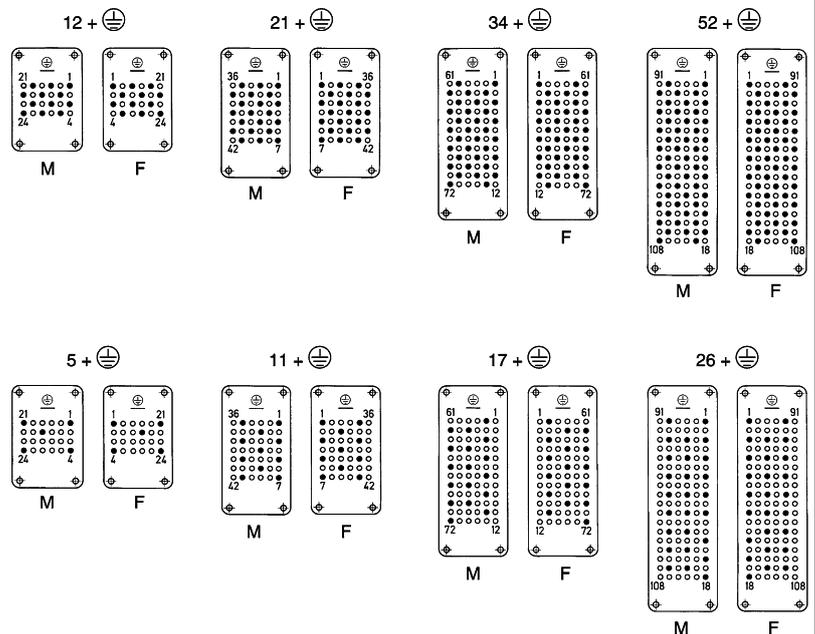
According to DIN EN 61 984 connectors should not be coupled or decoupled under electrical load.

Series Han DD®

Rated current 10 A 400 V 6 kV 3
 Rated voltage 10 A 400 V
 Rated impulse voltage 6 kV
 Pollution degree 3

Rated current 10 A 500 V 6 kV 3
 Rated voltage 10 A 500 V
 Rated impulse voltage 6 kV
 Pollution degree 3

Contact arrangement view from termination side

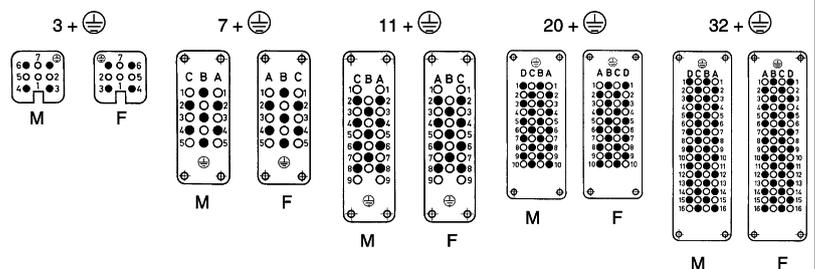


● Working contact ○ Without contact M - Male insert F - Female insert

Series Han D®

Rated current 10 A 500 V 6 kV 3
 Rated voltage 10 A 500 V
 Rated impulse voltage 6 kV
 Pollution degree 3

Contact arrangement view from termination side



● Working contact ○ Without contact M - Male insert F - Female insert



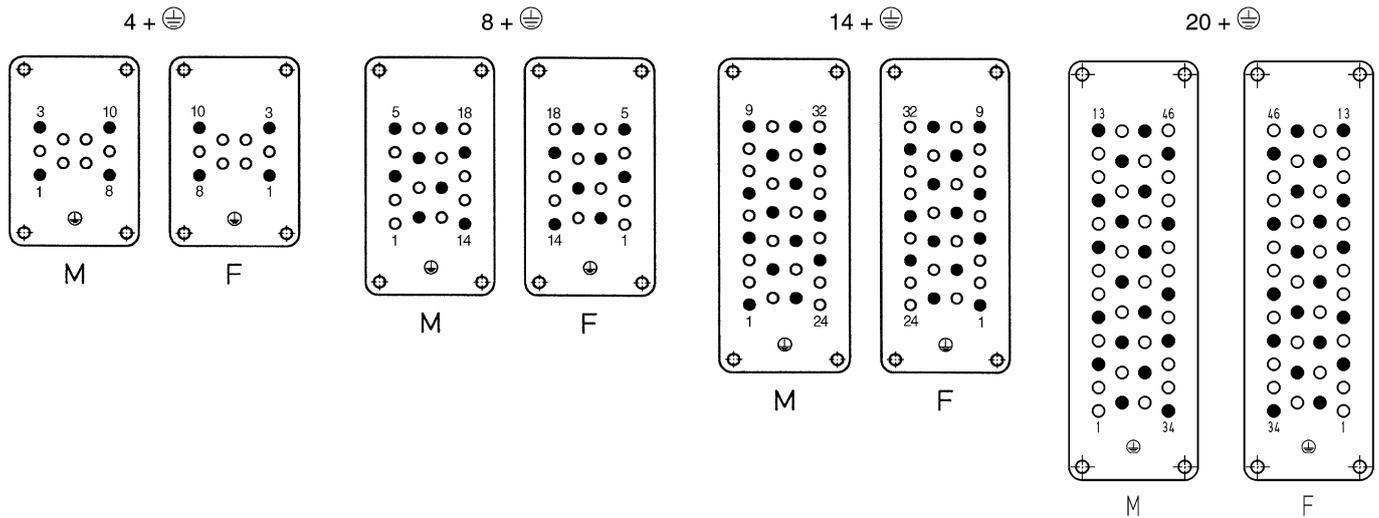
Contents	Page
Han E [®]	Han 03.3
Han [®] ES/ES Press/ESS	Han 03.12
Han [®] ES Press plug-in jumpers	Han 03.28
Han [®] EE	Han 03.30
Han [®] EEE	Han 03.37
Contacts	Han 03.40

Han E/
EE

The connector series Han® EE equipped with all contacts may be used for voltages up to 500 V ~ pollution degree 3. A modified contact loading arrangement permits use up to 1000 V ~ pollution degree also in pollution degree 3. Fully equipped connectors may also be used up to 1000 V ~ but in a lower pollution degree. See chapter 00. According to IEC 61984 connectors should not be coupled or decoupled under electrical load.

690 V Pollution degree 3

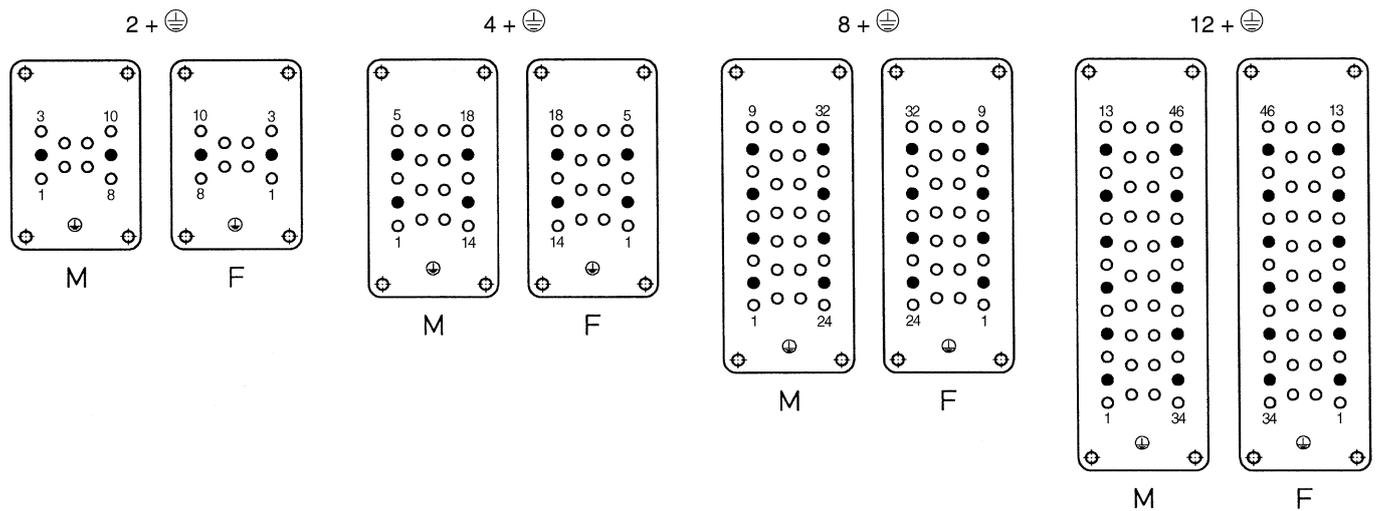
Contact arrangement view from termination side



• Working contact ○ Without contact M - Male insert F - Female insert

1000 V Pollution degree 3

Contact arrangement view from termination side



• Working contact ○ Without contact M - Male insert F - Female insert

Features

- Covers a wide range of cross-sections
- Screw termination with wire protection

Technical characteristics

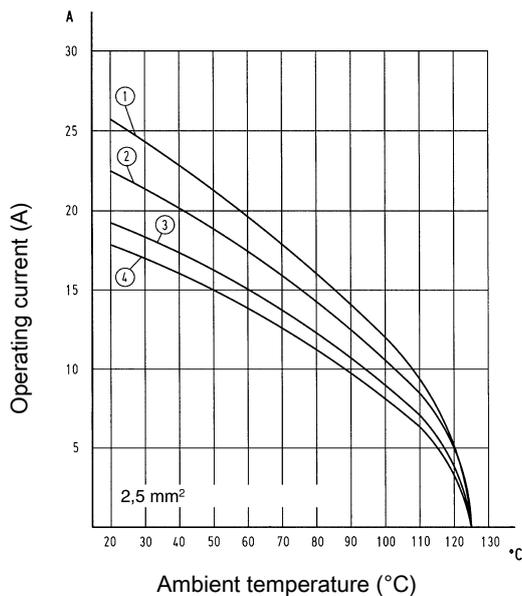
Number of contacts	6, 10, 16, 24, 32, 48
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

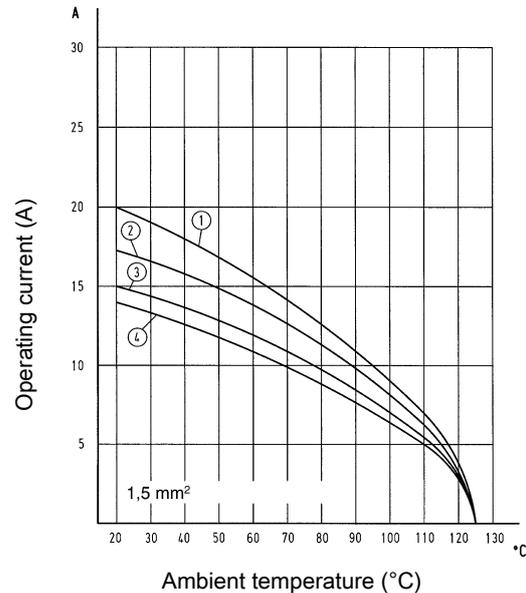
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 6 E
- ② Han® 10 E
- ③ Han® 16 E Han® 32 E
- ④ Han® 24 E Han® 48 E

Derating



- ① Han® 6 E
- ② Han® 10 E
- ③ Han® 16 E Han® 32 E
- ④ Han® 24 E Han® 48 E

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

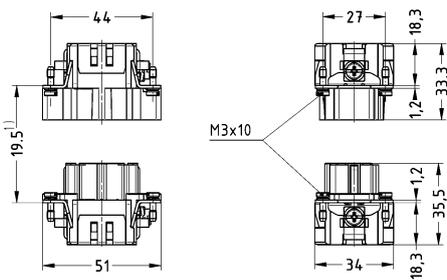
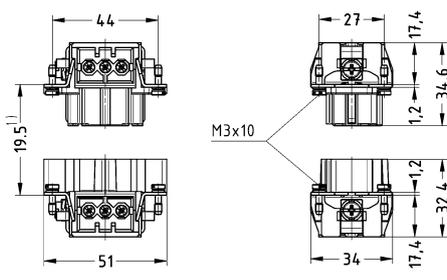


Tightening torque PE screw 1.2 Nm

Number of contacts

6+

16 A 500 V 6 kV 3

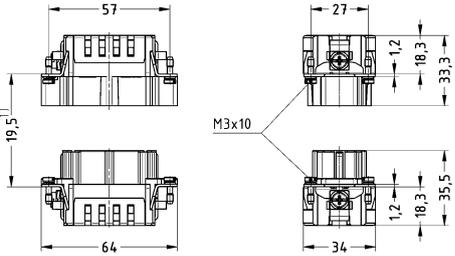
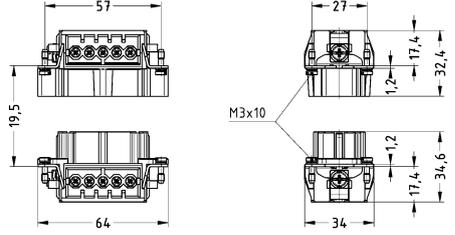


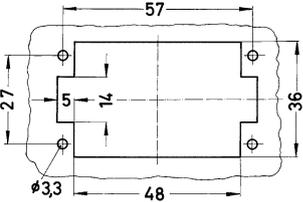
Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 33 006 2602	09 33 006 2702	 <p>1) distance for contact max. 21 mm</p>
<p>Han E®, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 33 006 2601	09 33 006 2701	 <p>1) distance for contact max. 21 mm</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>M</p> </div> <div style="text-align: center;">  <p>F</p> </div> </div> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

10+

16 A 500 V 6 kV 3

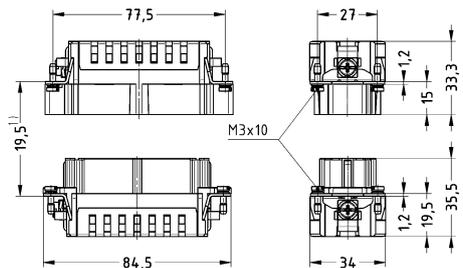
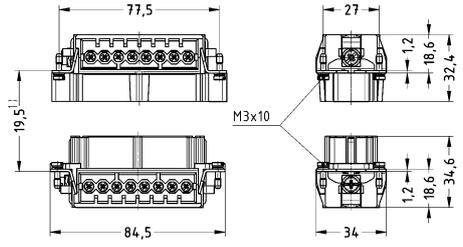
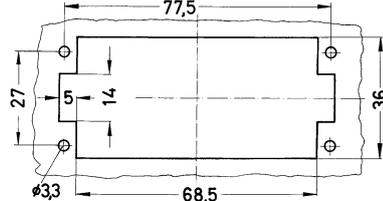
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 33 010 2602	09 33 010 2702	 <p>1) distance for contact max. 21 mm</p>
<p>Han E®, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 33 010 2601	09 33 010 2701	 <p>1) distance for contact max. 21 mm</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>M</p> </div> <div style="text-align: center;">  <p>F</p> </div> </div> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

16+

16 A 500 V 6 kV 3

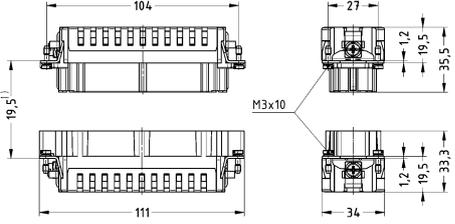
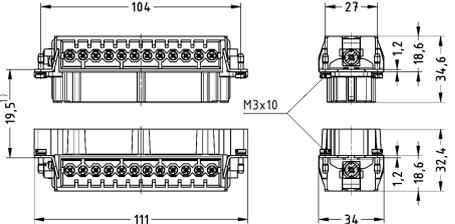
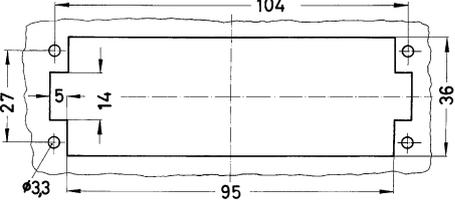
Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																																																
		Male	Female																																																	
<p>Han E®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 33 016 2602	09 33 016 2702	 <p>1) distance for contact max. 21 mm</p>																																																
<p>Han E®, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 33 016 2601	09 33 016 2701	 <p>1) distance for contact max. 21 mm</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <table border="1" style="border-collapse: collapse; text-align: center;"> <tr><td>9</td><td>●</td><td>1</td></tr> <tr><td>10</td><td>●</td><td>2</td></tr> <tr><td>11</td><td>●</td><td>3</td></tr> <tr><td>12</td><td>●</td><td>4</td></tr> <tr><td>13</td><td>●</td><td>5</td></tr> <tr><td>14</td><td>●</td><td>6</td></tr> <tr><td>15</td><td>●</td><td>7</td></tr> <tr><td>16</td><td>●</td><td>8</td></tr> </table> <table border="1" style="border-collapse: collapse; text-align: center;"> <tr><td>1</td><td>●</td><td>9</td></tr> <tr><td>2</td><td>●</td><td>10</td></tr> <tr><td>3</td><td>●</td><td>11</td></tr> <tr><td>4</td><td>●</td><td>12</td></tr> <tr><td>5</td><td>●</td><td>13</td></tr> <tr><td>6</td><td>●</td><td>14</td></tr> <tr><td>7</td><td>●</td><td>15</td></tr> <tr><td>8</td><td>●</td><td>16</td></tr> </table> </div> <p style="text-align: center;">M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>	9	●	1	10	●	2	11	●	3	12	●	4	13	●	5	14	●	6	15	●	7	16	●	8	1	●	9	2	●	10	3	●	11	4	●	12	5	●	13	6	●	14	7	●	15	8	●	16
9	●	1																																																		
10	●	2																																																		
11	●	3																																																		
12	●	4																																																		
13	●	5																																																		
14	●	6																																																		
15	●	7																																																		
16	●	8																																																		
1	●	9																																																		
2	●	10																																																		
3	●	11																																																		
4	●	12																																																		
5	●	13																																																		
6	●	14																																																		
7	●	15																																																		
8	●	16																																																		

Number of contacts

24+

16 A 500 V 6 kV 3

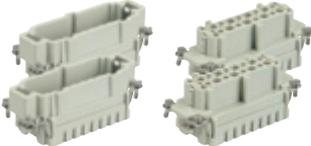
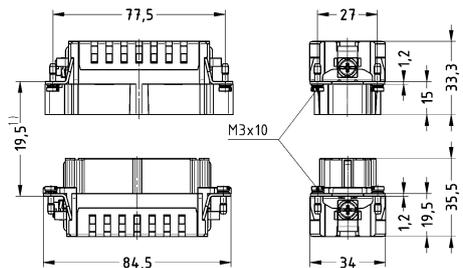
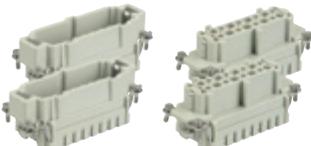
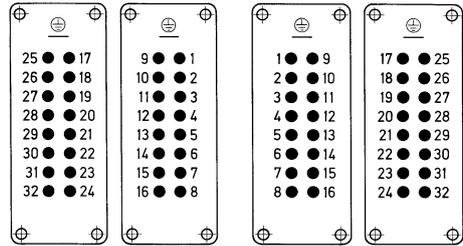
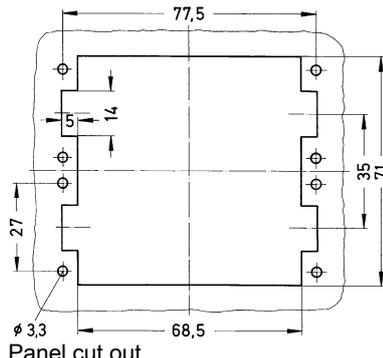
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																																																								
		Male	Female																																																									
Han E®, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 33 024 2602	09 33 024 2702	 <p>1) distance for contact max. 21 mm</p>																																																								
Han E®, Screw termination, With wire protection, Contact surface: Silver plated 	0.75 ... 2.5	09 33 024 2601	09 33 024 2701	 <p>1) distance for contact max. 21 mm</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <table border="1" style="font-size: 8px;"> <tr><td>⊕</td><td>⊕</td></tr> <tr><td>13 ● 1</td><td>1 ● 13</td></tr> <tr><td>14 ● 2</td><td>2 ● 14</td></tr> <tr><td>15 ● 3</td><td>3 ● 15</td></tr> <tr><td>16 ● 4</td><td>4 ● 16</td></tr> <tr><td>17 ● 5</td><td>5 ● 17</td></tr> <tr><td>18 ● 6</td><td>6 ● 18</td></tr> <tr><td>19 ● 7</td><td>7 ● 19</td></tr> <tr><td>20 ● 8</td><td>8 ● 20</td></tr> <tr><td>21 ● 9</td><td>9 ● 21</td></tr> <tr><td>22 ● 10</td><td>10 ● 22</td></tr> <tr><td>23 ● 11</td><td>11 ● 23</td></tr> <tr><td>24 ● 12</td><td>12 ● 24</td></tr> <tr><td>⊕</td><td>⊕</td></tr> </table> <table border="1" style="font-size: 8px;"> <tr><td>⊕</td><td>⊕</td></tr> <tr><td>1 ● 13</td><td>13 ● 1</td></tr> <tr><td>2 ● 14</td><td>14 ● 2</td></tr> <tr><td>3 ● 15</td><td>15 ● 3</td></tr> <tr><td>4 ● 16</td><td>16 ● 4</td></tr> <tr><td>5 ● 17</td><td>17 ● 5</td></tr> <tr><td>6 ● 18</td><td>18 ● 6</td></tr> <tr><td>7 ● 19</td><td>19 ● 7</td></tr> <tr><td>8 ● 20</td><td>20 ● 8</td></tr> <tr><td>9 ● 21</td><td>21 ● 9</td></tr> <tr><td>10 ● 22</td><td>22 ● 10</td></tr> <tr><td>11 ● 23</td><td>23 ● 11</td></tr> <tr><td>12 ● 24</td><td>24 ● 12</td></tr> <tr><td>⊕</td><td>⊕</td></tr> </table> </div> <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>	⊕	⊕	13 ● 1	1 ● 13	14 ● 2	2 ● 14	15 ● 3	3 ● 15	16 ● 4	4 ● 16	17 ● 5	5 ● 17	18 ● 6	6 ● 18	19 ● 7	7 ● 19	20 ● 8	8 ● 20	21 ● 9	9 ● 21	22 ● 10	10 ● 22	23 ● 11	11 ● 23	24 ● 12	12 ● 24	⊕	⊕	⊕	⊕	1 ● 13	13 ● 1	2 ● 14	14 ● 2	3 ● 15	15 ● 3	4 ● 16	16 ● 4	5 ● 17	17 ● 5	6 ● 18	18 ● 6	7 ● 19	19 ● 7	8 ● 20	20 ● 8	9 ● 21	21 ● 9	10 ● 22	22 ● 10	11 ● 23	23 ● 11	12 ● 24	24 ● 12	⊕	⊕
⊕	⊕																																																											
13 ● 1	1 ● 13																																																											
14 ● 2	2 ● 14																																																											
15 ● 3	3 ● 15																																																											
16 ● 4	4 ● 16																																																											
17 ● 5	5 ● 17																																																											
18 ● 6	6 ● 18																																																											
19 ● 7	7 ● 19																																																											
20 ● 8	8 ● 20																																																											
21 ● 9	9 ● 21																																																											
22 ● 10	10 ● 22																																																											
23 ● 11	11 ● 23																																																											
24 ● 12	12 ● 24																																																											
⊕	⊕																																																											
⊕	⊕																																																											
1 ● 13	13 ● 1																																																											
2 ● 14	14 ● 2																																																											
3 ● 15	15 ● 3																																																											
4 ● 16	16 ● 4																																																											
5 ● 17	17 ● 5																																																											
6 ● 18	18 ● 6																																																											
7 ● 19	19 ● 7																																																											
8 ● 20	20 ● 8																																																											
9 ● 21	21 ● 9																																																											
10 ● 22	22 ● 10																																																											
11 ● 23	23 ● 11																																																											
12 ● 24	24 ● 12																																																											
⊕	⊕																																																											

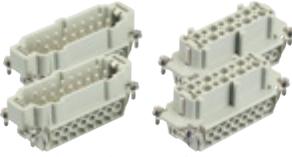
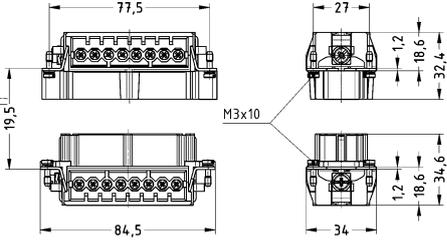
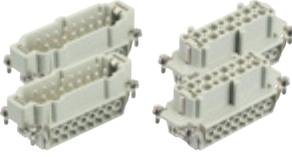
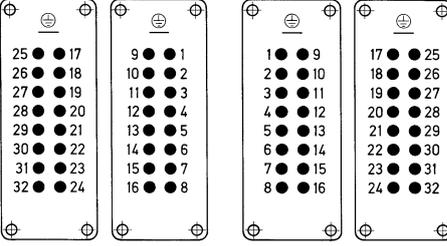
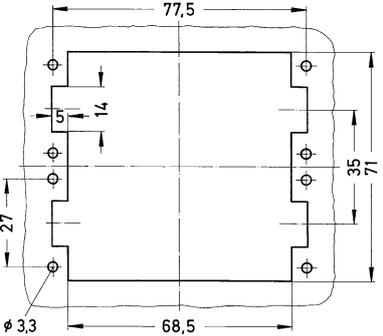
Number of contacts

32+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E®, Crimp termination, 1 ... 16</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 33 016 2602	09 33 016 2702	 <p>1) distance for contact max. 21 mm</p>
<p>Han E®, Continuing marking, Crimp termination, 17 ... 32</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 33 016 2612	09 33 016 2712	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

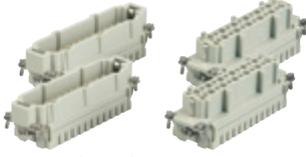
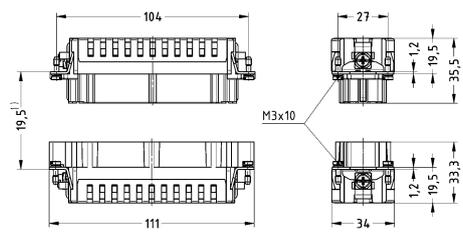
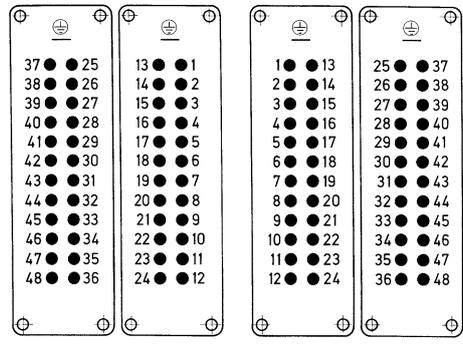
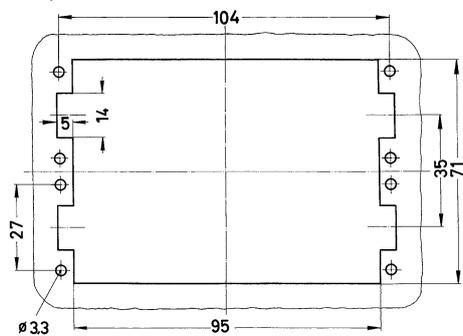
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E®, Screw termination, With wire protection, 1 ... 16 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 33 016 2601	09 33 016 2701	 <p>1) distance for contact max. 21 mm</p>
<p>Han E®, Continuing marking, Screw termination, With wire protection, 17 ... 32 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 33 016 2611	09 33 016 2711	 <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

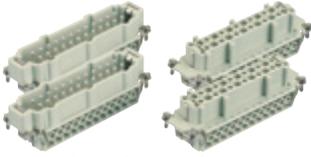
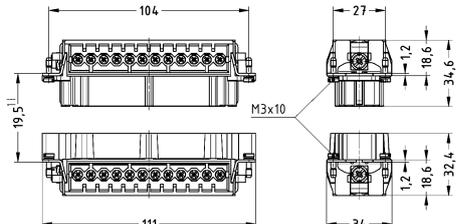
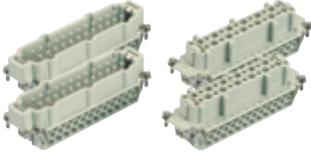
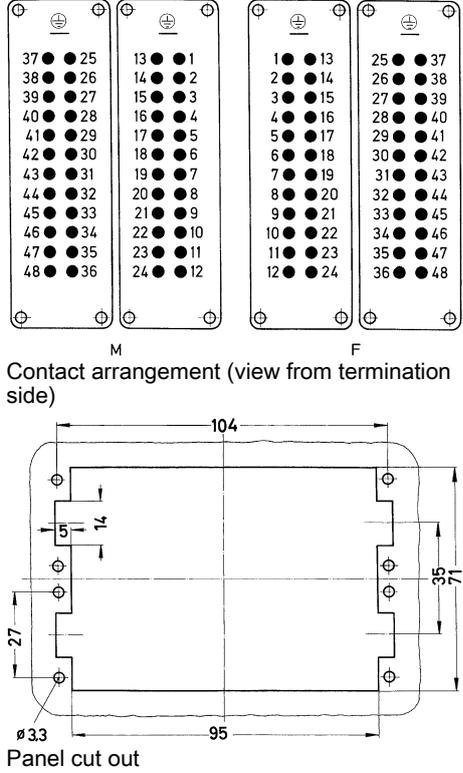
Number of contacts

48+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E®, Crimp termination, 1 ... 24</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 33 024 2602	09 33 024 2702	 <p>1) distance for contact max. 21 mm</p>
<p>Han E®, Continuing marking, Crimp termination, 25 ... 48</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 33 024 2612	09 33 024 2712	 <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E®, Screw termination, With wire protection, 1 ... 24 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 33 024 2601	09 33 024 2701	 <p>1) distance for contact max. 21 mm</p>
<p>Han E®, Continuing marking, Screw termination, With wire protection, 25 ... 48 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 33 024 2611	09 33 024 2711	 <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Features

- Rapid termination technology without tools for a time saving assembly and for optimal processreliability
- Vibration-proved
- Han® ES Press: Easy bridging functionality of contacts by means of plug-in jumpers directly on the connector
- Han® ES Press: Fast realisation of potential multiplication as well as star and delta bridges
- Han® ESS: two termination points per contact

Technical characteristics

Number of contacts	6, 10, 16, 24, 32, 48
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

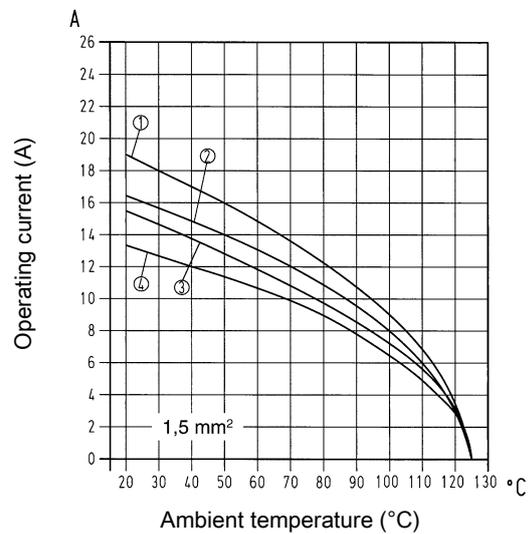
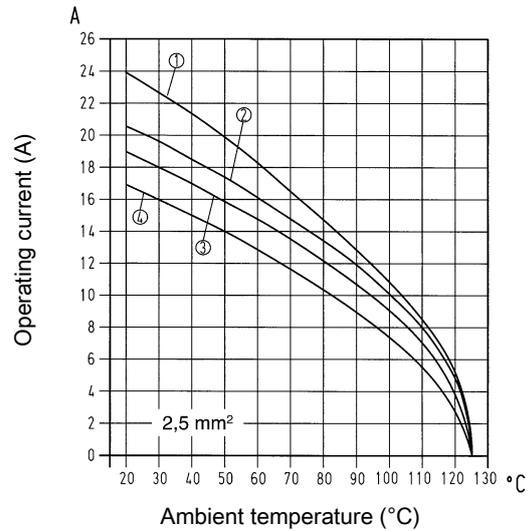
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

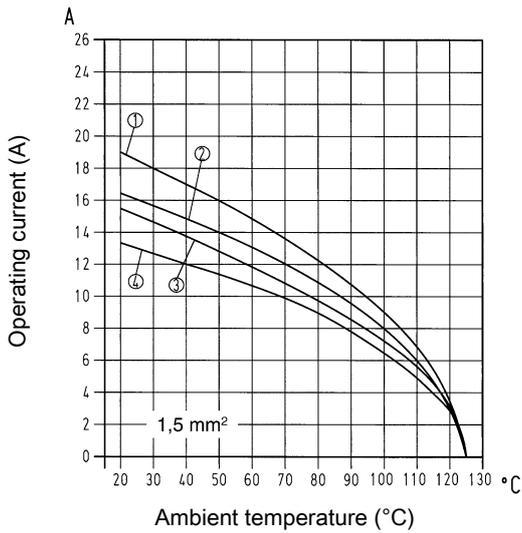
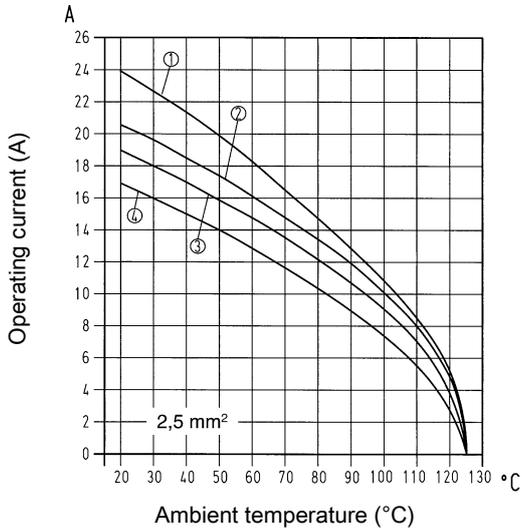
Han® ES



- ① Han® 6 ES
- ② Han® 10 ES
- ③ Han® 16 ES Han® 32 ES
- ④ Han® 24 ES Han® 48 ES

Derating

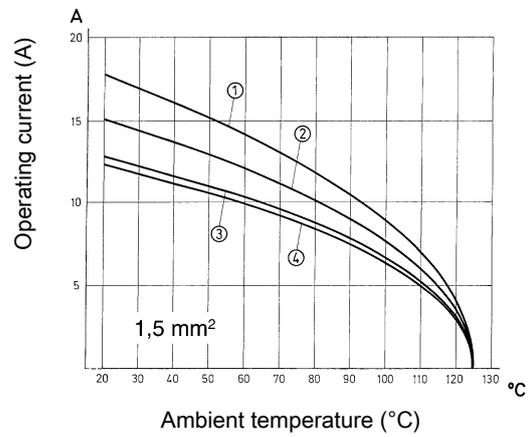
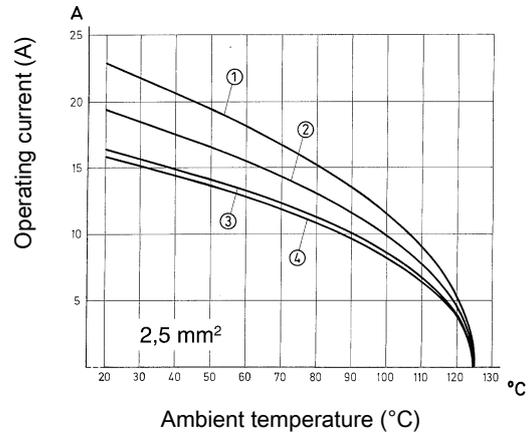
Han® ES Press



- ① Han® 6 ES Press
- ② Han® 10 ES Press
- ③ Han® 16 ES Press Han® 32 ES Press
- ④ Han® 24 ES Press Han® 48 ES Press

Derating

Han® ESS



- ① Han® 6 ESS
- ② Han® 10 ESS
- ③ Han® 16 ESS Han® 32 ESS
- ④ Han® 24 ESS Han® 48 ESS

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL
 CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

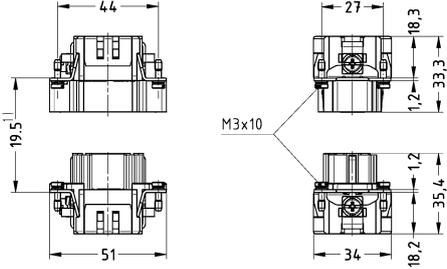
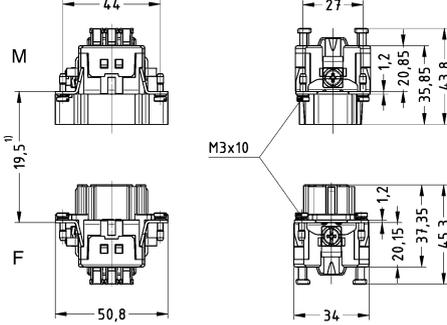


Tightening torque PE screw 1.2 Nm

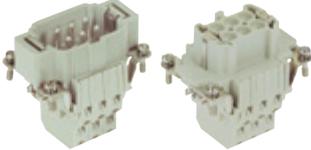
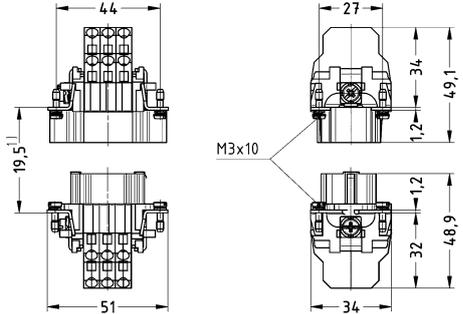


Number of contacts

6+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES, Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 006 2616	09 33 006 2716	 <p>1) distance for contact max. 21 mm</p>
<p>Han® ES Press, Cage-clamp termination, Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 006 2648	09 33 006 2748	 <p>Distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ESS, Cage-clamp termination, Contact surface: Silver plated</p>  <p>two terminations per contact for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 006 2672	09 33 006 2772	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

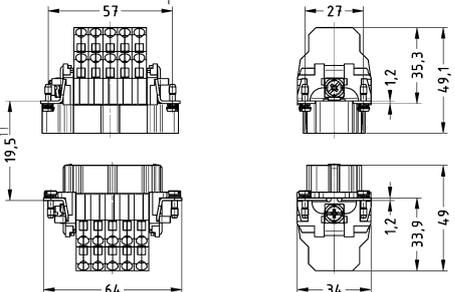

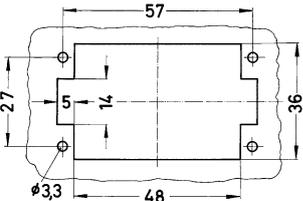
Number of contacts

10+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES, Cage-clamp termination, Contact surface: Silver plated</p>	0.14 ... 2.5	09 33 010 2616	09 33 010 2716	<p>1) distance for contact max. 21 mm</p>
<p>Han® ES Press, Cage-clamp termination, Contact surface: Silver plated</p> <p>Blue slide for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 010 2648	09 33 010 2748	<p>Distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

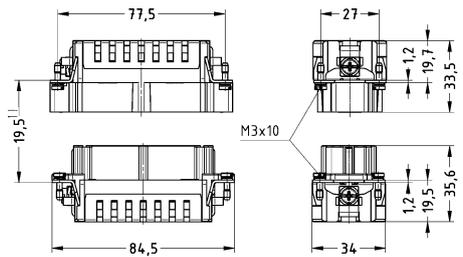
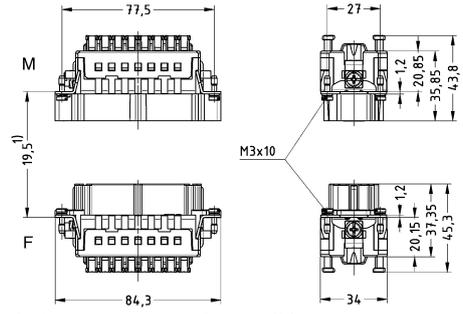
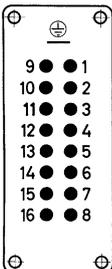
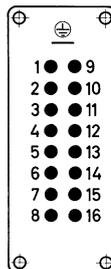
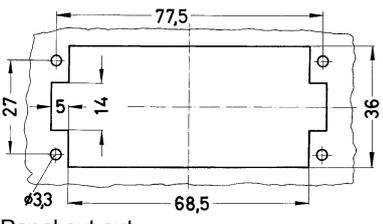
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ESS, Cage-clamp termination, Contact surface: Silver plated</p>  <p>two terminations per contact for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 010 2672	09 33 010 2772	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

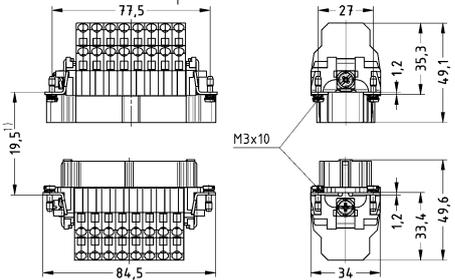
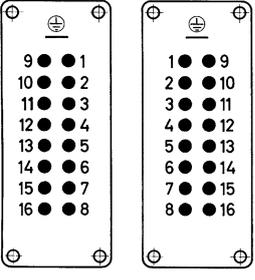
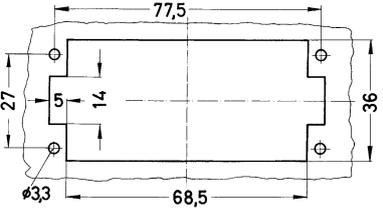
Number of contacts

16+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES, Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 016 2616	09 33 016 2716	 <p>1) distance for contact max. 21 mm</p>
<p>Han® ES Press, Cage-clamp termination, Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 016 2648	09 33 016 2748	 <p>Distance for contact max. 21 mm</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>M</p> </div> <div style="text-align: center;">  <p>F</p> </div> </div> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ESS, Cage-clamp termination, Contact surface: Silver plated</p>  <p>two terminations per contact for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 016 2672	09 33 016 2772	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

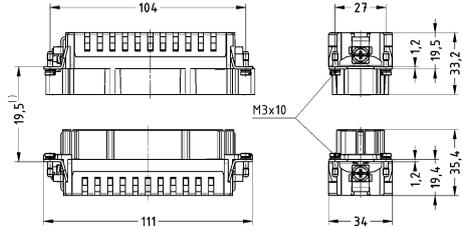
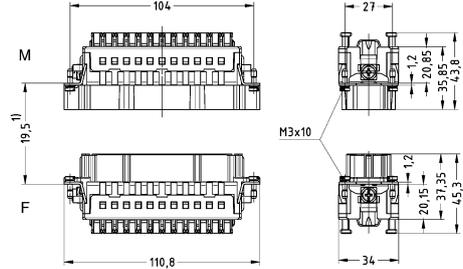
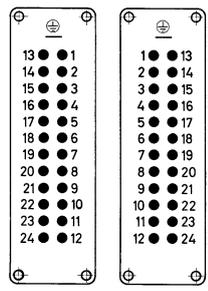
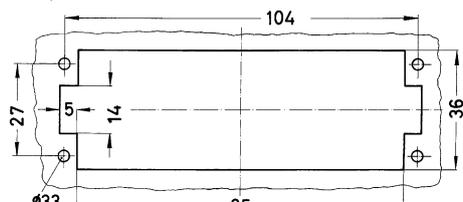
Han E/EE

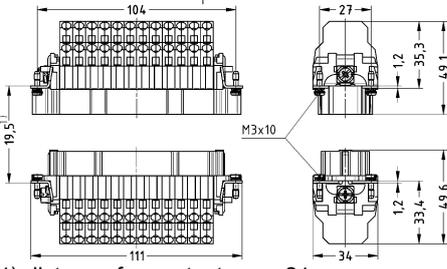
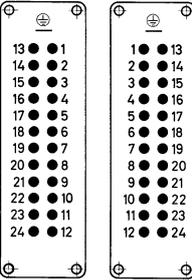
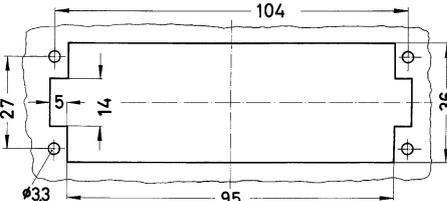
Number of contacts

24+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES, Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 024 2616	09 33 024 2716	 <p>1) distance for contact max. 21 mm</p>
<p>Han® ES Press, Cage-clamp termination, Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 024 2648	09 33 024 2748	 <p>Distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ESS, Cage-clamp termination, Contact surface: Silver plated</p>  <p>two terminations per contact for hoods/housings high construction only</p>	0.14 ... 2.5	09 33 024 2672	09 33 024 2772	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

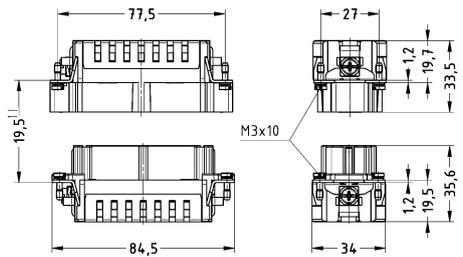
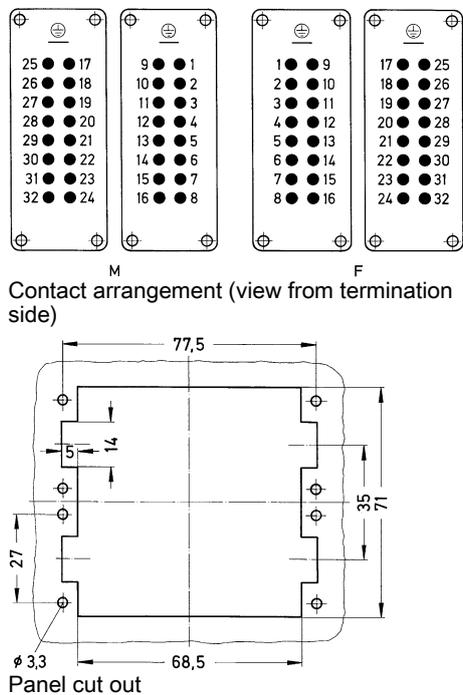
Han E/EE

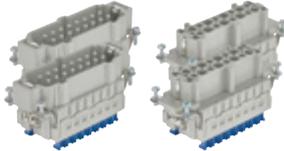
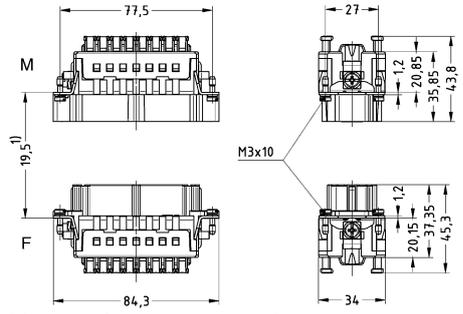
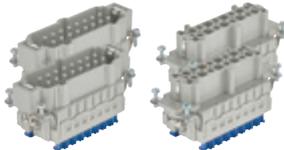
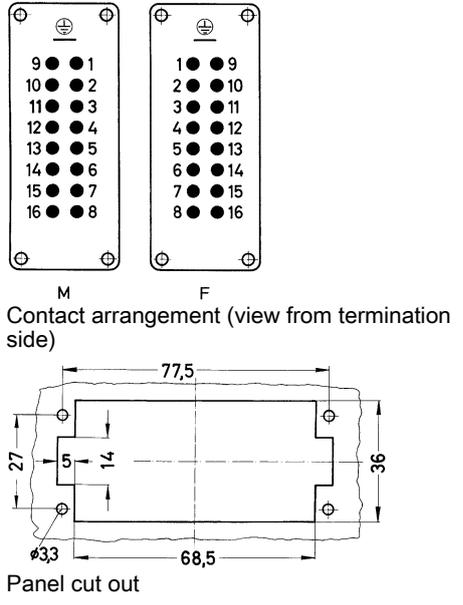
Number of contacts

32+

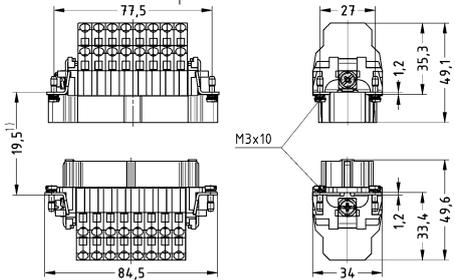
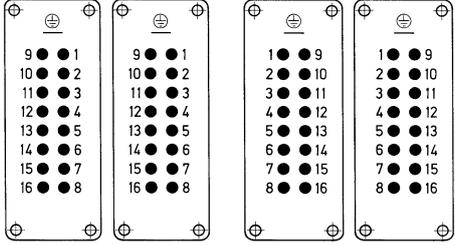
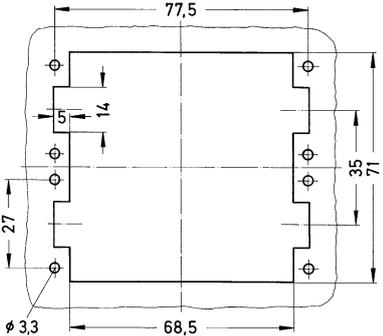
16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES, Cage-clamp termination, 1 ... 16</p> <p>Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 016 2616	09 33 016 2716	 <p>1) distance for contact max. 21 mm</p>
<p>Han® ES, Continuing marking, Cage-clamp termination, 17 ... 32</p> <p>Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 016 2626	09 33 016 2726	 <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES Press, Cage-clamp termination, 1 ... 16</p> <p>Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 016 2648	09 33 016 2748	 <p>Distance for contact max. 21 mm</p>
<p>Han® ES Press, Continuing marking, Cage-clamp termination, 17 ... 32</p> <p>Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 016 2688	09 33 016 2788	 <p>Panel cut out</p>

Han E/EE

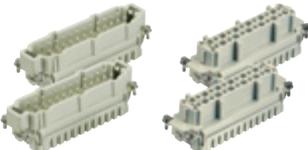
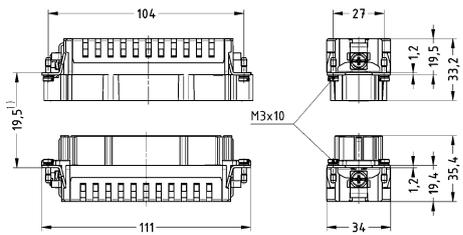
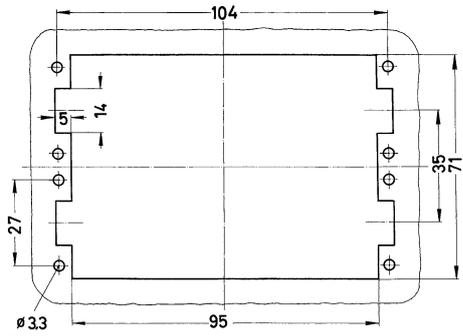
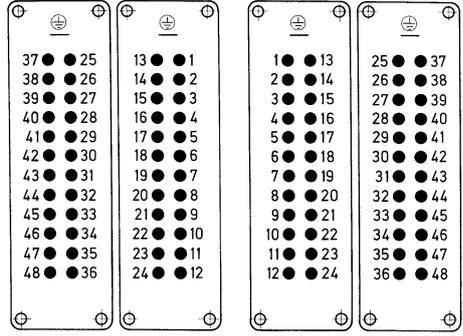
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ESS, Cage-clamp termination, 1 ... 16</p> <p>Contact surface: Silver plated</p>  <p>two terminations per contact for hoods/housings high construction only You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 016 2672	09 33 016 2772	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

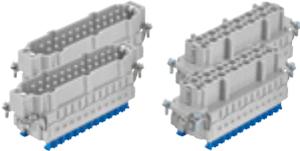
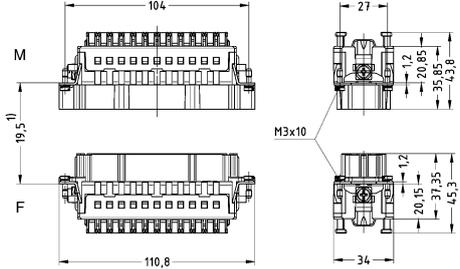
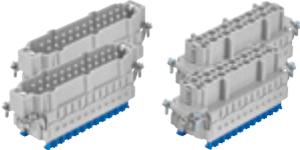
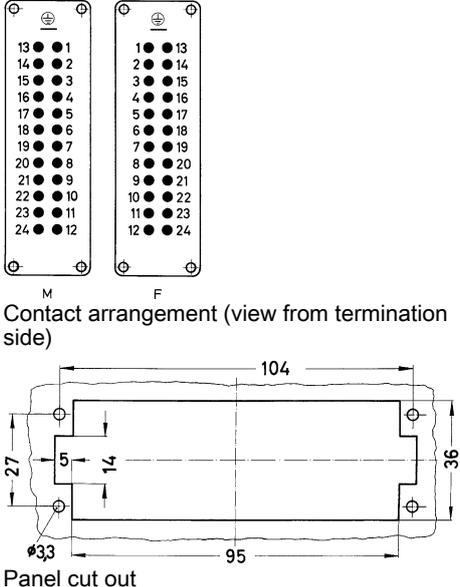
48+

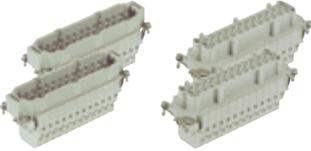
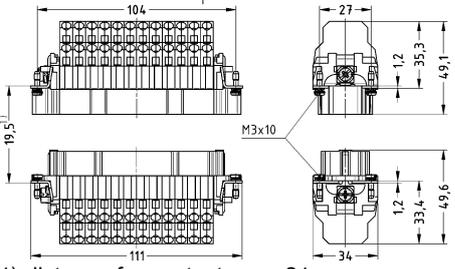
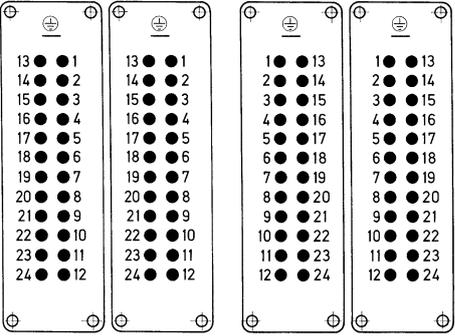
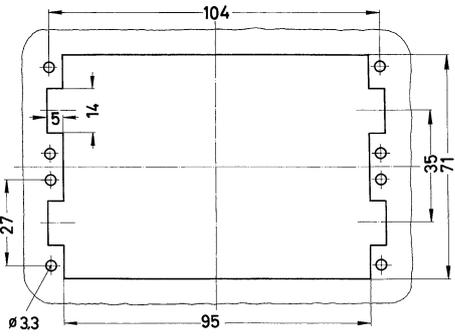
16 A 500 V 6 kV 3

Han E/EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES, Cage-clamp termination, 1 ... 24 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 024 2616	09 33 024 2716	 <p>1) distance for contact max. 21 mm</p>
<p>Han® ES, Continuing marking, Cage-clamp termination, 25 ... 48 Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 024 2626	09 33 024 2726	 <p>Contact arrangement (view from termination side)</p> 

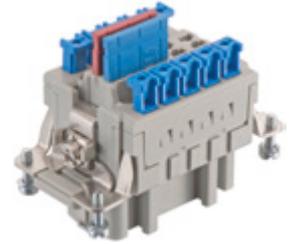
Han E/EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES Press, Cage-clamp termination, 1 ... 24</p> <p>Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 024 2648	09 33 024 2748	 <p>Distance for contact max. 21 mm</p>
<p>Han® ES Press, Continuing marking, Cage-clamp termination, 25 ... 48</p> <p>Contact surface: Silver plated</p>  <p>Blue slide for hoods/housings high construction only You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 024 2688	09 33 024 2788	 <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ESS, Cage-clamp termination, 1 ... 24</p> <p>Contact surface: Silver plated</p>  <p>two terminations per contact for hoods/housings high construction only You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 33 024 2672	09 33 024 2772	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

16 A 500 V 6 kV 3

Han E/
EE



Technical characteristics

Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 5
Material (contacts)	Copper alloy
Material (accessories)	Polyamide


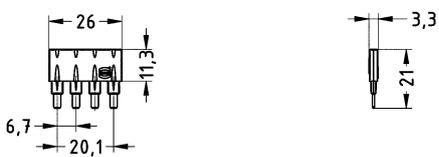

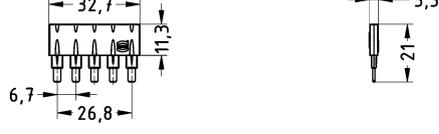

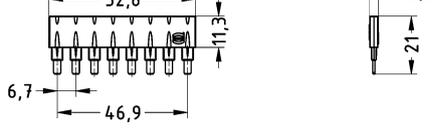
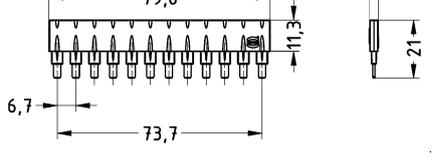
Technical characteristics

Colour (accessories)	RAL 3018 (strawberry red), RAL 5012 (light blue), RAL 5004 (black blue)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Details

When using plug-in jumpers within Han® ES Press hoods of high construction must be used.

Identification		Part number	Drawing (dimensions in mm)	
Han® ES Press, Plug-in jumper, 2 x 1, Transverse, Contact surface: Tin plated		Black Blue Red	09 33 000 9822 09 33 000 9821 09 33 000 9820	
Han® ES Press, Plug-in jumper, 1 x 2, Longitudinal, Contact surface: Tin plated		Black Blue Red	09 33 000 9852 09 33 000 9841 09 33 000 9830	
Han® ES Press, Plug-in jumper, 1 x 3, Longitudinal, Contact surface: Tin plated		Black Blue Red	09 33 000 9853 09 33 000 9842 09 33 000 9831	

Identification		Part number	Drawing (dimensions in mm)
<p>Han® ES Press, Plug-in jumper, 1 x 4, Longitudinal, Contact surface: Tin plated</p> 	<p>Black Blue Red</p>	<p>09 33 000 9854 09 33 000 9843 09 33 000 9832</p>	
<p>Han® ES Press, Plug-in jumper, 1 x 5, Longitudinal, Contact surface: Tin plated</p> 	<p>Black Blue Red</p>	<p>09 33 000 9855 09 33 000 9844 09 33 000 9833</p>	
<p>Han® ES Press, Plug-in jumper, 1 x 8, Longitudinal, Contact surface: Tin plated</p> 	<p>Black Blue Red</p>	<p>09 33 000 9858 09 33 000 9847 09 33 000 9836</p>	
<p>Han® ES Press, Plug-in jumper, 1 x 12, Longitudinal, Contact surface: Tin plated</p> 	<p>Black Blue Red</p>	<p>09 33 000 9862 09 33 000 9851 09 33 000 9840</p>	

Han E/
EE

Features

- Higher density of crimping contacts
- Coded insert
- Gold and silver contacts available

Technical characteristics

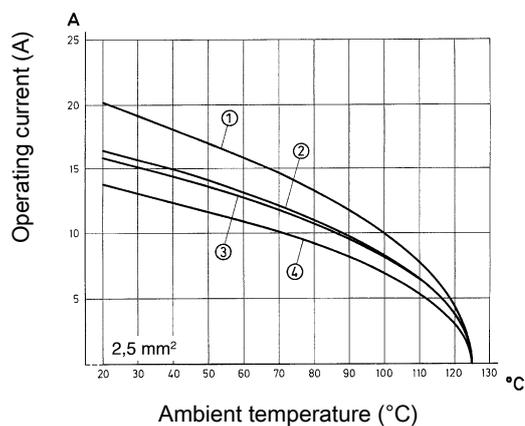
Number of contacts	10, 18, 32, 46, 64, 92
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

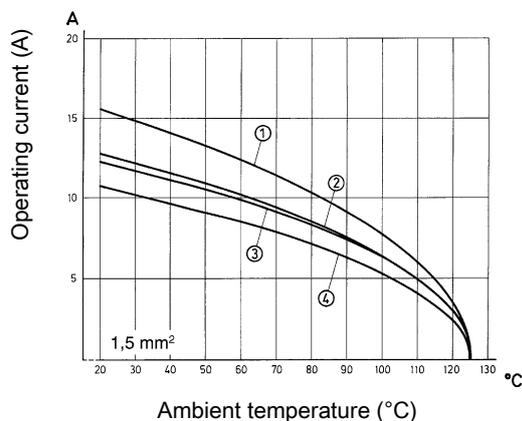
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 10 EE
- ② Han® 18 EE
- ③ Han® 32 EE Han® 64 EE
- ④ Han® 46 EE Han® 92 EE

Derating



- ① Han® 10 EE
- ② Han® 18 EE
- ③ Han® 32 EE Han® 64 EE
- ④ Han® 46 EE Han® 92 EE

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

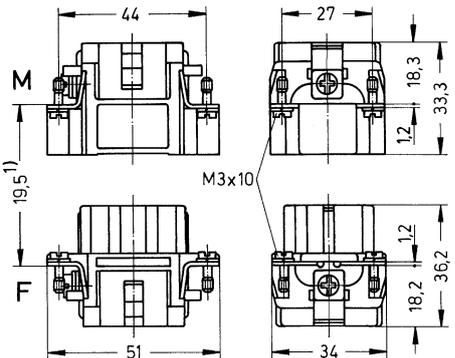
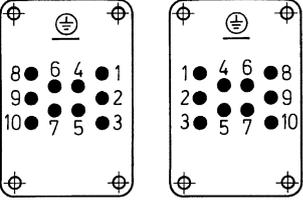

Tightening torque PE screw 1.2 Nm

Number of contacts

10+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 32 010 3001	09 32 010 3101	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

18+

16 A 500 V 6 kV 3

Han E/
EE

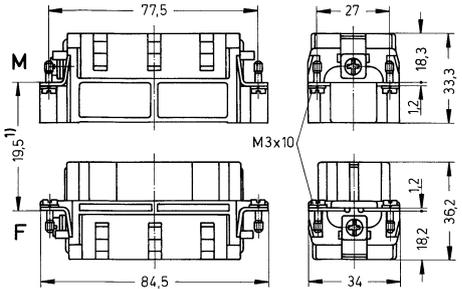

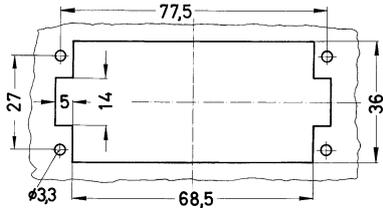
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® EE, Crimp termination</p> <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 32 018 3001	09 32 018 3101	<p>1) distance for contact max. 21 mm</p> <p>M F Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Number of contacts

32+

16 A 500 V 6 kV 3

Han E/
EE

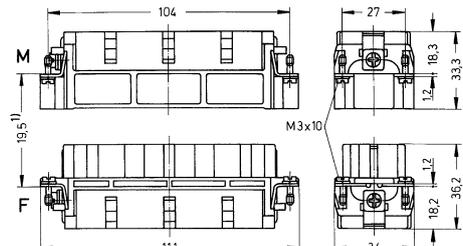

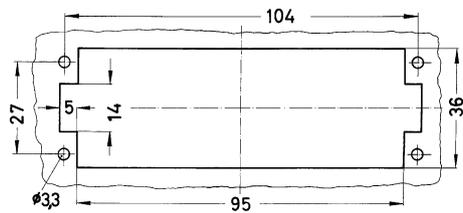
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 32 032 3001	09 32 032 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

46+

16 A 500 V 6 kV 3

Han E/
EE

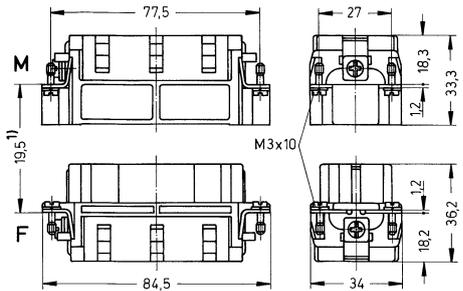
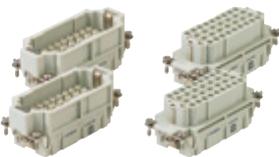
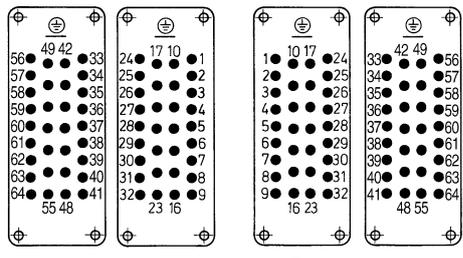
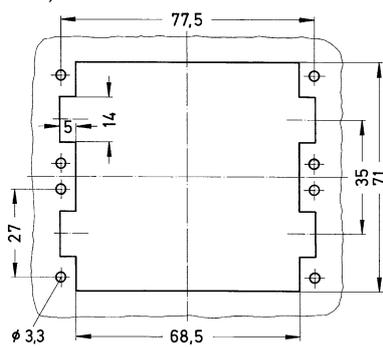
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® EE, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 32 046 3001	09 32 046 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

64+

16 A 500 V 6 kV 3

Han E/
EE

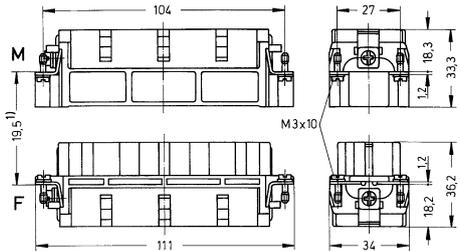
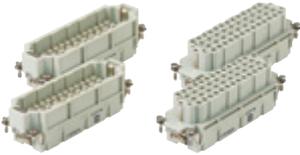
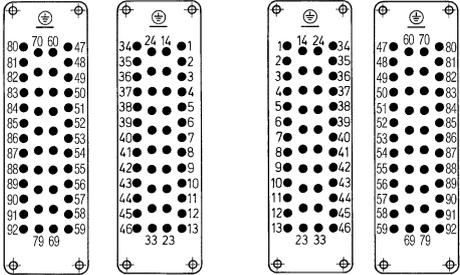
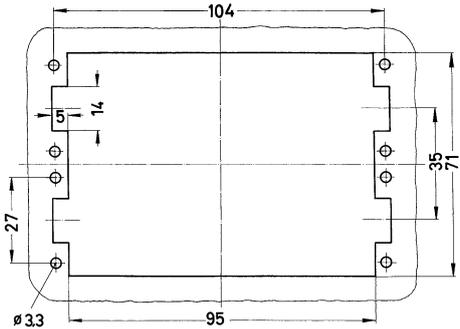
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® EE, Crimp termination, 1 ... 32</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 32 032 3001	09 32 032 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han® EE, Continuing marking, Crimp termination, 33 ... 64</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 32 032 3011	09 32 032 3111	 <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

92+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® EE, Crimp termination, 1 ... 46</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 32 046 3001	09 32 046 3101	 <p>1) distance for contact max. 21 mm</p>
<p>Han® EE, Continuing marking, Crimp termination, 47 ... 92</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.14 ... 4	09 32 046 3011	09 32 046 3111	 <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Features

- Highest density of crimping contacts
- Coded insert
- Gold and silver contacts available

Technical characteristics

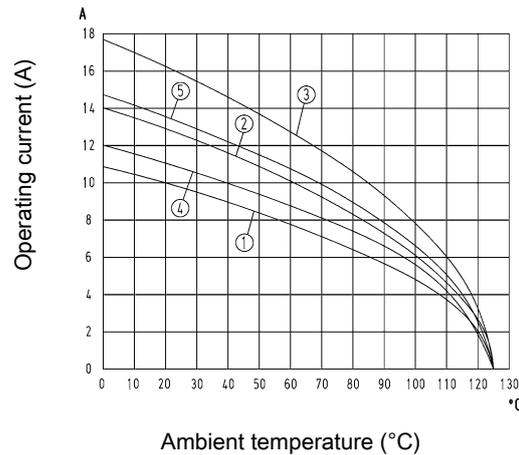
Number of contacts	40, 64
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 64 EEE / 1.5 mm²
- ② Han® 64 EEE / 2.5 mm²
- ③ Han® 64 EEE / 4 mm²
- ④ Han® 40 EEE / 1.5 mm²
- ⑤ Han® 40 EEE / 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

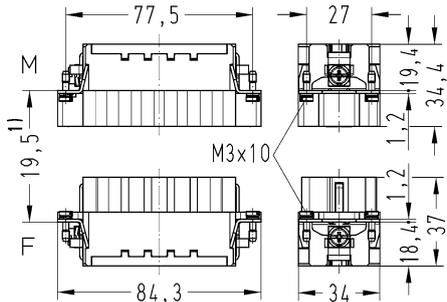

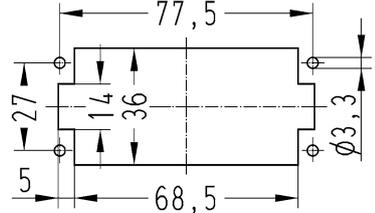
Tightening torque PE screw 1.2 Nm

Number of contacts

40+

16 A 500 V 6 kV 3

Han E/
EE

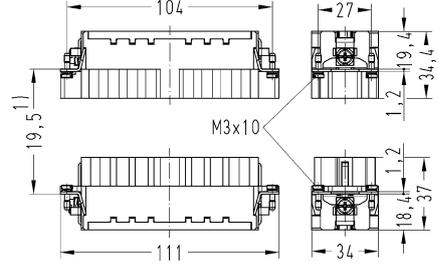
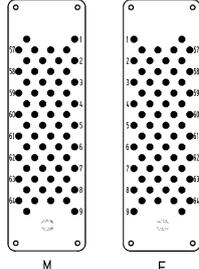
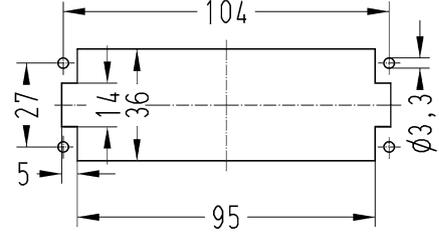
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 32 040 3001	09 32 040 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

64+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® EEE, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 32 064 3001	09 32 064 3101	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Details

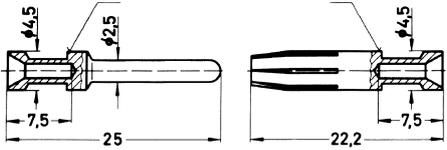
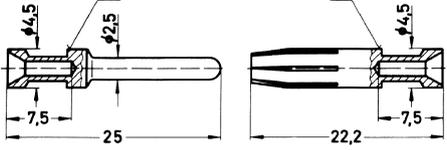
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 33 000 6127	09 33 000 6227	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22	0.5 mm ²	AWG 20	0.75 mm ²	AWG 18	1 mm ²	AWG 18	1.5 mm ²	AWG 16	2.5 mm ²	AWG 14	3 mm ²	AWG 12	4 mm ²	AWG 12
	Conductor cross-section	Identification																				
	0.14-0.37 mm ²	AWG 26-22																				
	0.5 mm ²	AWG 20																				
	0.75 mm ²	AWG 18																				
	1 mm ²	AWG 18																				
	1.5 mm ²	AWG 16																				
	2.5 mm ²	AWG 14																				
	3 mm ²	AWG 12																				
	4 mm ²	AWG 12																				
0.5	09 33 000 6121	09 33 000 6220																				
0.75	09 33 000 6114	09 33 000 6214																				
1	09 33 000 6105	09 33 000 6205																				
1.5	09 33 000 6104	09 33 000 6204																				
2.5	09 33 000 6102	09 33 000 6202																				
3	09 33 000 6106	09 33 000 6206																				
4	09 33 000 6107	09 33 000 6207																				
Han E®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 33 000 6117	09 33 000 6217	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22	0.5 mm ²	AWG 20	0.75 mm ²	AWG 18	1 mm ²	AWG 18	1.5 mm ²	AWG 16	2.5 mm ²	AWG 14	3 mm ²	AWG 12	4 mm ²	AWG 12
	Conductor cross-section	Identification																				
	0.14-0.37 mm ²	AWG 26-22																				
	0.5 mm ²	AWG 20																				
	0.75 mm ²	AWG 18																				
	1 mm ²	AWG 18																				
	1.5 mm ²	AWG 16																				
	2.5 mm ²	AWG 14																				
	3 mm ²	AWG 12																				
	4 mm ²	AWG 12																				
0.5	09 33 000 6122	09 33 000 6222																				
0.75	09 33 000 6115	09 33 000 6215																				
1	09 33 000 6118	09 33 000 6218																				
1.5	09 33 000 6116	09 33 000 6216																				
2.5	09 33 000 6123	09 33 000 6223																				
4	09 33 000 6119	09 33 000 6221																				

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp contact, Relay contact, Contact surface: Silver plated	0.75 ... 1 1.5 2.5	09 33 000 6109 09 33 000 6110 09 33 000 6111		
FO contact, for 1 mm plastic fibre		20 10 001 3311	20 10 001 3321	
Han E® Han® EE Han® EEE, Coding pin			09 33 000 9954	
for crimp inserts only With loss of one contact				

Han E/
EE

Contents	Page
Han Hv E [®]	Han 04.3
Han [®] 16 / 32 Hv E	Han 04.9
Han [®] Hv ES	Han 04.12
Contacts	Han 04.18
Hoods/Housings	Han 04.19

Han
Hv E

Standard Hoods/Housings Han[®] B

Suitable for
Han[®] Hv ES cage-clamp terminal
and Han Hv E[®] crimp terminal

Coding bar

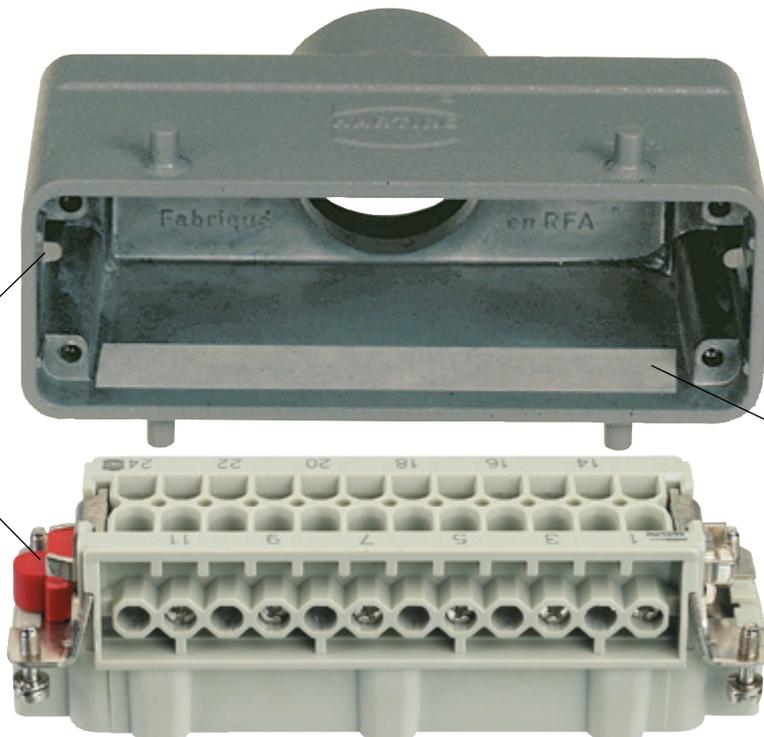


Special hood/housing Han Hv E[®]

Suitable for
Han Hv E[®] screw terminal

Coding Han Hv E[®]

Isolation
to increase the
electric strength



Features

- Designed for application up to 830 V
- Available in multiple termination techniques

Technical characteristics

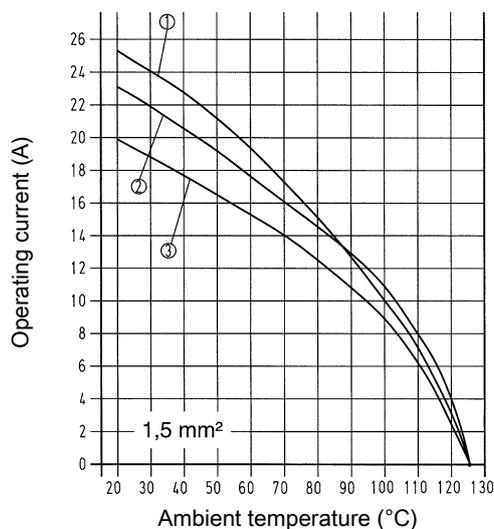
Number of contacts	3, 6, 10, 12, 20
Additional contacts	+ 2 additional relay contacts, + 4 additional relay contacts
Rated current	16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

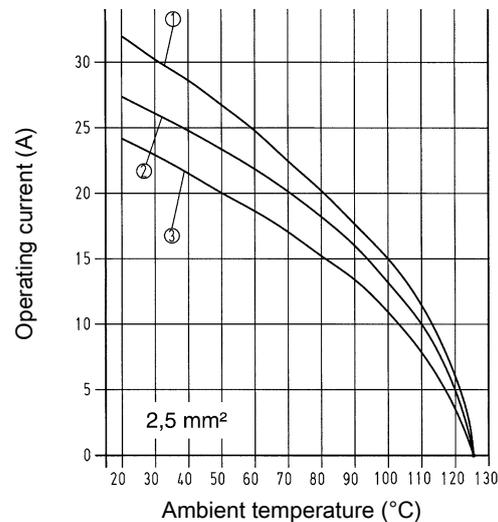
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 3 Hv E
- ② Han® 6 / 12 Hv E
- ③ Han® 10 / 16 / 20 / 32 Hv E

Derating



- ① Han® 3 Hv E
- ② Han® 6 / 12 Hv E
- ③ Han® 10 / 16 / 20 / 32 Hv E

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Han Hv E® screw requires special Han Hv E® housings

Tightening torque 0.5 Nm

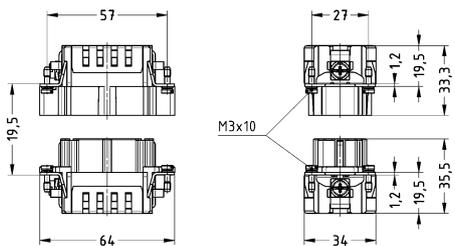
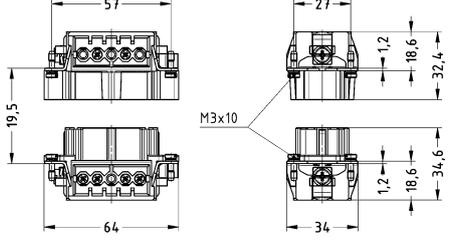

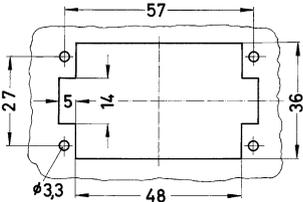
Tightening torque PE screw 1.2 Nm

Number of contacts

3+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

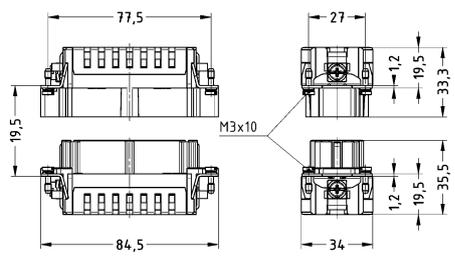
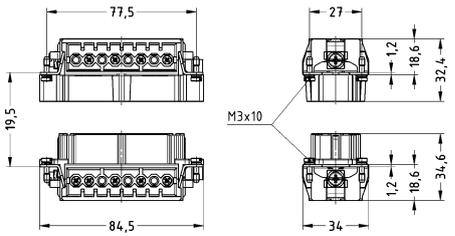

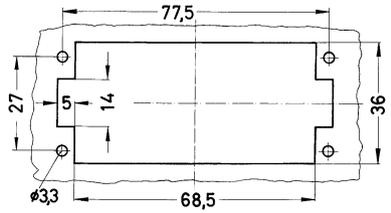
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  <p>Please order crimp contacts separately.</p>	0.5 ... 4	09 34 003 2602	09 34 003 2702	
Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated 	0.75 ... 2.5	09 34 003 2601	09 34 003 2701	  <p>M F</p> <p>Contact arrangement (view from termination side)</p> <p>Han® 3 Hv E</p> <ul style="list-style-type: none"> ◆ Power contacts ● Relay contact ○ Without contact  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

6+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

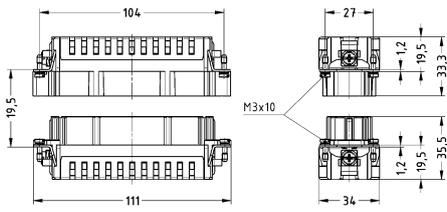
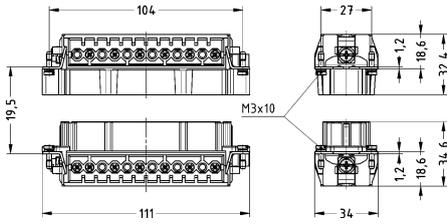
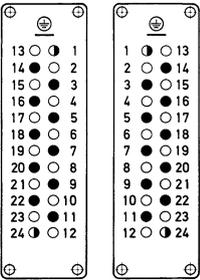
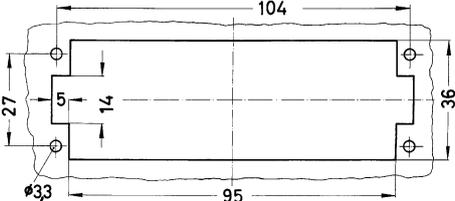
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han Hv E®, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.5 ... 4	09 34 006 2602	09 34 006 2702	
<p>Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 34 006 2601	09 34 006 2701	  <p>M F</p> <p>Contact arrangement (view from termination side) Han® 6 Hv E</p> <ul style="list-style-type: none"> ◆ Power contacts ● Relay contact ○ Without contact  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

10+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

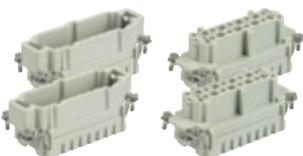
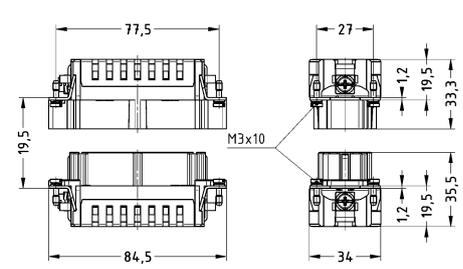
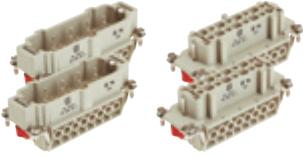
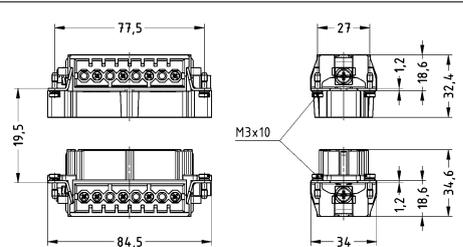
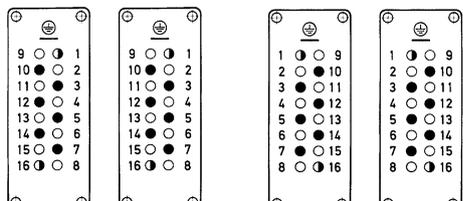
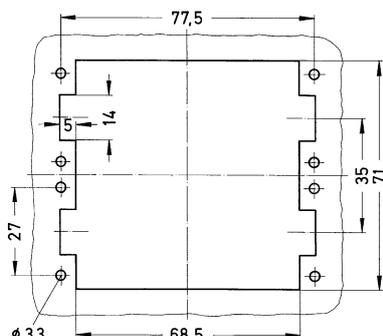
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  Please order crimp contacts separately.	0.5 ... 4	09 34 010 2602	09 34 010 2702	
Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated 	0.75 ... 2.5	09 34 010 2601	09 34 010 2701	  <p>M F</p> <p>Contact arrangement (view from termination side) Han® 10 Hv E</p> <ul style="list-style-type: none"> ◆ Power contacts ● Relay contact ○ Without contact  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

12+

16 A 830 V 8 kV 3
+ 4 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han Hv E®, Crimp termination</p>  <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.5 ... 4	09 34 006 2602	09 34 006 2702	
<p>Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 34 006 2601	09 34 006 2701	  <p>M F Contact arrangement (view from termination side) Han® 12 Hv E <ul style="list-style-type: none"> ◆ Power contacts ● Relay contact ○ Without contact </p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

20+

16 A 830 V 8 kV 3
+ 4 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han Hv E®, Crimp termination</p> <p>Please order crimp contacts separately. You need two inserts for a complete assembly!</p>	0.5 ... 4	09 34 010 2602	09 34 010 2702	
<p>Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated</p> <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 34 010 2601	09 34 010 2701	<div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>M</p> </div> <div style="text-align: center;"> <p>F</p> </div> </div> <p>M F Contact arrangement (view from termination side) Han® 20 Hv E <ul style="list-style-type: none"> ● Power contacts ○ Relay contact ○ Without contact </p> <p>Panel cut out for use without Hoods/Housings</p>

Features

- Designed for application up to 690 V
- No special tools required

Technical characteristics

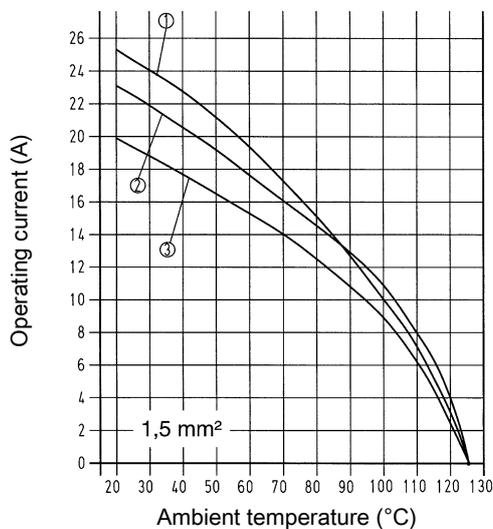
Number of contacts	16, 32
Additional contacts	+ 2 additional relay contacts, + 4 additional relay contacts
Rated current	16 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

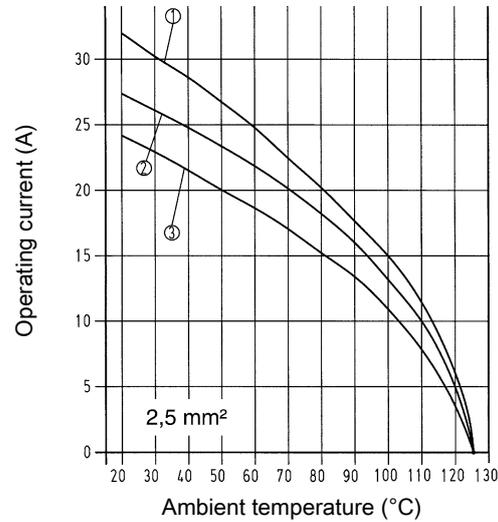
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 3 Hv E
- ② Han® 6 / 12 Hv E
- ③ Han® 10 / 16 / 20 / 32 Hv E

Derating



- ① Han® 3 Hv E
- ② Han® 6 / 12 Hv E
- ③ Han® 10 / 16 / 20 / 32 Hv E

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Han Hv E® screw requires special Han Hv E® housings

Tightening torque 0.5 Nm

Tightening torque PE screw 1.2 Nm

Number of contacts

16+

16 A 400/690 V 6 kV 3
+ 2 additional relay contacts

Han
Hv E

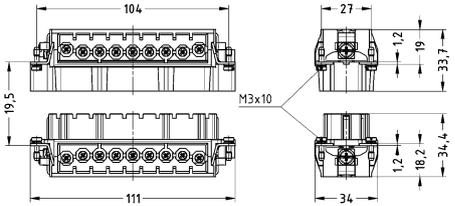
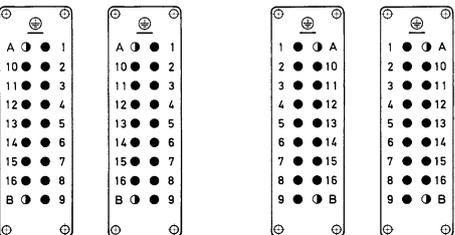
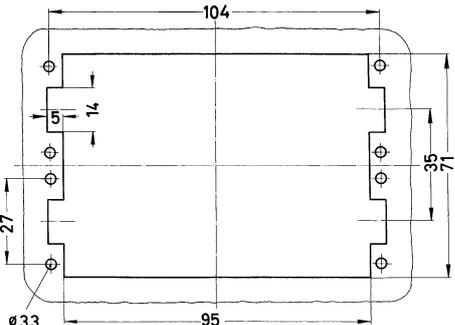
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated</p>	0.75 ... 2.5	09 34 016 2601	09 34 016 2701	 <p>M F Contact arrangement (view from termination side) Han® 16 Hv E</p> <ul style="list-style-type: none"> ◆ Power contacts ● Relay contact ○ Without contact <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

32+

16 A 400/690 V 6 kV 3
+ 4 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han Hv E®, Screw termination, With wire protection, Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	0.75 ... 2.5	09 34 016 2601	09 34 016 2701	  <p style="text-align: center;">M F</p> <p>Contact arrangement (view from termination side) Han® 32 Hv E</p> <ul style="list-style-type: none"> ● Power contacts ○ Relay contact ○ Without contact  <p>Panel cut out for use without Hoods/Housings</p>

Features

- Designed for application up to 830 V
- Reliable cage clamp termination
- No special tools required
- Vibration-proved

Technical characteristics

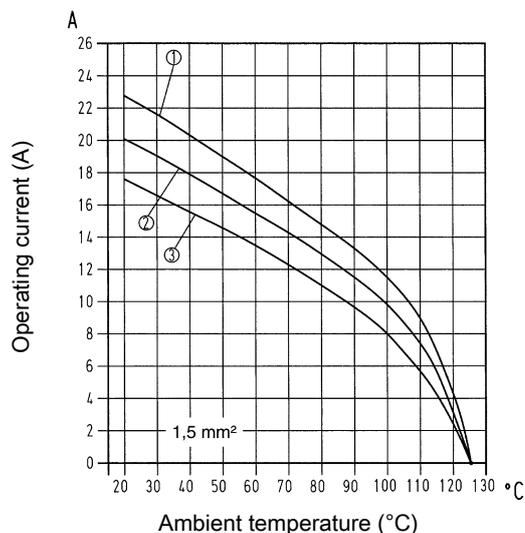
Number of contacts	3, 6, 10, 12, 20
Additional contacts	+ 2 additional relay contacts, + 4 additional relay contacts
Rated current	16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

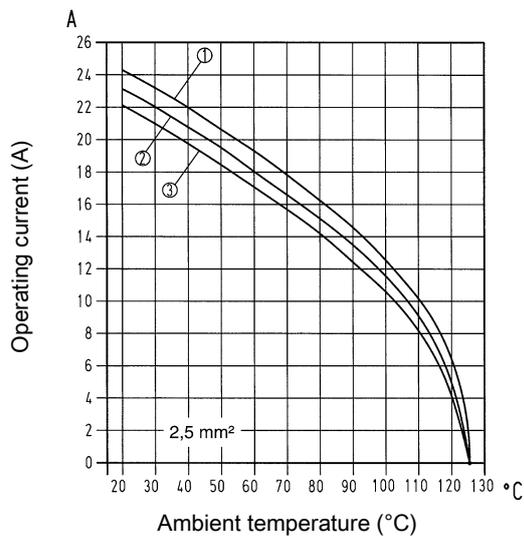
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 3 Hv ES
- ② Han® 6 Hv ES / Han® 12 Hv ES
- ③ Han® 10 Hv ES / Han® 20 Hv ES

Derating



- ① Han® 3 Hv ES
- ② Han® 6 Hv ES / Han® 12 Hv ES
- ③ Han® 10 Hv ES / Han® 20 Hv ES

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Not mating compatible to Han Hv E® screw/crimp termination

Tightening torque 0.5 Nm

Tightening torque PE screw 1.2 Nm

Number of contacts

3+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® Hv ES, Cage-clamp termination, Contact surface: Silver plated</p>	0.14 ... 2.5	09 34 003 2616	09 34 003 2716	<p>M F</p> <p>Contact arrangement (view from termination side) Han® 3 Hv ES</p> <ul style="list-style-type: none"> ◆ Power contacts ● Relay contact ○ Without contact <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

6+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® Hv ES, Cage-clamp termination, Contact surface: Silver plated</p>	0.14 ... 2.5	09 34 006 2616	09 34 006 2716	 <p>M F Contact arrangement (view from termination side) Han® 6 Hv ES</p> <ul style="list-style-type: none"> • Power contacts ● Relay contact ○ Without contact <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

10+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES, Cage-clamp termination, Contact surface: Silver plated 	0.14 ... 2.5	09 34 010 2616	09 34 010 2716	 <p> Contact arrangement (view from termination side) Han® 10 Hv ES ♦ Power contacts ● Relay contact ○ Without contact </p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

12+

16 A 830 V 8 kV 3
+ 4 additional relay contacts

Han
Hv E

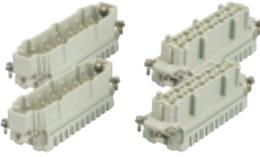
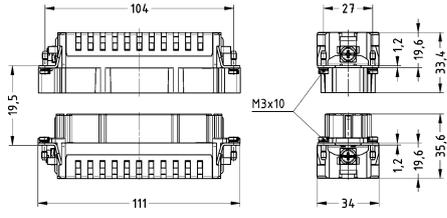
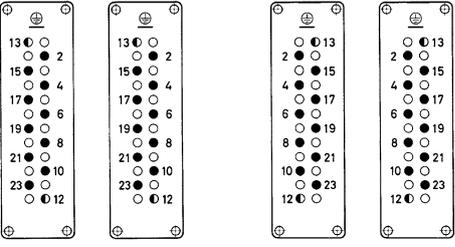
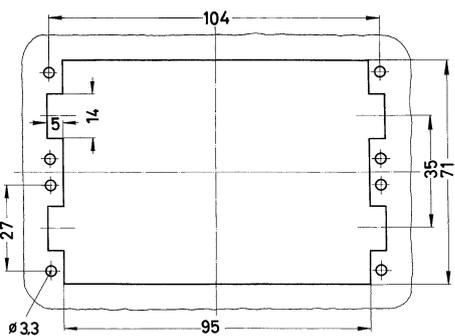
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® Hv ES, Cage-clamp termination, Contact surface: Silver plated</p> <p>You need two inserts for a complete assembly!</p>	0.14 ... 2.5	09 34 006 2616	09 34 006 2716	<p>M F Contact arrangement (view from termination side) Han® 12 Hv ES ◆ Power contacts ● Relay contact ○ Without contact</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

20+

16 A 830 V 8 kV 3
+ 4 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES, Cage-clamp termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	0.14 ... 2.5	09 34 010 2616	09 34 010 2716	  <p style="text-align: center;">M F</p> <p>Contact arrangement (view from termination side) Han® 20 Hv ES ◆ Power contacts ● Relay contact ○ Without contact</p>  <p>Panel cut out for use without Hoods/Housings</p>

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

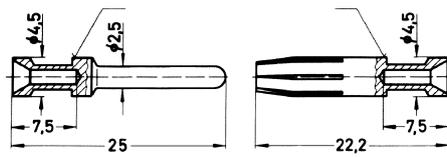

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han E®, Crimp contact, Contact surface: Silver plated 	0.5	09 33 000 6121	09 33 000 6220	 <table border="1" data-bbox="965 1187 1412 1467"> <thead> <tr> <th>Conductor cross-section</th> <th>AWG</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section	AWG	Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
	Conductor cross-section	AWG	Identification																												
	0.14-0.37 mm ²	AWG 26-22	no groove																												
	0.5 mm ²	AWG 20	no groove																												
	0.75 mm ²	AWG 18	1 groove*																												
	1 mm ²	AWG 18	1 groove																												
	1.5 mm ²	AWG 16	2 grooves																												
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													
0.75	09 33 000 6114	09 33 000 6214																													
1	09 33 000 6105	09 33 000 6205																													
1.5	09 33 000 6104	09 33 000 6204																													
2.5	09 33 000 6102	09 33 000 6202																													
3	09 33 000 6106	09 33 000 6206																													
4	09 33 000 6107	09 33 000 6207																													
Han E®, Crimp contact, Relay contact, Contact surface: Silver plated 	0.75 ... 1	09 33 000 6109																													
	1.5	09 33 000 6110																													
	2.5	09 33 000 6111																													

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0

Technical characteristics

RoHS compliant

Specifications and approvals

DNV GL

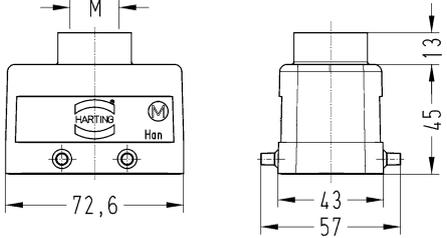
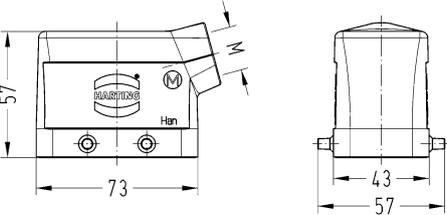
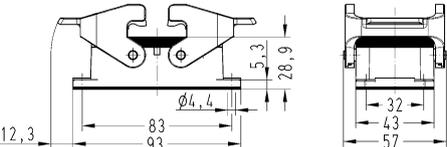
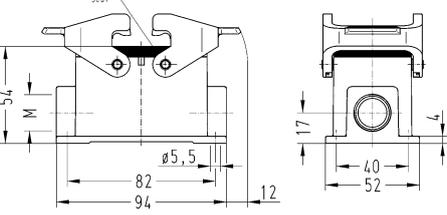
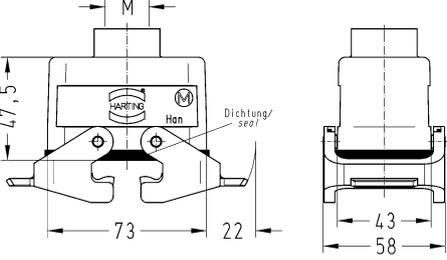
Details

Special hoods/housings for Han Hv E® screw terminal

Standard hoods/housings see chapter 31

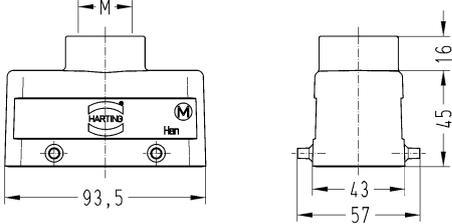
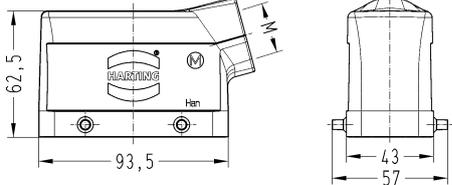
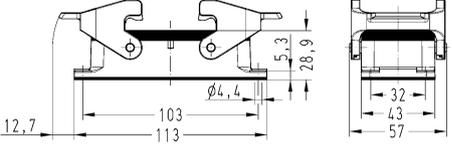
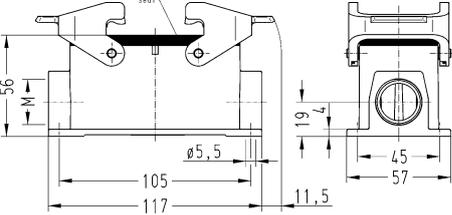
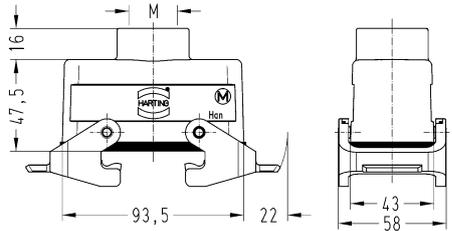
Special hoods/housings for Han Hv E® screw terminal
Double locking lever

Han
Hv E

Identification	Cable entry	Part number Low construction	Drawing (dimensions in mm)
Han Hv E®, Hoods, Top entry 	1x M20 1x M25	19 34 003 0420 19 34 003 0421	
Han Hv E®, Hoods, Side entry 	1x M20	19 34 003 0520	
Han Hv E®, Bulkhead mounted housings, Han-Easy Lock® 		09 34 003 0301	 <p>Panel cut out 60 x 35 mm</p>
Han Hv E®, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M20	19 34 003 0270	
Han Hv E®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25	19 34 003 0730 19 34 003 0731	

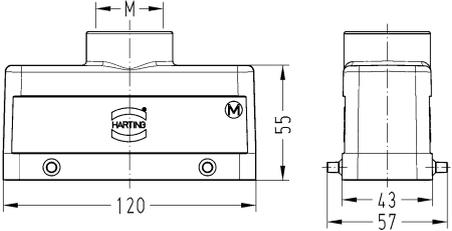
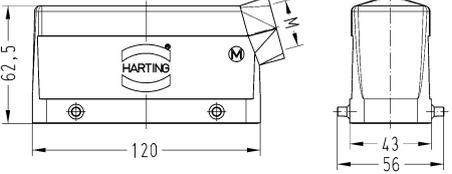
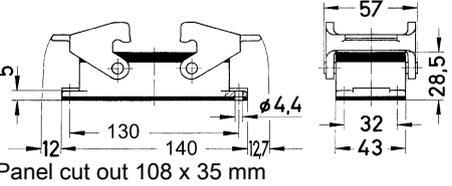
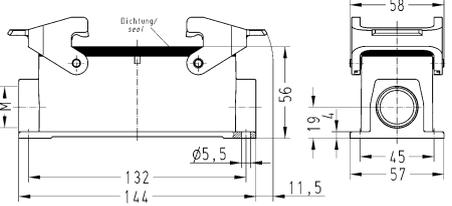
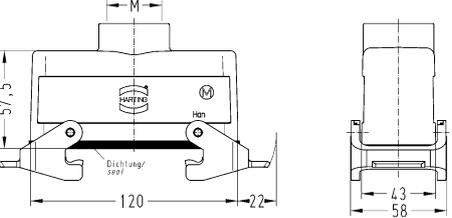
Special hoods/housings for Han Hv E® screw terminal
Double locking lever

Han
Hv E

Identification	Cable entry	Part number Low construction	Drawing (dimensions in mm)
Han Hv E®, Hoods, Top entry 	1x M25	19 34 006 0421	
Han Hv E®, Hoods, Side entry 	1x M25	19 34 006 0521	
Han Hv E®, Bulkhead mounted housings, Han-Easy Lock® 		09 34 006 0301	 <p>Panel cut out 82 x 35mm</p>
Han Hv E®, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25	19 34 006 0271	
Han Hv E®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32	19 34 006 0731 19 34 006 0732	

Special hoods/housings for Han Hv E® screw terminal
Double locking lever

Han
Hv E

Identification	Cable entry	Part number Low construction	Drawing (dimensions in mm)
<p>Han Hv E®, Hoods, Top entry</p> 	<p>1x M32</p>	<p>19 34 010 0422</p>	
<p>Han Hv E®, Hoods, Side entry</p> 	<p>1x M25</p>	<p>19 34 010 0521</p>	
<p>Han Hv E®, Bulkhead mounted housings, Han-Easy Lock®</p> 		<p>09 34 010 0301</p>	 <p>Panel cut out 108 x 35 mm</p>
<p>Han Hv E®, Surface mounted housing, Side entry, Han-Easy Lock®</p> 	<p>2x M25</p>	<p>19 34 010 0271</p>	
<p>Han Hv E®, Cable to cable housing, Top entry, Han-Easy Lock®</p> 	<p>1x M32</p>	<p>19 34 010 0732</p>	

Contents


Page

Han® K 4/4 Axial screw / Cage-clamp	Han 05.8
Han® K 8/24 Crimp	Han 05.11
Han® K 32/55 Crimp	Han 05.14
Han® K 4/0 Screw.....	Han 05.17
Han® K 4/2 Screw.....	Han 05.19
Han® K 6/12 Crimp	Han 05.21
Han® K 6/12 Axial screw / Screw.....	Han 05.24
Han® K 6/36 Crimp	Han 05.26
Han® K 12/2 Crimp	Han 05.29
Han® K 9/9/18 Crimp.....	Han 05.32
Han® K 4/8 Screw.....	Han 05.35
Han® K 6/6 Crimp	Han 05.37
Han® K 6/6 Axial screw / Screw.....	Han 05.40
Han® K 8/0 Axial screw.....	Han 05.42


Han-Com

Size Description


10 B



Han® K 8/24
Power 16 A / 230/400 V
Signal 10 A / 160 V

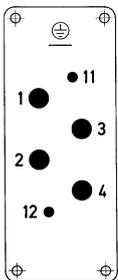


Han® K 4/4
63 A / 690 V
16 A / 230 V

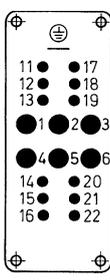


Han® K 32/55
10 A / 250 V
4 A / 50 V

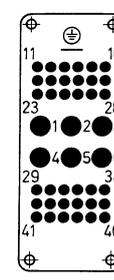
16 B



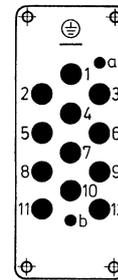
Han® K 4/0, 4/2
Power 80 A / 830 V
Power 16 A / 400 V
Signal



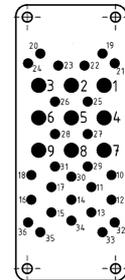
Han® K 6/12
40 A / 690 V
10 A / 230/400 V



Han® K 6/36
40 A / 690 V
10 A / 160 V

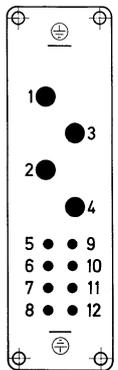


Han® K 12/2
40 A / 690 V
10 A / 250 V

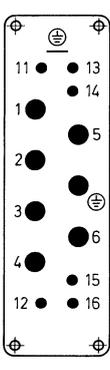


Han® K 9/9/18
40 A / 830 V
16 A / 830 V
10 A / 250 V

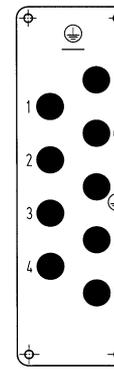
24 B



Han® K 4/8
Power 80 A / 400 V
Signal 16 A / 400 V



Han® K 6/6
100 A / 690 V
16 A / 400 V



Han® K 8/0
100 A / 690 V

32 B

suitable for 2 inserts of size 16 B

48 B

suitable for 2 inserts of size 24 B

Summary

Type	Technical characteristics								Suitable Hoods/ Housings
	Power area				Signal area				
	Number of contacts	A	V ~	Termination	Number of contacts	A	V ~	Termination	Size
Han® K 4/0	4+PE	80	830	screw	—	—	—	—	16 B, 32 B
Han® K 4/2	4+PE	80	830	screw	2	16	400	screw	16 B, 32 B
Han® K 4/4	4+PE	63	690	axial screw	4	16	250	cage clamp	10 B
Han® K 4/8	4+PE	80	400	screw	8	16	400	screw	24 B, 48 B
Han® K 6/6	6+PE	100	690	crimp	6	16	400	crimp	24 B, 48 B
Han® K 6/6	6+PE	100	690	axial screw	6	16	400	screw	24 B, 48 B
Han® K 6/12	6+PE	40	690	crimp	12	10	230/400	crimp	16 B, 32 B
Han® K 6/12	6+PE	40	690	axial screw	12	10	230/400	screw	16 B, 32 B
Han® K 6/36	6+PE	40	690	crimp	36	10	160	crimp	16 B, 32 B
Han® K 8/0	8+PE	100	690	axial screw	—	—	—	—	24 B, 48 B
Han® K 8/24	8+PE	16	230/400	crimp	24	10	160	crimp	10 B
Han® K 12/2	12+PE	40	690	crimp	2	10	250	crimp	16 B, 32 B
Han® K 9/9/18	9+9+PE	40/16	830	crimp	18	10	250	crimp	16 B, 32 B
Han® K 32/55	32+PE	10	250	crimp	55	4	50	crimp	10 B

Type identification

Han® K 6/12

Han® Industrial connectors Han®
K Series Han® K / Han-Com®
6 Number of power contacts
12 Number of signal contacts

Identification of contact position

Han® K connectors from 1 to ... (power area)
from 11 to... (signal area)

Exceptions

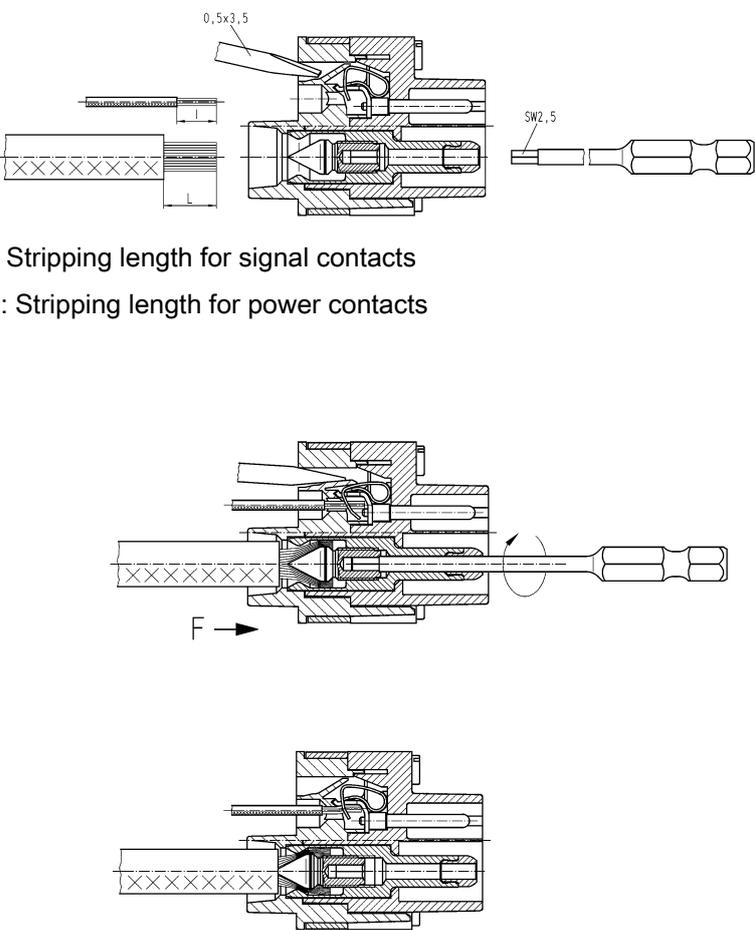
Han® K 4/8 and Han® K 8/24 from 1 to ... (consecutively)
Han® K 12/2 from 1 to 12 (power area)
with „a“ and „b“ (signal area)

Comment for users

For the combination of several circuits in one cable and/or e.g. one connector the following standards are valid:
DIN VDE 0100-410/10.2018 § 414.4 and DIN EN 60204-1/06.2007 § 13.1.3

Accessories

Crimping tools chapter 90
Cable clamps chapter 80
Coding of hoods/housings chapter 80
Label acc. to CSA-approval chapter 80
Han-Snap® chapter 11
PCB adapter chapter 80

Description	Depiction	Dimensions in mm
<p>Step 1:</p> <p>Signal contacts: Push screwdriver (0.5 x 3.5) into rectangular chamber. Strip insulation from the wire with a length and insert the wire into the round contact chamber.</p> <p>Power contacts: Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.</p> <p>Step 2:</p> <p>Signal contacts: Push screwdriver (0.5 x 3.5) out of rectangular chamber.</p> <p>Power contacts: Hold the wire in position and tighten by a hexagonal driver (SW 2.5) from the mating side with a tightening torque.</p> <p>Step 3: Complete connection</p>	 <p>The diagram consists of three cross-sectional views of the connector assembly:</p> <ul style="list-style-type: none"> Top Diagram (Step 1): Shows a screwdriver with dimensions 0.5x3.5 being inserted into the rectangular chamber. A wire is being inserted into the round contact chamber. A dimension line labeled 'L' indicates the stripping length for power contacts. Middle Diagram (Step 2): Shows the screwdriver being pushed out of the rectangular chamber. A hexagonal driver (SW 2.5) is shown tightening the wire from the mating side. A force vector 'F' is indicated. Bottom Diagram (Step 3): Shows the final complete connection of the wire to the contact chamber. <p>I: Stripping length for signal contacts L: Stripping length for power contacts</p>	

Description

Depiction

Dimensions in mm

Step 1:

Signal contacts:
Strip insulation from the wire with a length and insert the wire into the rectangular contact chamber.

Power contacts:
Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.

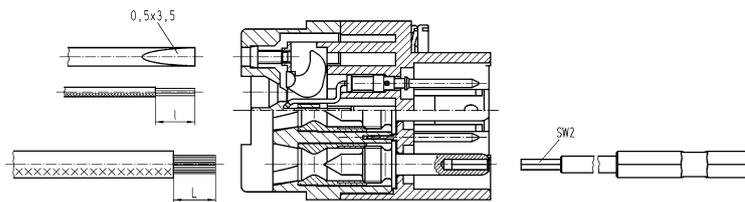
Step 2:

Signal contacts:
Tighten screw termination with screwdriver (0.5 x 3.5) with a tightening torque.

Power contacts:
Hold the wire in position and tighten by a hexagonal driver (SW 2) from the mating side with a tightening torque.

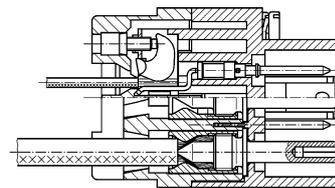
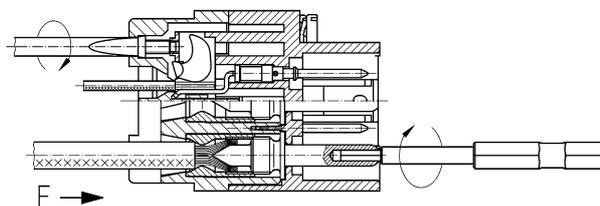
Step 3:

Complete connection



I: Stripping length for signal contacts

L: Stripping length for power contacts



Han-Com

Description

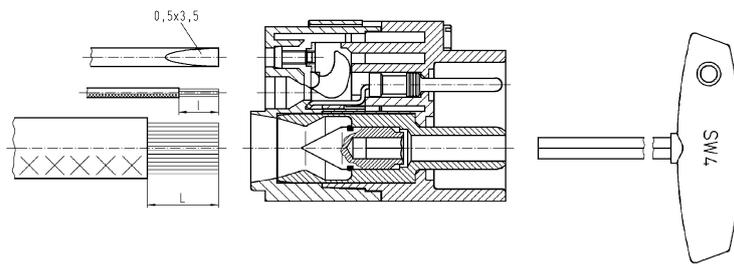
Depiction

Dimensions in mm

Step 1:

Signal contacts:
Strip insulation from the wire with a length and insert the wire into the rectangular contact chamber.

Power contacts:
Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.



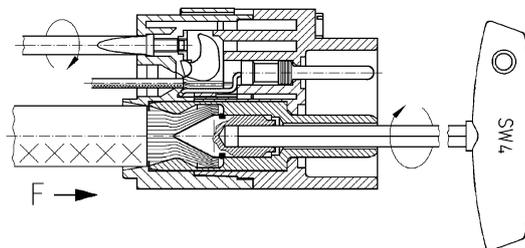
I: Stripping length for signal contacts

L: Stripping length for power contacts

Step 2:

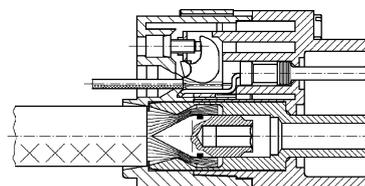
Signal contacts:
Tighten screw termination with screwdriver (0.5 x 3.5) with a tightening torque.

Power contacts:
Hold the wire in position and tighten by a hexagonal driver (SW 4) from the mating side with a tightening torque.



Step 3:

Complete connection

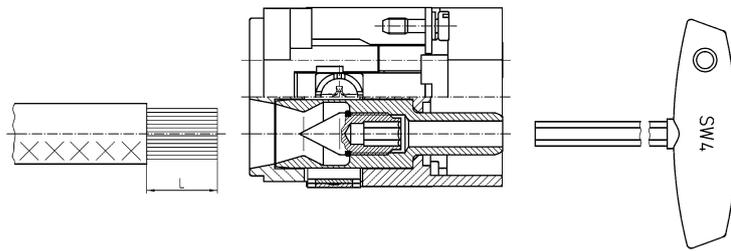


Description

Depiction

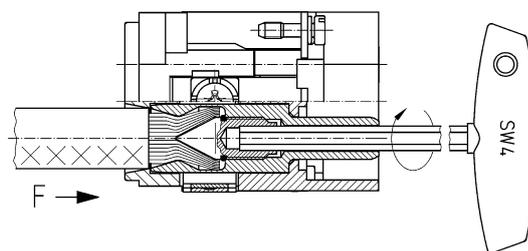
Dimensions in mm

Step 1:
Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.

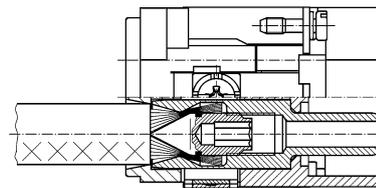


L: Stripping length for power contacts

Step 2:
Hold the wire in position and tighten by a hexagonal driver (SW 4) from the mating side with a tightening torque.



Step 3:
Complete connection



Features

- Combination of signal and power in one connector
- Axial screw termination for power area
- Cage clamp termination for signal area
- Same range of cross-section for PE contacts and power contacts

Technical characteristics

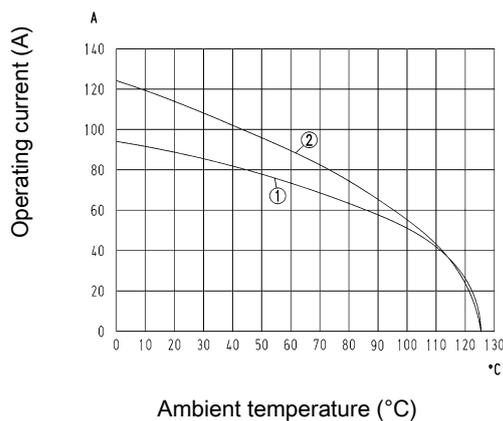
Number of contacts	4
Additional contacts	+ 4 additional signal contacts
Rated current	63 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated current acc. to UL	63 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	63 A
Rated current acc. to CSA (signal)	16 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	230 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	230 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.5 mΩ
Contact resistance, signal area	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤8,9 mm, ≤11 mm @ 22 mm ²
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight, 6(c): Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
- ② Conductor cross-section 22 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Hoods/Housings see chapter 31

Hex key (A/F 2.5) see chapter 90

Remarks on the axial screw technique

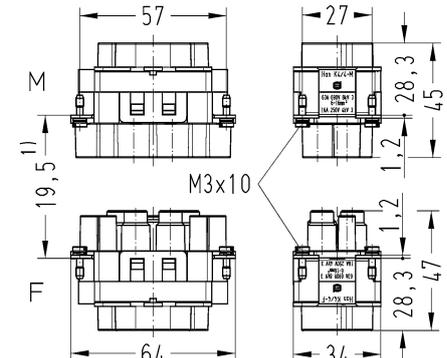

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

4+

63 A 690 V 8 kV 3
 + 4 additional signal contacts
 16 A 250 V 4 kV 3

Han-Com

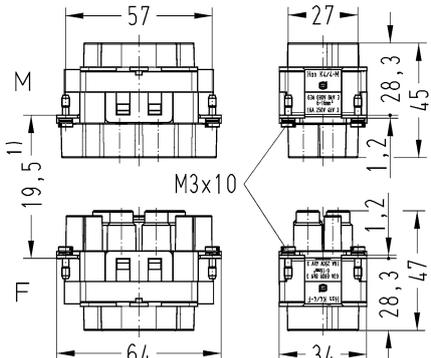

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Com®, Han® K 4/4, Axial screw termination / cage-clamp termination, Contact surface: Silver plated  Finger safe	6 ... 16, 0,14 ... 2,5 Signal	09 38 008 2601	09 38 008 2701	 1) distance for contact max. 21 mm																		
Han-Com®, Han® K 4/4, Axial screw termination / cage-clamp termination, Contact surface: Silver plated  Not finger safe	6 ... 16, 0,14 ... 2,5 Signal	09 38 008 2611		 Contact arrangement (view from termination side) <table border="1"> <thead> <tr> <th colspan="3">power contacts</th> </tr> <tr> <th>wire gauge</th> <th>tightening torque</th> <th>stripping length</th> </tr> </thead> <tbody> <tr> <td>6 mm²</td> <td>2 Nm</td> <td>11 ... 12 mm</td> </tr> <tr> <td>10 mm²</td> <td>3 Nm</td> <td>11 ... 12 mm</td> </tr> <tr> <td>16 mm²</td> <td>4 Nm</td> <td>11 ... 12 mm</td> </tr> <tr> <td>22 mm²</td> <td>4 Nm</td> <td>13 ... 14 mm</td> </tr> </tbody> </table> Signal contacts : Stripping length 7 ... 9 mm	power contacts			wire gauge	tightening torque	stripping length	6 mm ²	2 Nm	11 ... 12 mm	10 mm ²	3 Nm	11 ... 12 mm	16 mm ²	4 Nm	11 ... 12 mm	22 mm ²	4 Nm	13 ... 14 mm
power contacts																						
wire gauge	tightening torque	stripping length																				
6 mm ²	2 Nm	11 ... 12 mm																				
10 mm ²	3 Nm	11 ... 12 mm																				
16 mm ²	4 Nm	11 ... 12 mm																				
22 mm ²	4 Nm	13 ... 14 mm																				

Number of contacts

4+

63 A 690 V 8 kV 3
+ 4 additional signal contacts
16 A 250 V 4 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
<p>Han-Com®, Han® K 4/4, Axial screw termination / cage-clamp termination, Contact surface: Silver plated</p>  <p>Finger safe</p>	10 ... 22, 0,14 ... 2,5 Signal	09 38 008 2602	09 38 008 2702	 <p>1) distance for contact max. 21 mm</p>																		
<p>Han-Com®, Han® K 4/4, Axial screw termination / cage-clamp termination, Contact surface: Silver plated</p>  <p>Not finger safe</p>	10 ... 22, 0,14 ... 2,5 Signal	09 38 008 2612		 <p>M F</p> <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">power contacts</th> </tr> <tr> <th>wire gauge</th> <th>tightening torque</th> <th>stripping length</th> </tr> </thead> <tbody> <tr> <td>6 mm²</td> <td>2 Nm</td> <td>11 ... 12 mm</td> </tr> <tr> <td>10 mm²</td> <td>3 Nm</td> <td>11 ... 12 mm</td> </tr> <tr> <td>16 mm²</td> <td>4 Nm</td> <td>11 ... 12 mm</td> </tr> <tr> <td>22 mm²</td> <td>4 Nm</td> <td>13 ... 14 mm</td> </tr> </tbody> </table> <p>Signal contacts : Stripping length 7 ... 9 mm</p>	power contacts			wire gauge	tightening torque	stripping length	6 mm ²	2 Nm	11 ... 12 mm	10 mm ²	3 Nm	11 ... 12 mm	16 mm ²	4 Nm	11 ... 12 mm	22 mm ²	4 Nm	13 ... 14 mm
power contacts																						
wire gauge	tightening torque	stripping length																				
6 mm ²	2 Nm	11 ... 12 mm																				
10 mm ²	3 Nm	11 ... 12 mm																				
16 mm ²	4 Nm	11 ... 12 mm																				
22 mm ²	4 Nm	13 ... 14 mm																				

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han E® and Han D® contacts

Technical characteristics

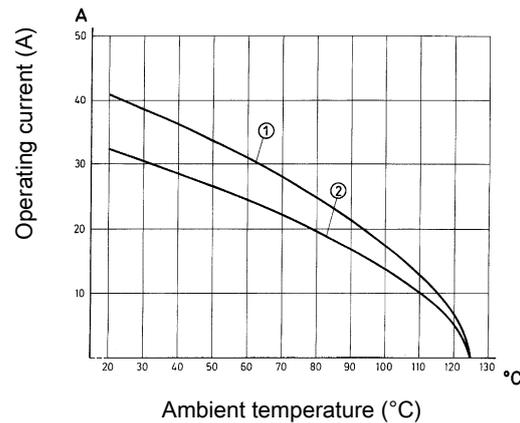
Number of contacts	8
Additional contacts	+ 24 additional signal contacts
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	160 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Rated current acc. to UL	16 A
Rated current acc. to UL (signal)	10 A
Rated current acc. to CSA	16 A
Rated current acc. to CSA (signal)	10 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	HB
RoHS	compliant, compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 4 mm²
- ② Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Hoods/Housings see chapter 31

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$


Contact resistance Han E® crimp contact: $\leq 1 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Removal of power contacts (Han E®)



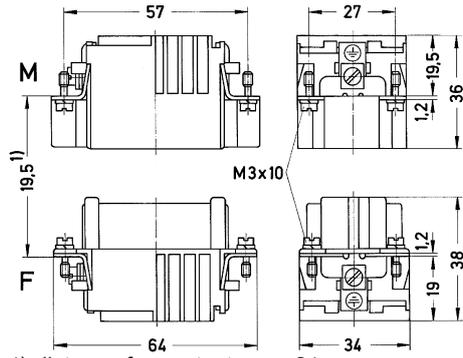

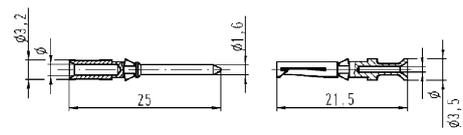
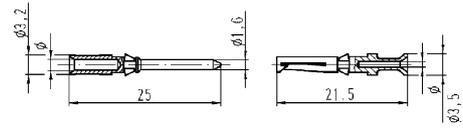
- ① Push cross-slotted screw driver (size 0) in the relevant hole of the contact until it reaches the bottom
- ② Withdraw the crimped contact from the insert

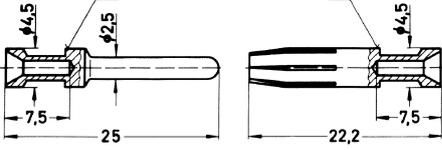
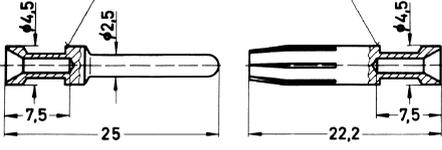


Number of contacts

8+

16 A 230/400 V 4 kV 3
 + 24 additional signal contacts
 10 A 160 V 2,5 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Com®, Han® K 8/24, Crimp termination  <p>Please order crimp contacts separately.</p>	0,5 ... 4, 0,14 ... 2,5 Signal	09 38 032 3001	09 38 032 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>																					
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1" data-bbox="957 1512 1420 1668"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han D®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1" data-bbox="957 1870 1420 2027"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																														
		Male	Female																															
Han E®, Crimp contact, Contact surface: Silver plated 	0,5	09 33 000 6121	09 33 000 6220	 <table border="1"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove	0,75	09 33 000 6114	09 33 000 6214
	Conductor cross-section		Identification																															
	0.14-0.37 mm ²	AWG 26-22	no groove																															
	0.5 mm ²	AWG 20	no groove																															
	0.75 mm ²	AWG 18	1 groove*																															
	1 mm ²	AWG 18	1 groove																															
1.5 mm ²	AWG 16	2 grooves																																
2.5 mm ²	AWG 14	3 grooves																																
3 mm ²	AWG 12	wide groove																																
4 mm ²	AWG 12	no groove																																
1	09 33 000 6105	09 33 000 6205																																
1,5	09 33 000 6104	09 33 000 6204																																
2,5	09 33 000 6102	09 33 000 6202																																
4	09 33 000 6107	09 33 000 6207																																
Han E®, Crimp contact, Contact surface: Gold plated 	0,5	09 33 000 6122	09 33 000 6222	 <table border="1"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove	0,75	09 33 000 6115	09 33 000 6215
	Conductor cross-section		Identification																															
	0.14-0.37 mm ²	AWG 26-22	no groove																															
	0.5 mm ²	AWG 20	no groove																															
	0.75 mm ²	AWG 18	1 groove*																															
	1 mm ²	AWG 18	1 groove																															
1.5 mm ²	AWG 16	2 grooves																																
2.5 mm ²	AWG 14	3 grooves																																
3 mm ²	AWG 12	wide groove																																
4 mm ²	AWG 12	no groove																																
1	09 33 000 6118	09 33 000 6218																																
1,5	09 33 000 6116	09 33 000 6216																																
2,5	09 33 000 6123	09 33 000 6223																																
4	09 33 000 6119	09 33 000 6221																																
Han E®, Crimp contact, Relay contact , Contact surface: Silver plated 	0,75 ... 1	09 33 000 6109																																
	1,5	09 33 000 6110																																
	2,5	09 33 000 6111																																
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 <p>20 10 001 3211 + 20 10 001 3221</p>																														

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han D® and Han® D-sub contacts

Technical characteristics

Number of contacts	32
Additional contacts	+ 55 additional signal contacts
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Rated current (signal)	4 A
Rated voltage (signal)	50 V
Rated impulse voltage (signal)	0.8 kV
Pollution degree (signal)	2
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	30 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega, \leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance D-Sub crimp contact: $\leq 10 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

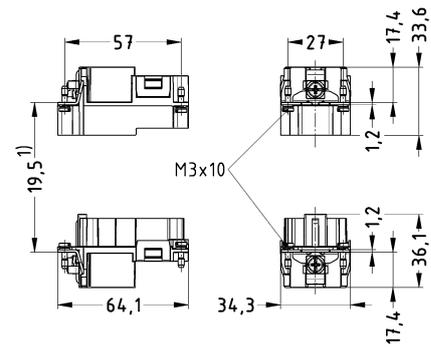

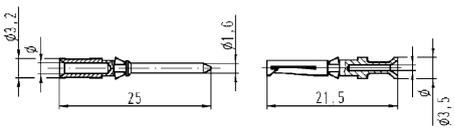
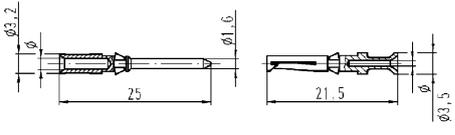
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

32+

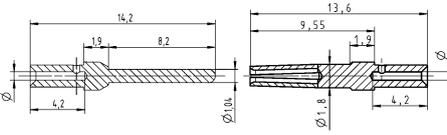
10 A 250 V 4 kV 2
 + 55 additional signal contacts
 4 A 50 V 0,8 kV 2

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Com®, Han® K 32/55, Crimp termination  <p>Please order crimp contacts separately.</p>	0,14 ... 2,5, 0,09 ... 0,52 Signal	09 38 087 3001	09 38 087 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>																					
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han D®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							



Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
D-Sub , Standard, Crimp contact, Turned 	0,09 ... 0,25	09 67 000 7576	09 67 000 7476	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	Ø	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
	Wire gauge	Ø	Stripping length																
	0.09-0.25 mm ²	0.64 mm	4 mm																
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	
0,13 ... 0,33	09 67 000 5576	09 67 000 5476																	
0,25 ... 0,52	09 67 000 8576	09 67 000 8476																	

Features

- Screw termination
- No signal contacts

Technical characteristics

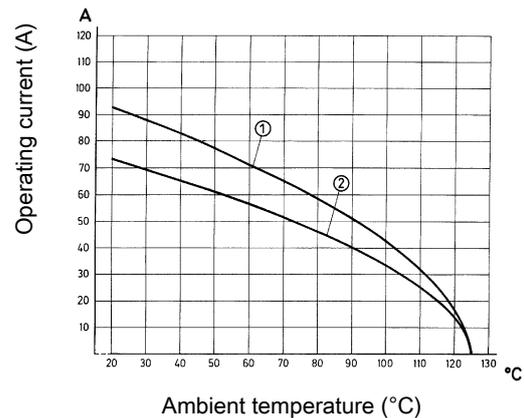
Number of contacts	4
Rated current	80 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	80 A
Rated current acc. to CSA	80 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	300 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight, 6(c): Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
 ② Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Hoods/Housings see chapter 31

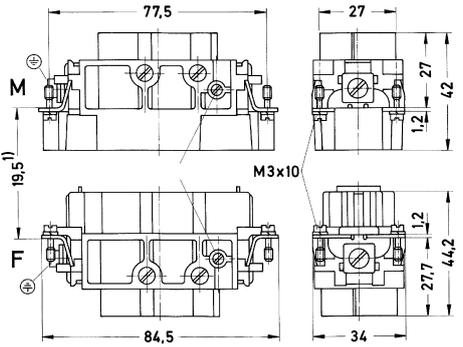

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

4+

80 A 830 V 8 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han-Com®, Han® K 4/0, Screw termination, Contact surface: Silver plated 	1,5 ... 16	09 38 006 2611	09 38 006 2711	 <p>1) distance for contact max. 21 mm</p>  <p>1 3 2 4</p> <p>M F</p> <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">power contacts</th> </tr> <tr> <th>wire gauge</th> <th>tightening torque</th> <th>stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm²</td> <td>1.2 Nm</td> <td>14 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>2 Nm</td> <td>14 mm</td> </tr> <tr> <td>4 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>6 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>10 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>16 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> </tbody> </table>	power contacts			wire gauge	tightening torque	stripping length	1.5 mm ²	1.2 Nm	14 mm	2.5 mm ²	2 Nm	14 mm	4 mm ²	3 Nm	14 mm	6 mm ²	3 Nm	14 mm	10 mm ²	3 Nm	14 mm	16 mm ²	3 Nm	14 mm
power contacts																												
wire gauge	tightening torque	stripping length																										
1.5 mm ²	1.2 Nm	14 mm																										
2.5 mm ²	2 Nm	14 mm																										
4 mm ²	3 Nm	14 mm																										
6 mm ²	3 Nm	14 mm																										
10 mm ²	3 Nm	14 mm																										
16 mm ²	3 Nm	14 mm																										

Features

- Combination of signal and power in one connector
- Screw termination for power and signal area

Technical characteristics

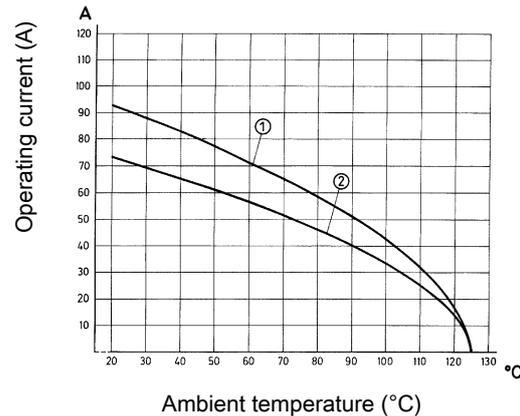
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Rated current	80 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to UL	80 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	80 A
Rated current acc. to CSA (signal)	16 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.3 mΩ
Contact resistance, signal area	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight, 6(c): Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
- ② Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Hoods/Housings see chapter 31

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

4+

80 A 830 V 8 kV 3
+ 2 additional signal contacts
16 A 400 V 6 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han-Com®, Han® K 4/2, Screw termination, Contact surface: Silver plated 	1,5 ... 16, 0,5 ... 2,5 Signal	09 38 006 2601	09 38 006 2701	<p>1) distance for contact max. 21 mm</p> <p>11 ● 1 3 ● 3 2 ● 2 12 ● 4 4 ● 12</p> <p>M F</p> <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">パワーコンタクト</th> </tr> <tr> <th>導体断面積</th> <th>締め付けトルク</th> <th>ストリップ長さ</th> </tr> </thead> <tbody> <tr> <td>1.5 mm²</td> <td>1.2 Nm</td> <td>14 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>2 Nm</td> <td>14 mm</td> </tr> <tr> <td>4 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>6 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>10 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>16 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> </tbody> </table> <p>Signal contacts : Stripping length 7.5 mm Tightening torque 0.5 Nm</p>	パワーコンタクト			導体断面積	締め付けトルク	ストリップ長さ	1.5 mm ²	1.2 Nm	14 mm	2.5 mm ²	2 Nm	14 mm	4 mm ²	3 Nm	14 mm	6 mm ²	3 Nm	14 mm	10 mm ²	3 Nm	14 mm	16 mm ²	3 Nm	14 mm
パワーコンタクト																												
導体断面積	締め付けトルク	ストリップ長さ																										
1.5 mm ²	1.2 Nm	14 mm																										
2.5 mm ²	2 Nm	14 mm																										
4 mm ²	3 Nm	14 mm																										
6 mm ²	3 Nm	14 mm																										
10 mm ²	3 Nm	14 mm																										
16 mm ²	3 Nm	14 mm																										

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han® C and Han D® contacts
- 16 coding options

Technical characteristics

Number of contacts	6
Additional contacts	+ 12 additional signal contacts
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage conductor-earth (signal)	230 V
Rated voltage conductor-conductor (signal)	400 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated current acc. to UL	40 A
Rated current acc. to UL (signal)	10 A
Rated current acc. to CSA	40 A
Rated current acc. to CSA (signal)	10 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega, \leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Wire outer diameter	$\leq 5 \text{ mm}$
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Contact resistance Han® C crimp contact: $\leq 1 \text{ m}\Omega$

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6+

40 A 690 V 8 kV 3
+ 12 additional signal contacts
10 A 230/400 V 4 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
<p>Han-Com®, Han® K 6/12, Crimp termination</p> <p>Please order crimp contacts separately. Please order coding pins separately.</p>	1,5 ... 6, 0,14 ... 2,5 Signal	09 38 018 3002	09 38 018 3102	<p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p>																					
<p>Han® C, Crimp contact, Contact surface: Silver plated</p>	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm ² AWG 16	1.75 mm	9.5 mm																							
2.5 mm ² AWG 14	2.25 mm	9.5 mm																							
4 mm ² AWG 12	2.85 mm	9.5 mm																							
6 mm ² AWG 10	3.5 mm	9.5 mm																							
10 mm ² AWG 8	4.3 mm	12 mm																							
<p>Han D®, Crimp contact, Contact surface: Silver plated</p>	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 15 000 6124	09 15 000 6224																						
	0,5	09 15 000 6123	09 15 000 6223																						
	0,75	09 15 000 6125	09 15 000 6225																						
	1	09 15 000 6122	09 15 000 6222																						
	1,5	09 15 000 6121	09 15 000 6221																						
	2,5	09 15 000 6126	09 15 000 6226																						
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Coding element		09 12 000 9922																							

Han-Com

Features

- Combination of signal and power in one connector
- Axial screw termination for power area
- Screw termination for signal area

Technical characteristics

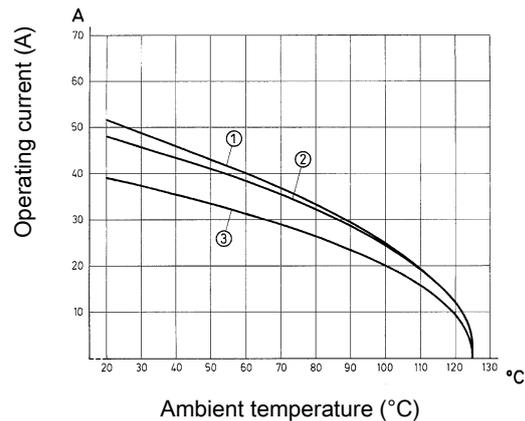
Number of contacts	6
Additional contacts	+ 12 additional signal contacts
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage conductor-earth (signal)	230 V
Rated voltage conductor-conductor (signal)	400 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated current acc. to UL	40 A
Rated current acc. to UL (signal)	10 A
Rated current acc. to CSA	40 A
Rated current acc. to CSA (signal)	10 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.5 mΩ
Contact resistance, signal area	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤6,1 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 10 mm²
- ② Conductor cross-section 6 mm²
- ③ Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Hoods/Housings see chapter 31

Hex key (A/F 2) see chapter 90

Remarks on the axial screw technique

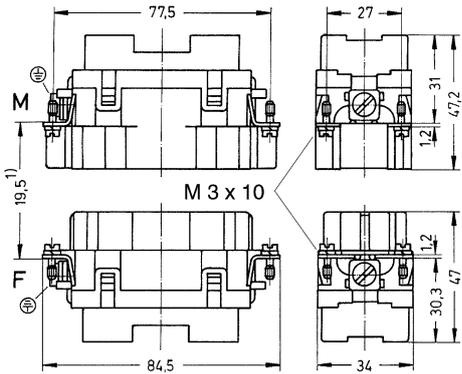

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6+

40 A 690 V 8 kV 3
 + 12 additional signal contacts
 10 A 230/400 V 4 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Com®, Han® K 6/12, Axial screw termination / screw termination, Contact surface: Silver plated 	2,5 ... 8, 0,2 ... 2,5 Signal	09 38 018 2601	09 38 018 2701																			
Han-Com®, Han® K 6/12, Axial screw termination / screw termination, Contact surface: Silver plated 	6 ... 10, 0,2 ... 2,5 Signal	09 38 018 2602	09 38 018 2702	 <p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">Power contacts</th> </tr> <tr> <th>Conductor cross-section</th> <th>Tightening torque</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>2.5 mm²</td> <td>1.5 Nm</td> <td>5 ... 6 mm</td> </tr> <tr> <td>4 mm²</td> <td>1.5 Nm</td> <td>5 ... 6 mm</td> </tr> <tr> <td>6 mm²</td> <td>2 Nm</td> <td>8 ... 9 mm</td> </tr> <tr> <td>10 mm²</td> <td>2 Nm</td> <td>8 ... 9 mm</td> </tr> </tbody> </table> <p>Signal contacts : Stripping length 7.5 mm Tightening torque 0.5 Nm</p>	Power contacts			Conductor cross-section	Tightening torque	Stripping length	2.5 mm ²	1.5 Nm	5 ... 6 mm	4 mm ²	1.5 Nm	5 ... 6 mm	6 mm ²	2 Nm	8 ... 9 mm	10 mm ²	2 Nm	8 ... 9 mm
Power contacts																						
Conductor cross-section	Tightening torque	Stripping length																				
2.5 mm ²	1.5 Nm	5 ... 6 mm																				
4 mm ²	1.5 Nm	5 ... 6 mm																				
6 mm ²	2 Nm	8 ... 9 mm																				
10 mm ²	2 Nm	8 ... 9 mm																				

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han® C and Han D® contacts

Technical characteristics

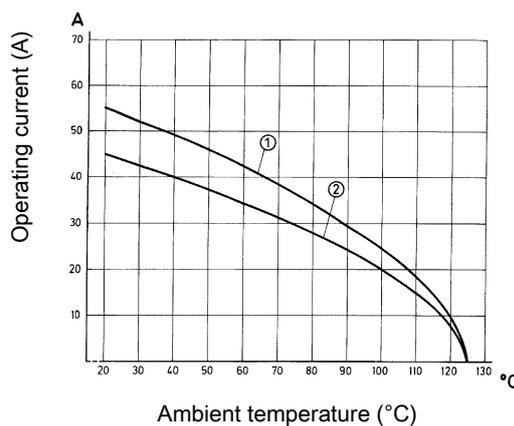
Number of contacts	6
Additional contacts	+ 36 additional signal contacts
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	160 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Rated current acc. to UL	40 A
Rated current acc. to UL (signal)	10 A
Rated current acc. to CSA	40 A
Rated current acc. to CSA (signal)	10 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ, ≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤5 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 6 mm²
- ② Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Hoods/Housings see chapter 31

Contact resistance Han D® crimp contact: ≤ 3 mOhm

Contact resistance Han® C crimp contact: ≤ 1 mOhm

Crimping tools see chapter 90

Remarks on the crimp technique

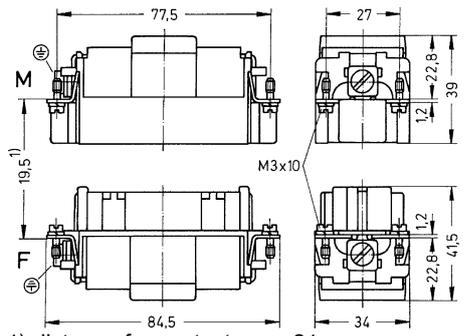

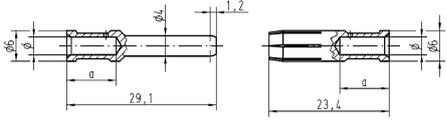
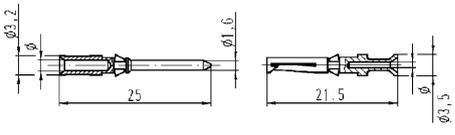
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6+

40 A 690 V 8 kV 3
 + 36 additional signal contacts
 10 A 160 V 2,5 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Com®, Han® K 6/36, Crimp termination  <p>Please order crimp contacts separately.</p>	1,5 ... 6, 0,14 ... 2,5 Signal	09 38 042 3001	09 38 042 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>																					
Han® C, Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm ² AWG 16	1.75 mm	9.5 mm																							
2.5 mm ² AWG 14	2.25 mm	9.5 mm																							
4 mm ² AWG 12	2.85 mm	9.5 mm																							
6 mm ² AWG 10	3.5 mm	9.5 mm																							
10 mm ² AWG 8	4.3 mm	12 mm																							
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 15 000 6124	09 15 000 6224	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0,5	09 15 000 6123	09 15 000 6223																							
0,75	09 15 000 6125	09 15 000 6225																							
1	09 15 000 6122	09 15 000 6222																							
1,5	09 15 000 6121	09 15 000 6221																							
2,5	09 15 000 6126	09 15 000 6226																							
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han® C and Han D® contacts

Technical characteristics

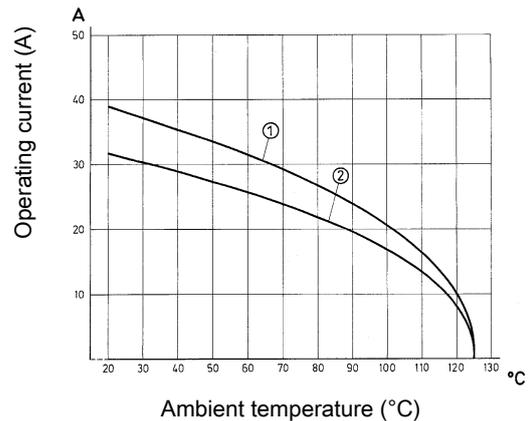
Number of contacts	12
Additional contacts	+ 2 additional signal contacts
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated current acc. to UL	40 A
Rated current acc. to UL (signal)	10 A
Rated current acc. to CSA	40 A
Rated current acc. to CSA (signal)	10 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ, ≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤5 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 6 mm²
- ② Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Hoods/Housings see chapter 31

Contact resistance Han D® crimp contact: ≤ 3 mOhm

Contact resistance Han® C crimp contact: ≤ 1 mOhm

Crimping tools see chapter 90

Remarks on the crimp technique

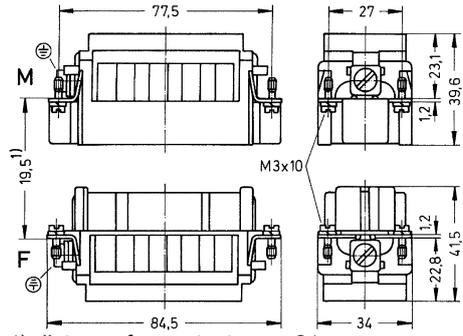

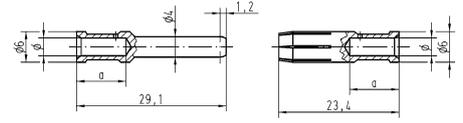
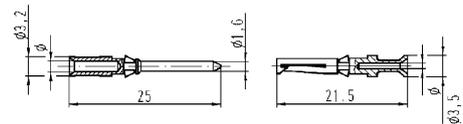
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

12+

40 A 690 V 8 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
<p>Han-Com®, Han® K 12/2, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	1,5 ... 6, 0,14 ... 2,5 Signal	09 32 012 3001	09 32 012 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>																					
<p>Han® C, Crimp contact, Contact surface: Silver plated</p> 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm ² AWG 16	1.75 mm	9.5 mm																							
2.5 mm ² AWG 14	2.25 mm	9.5 mm																							
4 mm ² AWG 12	2.85 mm	9.5 mm																							
6 mm ² AWG 10	3.5 mm	9.5 mm																							
10 mm ² AWG 8	4.3 mm	12 mm																							
<p>Han D®, Crimp contact, Contact surface: Silver plated</p> 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 15 000 6124	09 15 000 6224	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0,5	09 15 000 6123	09 15 000 6223																							
0,75	09 15 000 6125	09 15 000 6225																							
1	09 15 000 6122	09 15 000 6222																							
1,5	09 15 000 6121	09 15 000 6221																							
2,5	09 15 000 6126	09 15 000 6226																							
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					

Han-Com

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Han® C power contacts
- Han E® power contacts
- Han D® signal contacts

Technical characteristics

Number of contacts	18
Additional contacts	+ 18 additional signal contacts
Rated current	40 A, 16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ, ≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Contact resistance Han D® crimp contact: ≤ 3 mΩ

Contact resistance Han E® crimp contact: ≤ 1 mΩ

Contact resistance Han® C crimp contact: ≤ 1 mΩ

Crimping tools see chapter 90

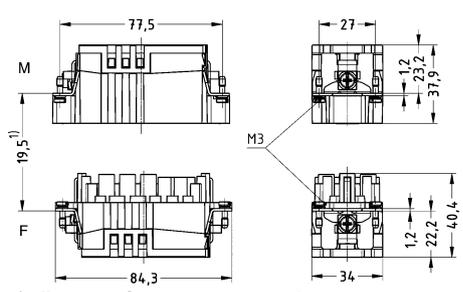

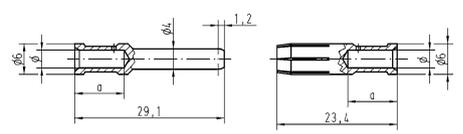
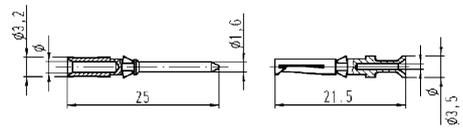
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

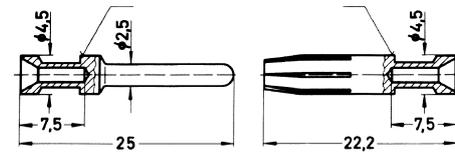
18+

 40 A 830 V 8 kV 3 16 A 830 V 8 kV 3
 + 18 additional signal contacts
 10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																												
		Male	Female																													
Han-Com [®] , Han [®] K 9/9/18, Crimp termination  <p>Please order crimp contacts separately. To ensure a preloading PE-contact under all conditions, it is necessary to use guide pins/bushes (09 33 000 9908 / 09 33 000 9909).</p>	1,5 ... 6, 0,14 ... 4, 0,14 ... 2,5 Signal	09 38 036 3001	09 38 036 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>																												
Han [®] C, Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> <td></td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length		1.5 mm ² AWG 16	1.75 mm	9.5 mm		2.5 mm ² AWG 14	2.25 mm	9.5 mm		4 mm ² AWG 12	2.85 mm	9.5 mm		6 mm ² AWG 10	3.5 mm	9.5 mm		10 mm ² AWG 8	4.3 mm	12 mm					
Conductor cross-section	Ø	Stripping length																														
1.5 mm ² AWG 16	1.75 mm	9.5 mm																														
2.5 mm ² AWG 14	2.25 mm	9.5 mm																														
4 mm ² AWG 12	2.85 mm	9.5 mm																														
6 mm ² AWG 10	3.5 mm	9.5 mm																														
10 mm ² AWG 8	4.3 mm	12 mm																														
Han D [®] , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> <td></td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> <td></td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> <td></td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> <td></td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> <td></td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> <td></td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length		0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm		0.5 mm ² AWG 20	1.1 mm	8 mm		0.75 mm ² AWG 18	1.3 mm	8 mm		1 mm ² AWG 18	1.45 mm	8 mm		1.5 mm ² AWG 16	1.75 mm	8 mm		2.5 mm ² AWG 14	2.25 mm	6 mm	
Wire gauge	Ø	Stripping length																														
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																														
0.5 mm ² AWG 20	1.1 mm	8 mm																														
0.75 mm ² AWG 18	1.3 mm	8 mm																														
1 mm ² AWG 18	1.45 mm	8 mm																														
1.5 mm ² AWG 16	1.75 mm	8 mm																														
2.5 mm ² AWG 14	2.25 mm	6 mm																														

Han-Com

Identification	Conductor cross-section (mm ²)	Part number	
		Male	Female
Han E®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37	09 33 000 6127	09 33 000 6227
	0,5	09 33 000 6121	09 33 000 6220
	0,75	09 33 000 6114	09 33 000 6214
	1	09 33 000 6105	09 33 000 6205
	1,5	09 33 000 6104	09 33 000 6204
	2,5	09 33 000 6102	09 33 000 6202
	3	09 33 000 6106	09 33 000 6206
	4	09 33 000 6107	09 33 000 6207



Conductor cross-section	AWG	Identification
0.14-0.37 mm ²	AWG 26-22	no groove
0.5 mm ²	AWG 20	no groove
0.75 mm ²	AWG 18	1 groove*
1 mm ²	AWG 18	1 groove
1.5 mm ²	AWG 16	2 grooves
2.5 mm ²	AWG 14	3 grooves
3 mm ²	AWG 12	wide groove
4 mm ²	AWG 12	no groove

* on the back crimp collar
 Stripping length 7.5 mm

Features

- Combination of signal and power in one connector
- Screw termination for power and signal area

Technical characteristics

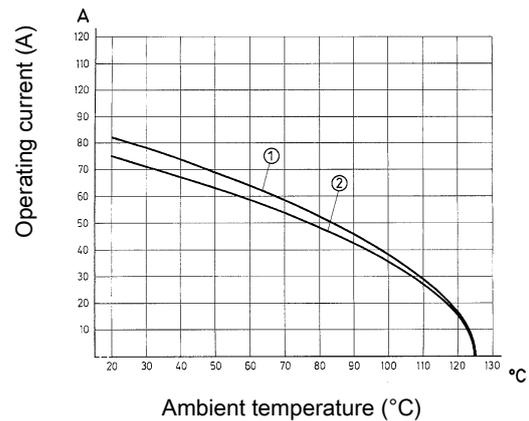
Number of contacts	4
Additional contacts	+ 8 additional signal contacts
Rated current	80 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to UL	80 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	80 A
Rated current acc. to CSA (signal)	16 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.3 mΩ
Contact resistance, signal area	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	HB
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight, 6(c): Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
 ② Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Hoods/Housings see chapter 31

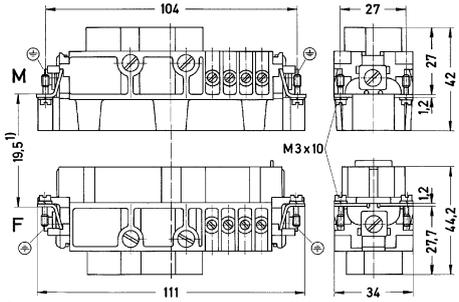

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

4+

80 A 400 V 6 kV 3
 + 8 additional signal contacts
 16 A 400 V 6 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han-Com®, Han® K 4/8, Screw termination, Contact surface: Silver plated 	1,5 ... 16, 0,5 ... 2,5 Signal	09 38 012 2601	09 38 012 2701	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">パワーコンタクト</th> </tr> <tr> <th>導体断面積</th> <th>締め付けトルク</th> <th>ストリップ長さ</th> </tr> </thead> <tbody> <tr> <td>1.5 mm²</td> <td>1.2 Nm</td> <td>14 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>2 Nm</td> <td>14 mm</td> </tr> <tr> <td>4 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>6 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>10 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> <tr> <td>16 mm²</td> <td>3 Nm</td> <td>14 mm</td> </tr> </tbody> </table> <p>Signal contacts : Stripping length 7.5 mm Tightening torque 0.5 Nm</p>	パワーコンタクト			導体断面積	締め付けトルク	ストリップ長さ	1.5 mm ²	1.2 Nm	14 mm	2.5 mm ²	2 Nm	14 mm	4 mm ²	3 Nm	14 mm	6 mm ²	3 Nm	14 mm	10 mm ²	3 Nm	14 mm	16 mm ²	3 Nm	14 mm
パワーコンタクト																												
導体断面積	締め付けトルク	ストリップ長さ																										
1.5 mm ²	1.2 Nm	14 mm																										
2.5 mm ²	2 Nm	14 mm																										
4 mm ²	3 Nm	14 mm																										
6 mm ²	3 Nm	14 mm																										
10 mm ²	3 Nm	14 mm																										
16 mm ²	3 Nm	14 mm																										

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han® TC 100 and Han E® contacts
- 16 coding options

Technical characteristics

Number of contacts	6
Additional contacts	+ 6 additional signal contacts
Rated current	100 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to UL	100 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	100 A
Rated current acc. to CSA (signal)	15 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	300 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ, ≤0.3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤12,8 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Contact resistance Han E® crimp contact: ≤ 1 mΩ

Contact resistance TC 100: ≤ 0.3 mΩ

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90

Remarks on the crimp technique

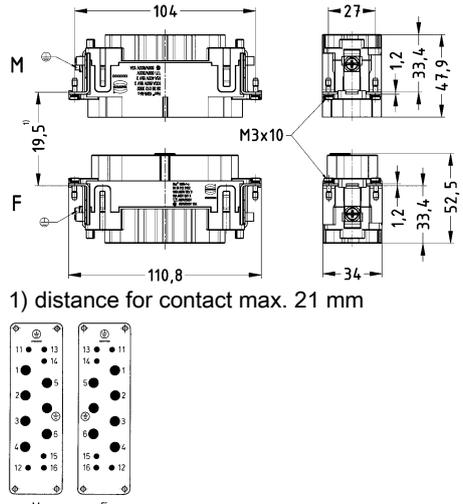
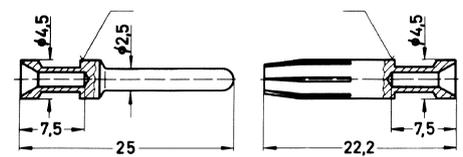
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

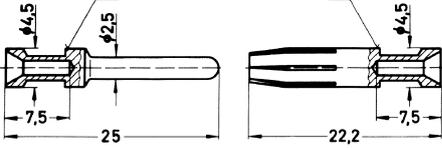

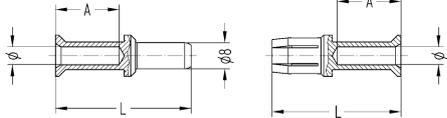
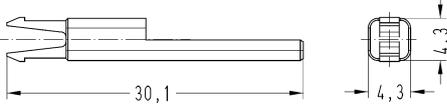
Number of contacts

6+

100 A 690 V 8 kV 3
 + 6 additional signal contacts
 16 A 400 V 6 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Com®, Han® K 6/6, Crimp termination  <p>Please order crimp contacts separately. Please order coding pins separately.</p>	10 ... 25, 0,14 ... 2,5 Signal	09 38 012 3002	09 38 012 3102	 <p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p>																		
Han E®, Crimp contact, Contact surface: Silver plated 	0,5 0,75 1 1,5 2,5 4	09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6107	09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han E®, Crimp contact, Contact surface: Gold plated 	0,5	09 33 000 6122	09 33 000 6222	 <table border="1" data-bbox="997 488 1449 772"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
	Conductor cross-section		Identification																												
	0.14-0.37 mm ²	AWG 26-22	no groove																												
	0.5 mm ²	AWG 20	no groove																												
	0.75 mm ²	AWG 18	1 groove*																												
	1 mm ²	AWG 18	1 groove																												
1.5 mm ²	AWG 16	2 grooves																													
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													
0,75	09 33 000 6115	09 33 000 6215																													
1	09 33 000 6118	09 33 000 6218																													
1,5	09 33 000 6116	09 33 000 6216																													
2,5	09 33 000 6123	09 33 000 6223																													
4	09 33 000 6119	09 33 000 6221																													
Han E®, Crimp contact, Relay contact , Contact surface: Silver plated 	0,75 ... 1	09 33 000 6109																													
	1,5	09 33 000 6110																													
	2,5	09 33 000 6111																													
TC 100 , Crimp contact, Contact surface: Silver plated 	10	09 11 000 6114	09 11 000 6214	 <table border="1" data-bbox="997 1227 1449 1406"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>4.3</td> <td>19 mm</td> </tr> <tr> <td>16 mm²</td> <td>5.5</td> <td>19 mm</td> </tr> <tr> <td>25 mm²</td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>16 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Wire gauge	∅	Stripping length A	10 mm ²	4.3	19 mm	16 mm ²	5.5	19 mm	25 mm ²	7	19 mm	35 mm ²	8.2	16 mm												
	Wire gauge	∅	Stripping length A																												
	10 mm ²	4.3	19 mm																												
16 mm ²	5.5	19 mm																													
25 mm ²	7	19 mm																													
35 mm ²	8.2	16 mm																													
16	09 11 000 6116	09 11 000 6216																													
25	09 11 000 6125	09 11 000 6225																													
Coding element 		09 12 000 9922																													

Features

- Combination of signal and power in one connector
- Axial screw termination for power area
- Screw termination for signal area

Technical characteristics

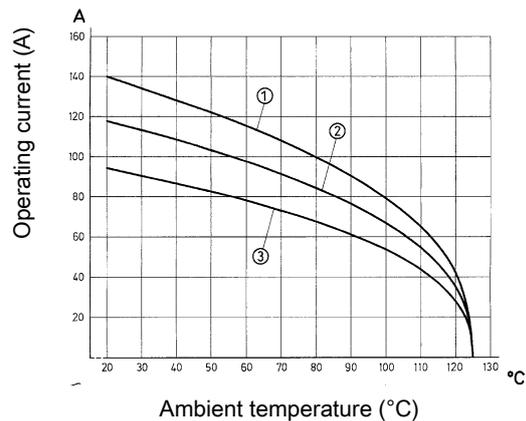
Number of contacts	6
Additional contacts	+ 6 additional signal contacts
Rated current	100 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to UL	100 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	100 A
Rated current acc. to CSA (signal)	15 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	300 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.5 mΩ
Contact resistance, signal area	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤11,4 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight, 6(c): Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
- ② Conductor cross-section 25 mm²
- ③ Conductor cross-section 16 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Hoods/Housings see chapter 31

Hex key (A/F 4) see chapter 90

Adapter 3/8" 09 99 000 0370 see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6+

100 A 690 V 8 kV 3
 + 6 additional signal contacts
 16 A 400 V 6 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Com®, Han® K 6/6, Axial screw termination / screw termination, Contact surface: Silver plated 	16 ... 35, 0,2 ... 2,5 Signal	09 38 012 2651	09 38 012 2751	<p>1) distance for contact max. 21 mm</p> <p>11 ● 13 14 ● 5 2 ● 1 3 ● 6 4 ● 15 12 ● 16</p> <p>13 ● 11 14 ● 2 5 ● 3 6 ● 15 15 ● 12</p> <p>M F</p> <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">power contacts</th> </tr> <tr> <th>wire gauge</th> <th>tightening torque</th> <th>stripping length</th> </tr> </thead> <tbody> <tr> <td>16 mm²</td> <td>6 Nm</td> <td>13 ... 14 mm</td> </tr> <tr> <td>25 mm²</td> <td>7 Nm</td> <td>13 ... 14 mm</td> </tr> <tr> <td>35 mm²</td> <td>8 Nm</td> <td>13 ... 14 mm</td> </tr> </tbody> </table> <p>Signal contacts : Stripping length 7.5 mm Tightening torque 0.5 Nm</p>	power contacts			wire gauge	tightening torque	stripping length	16 mm ²	6 Nm	13 ... 14 mm	25 mm ²	7 Nm	13 ... 14 mm	35 mm ²	8 Nm	13 ... 14 mm
power contacts																			
wire gauge	tightening torque	stripping length																	
16 mm ²	6 Nm	13 ... 14 mm																	
25 mm ²	7 Nm	13 ... 14 mm																	
35 mm ²	8 Nm	13 ... 14 mm																	

Features

- Axial screw termination
- No signal contacts

Technical characteristics

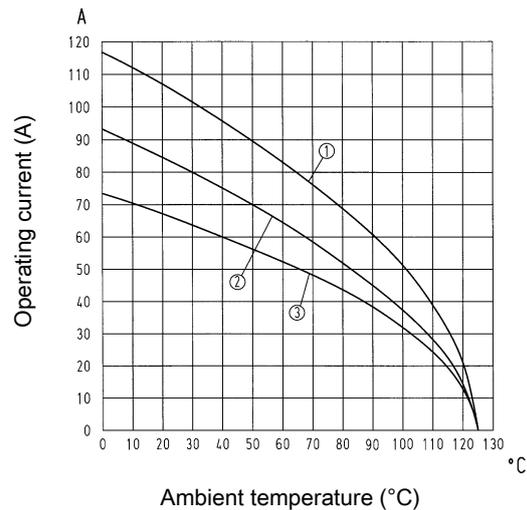
Number of contacts	8
Rated current	100 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	82 A
Rated current acc. to CSA	100 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Wire outer diameter	$\leq 11,4 \text{ mm}$
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c) : Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 25 mm²
- ② Conductor cross-section 16 mm²
- ③ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Hoods/Housings see chapter 31

Hex key (A/F 4) see chapter 90

Adapter 3/8" 09 99 000 0370 see chapter 90

Remarks on the axial screw technique

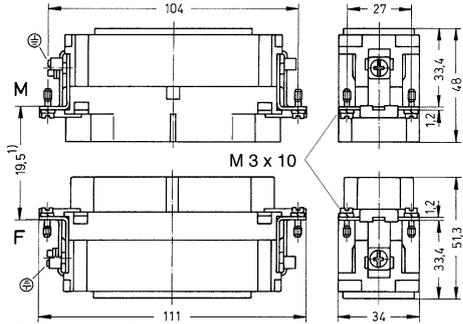

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

8+

100 A 690 V 8 kV 3

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Com®, Han® K 8/0, Axial screw termination, Contact surface: Silver plated 	10 ... 25	09 38 008 2653	09 38 008 2753	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p> <table border="1"> <thead> <tr> <th colspan="3">power contacts</th> </tr> <tr> <th>wire gauge</th> <th>tightening torque</th> <th>stripping length</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>6 Nm</td> <td>13 ... 14 mm</td> </tr> <tr> <td>16 mm²</td> <td>6 Nm</td> <td>13 ... 14 mm</td> </tr> <tr> <td>25 mm²</td> <td>7 Nm</td> <td>13 ... 14 mm</td> </tr> </tbody> </table>	power contacts			wire gauge	tightening torque	stripping length	10 mm ²	6 Nm	13 ... 14 mm	16 mm ²	6 Nm	13 ... 14 mm	25 mm ²	7 Nm	13 ... 14 mm
power contacts																			
wire gauge	tightening torque	stripping length																	
10 mm ²	6 Nm	13 ... 14 mm																	
16 mm ²	6 Nm	13 ... 14 mm																	
25 mm ²	7 Nm	13 ... 14 mm																	

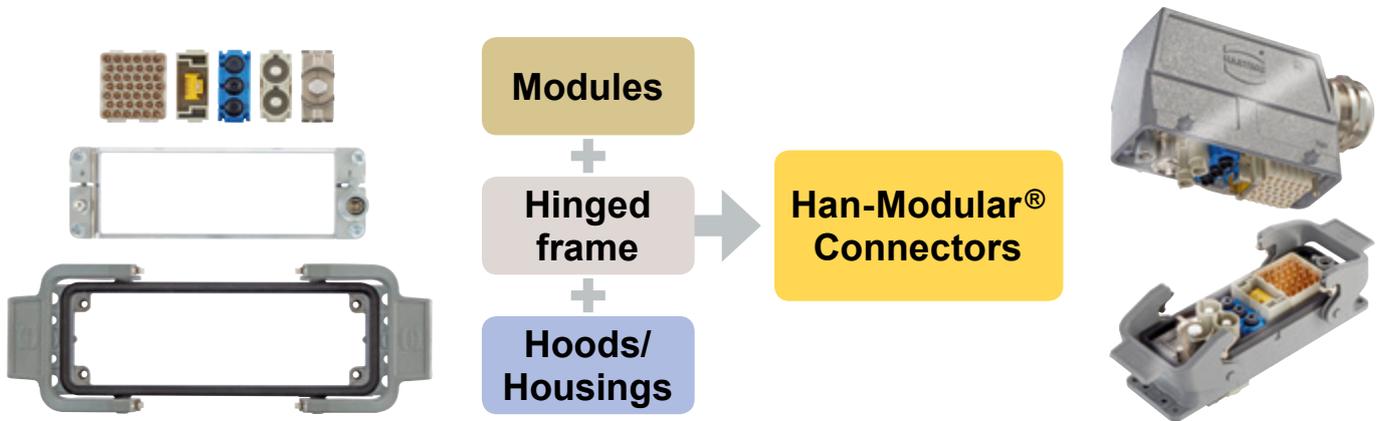
Contents	Page
Summary	Han 06.5
Han-Modular® hinged frames	Han 06.9
Han® PE module	Han 06.14
Han® 200 A module	Han 06.16
Han® 200 A PE module	Han 06.20
Han® 100 A module	Han 06.22
Han® 100 A Single module	Han 06.24
Han® 70 A module	Han 06.26
Han® 70 A Hybrid module	Han 06.29
Han® 40 A module	Han 06.32
Han® C module	Han 06.35
Han® CC Protected module	Han 06.38
Han® CD module	Han 06.40
Han® Guiding module	Han 06.43
Han E® module	Han 06.48
Han E® Screw module	Han 06.51
Han E® Protected module	Han 06.53
Han® EE module	Han 06.55
Han® EEE module	Han 06.58
Han® ES module	Han 06.61
Han® HV module	Han 06.63
Han® HV Single module	Han 06.66
Han DD® module	Han 06.68

Contents	Page
Han DD® Quad module	Han 06.71
Han® DDD module	Han 06.73
Han® High Density module	Han 06.75
Han® Full High Density module	Han 06.77
Han® D-Sub module	Han 06.79
Han® USB module	Han 06.82
Han® FireWire module	Han 06.84
Han® RJ45 module, female	Han 06.85
Han® RJ45 module, male	Han 06.87
RJ45 patch cable	Han 06.90
Han® Gigabit module	Han 06.93
Han® Shielded module	Han 06.98
Han® High density shielded module	Han 06.100
Han® Megabit module	Han 06.101
Accessories for Gigabit, Shielded and Megabit	Han 06.105
Han-Quintax® module	Han 06.107
Han-Quintax® High Density module	Han 06.109
Han® D Coax	Han 06.111
Han® E Coax	Han 06.113
Han® Multi module	Han 06.115
Han® Pneumatic module	Han 06.122
Han® SC module	Han 06.124
Han® LC module	Han 06.127

Contents	Page
Han-Smart® Ethernet Switches	Han 06.129
Han-Smart® ID CAN module	Han 06.131
Han-Smart® Surge protection module	Han 06.133
Han-Modular® Compact	Han 06.137
Han-Modular® Twin	Han 06.142
Han-Modular® ECO	Han 06.145
Han® Modular Flexbox	Han 06.150
Han-Modular® docking frames	Han 06.155
Sliding frame.....	Han 06.159
Accessories	Han 06.161

Description of the Han-Modular® system

Modular



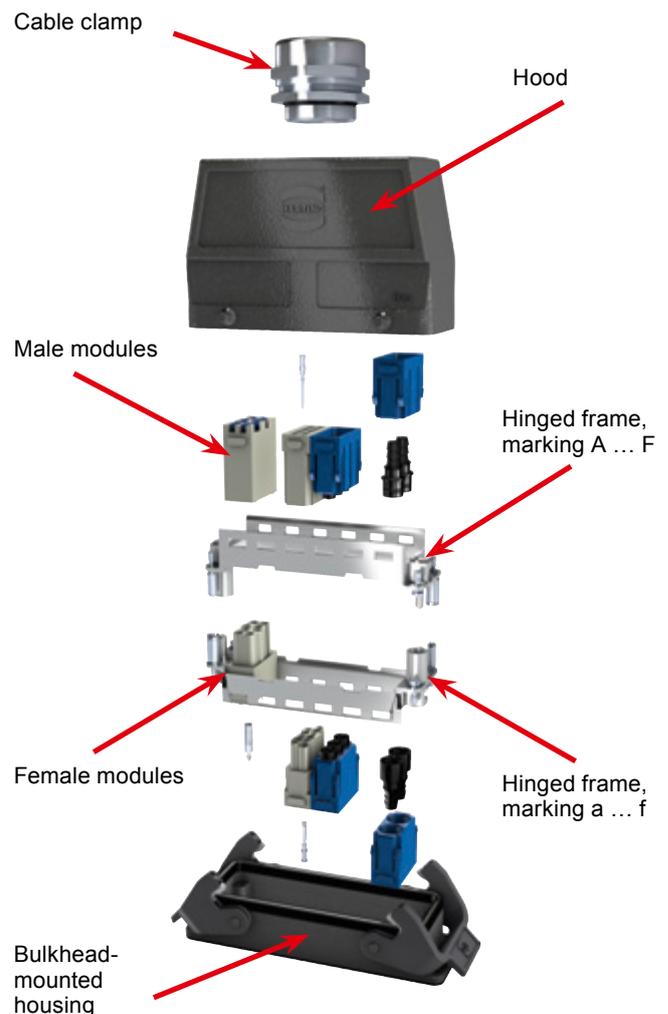
The Han-Modular® series is designed for combining different transmission media in one connector. The multifaceted system of inserts, contacts, frames, hoods and housings as well as accessories fulfils individual customer requirements. The customer can choose between more than 100 different modules. These are suitable for different transmission media and cover various termination techniques.

The patented Han-Modular® hinged frame enables the configuration of all modules in the well-accepted Han® hoods and housings. Further additional solutions are available, e.g. suitable docking frames for drawer units. Individual customer requirements can be realised by means of the Han-Modular® series. Combining various transmission media in one single connector results in lower expenditures in installation time and production downtime. Space savings and cost savings are further benefits. The easy extension possibilities secure the ideal solution for an actual as well as future safe design.

Product features at a glance

- Combination of different connectors to one unit
- Shorter installation times
- Important space saving
- Save money for components as well as for the whole industrial site
- Future safe design due to easy extensions

Assembly details



		Han® 200 A Axial Module	Han® 200 A PE Module	Han® 100 A Axial Module	Han® PE Module
100 - 200 A					
	Number of contacts	1*	1 x PE*	1*	1 x PE
	Electrical data	200 A / 1000 V	200 A	100 A / 1000 V	100 A
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	40 ... 70 mm ²	40 ... 70 mm ²	16 ... 35 mm ²	16 ... 35 mm ²
	Male module (M)	09 14 001 2662	09 14 001 2667	09 14 002 2651	09 14 001 2633
Female module (F)	09 14 001 2762	09 14 001 2767	09 14 002 2751	09 14 001 2733	
40 - 70 A					
	Number of contacts	2	1 + (4 x Han E®)	2	3
	Electrical data	70 A / 1000 V	70 A / 1000 V	40 A / 1000 V	40 A / 690 V
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	14 ... 22 mm ²	14 ... 22 mm ²	6 ... 10 mm ²	6 ... 10 mm ²
	Male module (M)	09 14 002 2647	09 14 005 2647	09 14 002 2602	09 14 003 2602
Female module (F)	09 14 002 2742	09 14 005 2742	09 14 002 2702	09 14 003 2702	
16 A					
	Number of contacts	6	8	5	5
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 400 V	16 A / 230/400 V
	Termination type	Quick Lock termination	Quick Lock termination	Cage clamp termination	Screw termination
	Cross-section	0.5 ... 2.5 mm ²	0.5 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.5 ... 2.5 mm ²
	Male module (M)	09 14 006 2633	09 14 008 2633	09 14 005 2616	09 14 005 2601
Female module (F)	09 14 006 2733	09 14 008 2733	09 14 005 2716	09 14 005 2701	
≤ 10 A					
	Number of contacts	12, silver plated	12, gold plated		
	Electrical data	10 A / 250 V	10 A / 250 V		
	Termination type	Quick Lock termination	Quick Lock termination		
	Cross-section	0.25 ... 1.5 mm ²	0.25 ... 1.5 mm ²		
Male module (M)	09 14 012 2632	09 14 012 2634			
Female module (F)	09 14 012 2732	09 14 012 2734			
Axial screw termination	Hexagonal drivers	with grip	Bit 1/4"	Adapter 3/8"	Hexagonal torque set
	2 mm (40 A)	09 99 000 0313	09 99 000 0369		09 99 000 0834
	2.5 mm (70 A)		09 99 000 0375		09 99 000 0834
	4 mm (100 A)	09 99 000 0363		09 99 000 0370	09 99 000 0833
5 mm (200 A)	09 99 000 0364		09 99 000 0371	09 99 000 0833	

* Double module, requires two places in the frame

Summary



Modular

		Han® PE module (Including crimp contact for earthing)					
PE	Number of contacts	1 x PE	1 x PE	1 x PE			
	Cross-section	35 mm ²	25 mm ²	16 mm ²			
	Termination type	Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC			
	Male module (M)	09 14 001 3074	09 14 001 3073	09 14 001 3072			
	Female module (F)	09 14 001 3174	09 14 001 3173	09 14 001 3172			
70 - 200 A		Han® 200 A Crimp module	Han® 100 A Crimp module	Han® 100 A Single module	Han® 70 A Crimp module		
		Number of contacts	1*	2*	1	2	
		Electrical data	200 A / 1000 V	100 A / 1000 V	100 A / 830 V	70 A / 1000 V	
		Cross-section	25 ... 70 mm ²	10 ... 35 mm ²	10 ... 35 mm ²	6 ... 25 mm ²	
		Termination type	Crimp termination, Han® HC				
	Male module (M)	09 14 001 3001	09 14 002 3051	09 14 001 3031	09 14 002 3041		
	Female module (F)	09 14 001 3101	09 14 002 3151	09 14 001 3131	09 14 002 3141		
40 A		Han® 40 A Crimp module	Han® C module	Han® CC module	Han® CD module		
		Number of contacts	2	3	4	3 + 4	
		Electrical data	40 A / 1000 V	40 A / 690 V	40 A / 830 V	40 A + 10 A / 830 V	
		Cross-section	1.5 ... 10 mm ²	1.5 ... 6 mm ²	1.5 ... 6 mm ²	0.14 ... 6 mm ²	
		Termination type	Crimp termination, Han® C	Crimp termination, Han® C	Crimp termination, Han® C	Crimp, Han® C + Han D®	
	Male module (M)	09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001		
	Female module (F)	09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101		
16 A		Han E® module	Han® EE module	Han® EEE module	Han E® Protected module		
		Number of contacts	6	8	20*	6	
		Electrical data	16 A / 500 V	16 A / 400 V	16 A / 500 V	16 A / 830 V	
		Cross-section	0.14 ... 4 mm ²				
		Termination type	Crimp termination, Han E®				
	Male module (M)	09 14 006 3001	09 14 008 3001	09 14 020 3001	09 14 006 3041		
	Female module (F)	09 14 006 3101	09 14 008 3101	09 14 020 3101	09 14 006 3141		
≤ 10 A		Han DD® module	Han® DDD module	Han DD® Quad module	Han® High Density module		
		Number of contacts	12	17	42*	25	
		Electrical data	10 A / 250 V	10 A / 150 V	10 A / 150 V	4 A / 50 V	
		Cross-section	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.08 ... 0.52 mm ²	
		Termination type	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub	
	Male module (M)	09 14 012 3002	09 14 017 3001	09 14 042 3001	09 14 025 3001		
	Female module (F)	09 14 012 3102	09 14 017 3101	09 14 042 3101	09 14 025 3101		
High Voltage		Han® HV module 40 A	Han® HV module 16 A	Han® HV single module			
		Number of contacts	2*	2*	2		
		Electrical data	40 A / 2900/5000 V	16 A / 2900/5000 V	16 A / 2500 V		
		Cross-section	1.5 ... 10 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²		
		Termination type	Crimp termination, Han® C	Crimp termination, Han E®	Crimp termination, Han E®		
	Male module (M)	09 14 002 3023	09 14 002 3021	09 14 002 3025			
	Female module (F)	09 14 002 3123	09 14 002 3121	09 14 002 3125			

* Double module, requires two places in the frame

Summary



Modu-
lar

Han® RJ45 module	Han® RJ45 module	for patch cable	for IDC	for patch cable	for IDC and preLink
	- 8 contacts - cat. 6 _A - 10 Gbit/s				
	Part numbers	Male module (M) 09 14 001 4623	Male module (M) 09 14 001 4623	Female module (F) 09 14 001 4721	Female module (F) 09 14 001 4722
		Adapter for patch cable: 09 14 000 9966	RJ Industrial IDC: 09 45 400 1560		RJ45 female IDC: 09 14 545 1561
Patch cable cat. 6: 09 47 474 71xx				RJ45 female preLink: 09 14 008 4720	
Han-Quintax® Modules		Han-Quintax®	Han® High Density Quintax	Han D® Coax	Han E® Coax
	Quintax modul				
	Number of contacts	2 x 4*	2 x 8*	2 x Coax*	2 x Coax*
	Male module (M)	09 14 002 3001	09 14 002 3001	09 14 002 3001	09 14 002 3001
	Female module (F)	09 14 002 3101	09 14 002 3101	09 14 002 3101	09 14 002 3101
	Insert (Cable Ø ≤ 9.5 mm)				
	Data rate	100 Mbit/s (cat. 5e)	100 Mbit/s (cat. 5e)	≤ 500 Mhz / 75 Ω	≤ 500 Mhz / 50 Ω
	Electrical data	10 A / 50 V	5 A / 50 V	10 A / 50 V	16 A / 50 V
	Cross-section	0.14 ... 2.5 mm ²	0.09 ... 0.52 mm ²	0.14 ... 2.5 mm ²	0.14 ... 4 mm ²
	Termination type	Crimp termination, Han D®	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han E®
Male insert (M)	09 15 004 3013	09 15 008 3013	09 15 001 3013	09 15 001 3023	
Female insert (F)	09 15 004 3113	09 15 008 3113	09 15 001 3113	09 15 001 3123	
PE shielding termination	Optional shielding termination to the hinged frame with the aid of Han-Quintax® metal adapter 09 14 000 9915				
Han® GigaBit – Han® MegaBit Modules		Han® GigaBit module	Han® MegaBit module with 2 cable entries	Han® MegaBit module with 1 cable entry	Han® Shielded Module
	Adapter Module				
	Male module (M)	09 14 001 3011	09 14 001 3011	09 14 001 3011	09 14 001 3011
	Female module (F)	09 14 001 3111	09 14 001 3111	09 14 001 3111	09 14 001 3111
	Insert (Cable Ø ≤ 14 mm)				
	Number of contacts	8	2 x 4	8	20
	Data rate	10 Gbit/s (cat. 6 _A)	2 x 100 Mbit/s (cat. 5e)	1 Gbit/s (cat. 5e)	
	Electrical data	5 A / 50 V	10 A / 50 V	10 A / 50 V	4 A / 32 V
	Cross-section	0.09 ... 0.52 mm ²	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.09 ... 0.52 mm ²
	Termination type	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub
Shielding termination	Crimp flange	2 x crimp flange	Crimp flange	Crimp flange	
Male insert (M)	09 14 008 3011	09 14 008 3016	09 14 008 3021	09 14 020 3013	
Female insert (F)	09 14 008 3111	09 14 008 3116	09 14 008 3121	09 14 020 3113	
	with PE shielding termination	with PE shielding termination	with PE shielding termination		
Male insert (M)	09 14 008 3012	09 14 008 3017	09 14 008 3022		
Female insert (F)	09 14 008 3112	09 14 008 3117	09 14 008 3122		
Serial Bus Modules		Han D-Sub module	Han® USB module	Han® FireWire module	Han® ID CAN module
	Number of contacts	9 + shielding	8	6	10 MB memory
	Data rate	12 Mbit/s (Profibus)	5 Gbit/s (USB 3.0)	400 Mbit/s (IEEE 1394a)	1 Mbit/s (CAN bus)
	Electrical data	5 A / 50 V	1 A / 50 V	1 A / 50 V	24 V
	Cross-section	0.09 ... 0.52 mm ²			0.13 ... 1.5 mm ²
Termination type	Crimp termination, D-Sub	USB patch cable	FireWire patch cable	Cage clamp termination	
Male module (M)	09 14 009 3001	09 14 001 4601	09 14 001 4611	09 80 015 0100	
Female module (F)	09 14 009 3101	09 14 001 4703	09 14 001 4711	09 80 115 0200	

* Double module, requires two places in the frame

Han
06
7

Summary



Modular

		Han® Multi Module (for D-Sub coaxial contacts)		Han® Multi Module (for DIN 41626 coaxial contacts)	
Coaxial Modules					
	Number of contacts	4	4	12*	12*
	Male module (M)	09 14 004 4501	09 14 004 4501	09 14 012 4501	09 14 012 4501
	Female module (F)	09 14 004 4513	09 14 004 4513	09 14 012 4512	09 14 012 4512
	Coaxial contacts (≤ 2 GHz)				
	Impedance	75 Ω	50 Ω	75 Ω	50 Ω
	Coaxial cable	RG179, RG187	RG174, RG188, RG316	RG179, RG187	RG174, RG188, RG316
	Termination type	Crimp /crimp termination	Crimp /crimp termination	Solder /crimp termination	Solder /crimp termination
Male contact	09 69 282 5230	09 69 282 5140	09 14 000 6221	09 14 000 6211	
Female contact	09 69 182 5230	09 69 182 5140	09 14 000 6121	09 14 000 6111	
Optical Modules		Han® LC module	Han® SC module	Han® Multi module	Han® Multi module
	Number of contacts	6	4	4	12*
	Male module (M)	09 14 006 4701	09 14 004 4701	09 14 004 4501	09 14 012 4501
	Female module (F)	09 14 006 4711	09 14 004 4711	09 14 004 4512	09 14 012 4512
	Contacts				
	1 mm POF		20 10 001 5211	Male: 20 10 001 4211 Female: 20 10 001 4221	Male: 20 10 001 4211 Female: 20 10 001 4221
	1 mm POF Fast assembly termination		20 10 001 5217		
	SI-Fibre 200 / 230 µm Multi-Mode		20 10 230 5211	Male: 20 10 230 4211 Female: 20 10 230 4221	Male: 20 10 230 4211 Female: 20 10 230 4221
	GI-Fibre 50-62,5 / 125 µm Multi-Mode	20 10 125 8211	20 10 125 5211	Male: 20 10 125 4212 Female: 20 10 125 4222	Male: 20 10 125 4212 Female: 20 10 125 4222
GI-Fibre 9 / 125 µm Single-Mode	20 10 125 8220	20 10 125 5220			
Further Modules		Han-Eco® Monoblock	Han-Eco® PE module	Han® Dummy module	Han® Pneumatic module metal
	Field of application	for Han-Eco® hoods/housings only	for Han-Eco® hoods/housings only	to fill-up empty module places	
	Number of contacts	10, 14, 20, 28 + PE	1 x PE		3
	Electrical data	16 A / 500 V			
	Cross-section	0.5 ... 2.5 mm ²	1.5 ... 16 mm ²		3, 4, 6 mm
Termination type	Screw termination	Screw termination			
Male module (M)	19 41 0xx 2601	19 41 001 2600	09 14 000 9950	09 14 003 3501	
Female module (F)	19 41 0xx 2701	19 41 001 2700		09 14 003 3501	
Contacts for pneumatic modules		Pneumatic contacts (max. 10 bar)			Adapter
	For tube outer diameter				
	Tube-Ø	6 mm OD	4 mm OD	3 mm OD	for Han® C contacts
	Male contact	09 14 000 6356	09 14 000 6354	09 14 000 6353	Male: 09 14 000 6391
	Female without shut-off	09 14 000 6456	09 14 000 6454	09 14 000 6453	Female: 09 14 000 6491
	Female with shut-off	09 14 000 6466	09 14 000 6464	09 14 000 6463	
	For tube inner diameter				
	Tube-Ø	6 mm ID	4 mm ID	3 mm ID	
	Male contact	09 14 000 6306	09 14 000 6304	09 14 000 6303	
	Female without shut-off	09 14 000 6406	09 14 000 6404	09 14 000 6403	
Female with shut-off	09 14 000 6416	09 14 000 6414	09 14 000 6413		

* Double module, requires two places in the frame

Features

- Suitable for more than 100 different modules
- Quick and easy assembly supported by an audible “Click”
- Very robust mechanical characteristics
- Modules can be assembled/removed without tools
- Two leading PE contacts
- Easy handling

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (frames)	Zinc die-cast, Stainless steel
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Both different markings must be used for one connector!

Conductor cross-section PE (power side) 4 ... 10 mm²

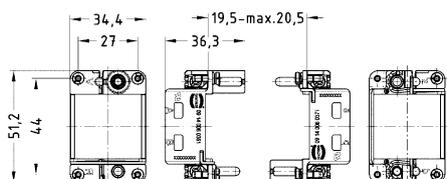
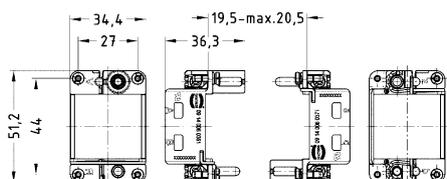
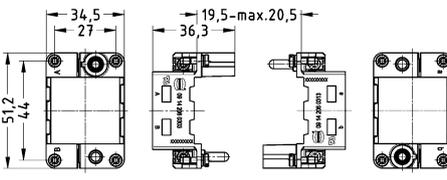
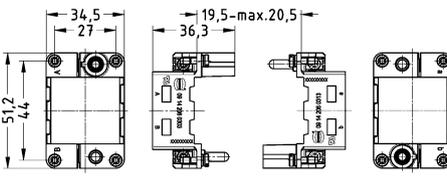
Conductor cross-section 10 mm² only with ferrule crimping tool
09 99 000 0374

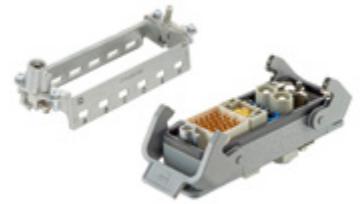
Conductor cross-section PE (signal side) 1 ... 2.5 mm²

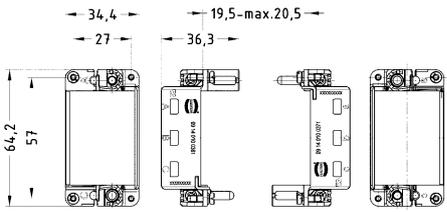
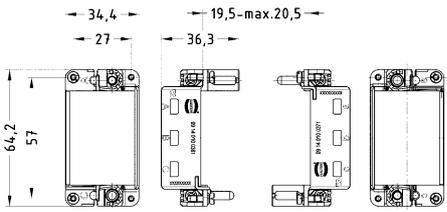
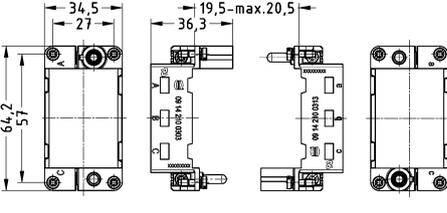
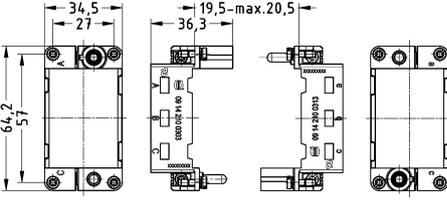
Locking element 09 14 000 9960 see accessories in chapter 06

Modular



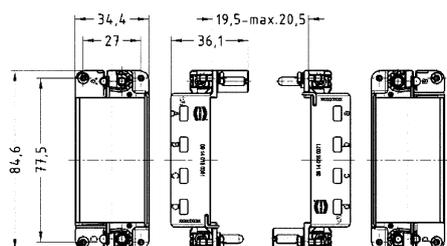
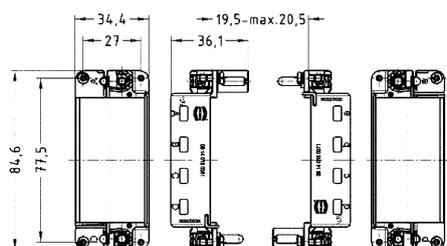
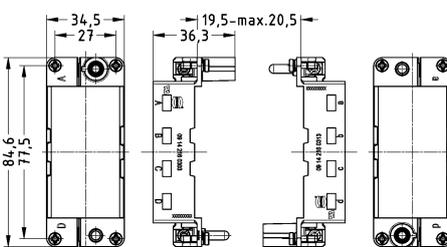
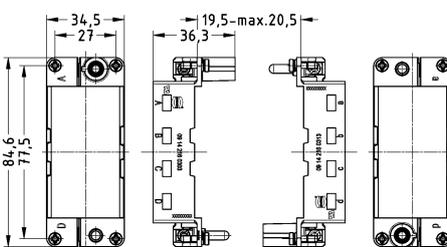
Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Hinged frame, for 2 modules, A ... B, Mating cycles ≥ 500</p> 	<p>09 14 006 0361</p>	
<p>Han-Modular®, Hinged frame, for 2 modules, a ... b, Mating cycles ≥ 500</p> 	<p>09 14 006 0371</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 2 modules, A ... B, Mating cycles ≥ 10000</p> 	<p>09 14 206 0303</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 2 modules, a ... b, Mating cycles ≥ 10000</p> 	<p>09 14 206 0313</p>	



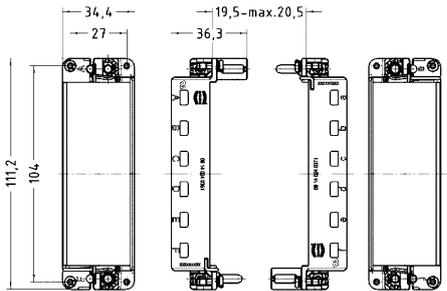
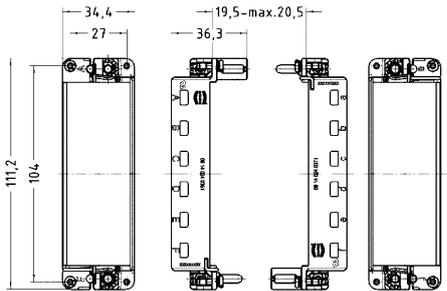
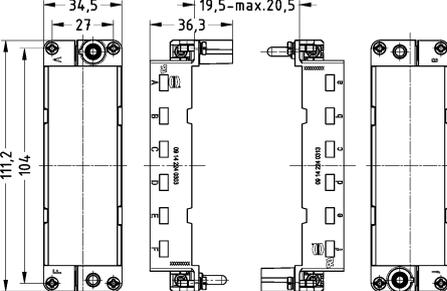
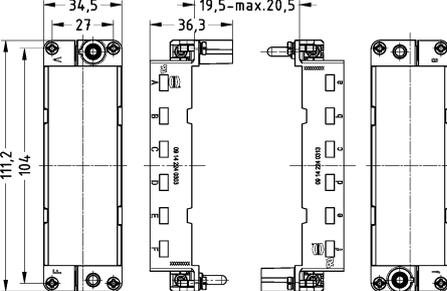
Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Hinged frame, for 3 modules, A ... C, Mating cycles ≥500</p> 	<p>09 14 010 0361</p>	
<p>Han-Modular®, Hinged frame, for 3 modules, a ... c, Mating cycles ≥500</p> 	<p>09 14 010 0371</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 3 modules, A ... C, Mating cycles ≥10000</p> 	<p>09 14 210 0303</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 3 modules, a ... c, Mating cycles ≥10000</p> 	<p>09 14 210 0313</p>	

Modular



Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Hinged frame, for 4 modules, A ... D, Mating cycles ≥ 500</p> 	<p>09 14 016 0361</p>	
<p>Han-Modular®, Hinged frame, for 4 modules, a ... d, Mating cycles ≥ 500</p> 	<p>09 14 016 0371</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 4 modules, A ... D, Mating cycles ≥ 10000</p> 	<p>09 14 216 0303</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 4 modules, a ... d, Mating cycles ≥ 10000</p> 	<p>09 14 216 0313</p>	



Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Hinged frame, for 6 modules, A ... F, Mating cycles ≥500</p> 	<p>09 14 024 0361</p>	
<p>Han-Modular®, Hinged frame, for 6 modules, a ... f, Mating cycles ≥500</p> 	<p>09 14 024 0371</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 6 modules, A ... F, Mating cycles ≥10000</p> 	<p>09 14 224 0303</p>	
<p>Han-Modular®, Hinged frame, HMC version, for 6 modules, a ... f, Mating cycles ≥10000</p> 	<p>09 14 224 0313</p>	

Number of contacts

1

Modular

Features

- PE module to connect large cable diameters within the Han-Modular® hinged frames
- Electrically conductive connection of the PE contact to the hinged frames and the hoods and housings acc. to EN 61984
- Pre-leading and robust 100 A PE contact
- Suitable for the connection of standard power cables even with large cross-sections (no special cables with reduced PE necessary)
- Crimp- and axial module are compatible modules

Technical characteristics

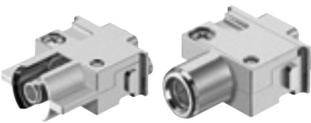

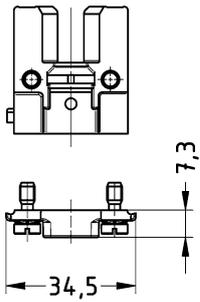


Number of contacts	1
Contact resistance	≤0.3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Zinc die-cast, nickel-plated
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Short-time withstand current: 1920 A for 1 second (acc. to IEC 60947-7-2)

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)											
		Male	Female												
Han-Modular®, Han® PE module, Crimp termination, Pack contents: 2 PE module halves, 1 contact pressure plate, 1 crimp contact Contact surface: Silver plated 	16 25 35	09 14 001 3072 09 14 001 3073 09 14 001 3074	09 14 001 3172 09 14 001 3173 09 14 001 3174												
															
				Stripping length <table border="1"> <tr> <td>mm²</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>mm</td> <td>19</td> <td>19</td> <td>19</td> <td>16</td> </tr> </table>		mm ²	10	16	25	35	mm	19	19	19	16
mm ²	10	16	25	35											
mm	19	19	19	16											

Number of contacts

1

Modular

Features

- PE module to connect large cable diameters within the Han-Modular® hinged frames
- Electrically conductive connection of the PE contact to the hinged frames and the hoods and housings acc. to EN 61984
- Pre-leading and robust 100 A PE contact
- Suitable for the connection of standard power cables even with large cross-sections (no special cables with reduced PE necessary)
- Crimp- and axial module are compatible modules

Technical characteristics

Number of contacts	1
Contact resistance	≤0.3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Zinc die-cast, nickel-plated
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Specifications and approvals

IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Short-time withstand current: 1920 A for 1 second (acc. to IEC 60947-7-2)

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)										
		Male	Female											
Han-Modular®, Han® PE module, Axial screw termination, Pack contents: PE module with pre-assembled axial screw contact Contact surface: Silver plated	10 ... 25 16 ... 35 22 ... 38	09 14 001 2632 09 14 001 2633 09 14 001 2634	09 14 001 2732 09 14 001 2733 09 14 001 2734	<p>Stripping length 13 mm</p> <table border="1"> <caption>Tightening torque</caption> <tr> <td>mm²</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>Nm</td> <td>6</td> <td>6</td> <td>7</td> <td>8</td> </tr> </table>	mm ²	10	16	25	35	Nm	6	6	7	8
mm ²	10	16	25	35										
Nm	6	6	7	8										

Features

- Contacts can be unlocked from the mating side
- Power module for big cross-sections up to 70 mm²
- Suitable as a 3 + PE connector in a Han® 32 B housing

Technical characteristics

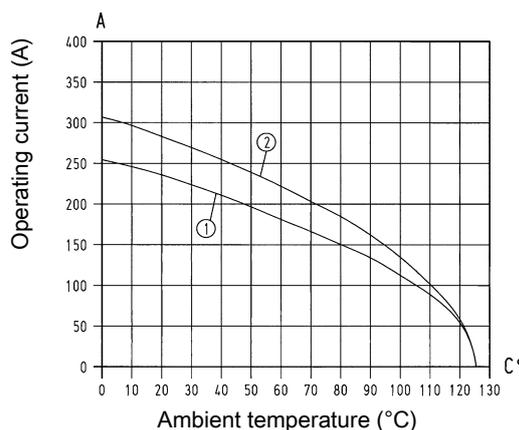
Number of contacts	1
Rated current	200 A
Rated voltage	1000 V, 800 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤0.3 mΩ, ≤0.2 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 3 modules Conductor cross-section 50 mm²
 ② 24 B hoods/housings with 3 modules Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Contact resistance crimp contact: ≤ 0.3 mΩ

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Contact resistance axial screw contact: ≤ 0.2 mΩ

Crimping tools see chapter 90

Remarks on the crimp technique

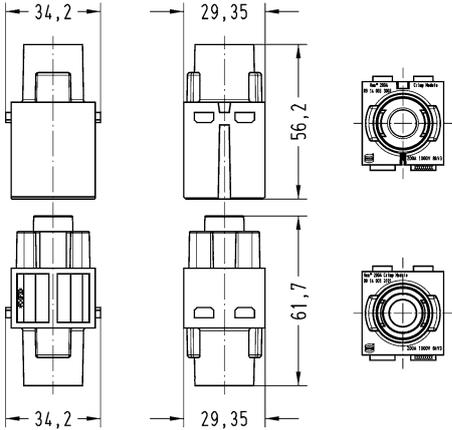
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

200 A 1.000 V 8 kV 3

Modular

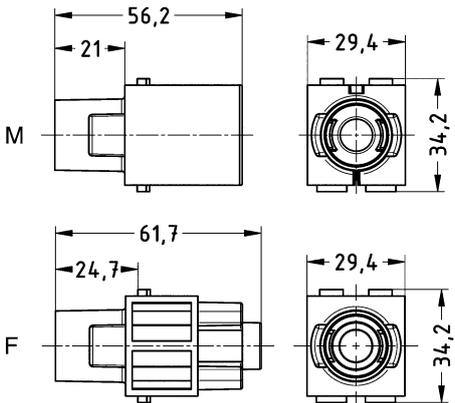
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han® 200 A module, Crimp termination  <p>Please order crimp contacts separately.</p>	25 ... 70	09 14 001 3001	09 14 001 3101	 <p>Removal tool 09 99 000 0820 See chapter 90</p>															
TC 200, Crimp contact, Contact surface: Silver plated 	25 35 50 70	09 11 000 6120 09 11 000 6121 09 11 000 6122 09 11 000 6123	09 11 000 6220 09 11 000 6221 09 11 000 6222 09 11 000 6223	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>25 mm²</td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>20 mm</td> </tr> <tr> <td>50 mm²</td> <td>10</td> <td>22.5 mm</td> </tr> <tr> <td>70 mm²</td> <td>11.5</td> <td>22.5 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Wire gauge	∅	Stripping length A	25 mm ²	7	19 mm	35 mm ²	8.2	20 mm	50 mm ²	10	22.5 mm	70 mm ²	11.5	22.5 mm
Wire gauge	∅	Stripping length A																	
25 mm ²	7	19 mm																	
35 mm ²	8.2	20 mm																	
50 mm ²	10	22.5 mm																	
70 mm ²	11.5	22.5 mm																	
TC 200, Screw contact, Contact surface: Silver plated 	70	09 11 000 6124	09 11 000 6224																

Number of contacts

1

200 A 1.000 V 8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han® 200 A module, With protective insert, Crimp termination  <p>Please order crimp contacts separately.</p>	25 ... 70	09 14 001 3002	09 14 001 3102																
TC 200, Crimp contact, Contact surface: Silver plated 	25 35 50 70	09 11 000 7120 09 11 000 7121 09 11 000 7122 09 11 000 7123	09 11 000 6220 09 11 000 6221 09 11 000 6222 09 11 000 6223	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>25 mm²</td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>20 mm</td> </tr> <tr> <td>50 mm²</td> <td>10</td> <td>22.5 mm</td> </tr> <tr> <td>70 mm²</td> <td>11.5</td> <td>22.5 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Wire gauge	∅	Stripping length A	25 mm ²	7	19 mm	35 mm ²	8.2	20 mm	50 mm ²	10	22.5 mm	70 mm ²	11.5	22.5 mm
Wire gauge	∅	Stripping length A																	
25 mm ²	7	19 mm																	
35 mm ²	8.2	20 mm																	
50 mm ²	10	22.5 mm																	
70 mm ²	11.5	22.5 mm																	

Number of contacts

1

200 A 1.000 V 8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® 200 A module, Axial screw termination, Contact surface: Silver plated	25 ... 40 40 ... 70	09 14 001 2663 09 14 001 2662	09 14 001 2763 09 14 001 2762	<p> Stripping length 16 mm Tightening torque 8 Nm @ 25 ... 40 mm², 9 Nm @ 40 mm², 10 Nm @ 70 mm² </p>

Technical characteristics

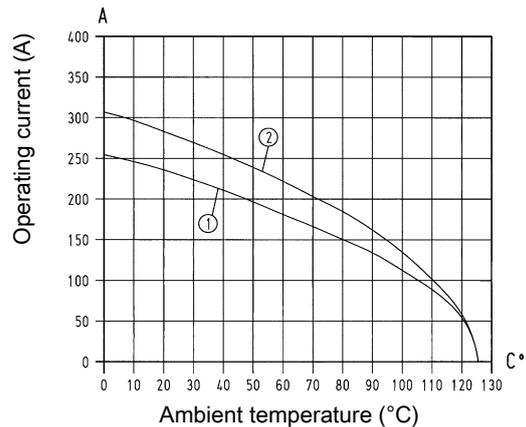
Number of contacts	1
Contact resistance	≤0.2 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 3 modules Conductor cross-section 50 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390

Number of contacts

1

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® 200 A PE module, Axial screw termination, Contact surface: Silver plated	25 ... 40 40 ... 70	09 14 001 2668 09 14 001 2667	09 14 001 2768 09 14 001 2767	<p> M F </p> <p> Hex key with grip 09 99 000 0364 Adapter 3/8" 09 99 000 0371 See chapter 90 Stripping length 16 mm Tightening torque 8 Nm @ 25 ... 40 mm², 9 Nm @ 40 mm², 10 Nm @ 70 mm² </p>

Features

- Crimp- and axial module are compatible modules
- Contacts can be unlocked from the mating side

Technical characteristics

Number of contacts	2
Rated current	100 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight

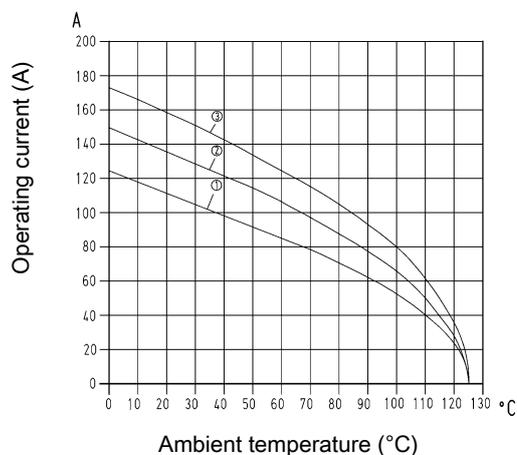
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

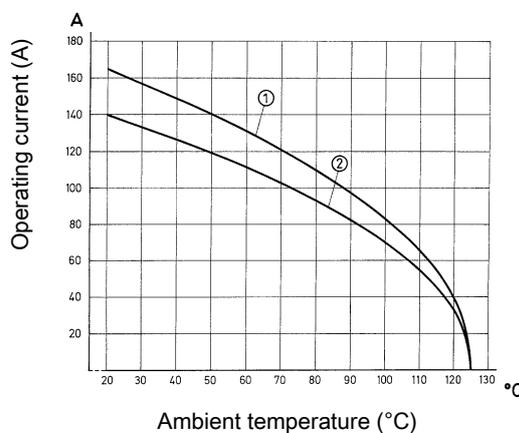
Crimp termination



- ① 24 B hoods/housings with 3 modules Conductor cross-section 16 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 25 mm²
- ③ 24 B hoods/housings with 3 modules Conductor cross-section 35 mm²

Derating

Axial screw termination



- ① 24 B hoods/housings with 3 modules Conductor cross-section 35 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 25 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90

Remarks on the crimp technique

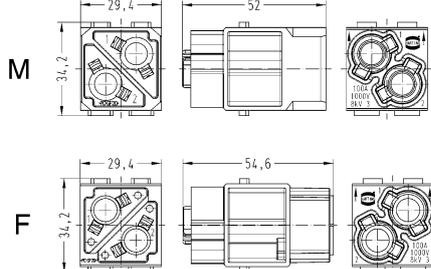
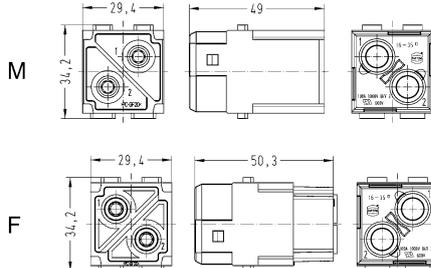
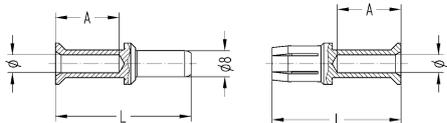
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

100 A 1.000 V 8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han® 100 A module, Crimp termination  <p>Please order crimp contacts separately.</p>	10 ... 35	09 14 002 3051	09 14 002 3151																
Han-Modular®, Han® 100 A module, Axial screw termination, Contact surface: Silver plated 	10 ... 25 16 ... 35 38	09 14 002 2653 09 14 002 2651 09 14 002 2650	09 14 002 2753 09 14 002 2751 09 14 002 2750	 <p>Stripping length 12 ... 14 mm Tightening torque 6 Nm @ 10 ... 16 mm², 7 Nm @ 25 mm², 8 Nm @ 35 ... 38 mm²</p>															
TC 100, Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>4.3</td> <td>19 mm</td> </tr> <tr> <td>16 mm²</td> <td>5.5</td> <td>19 mm</td> </tr> <tr> <td>25 mm²</td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>16 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Wire gauge	Ø	Stripping length A	10 mm ²	4.3	19 mm	16 mm ²	5.5	19 mm	25 mm ²	7	19 mm	35 mm ²	8.2	16 mm
Wire gauge	Ø	Stripping length A																	
10 mm ²	4.3	19 mm																	
16 mm ²	5.5	19 mm																	
25 mm ²	7	19 mm																	
35 mm ²	8.2	16 mm																	

Modu-
lar

Features

- Crimp or axial screw termination available
- Unlock of contacts with a screw driver from mating side
- Separate axial screw contacts can be terminated without any special tools directly to the wire

Technical characteristics

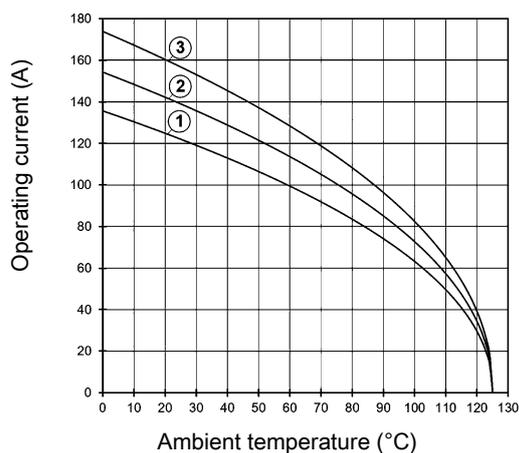
Number of contacts	1
Rated current	100 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
- ② Conductor cross-section 25 mm²
- ③ Conductor cross-section 35 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Hex key (A/F 4) see chapter 90

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

Remarks on the crimp technique

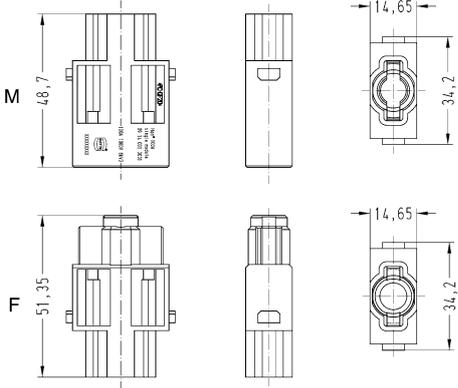
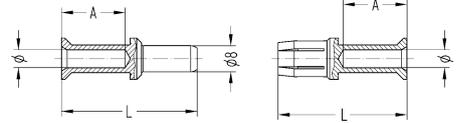
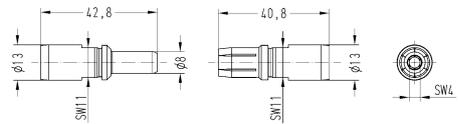
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

100 A 830 V 8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han® 100 A module, Single module  <p>Please order contacts separately.</p>	10 ... 35	09 14 001 3031	09 14 001 3131																
TC 100, Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>4.3</td> <td>19 mm</td> </tr> <tr> <td>16 mm²</td> <td>5.5</td> <td>19 mm</td> </tr> <tr> <td>25 mm²</td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>16 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Wire gauge	Ø	Stripping length A	10 mm ²	4.3	19 mm	16 mm ²	5.5	19 mm	25 mm ²	7	19 mm	35 mm ²	8.2	16 mm
Wire gauge	Ø	Stripping length A																	
10 mm ²	4.3	19 mm																	
16 mm ²	5.5	19 mm																	
25 mm ²	7	19 mm																	
35 mm ²	8.2	16 mm																	
TC 100, Axial screw contact, Contact surface: Silver plated 	10 ... 25 16 ... 35	09 11 000 6112 09 11 000 6113	09 11 000 6212 09 11 000 6213	 <p>Stripping length 13 mm</p> <table border="1"> <thead> <tr> <th colspan="5">Tightening torque</th> </tr> <tr> <th>mm²</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>Nm</td> <td>6</td> <td>6</td> <td>7</td> <td>8</td> </tr> </tbody> </table>	Tightening torque					mm ²	10	16	25	35	Nm	6	6	7	8
Tightening torque																			
mm ²	10	16	25	35															
Nm	6	6	7	8															

Modular

Features

- for power circuits
- Male inserts with protection collar
- Polarisation of module

Technical characteristics

Number of contacts	2
Rated current	70 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight

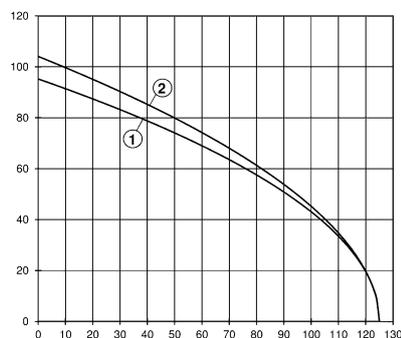
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

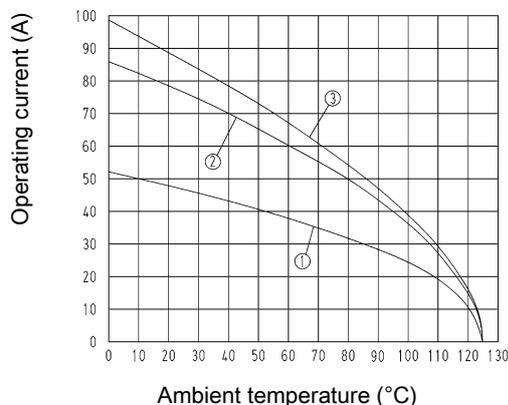
Crimp termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 16 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 25 mm²

Derating

Axial screw termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 16 mm²
- ③ 24 B hoods/housings with 6 modules Conductor cross-section 22 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 2.5) see chapter 90

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90

Remarks on the crimp technique

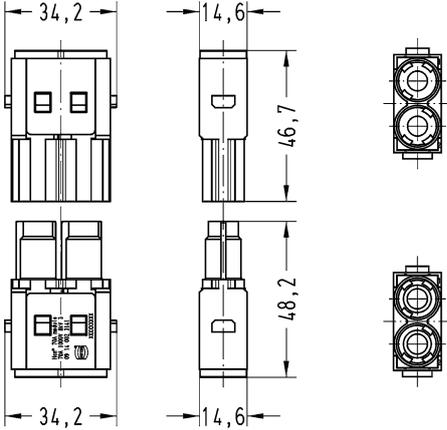
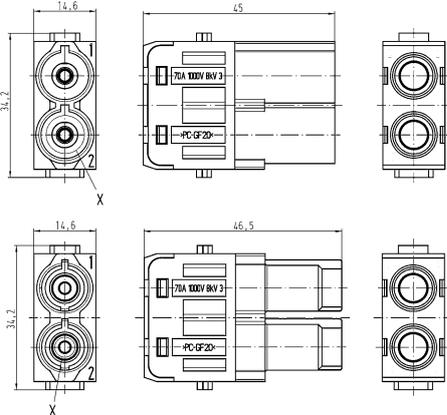
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

70 A 1.000 V 8 kV 3

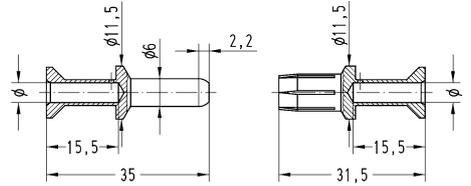
Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)		
		Male	Female			
Han-Modular®, Han® 70 A module, Crimp termination  <p>Please order crimp contacts separately.</p>	10 ... 25	09 14 002 3041	09 14 002 3141			
Han-Modular®, Han® 70 A module, Axial screw termination, Contact surface: Silver plated  <p>Finger safe</p>	6 ... 16 14 ... 22	09 14 002 2641 09 14 002 2642				
Han-Modular®, Han® 70 A module, Axial screw termination, Contact surface: Silver plated 	6 ... 16 14 ... 22	09 14 002 2646 09 14 002 2647	09 14 002 2741 09 14 002 2742			

6 ... 16 mm²: Stripping length 11 ... 12 mm
 14 ... 22 mm²: Stripping length 12.5 ... 13.5 mm
 Tightening torque
 2 Nm @ 6 mm², 3 Nm @ 10 mm², 4 Nm @ 14 mm², 4 Nm @ 16 mm², 4 Nm @ 22 mm²

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
TC 70, Crimp contact, Contact surface: Silver plated	10 16 25	09 11 000 6131 09 11 000 6132 09 11 000 6133	09 11 000 6231 09 11 000 6232 09 11 000 6233	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>4.3</td> <td>15.5 mm</td> </tr> <tr> <td>16 mm²</td> <td>5.5</td> <td>15.5 mm</td> </tr> <tr> <td>25 mm²</td> <td>7</td> <td>15.5 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p>	Wire gauge	∅	Stripping length A	10 mm ²	4.3	15.5 mm	16 mm ²	5.5	15.5 mm	25 mm ²	7	15.5 mm
Wire gauge	∅	Stripping length A														
10 mm ²	4.3	15.5 mm														
16 mm ²	5.5	15.5 mm														
25 mm ²	7	15.5 mm														



Wire gauge	∅	Stripping length A
10 mm ²	4.3	15.5 mm
16 mm ²	5.5	15.5 mm
25 mm ²	7	15.5 mm

for stranded wire according to IEC 60 228 Class 5

Features

- Axial screw termination
- for power circuits
- Male inserts with protection collar
- Polarisation of module

Technical characteristics

Number of contacts	1
Additional contacts	+ 4 additional signal contacts
Rated current	70 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Hex key (A/F 2.5) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Contact resistance axial screw contact: $\leq 0.5 \text{ m}\Omega$

Contact resistance Han E® crimp contact: $\leq 1 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

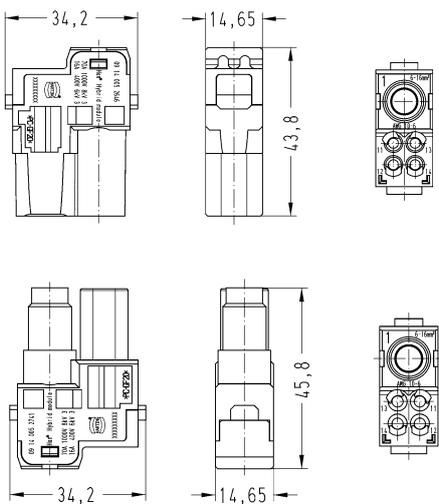
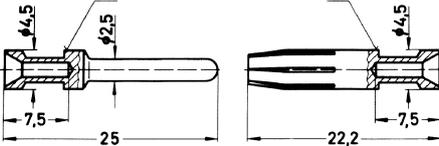
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

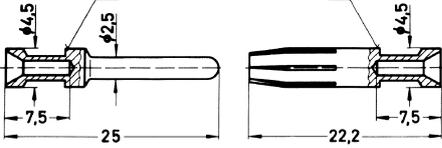
Number of contacts

1

70 A 1.000 V 8 kV 3
+ 4 additional signal contacts
16 A 400 V 6 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Modular®, Han® 70 A Hybrid module, Axial screw termination / crimp termination  <p>Please order signal contacts separately.</p>	6 ... 16 14 ... 22	09 14 005 2646 09 14 005 2647	09 14 005 2741 09 14 005 2742	 <p>6 ... 16 mm²: Stripping length 11 ... 12 mm 14 ... 22 mm²: Stripping length 12.5 ... 13.5 mm Tightening torque 2 Nm @ 6 mm², 3 Nm @ 10 mm², 4 Nm @ 14 mm², 4 Nm @ 16 mm², 4 Nm @ 22 mm²</p>																		
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E [®] , Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 33 000 6117	09 33 000 6217	
	0.5	09 33 000 6122	09 33 000 6222	
	0.75	09 33 000 6115	09 33 000 6215	
	1	09 33 000 6118	09 33 000 6218	
	1.5	09 33 000 6116	09 33 000 6216	
	2.5	09 33 000 6123	09 33 000 6223	
	4	09 33 000 6119	09 33 000 6221	

Conductor cross-section	AWG	Identification
0.14-0.37 mm ²	AWG 26-22	no groove
0.5 mm ²	AWG 20	no groove
0.75 mm ²	AWG 18	1 groove*
1 mm ²	AWG 18	1 groove
1.5 mm ²	AWG 16	2 grooves
2.5 mm ²	AWG 14	3 grooves
3 mm ²	AWG 12	wide groove
4 mm ²	AWG 12	no groove

* on the back crimp collar

Stripping length 7.5 mm

Modular

Features

- Crimp or axial screw termination available
- No special tools required for axial-screw termination

Technical characteristics

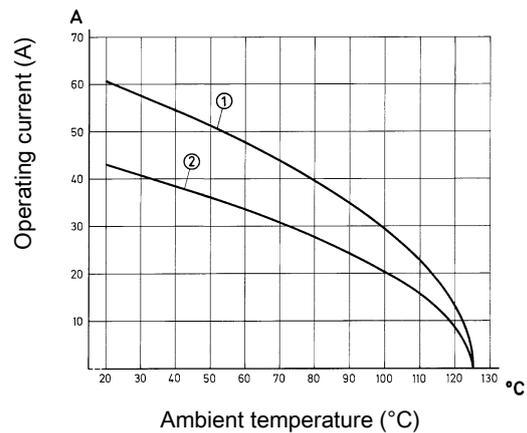
Number of contacts	2
Rated current	40 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 10 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 DNV GL
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390

Details

Contact resistance Han® C crimp contact: $\leq 1 \text{ m}\Omega$

Contact resistance axial screw contact: $\leq 0.3 \text{ m}\Omega$

Hex key (A/F 2) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

Remarks on the crimp technique

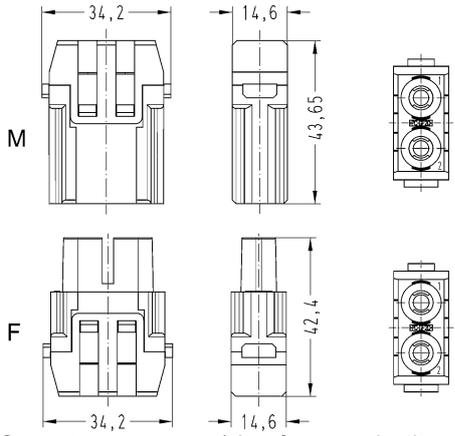
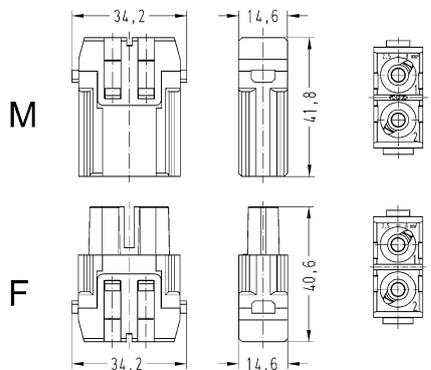
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

40 A 1.000 V 8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																				
		Male	Female																					
Han-Modular®, Han® 40 A module, Crimp termination  <p>Please order crimp contacts separately.</p>	1.5 ... 10	09 14 002 3002	09 14 002 3102	 <p>Contact arrangement (view from termination side)</p>																				
Han-Modular®, Han® 40 A module, Axial screw termination, Contact surface: Silver plated 	2.5 ... 8 6 ... 10	09 14 002 2601 09 14 002 2602	09 14 002 2701 09 14 002 2702	 <p>Contact arrangement (view from termination side)</p> <p>Stripping length</p> <table border="1"> <tr> <td>mm²</td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>mm</td> <td>5⁺¹</td> <td>5⁺¹</td> <td>8⁺¹</td> <td>11⁺¹</td> </tr> </table> <p>Tightening torque</p> <table border="1"> <tr> <td>mm²</td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>Nm</td> <td>1,5</td> <td>1,5</td> <td>2</td> <td>2</td> </tr> </table>	mm ²	2,5	4	6	10	mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹	mm ²	2,5	4	6	10	Nm	1,5	1,5	2	2
mm ²	2,5	4	6	10																				
mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹																				
mm ²	2,5	4	6	10																				
Nm	1,5	1,5	2	2																				

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® C, Crimp contact, Contact surface: Silver plated	1.5	09 32 000 6104	09 32 000 6204	
	2.5	09 32 000 6105	09 32 000 6205	
	4	09 32 000 6107	09 32 000 6207	
	6	09 32 000 6108	09 32 000 6208	
	10	09 32 000 6109	09 32 000 6209	

Conductor cross-section	Ø	Stripping length
1.5 mm ² AWG 16	1.75 mm	9.5 mm
2.5 mm ² AWG 14	2.25 mm	9.5 mm
4 mm ² AWG 12	2.85 mm	9.5 mm
6 mm ² AWG 10	3.5 mm	9.5 mm
10 mm ² AWG 8	4.3 mm	12 mm

Features

- Standard module for power up to 40 A
- No special tools required for axial-screw termination

Technical characteristics

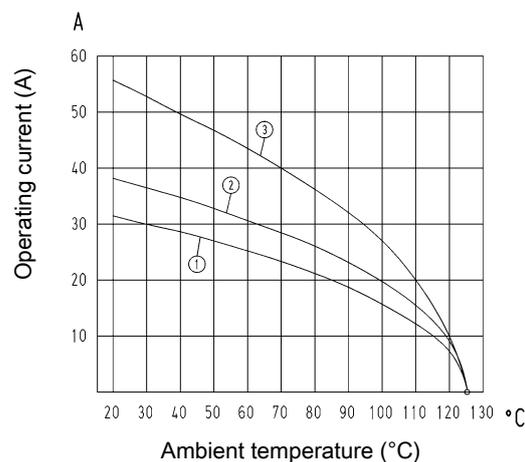
Number of contacts	3
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	40 A
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²
- ③ 24 B hoods/housings with 6 modules Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390

Details

Contact resistance Han® C crimp contact: $\leq 1 \text{ m}\Omega$

Contact resistance axial screw contact: $\leq 0.3 \text{ m}\Omega$

Hex key (A/F 2) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

Remarks on the crimp technique

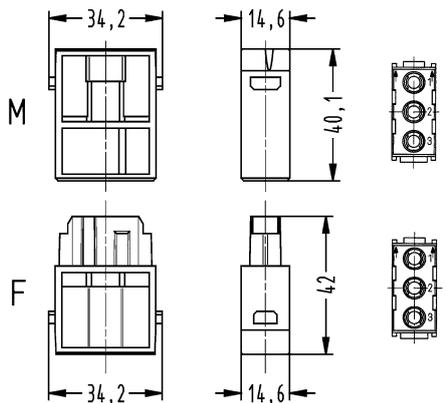
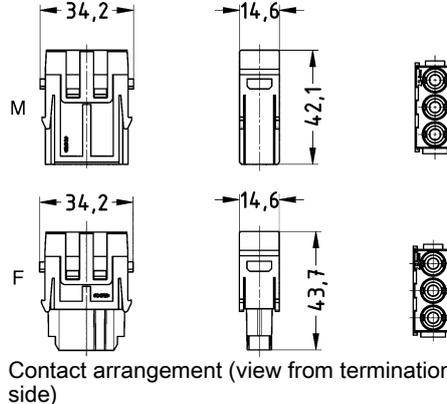
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

3

40 A 690 V 8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																				
		Male	Female																					
Han-Modular®, Han® C module, Crimp termination  <p>Please order crimp contacts separately.</p>	1.5 ... 6	09 14 003 3001	09 14 003 3101	 <p>Contact arrangement (view from termination side)</p>																				
Han-Modular®, Han® C module, Axial screw termination, Contact surface: Silver plated 	2.5 ... 8 6 ... 10	09 14 003 2601 09 14 003 2602	09 14 003 2701 09 14 003 2702	 <p>Contact arrangement (view from termination side)</p> <p>Stripping length</p> <table border="1"> <tr> <td>mm²</td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>mm</td> <td>5⁺¹</td> <td>5⁺¹</td> <td>8⁺¹</td> <td>11⁺¹</td> </tr> </table> <p>Tightening torque</p> <table border="1"> <tr> <td>mm²</td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>Nm</td> <td>1,5</td> <td>1,5</td> <td>2</td> <td>2</td> </tr> </table>	mm ²	2,5	4	6	10	mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹	mm ²	2,5	4	6	10	Nm	1,5	1,5	2	2
mm ²	2,5	4	6	10																				
mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹																				
mm ²	2,5	4	6	10																				
Nm	1,5	1,5	2	2																				

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® C, Crimp contact, Contact surface: Silver plated	1.5	09 32 000 6104	09 32 000 6204																			
	2.5	09 32 000 6105	09 32 000 6205																			
	4	09 32 000 6107	09 32 000 6207																			
	6	09 32 000 6108	09 32 000 6208																			
				<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm ² AWG 16	1.75 mm	9.5 mm																				
2.5 mm ² AWG 14	2.25 mm	9.5 mm																				
4 mm ² AWG 12	2.85 mm	9.5 mm																				
6 mm ² AWG 10	3.5 mm	9.5 mm																				
10 mm ² AWG 8	4.3 mm	12 mm																				

Modular

Features

- Suitable for Han® C crimp contacts
- Designed for a high working voltage up to 830 V
- Finger safe male and female contacts
- High density of contacts

Technical characteristics

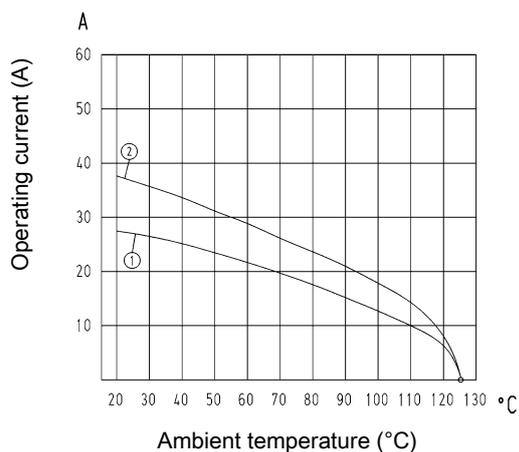
Number of contacts	4
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

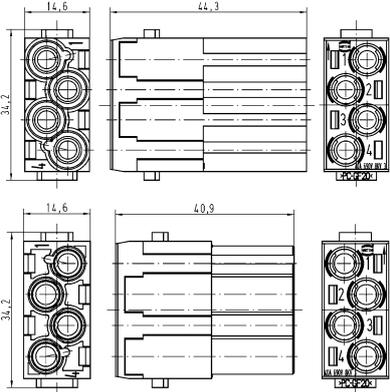
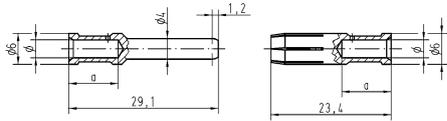
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

4

40 A 830 V 8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han-Modular®, Han® CC Protected module, Crimp termination  <p>Please order crimp contacts separately.</p>	1.5 ... 6	09 14 004 3041	09 14 004 3141																									
Han® C, Crimp contact, Contact surface: Silver plated 	1.5 2.5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table border="1" data-bbox="995 1256 1449 1424"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td colspan="2">12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length		1.5 mm ² AWG 16	1.75 mm	9.5 mm		2.5 mm ² AWG 14	2.25 mm	9.5 mm		4 mm ² AWG 12	2.85 mm	9.5 mm		6 mm ² AWG 10	3.5 mm	9.5 mm		10 mm ² AWG 8	4.3 mm	12 mm	
Conductor cross-section	Ø	Stripping length																										
1.5 mm ² AWG 16	1.75 mm	9.5 mm																										
2.5 mm ² AWG 14	2.25 mm	9.5 mm																										
4 mm ² AWG 12	2.85 mm	9.5 mm																										
6 mm ² AWG 10	3.5 mm	9.5 mm																										
10 mm ² AWG 8	4.3 mm	12 mm																										

Features

- 3 contacts (40 A) for power circuits and 4 contacts (10 A) for signal circuits
- Ideal as motor drive connector
- Finger safe male and female contacts

Technical characteristics

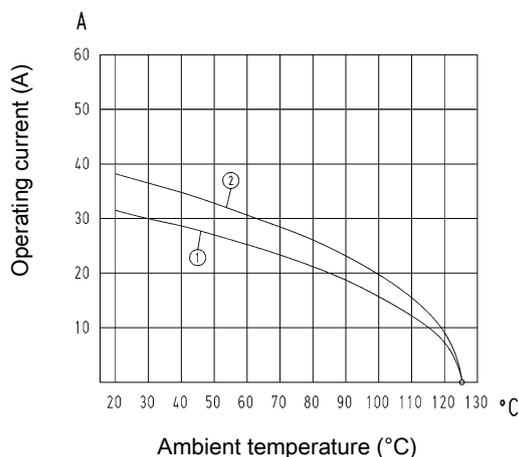
Number of contacts	3
Additional contacts	+ 4 additional signal contacts
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	830 V
Rated impulse voltage (signal)	8 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega, \leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Wire outer diameter	$\leq 5 \text{ mm}$
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance Han® C crimp contact: $\leq 1 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

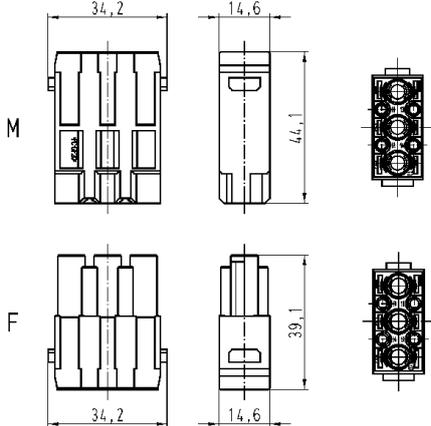
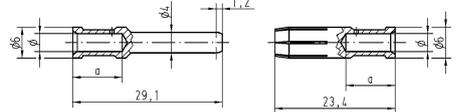
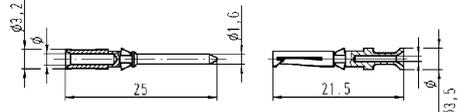
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

3

40 A 830 V 8 kV 3
 + 4 additional signal contacts
 10 A 830 V 8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular®, Han® CD module, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 6	09 14 007 3001	09 14 007 3101	 <p>Contact arrangement (view from termination side)</p>																					
Han® C, Crimp contact, Contact surface: Silver plated 	1.5 2.5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm ² AWG 16	1.75 mm	9.5 mm																							
2.5 mm ² AWG 14	2.25 mm	9.5 mm																							
4 mm ² AWG 12	2.85 mm	9.5 mm																							
6 mm ² AWG 10	3.5 mm	9.5 mm																							
10 mm ² AWG 8	4.3 mm	12 mm																							
Han D®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 15 000 6124	09 15 000 6224																						
	0.5	09 15 000 6123	09 15 000 6223																						
	0.75	09 15 000 6125	09 15 000 6225																						
	1	09 15 000 6122	09 15 000 6222																						
	1.5	09 15 000 6121	09 15 000 6221																						
	2.5	09 15 000 6126	09 15 000 6226																						
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Features

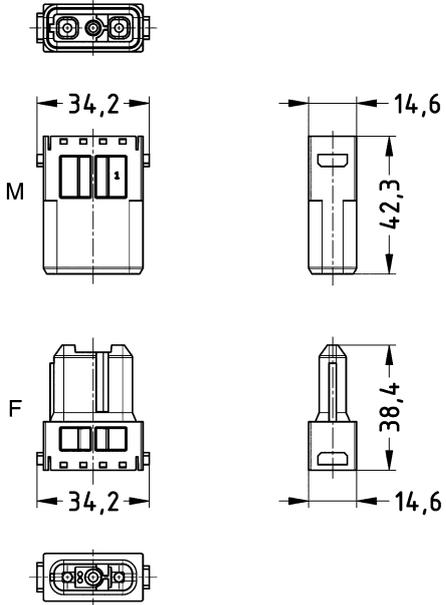
- Centring function with a very large inlet cone of +/- 4 mm
- Significantly better handling compared to conventional guide pins/sockets
- Ideal add-on when dealing with many mating cycles or inaccessible connectors

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Lock-in range	±4 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0

Specifications and approvals

EN 60664-1
IEC 61984

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Guiding module, Dummy module 	09 14 003 3050	09 14 003 3150	

Number of contacts

3

16 A 500 V 6 kV 3

Modular

Features

- 2 contacts with relay function (last mate - first break)
- Enables other power contacts to be switched off via a relay

Technical characteristics

Number of contacts	3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Lock-in range	±4 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

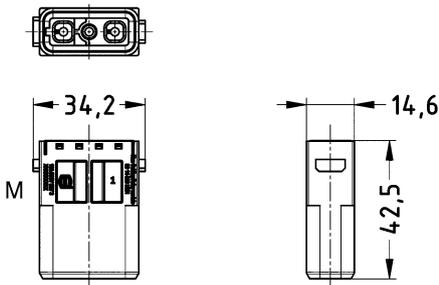

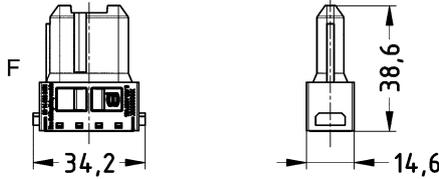

EN 60664-1
IEC 61984

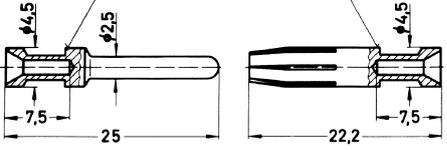
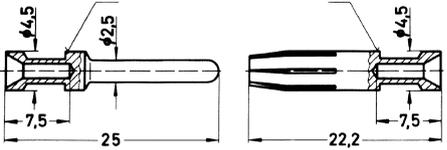

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han-Modular®, Han® Guiding module, Relay module, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 14 003 3051	09 14 003 3151		
					
					

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 33 000 6127	09 33 000 6227	 <table border="1"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
	Conductor cross-section		Identification																												
	0.14-0.37 mm ²	AWG 26-22	no groove																												
	0.5 mm ²	AWG 20	no groove																												
	0.75 mm ²	AWG 18	1 groove*																												
	1 mm ²	AWG 18	1 groove																												
	1.5 mm ²	AWG 16	2 grooves																												
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													
0.5	09 33 000 6121	09 33 000 6220																													
0.75	09 33 000 6114	09 33 000 6214																													
1	09 33 000 6105	09 33 000 6205																													
1.5	09 33 000 6104	09 33 000 6204																													
2.5	09 33 000 6102	09 33 000 6202																													
3	09 33 000 6106	09 33 000 6206																													
4	09 33 000 6107	09 33 000 6207																													
Han E®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 33 000 6117	09 33 000 6217	 <table border="1"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
	Conductor cross-section		Identification																												
	0.14-0.37 mm ²	AWG 26-22	no groove																												
	0.5 mm ²	AWG 20	no groove																												
	0.75 mm ²	AWG 18	1 groove*																												
	1 mm ²	AWG 18	1 groove																												
	1.5 mm ²	AWG 16	2 grooves																												
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													
0.5	09 33 000 6122	09 33 000 6222																													
0.75	09 33 000 6115	09 33 000 6215																													
1	09 33 000 6118	09 33 000 6218																													
1.5	09 33 000 6116	09 33 000 6216																													
2.5	09 33 000 6123	09 33 000 6223																													
4	09 33 000 6119	09 33 000 6221																													
Han E®, Crimp contact, Relay contact, Contact surface: Silver plated 	0.75 ... 1	09 33 000 6109																													
	1.5	09 33 000 6110																													
	2.5	09 33 000 6111																													

Number of contacts

2+

16 A 500 V 6 kV 3

Modular

Features

- Only for use in the Han-Eco® Modular plastic housings

Technical characteristics

Number of contacts	2
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Lock-in range	±4 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

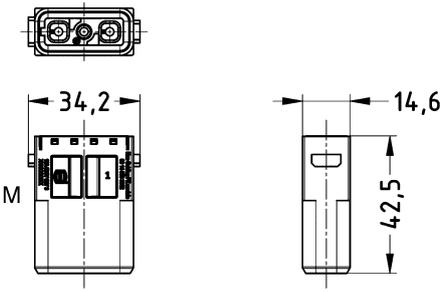
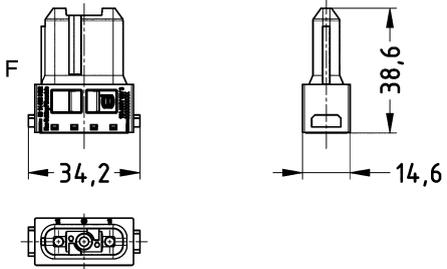
EN 60664-1
IEC 61984

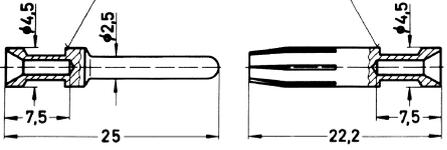
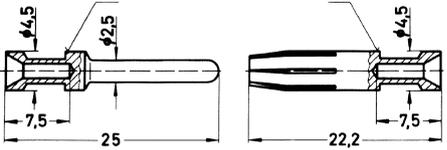
Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han-Modular®, Han® Guiding module, PE module, Crimp termination  Please order crimp contacts separately. Not for Han-Modular® hinged frames!	0.14 ... 4	09 14 003 3052	09 14 003 3152		

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																														
		Male	Female																															
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 33 000 6127	09 33 000 6227	 <table border="1"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove	0.5	09 33 000 6121	09 33 000 6220
	Conductor cross-section		Identification																															
	0.14-0.37 mm ²	AWG 26-22	no groove																															
	0.5 mm ²	AWG 20	no groove																															
	0.75 mm ²	AWG 18	1 groove*																															
	1 mm ²	AWG 18	1 groove																															
	1.5 mm ²	AWG 16	2 grooves																															
	2.5 mm ²	AWG 14	3 grooves																															
3 mm ²	AWG 12	wide groove																																
4 mm ²	AWG 12	no groove																																
0.75	09 33 000 6114	09 33 000 6214																																
1	09 33 000 6105	09 33 000 6205																																
1.5	09 33 000 6104	09 33 000 6204																																
2.5	09 33 000 6102	09 33 000 6202																																
3	09 33 000 6106	09 33 000 6206																																
4	09 33 000 6107	09 33 000 6207																																
Han E®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 33 000 6117	09 33 000 6217	 <table border="1"> <thead> <tr> <th colspan="2">Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section		Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove	0.5	09 33 000 6122	09 33 000 6222
	Conductor cross-section		Identification																															
	0.14-0.37 mm ²	AWG 26-22	no groove																															
	0.5 mm ²	AWG 20	no groove																															
	0.75 mm ²	AWG 18	1 groove*																															
	1 mm ²	AWG 18	1 groove																															
	1.5 mm ²	AWG 16	2 grooves																															
	2.5 mm ²	AWG 14	3 grooves																															
3 mm ²	AWG 12	wide groove																																
4 mm ²	AWG 12	no groove																																
0.75	09 33 000 6115	09 33 000 6215																																
1	09 33 000 6118	09 33 000 6218																																
1.5	09 33 000 6116	09 33 000 6216																																
2.5	09 33 000 6123	09 33 000 6223																																
3	09 33 000 6119	09 33 000 6221																																

Features

- Standard module for power up to 16 A
- Han-Quick Lock[®] or crimp termination available

Technical characteristics

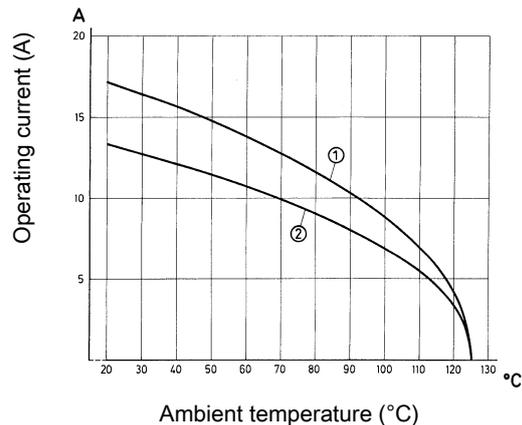
Number of contacts	6
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL
 CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

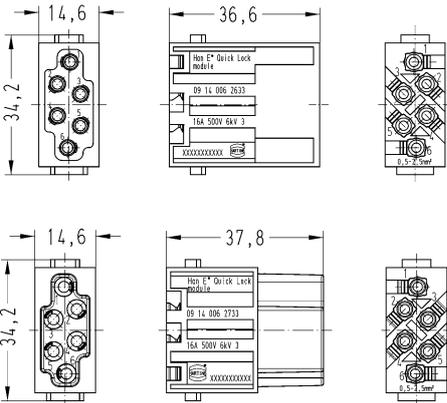
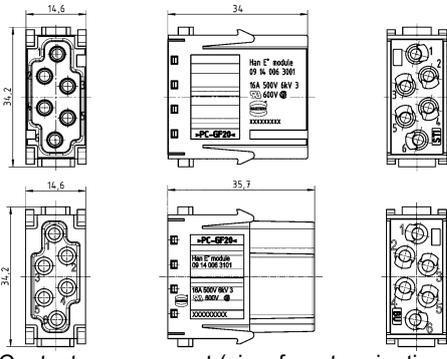
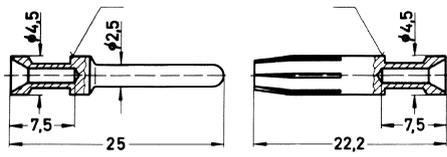
Modular

Number of contacts

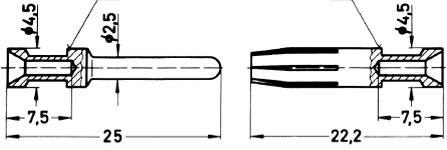
6

16 A 500 V 6 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Modular®, Han E® module, Han-Quick Lock® termination, Contact surface: Silver plated 	0.5 ... 2.5	09 14 006 2633	09 14 006 2733	 <p>Contact arrangement (view from termination side)</p>																		
Han-Modular®, Han E® module, Crimp termination Please order crimp contacts separately. 	0.14 ... 4	09 14 006 3001	09 14 006 3101	 <p>Contact arrangement (view from termination side)</p>																		
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1" data-bbox="997 1742 1444 2027"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 33 000 6117	09 33 000 6217	
	0.5	09 33 000 6122	09 33 000 6222	
	0.75	09 33 000 6115	09 33 000 6215	
	1	09 33 000 6118	09 33 000 6218	
	1.5	09 33 000 6116	09 33 000 6216	
	2.5	09 33 000 6123	09 33 000 6223	
	4	09 33 000 6119	09 33 000 6221	

Conductor cross-section	AWG	Identification
0.14-0.37 mm ²	AWG 26-22	no groove
0.5 mm ²	AWG 20	no groove
0.75 mm ²	AWG 18	1 groove*
1 mm ²	AWG 18	1 groove
1.5 mm ²	AWG 16	2 grooves
2.5 mm ²	AWG 14	3 grooves
3 mm ²	AWG 12	wide groove
4 mm ²	AWG 12	no groove

* on the back crimp collar
Stripping length 7.5 mm

Number of contacts

5

16 A 230/400 V 4 kV 3

Modu-
lar

Features

- Screw connection, suitable for all users around the world
- No special tools required
- for flexible and solid conductors from 0.5 to 2.5 mm²
- Additional protection against voltage and accidental contact by a sliding insulation cover which closes automatically during mating.

Technical characteristics

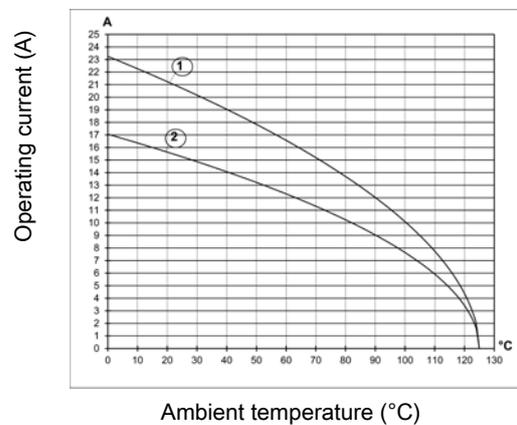
Number of contacts	5
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

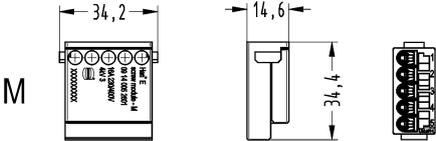
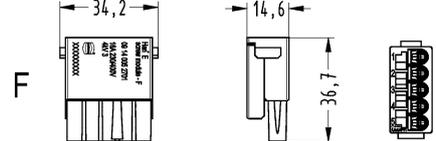


- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han-Modular [®] , Han E [®] module, Screw termination, Contact surface: Silver plated 	0.5 ... 2.5	09 14 005 2601	09 14 005 2701	M 	F 
				Stripping length 7.5 mm Tightening torque 0.5 Nm	

Features

- Suitable for Han E® crimp contacts
- Designed for a high working voltage up to 830 V
- Finger safe male and female contacts

Technical characteristics

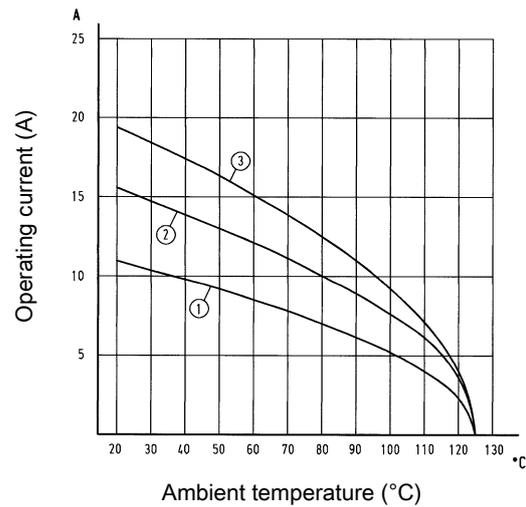
Number of contacts	6
Rated current	16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²
- ③ 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

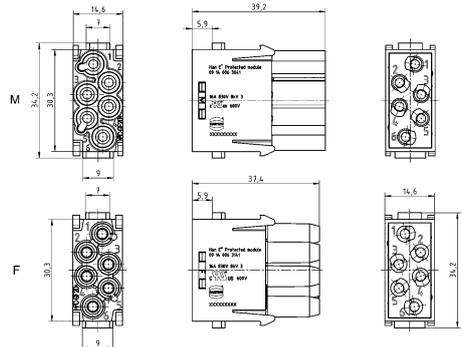
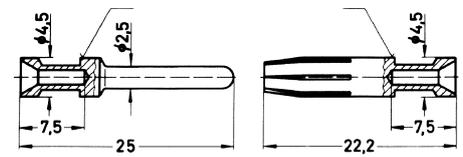
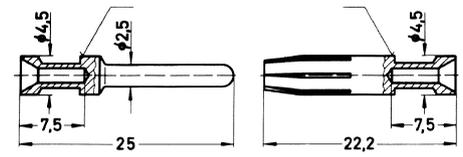
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6

16 A 830 V 8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Modular [®] , Han E [®] Protected module, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 14 006 3041	09 14 006 3141	 <p>Contact arrangement (view from termination side)</p>																		
Han E [®] , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					
Han E [®] , Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 4	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					

Features

- Han-Quick Lock® or crimp termination available
- High packing density

Technical characteristics

Number of contacts	8
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

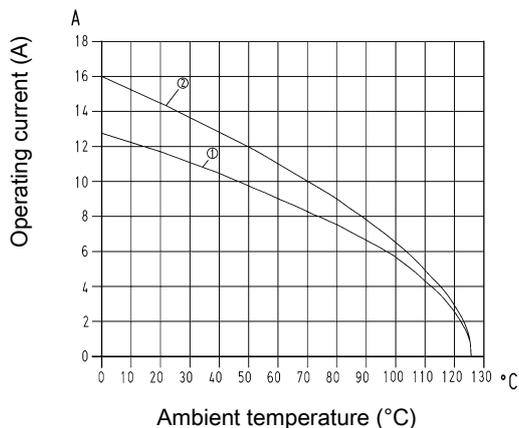
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

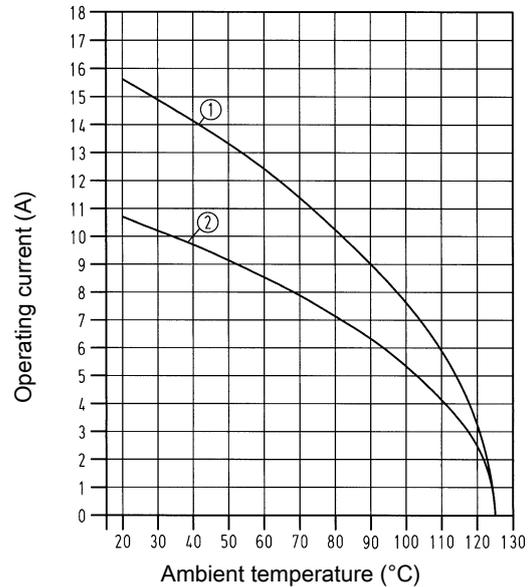
Han-Quick Lock® termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²

Derating

Crimp termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²
- ② 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

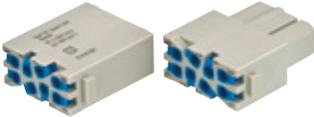
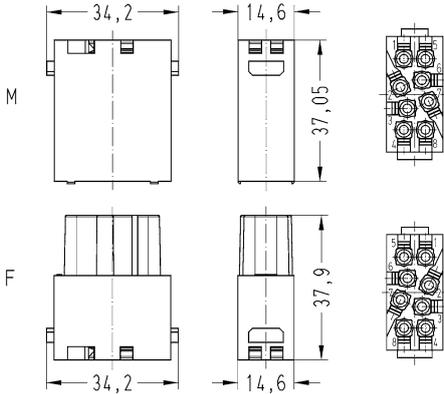
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

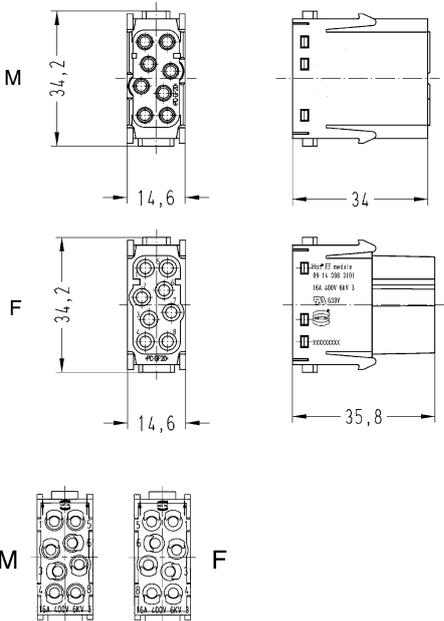
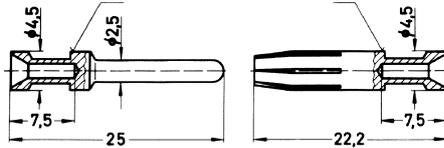
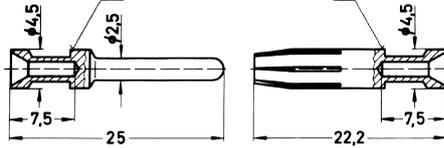
Number of contacts

8

16 A 400 V 6 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Modular®, Han® EE module, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Blue slide</p>	0.5 ... 2.5	09 14 008 2633	09 14 008 2733	 <p>Contact arrangement (view from termination side) Stripping length 10 mm</p>
<p>Han-Modular®, Han® EE module, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Black slide</p>	0.25 ... 1.5	09 14 008 2634	09 14 008 2734	

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
<p>Han-Modular®, Han® EE module, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 14 008 3001	09 14 008 3101	 <p>Contact arrangement (view from termination side) Stripping length 7.5 mm</p>																		
<p>Han E®, Crimp contact, Contact surface: Silver plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					
<p>Han E®, Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 4	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					

Features

- Suitable for Han E® crimp contacts
- Higher density of crimping contacts
- Standard module for power up to 16 A
- Also suitable as a reliable signal connector

Technical characteristics

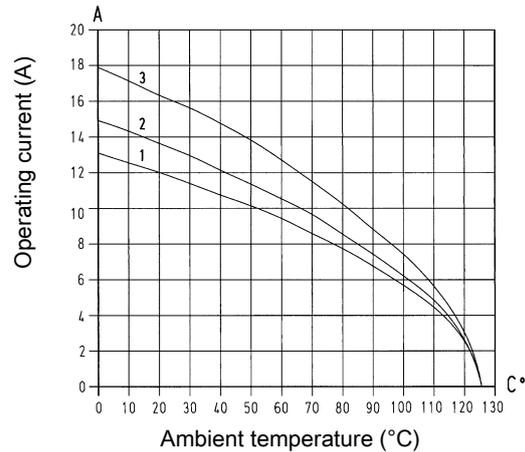
Number of contacts	20
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 3 modules Conductor cross-section 1.5 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 2.5 mm²
- ③ 24 B hoods/housings with 3 modules Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 DNV GL
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390

Details

Crimping tools see chapter 90

Remarks on the crimp technique

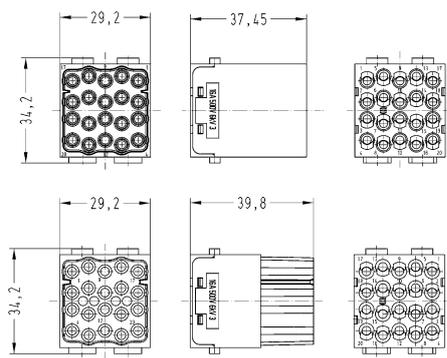
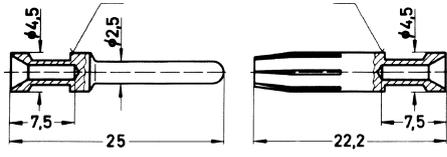
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

20

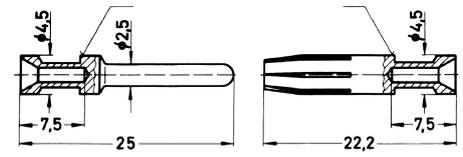
16 A 500 V 6 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han-Modular®, Han® EEE module, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 14 020 3001	09 14 020 3101	 <p>Contact arrangement (view from termination side)</p>																											
Han E®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>AWG</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	AWG	Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
Conductor cross-section	AWG	Identification																													
0.14-0.37 mm ²	AWG 26-22	no groove																													
0.5 mm ²	AWG 20	no groove																													
0.75 mm ²	AWG 18	1 groove*																													
1 mm ²	AWG 18	1 groove																													
1.5 mm ²	AWG 16	2 grooves																													
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number	
		Male	Female
Han E®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 33 000 6117	09 33 000 6217
	0.5	09 33 000 6122	09 33 000 6222
	0.75	09 33 000 6115	09 33 000 6215
	1	09 33 000 6118	09 33 000 6218
	1.5	09 33 000 6116	09 33 000 6216
	2.5	09 33 000 6123	09 33 000 6223
	4	09 33 000 6119	09 33 000 6221



Conductor cross-section	AWG	Identification
0.14-0.37 mm ²	AWG 26-22	no groove
0.5 mm ²	AWG 20	no groove
0.75 mm ²	AWG 18	1 groove*
1 mm ²	AWG 18	1 groove
1.5 mm ²	AWG 16	2 grooves
2.5 mm ²	AWG 14	3 grooves
3 mm ²	AWG 12	wide groove
4 mm ²	AWG 12	no groove

* on the back crimp collar
Stripping length 7.5 mm

Features

- Reliable cage clamp termination
- No special tools required

Technical characteristics

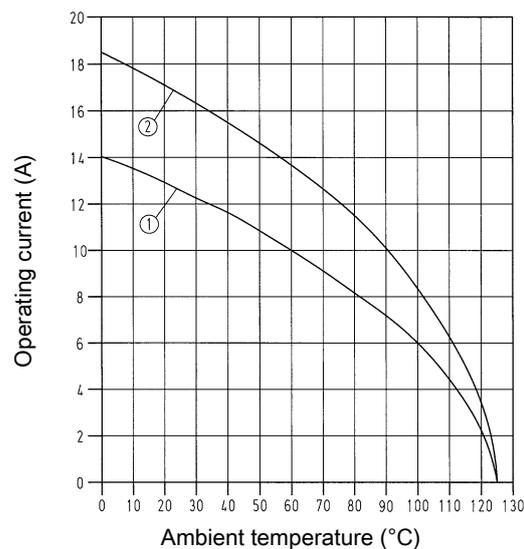
Number of contacts	5
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²

Specifications and approvals

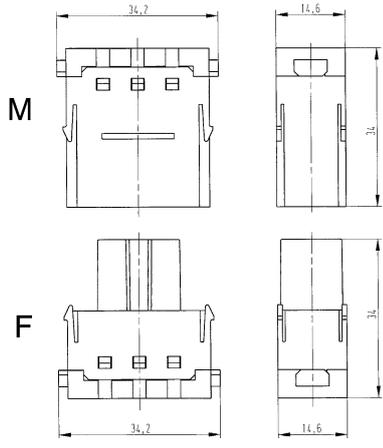
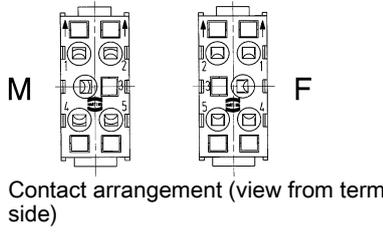
EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Number of contacts

5

16 A 400 V 6 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® ES module, Cage-clamp termination, Contact surface: Silver plated 	0.14 ... 2.5	09 14 005 2616	09 14 005 2716	
Han-Modular®, Han® ES module, Cage-clamp termination, Contact surface: Gold plated	0.14 ... 2.5	09 14 005 2617	09 14 005 2717	 <p>Contact arrangement (view from termination side)</p>

Features

- Available in two versions: for Han® C or Han E® crimp contacts
- 2 contacts up to 5000 V
- Insulator out of a voltage resistant teflon material
- Combination with all other modules (pneumatic, signal etc.)

Technical characteristics

Number of contacts	2
Rated current	40 A, 16 A
Rated voltage conductor-earth	2900 V
Rated voltage conductor-conductor	5000 V
Rated impulse voltage	15 kV
Pollution degree	3
Rated current acc. to UL	31 A, 16 A
Rated voltage acc. to UL	5000 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate / Teflon (PTFE)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

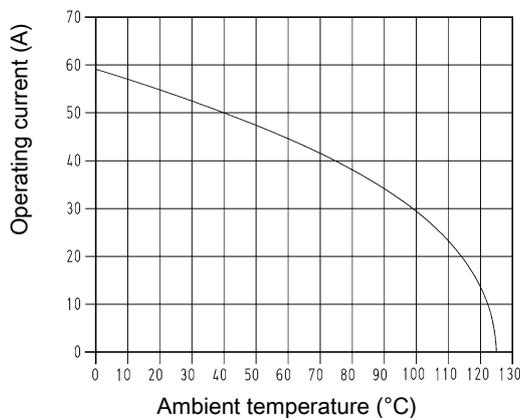
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

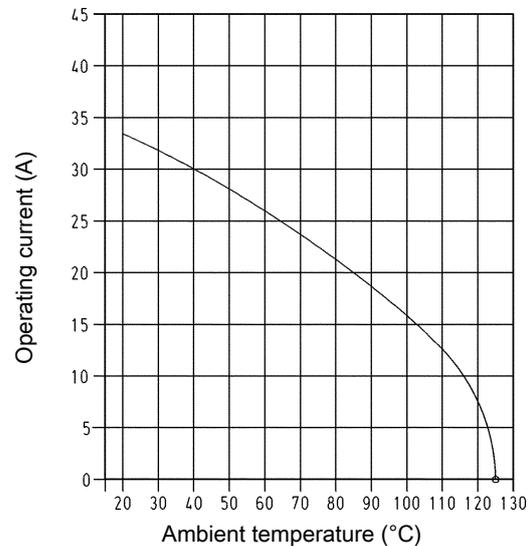
Han® C crimp contacts



① 24 B hoods/housings with 3 modules Conductor cross-section 6 mm²

Derating

Han E® crimp contacts



① Housing Han® 16 B with 1 Han® HV module Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
EN 50124-1
IEC 60352-4
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

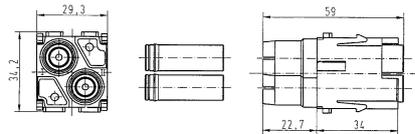
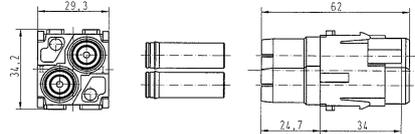
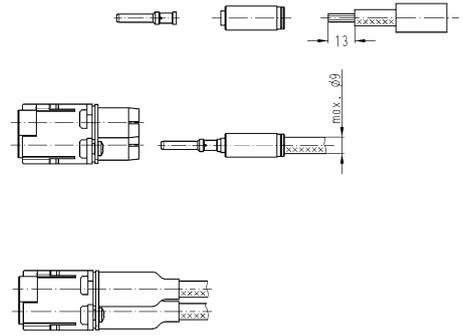
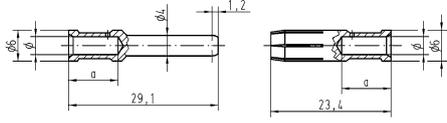
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

40 A 2.900/5.000 V 15 kV 3

Modular

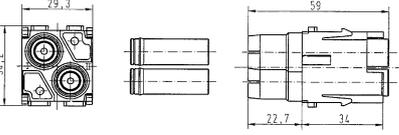
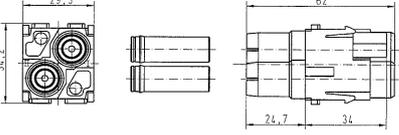
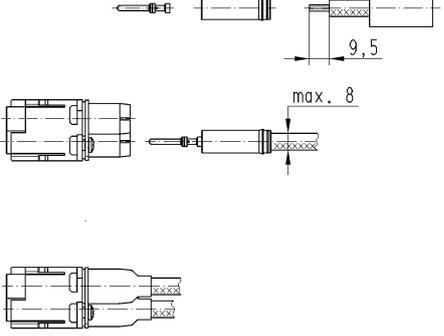
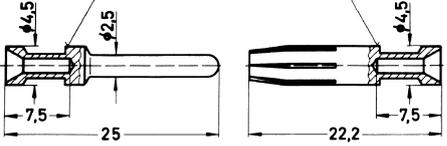
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
<p>Han-Modular®, Han® HV module, for Han® C crimp contacts, Crimp termination, Crimp termination,</p> <p>Pack contents: 1 module, 2 locking sleeves, 2 heat shrink tubes</p>  <p>Please order crimp contacts separately.</p>	1.5 ... 10	09 14 002 3023	09 14 002 3123	<p>M</p>  <p>F</p>  <p>Assembly instructions</p>  <p>ATTENTION! Stripping length 13 mm Crimp with tool 09 99 000 0888, 09 99 000 0110 or 09 99 000 0377 Snap crimped cable in the insert. Shrink the heat shrink tube over the rear of contact.</p>																		
<p>Han® C, Crimp contact, Contact surface: Silver plated</p> 	1.5 2.5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm ² AWG 16	1.75 mm	9.5 mm																				
2.5 mm ² AWG 14	2.25 mm	9.5 mm																				
4 mm ² AWG 12	2.85 mm	9.5 mm																				
6 mm ² AWG 10	3.5 mm	9.5 mm																				
10 mm ² AWG 8	4.3 mm	12 mm																				

Number of contacts

2

16 A 2.900/5.000 V 15 kV 3

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
<p>Han-Modular®, Han® HV module, for Han E® crimp contacts, Crimp termination, Pack contents: 1 module, 2 locking sleeves, 2 heat shrink tubes</p>  <p>Please order crimp contacts separately.</p>	0.5 ... 4	09 14 002 3021	09 14 002 3121	<p>M</p>  <p>F</p>  <p>Assembly instructions</p>  <p>ATTENTION! Stripping length 9.5 mm Crimp with crimping tool 09 99 000 0888 Snap crimped cable in the insert. Shrink the heat shrink tube over the rear of contact.</p>																											
<p>Han E®, Crimp contact, Contact surface: Silver plated</p> 	0.5 0.75 1 1.5 2.5 3 4	09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>AWG</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	AWG	Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
Conductor cross-section	AWG	Identification																													
0.14-0.37 mm ²	AWG 26-22	no groove																													
0.5 mm ²	AWG 20	no groove																													
0.75 mm ²	AWG 18	1 groove*																													
1 mm ²	AWG 18	1 groove																													
1.5 mm ²	AWG 16	2 grooves																													
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													

Modular

Features

- Suitable for Han E® crimp contacts
- 2 contacts up to 2500 V
- Insulator out of a voltage resistant teflon material
- Combination with all other modules (pneumatic, signal etc.)

Technical characteristics

Number of contacts	2
Rated current	16 A
Rated voltage	2500 V
Rated impulse voltage	15 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate / Teflon (PTFE)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

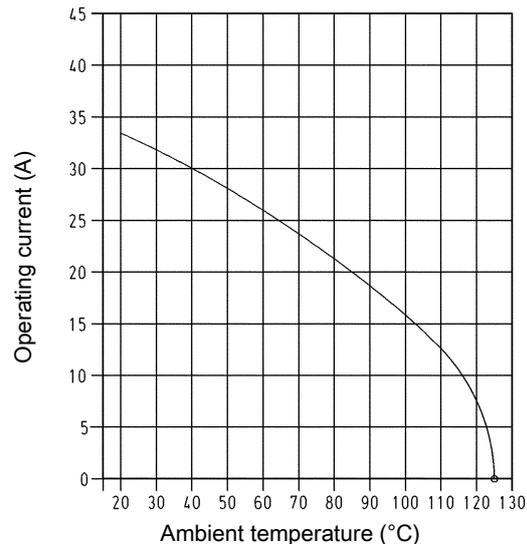
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

Han E® crimp contacts



① Housing Han® 16 B with 1 Han® HV module Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
EN 50124-1
DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

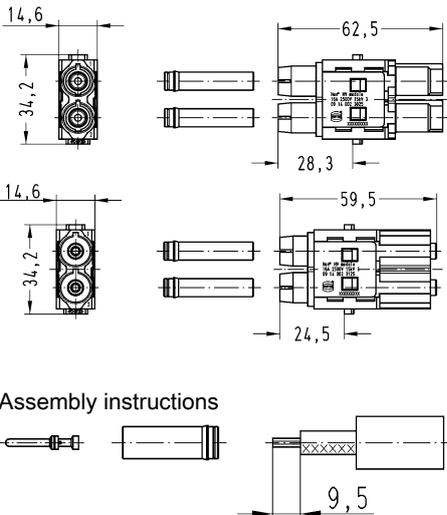
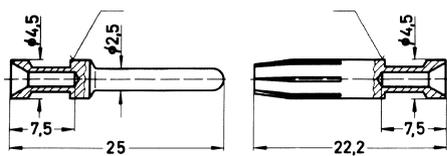
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

16 A 2.500 V 15 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
<p>Han-Modular®, Han® HV module, Single module, Crimp termination,</p> <p>Pack contents: 1 module, 2 locking sleeves, 2 heat shrink tubes</p>  <p>Please order crimp contacts separately.</p>	0.5 ... 4	09 14 002 3025	09 14 002 3125	 <p>Assembly instructions</p> <p>ATTENTION! Stripping length 9.5 mm Crimp with crimping tool 09 99 000 0888 Snap crimped cable in the insert. Shrink the heat shrink tube over the rear of contact.</p>																											
<p>Han E®, Crimp contact, Contact surface: Silver plated</p> 	0.5 0.75 1 1.5 2.5 3 4	09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>AWG</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section	AWG	Identification	0.14-0.37 mm ²	26-22	no groove	0.5 mm ²	20	no groove	0.75 mm ²	18	1 groove*	1 mm ²	18	1 groove	1.5 mm ²	16	2 grooves	2.5 mm ²	14	3 grooves	3 mm ²	12	wide groove	4 mm ²	12	no groove
Conductor cross-section	AWG	Identification																													
0.14-0.37 mm ²	26-22	no groove																													
0.5 mm ²	20	no groove																													
0.75 mm ²	18	1 groove*																													
1 mm ²	18	1 groove																													
1.5 mm ²	16	2 grooves																													
2.5 mm ²	14	3 grooves																													
3 mm ²	12	wide groove																													
4 mm ²	12	no groove																													

Modular

Features

- Han-Quick Lock[®] or crimp termination available
- Standard module for signal up to 10 A

Technical characteristics

Number of contacts	12
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

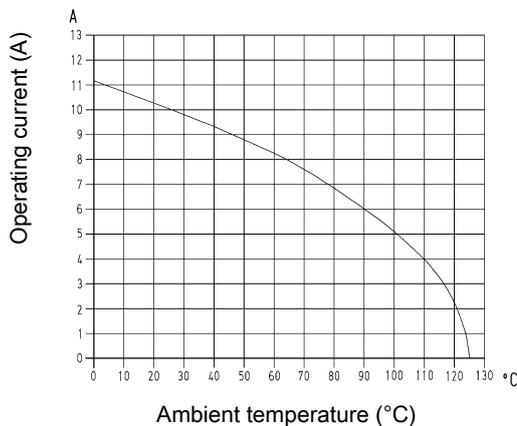
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

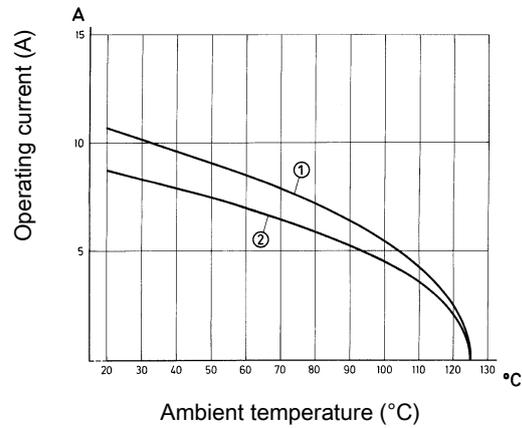
Han-Quick Lock[®] termination



① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

Derating

Crimp termination



① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

② 24 B hoods/housings with 6 modules Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Crimping tools see chapter 90

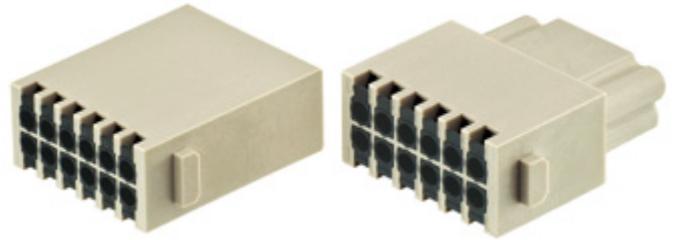
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

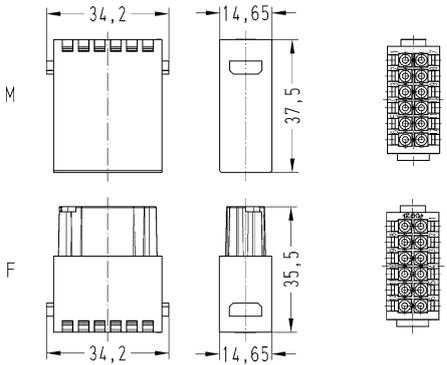
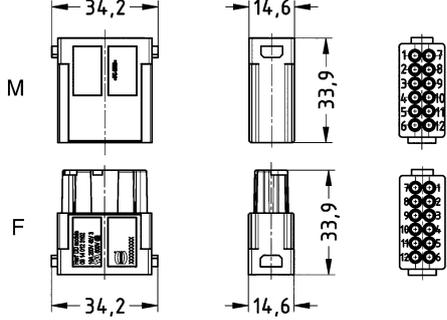
Number of contacts

12

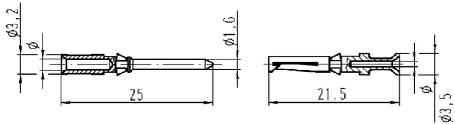
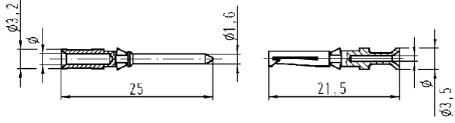

10 A 250 V 4 kV 3



Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular [®] , Han DD [®] module, Han-Quick Lock [®] termination, Contact surface: Silver plated  Black slide	0.25 ... 1.5	09 14 012 2632	09 14 012 2732	 <p>Contact arrangement (view from termination side) Stripping length 10 mm</p>
Han-Modular [®] , Han DD [®] module, Han-Quick Lock [®] termination, Contact surface: Gold plated Black slide	0.25 ... 1.5	09 14 012 2634	09 14 012 2734	
Han-Modular [®] , Han DD [®] module, Crimp termination  Please order crimp contacts separately.	0.14 ... 2.5	09 14 012 3002	09 14 012 3102	 <p>Contact arrangement (view from termination side)</p>

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D [®] , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37	09 15 000 6104	09 15 000 6204	 <table border="1" data-bbox="965 504 1420 660"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6103	09 15 000 6203																							
0.75	09 15 000 6105	09 15 000 6205																							
1	09 15 000 6102	09 15 000 6202																							
1.5	09 15 000 6101	09 15 000 6201																							
2.5	09 15 000 6106	09 15 000 6206																							
Han D [®] , Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 15 000 6124	09 15 000 6224	 <table border="1" data-bbox="965 862 1420 1019"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6123	09 15 000 6223																							
0.75	09 15 000 6125	09 15 000 6225																							
1	09 15 000 6122	09 15 000 6222																							
1.5	09 15 000 6121	09 15 000 6221																							
2.5	09 15 000 6126	09 15 000 6226																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 <p>20 10 001 3211 + 20 10 001 3221</p>																					

Technical characteristics

Number of contacts	42
Rated current	10 A
Rated voltage	150 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated voltage acc. to UL	250 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	LCP
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

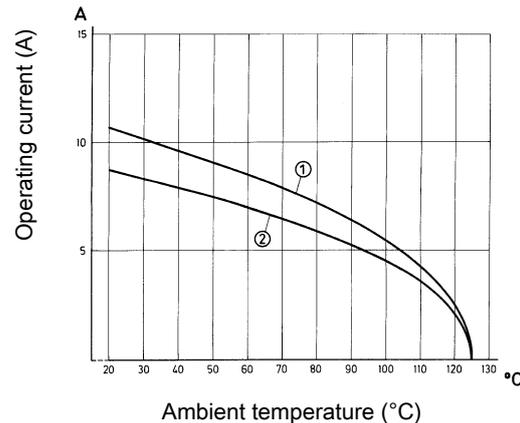
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

Crimp termination



① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

② 24 B hoods/housings with 6 modules Conductor cross-section 1 mm²

Specifications and approvals

UL 1977 ECBT2.E235076
 EN 60664-1
 IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

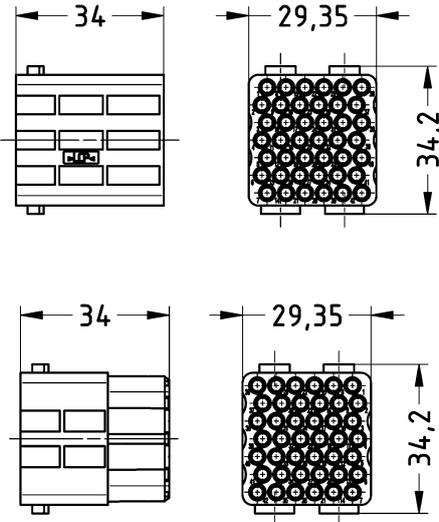
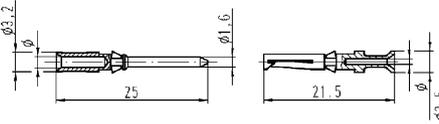
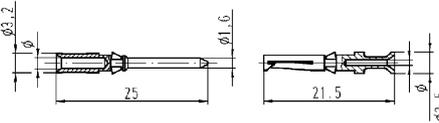
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

42

10 A 150 V 2.5 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
<p>Han-Modular[®], Han DD[®] Quad module, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 14 042 3001	09 14 042 3101																						
<p>Han D[®], Crimp contact, Contact surface: Silver plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
<p>Han D[®], Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Features

- Suitable for Han D® crimp contacts
- High packing density

Technical characteristics

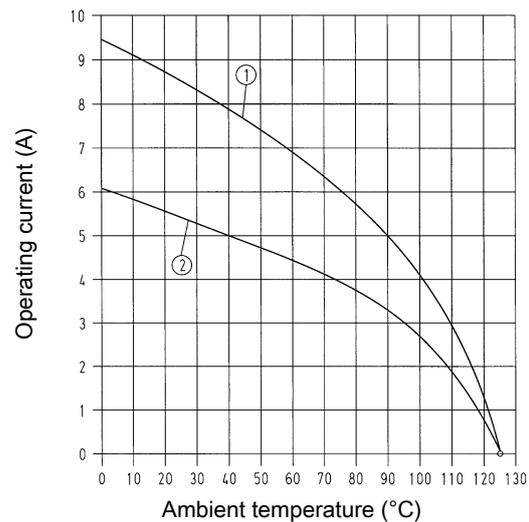
Number of contacts	17
Rated current	10 A
Rated voltage	160 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated voltage acc. to UL	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

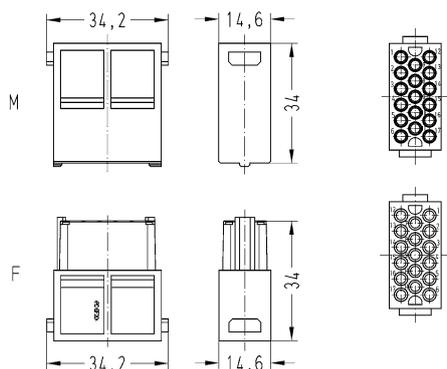
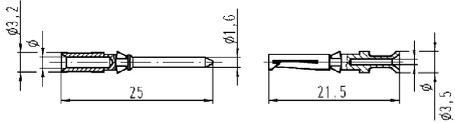
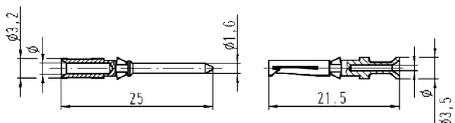

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

17

10 A 160 V 2.5 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular®, Han® DDD module, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 14 017 3001	09 14 017 3101	 <p>Contact arrangement (view from termination side)</p>																					
Han D®, Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 <p>20 10 001 3211 + 20 10 001 3221</p>																					

Features

- Suitable for standard D-Sub crimp contacts
- High packing density

Technical characteristics

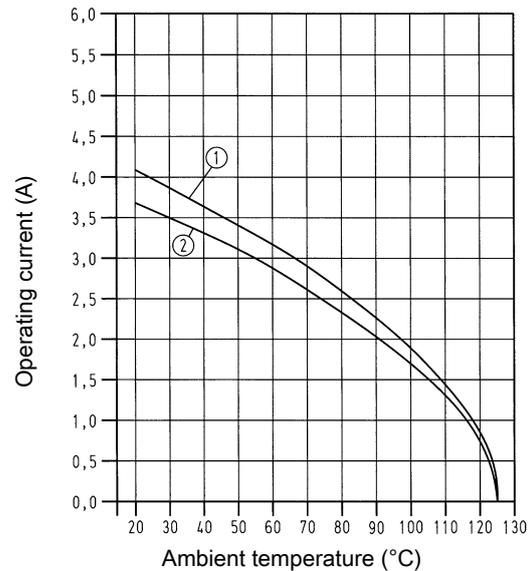
Number of contacts	25
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules; turned contacts Conductor cross-section 0.5 mm²
 ② 24 B hoods/housings with 6 modules; stamped contacts Conductor cross-section 0.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076

Details

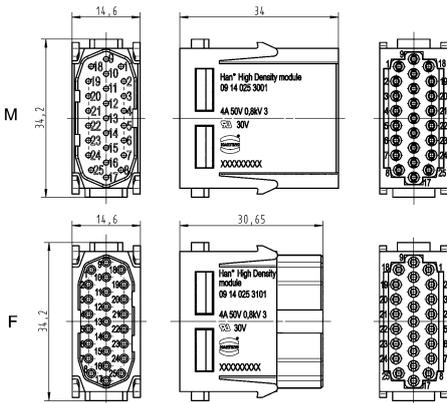
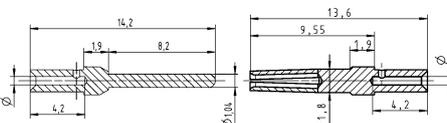
Guide pins and bushes are recommended (see chapter 80).

Number of contacts

25

4 A 50 V 0.8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
<p>Han-Modular®, Han® High Density module, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.09 ... 0.52	09 14 025 3001	09 14 025 3101	 <p>Contact arrangement (view from termination side)</p>															
<p>D-Sub, Standard, Crimp contact, Turned</p> 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	Ø	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

Features

- Suitable for standard D-Sub crimp contacts
- 44 % higher density

Technical characteristics

Number of contacts	36
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Modu-
lar

Han® Full High Density module

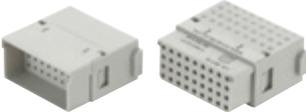
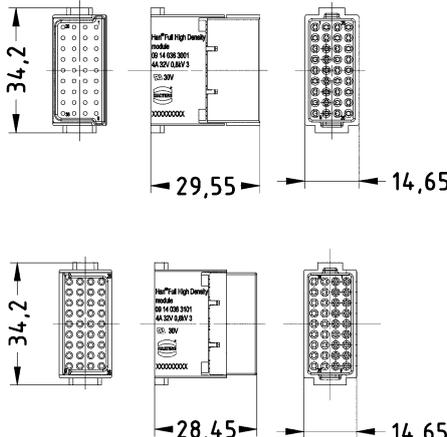
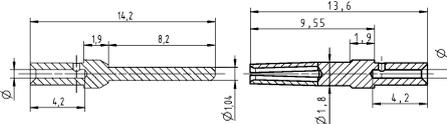


Number of contacts

36

4 A 32 V 0.8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han® Full High Density module, Crimp termination  <p>Please order crimp contacts separately.</p>	0.09 ... 0.52	09 14 036 3001	09 14 036 3101																
D-Sub, Standard, Crimp contact, Turned 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	Ø	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

Features

- D-Sub 1 (9-pin) in the Han-Modular® system
- Suitable for the transmission of sensitive signals
- Compatible to crimp, solder or IDC termination

Technical characteristics

Number of contacts	9
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤10 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate, Zinc die-cast
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

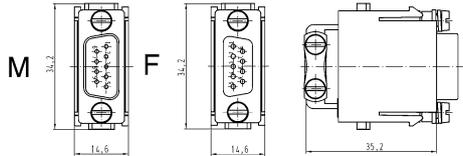
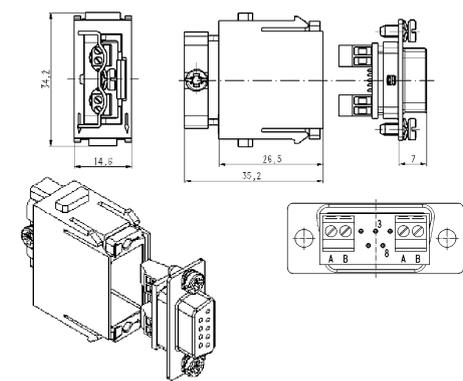
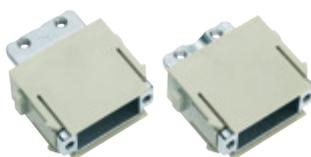
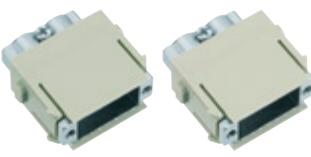
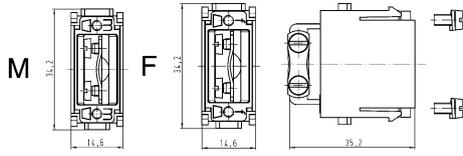
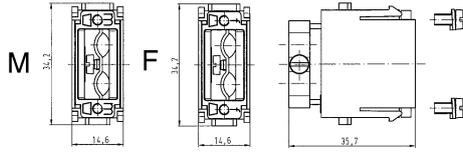
Guide pins and bushes are recommended (see chapter 80).

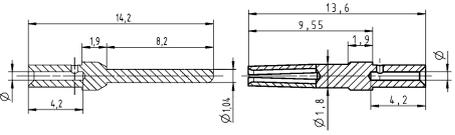
Number of contacts

9

5 A 50 V 0.8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Modular®, Han® D-Sub module, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.08 ... 0.52	09 14 009 3001	09 14 009 3101	
<p>Han-Modular®, Han® D-Sub module, Screw termination</p>  <p>for RS 485-based bus systems with T-functionality</p>	0.08 ... 0.52		09 14 009 3151	 <p>Contact arrangement (view from termination side) Signal A: Contact no. 8 Signal B: Contact no. 3</p>
<p>Han-Modular®, Adapter module, for D-Sub 1 (9-pin)</p>  <p>for one cable</p> <p>Han-Modular®, Adapter module, for D-Sub 1 (9-pin)</p>  <p>for two cables</p>		09 14 000 9930	09 14 000 9931	 

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
D-Sub, Standard, Crimp contact, Turned 	0.09 ... 0.25	09 67 000 7576	09 67 000 7476	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	∅	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
	Wire gauge	∅	Stripping length																
	0.09-0.25 mm ²	0.64 mm	4 mm																
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	
0.13 ... 0.33	09 67 000 5576	09 67 000 5476																	
0.25 ... 0.52	09 67 000 8576	09 67 000 8476																	

Features

- According to USB 2.0 / USB 3.0 specification
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief

Technical characteristics

Number of contacts	4, 8
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

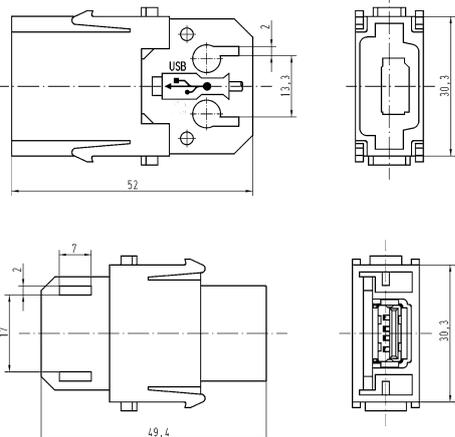

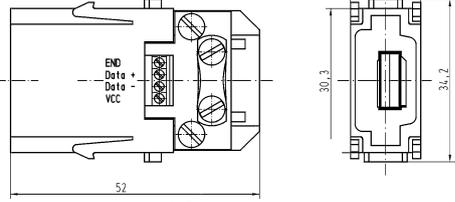
EN 60664-1
IEC 60352-4
UL 1977 ECBT2.E235076
DNV GL

Number of contacts

4

1 A 50 V 0.8 kV 3

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® USB module, for patch cable  USB 2.0	0.14 ... 0.5	09 14 001 4601	09 14 001 4701	
Han-Modular®, Han® USB module, for patch cable  USB 3.0		09 14 001 4703		
Han-Modular®, Han® USB module, for screw termination, Screw termination  USB 2.0		09 14 001 4651		 <p>Stripping length 4.5 mm Tightening torque 0.12 Nm</p>

1 A 50 V 0.8 kV 3

Modular

Features

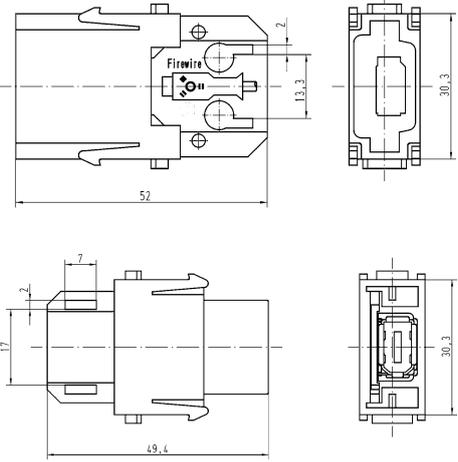
- Compatibel to IEEE 1394
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief

Technical characteristics

Number of contacts	6
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® FireWire module, for patch cable 	09 14 001 4611	09 14 001 4711	

Number of contacts

8

Modular

Features

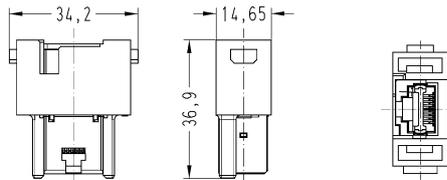
- Single module with standard shielded RJ45 plug and jack
- Cat. 6 for all data pairs (8-pin)
- Patch cables are assembled/removed without tools

Technical characteristics

Number of contacts	8, 4
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +70 °C
Mating cycles	≥ 500
Transmission characteristics	Cat. 6 _A , Class E _A up to 500 MHz, Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 10 Gbit/s
Material (insert)	Polyamide, Polycarbonate, Zinc die-cast, nickel-plated
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL
UL 1977 ECBT2.E235076

Identification	Part number Female	Drawing (dimensions in mm)
<p>Han-Modular®, Han® RJ45 module, Single module</p>  <p>Please order insert separately.</p>	09 14 001 4722	
<p>Han-Modular®, Han® RJ45 module, Gender changer, for patch cable, 8-pins, Cat. 6_A</p> 	09 14 001 4721	

Modular

Identification		Part number Female	Drawing (dimensions in mm)
<p>Data connectors, Han® RJ45 cable jack, preLink® termination, 8-pins, Cat. 6A</p> 	<p>AWG 23 ... AWG 22</p>	<p>09 14 008 4720</p>	
<p>Data connectors, Han® RJ45 cable jack, IDC termination, 4-pin, Cat. 5</p> 	<p>AWG 24 ... AWG 22</p>	<p>09 14 545 1120</p>	
<p>Data connectors, Han® RJ45 cable jack, IDC termination, 8-pins, Cat. 6A</p> 	<p>AWG 24 ... AWG 22 AWG 28 ... AWG 24</p>	<p>09 14 545 1562 09 14 545 1561</p>	

Number of contacts

8

1 A 50 V 0.8 kV 3

Modular

Features

- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator

Technical characteristics

Number of contacts	8
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +70 °C
Mating cycles	≥ 500
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Han® RJ45 module for data connectors RJ45, Data connectors, for Han® RJ45 module, Cat. 5	Male 09 14 001 4622 09 12 000 9958	

Features

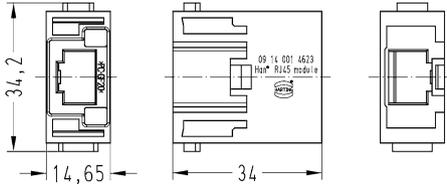
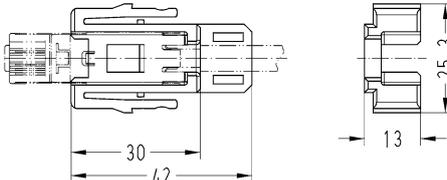
- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator
- 360° shielded contact
- Field assembly without tools possible by means of *HARAX®* rapid termination in IDC technology
- Suitable for termination of massive and flexible wires

Technical characteristics

Number of contacts	4
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +70 °C
Mating cycles	≥ 500
Wire outer diameter	$\leq 1.6 \text{ mm}$
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL
IEC 60603-7

Identification		Part number Male	Drawing (dimensions in mm)
Han-Modular®, Han® RJ45 module, Single module 		09 14 001 4623	
Data connectors, RJ Industrial RJ45 connector set 	AWG 24 ... AWG 22 AWG 26	09 45 400 1100 09 45 400 1109	 <p>Wire outer diameter $\leq 1.6 \text{ mm}$</p>

Features

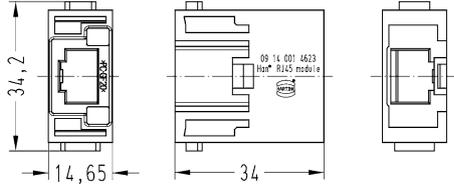
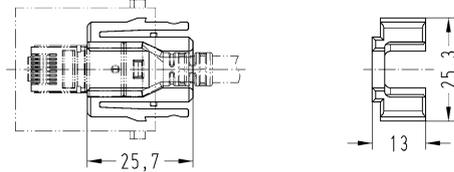
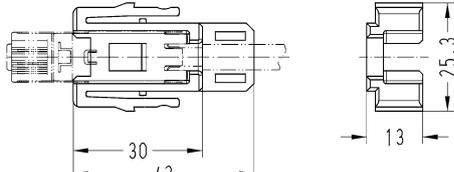
- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator
- 360° shielded contact
- Field assembly without tools possible by means of *HARAX*® rapid termination in IDC technology
- Gigalink: Field assembly by means of piercing contacts (Assembly tool 09 45 800 0520)
- Suitable for termination of massive and flexible wires
- Gigalink: Suitable for termination of flexible wires

Technical characteristics

Number of contacts	8
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +70 °C
Mating cycles	≥ 500
Wire outer diameter	$\leq 1.05 \text{ mm}, \leq 1.5 \text{ mm}$
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz, Cat. 6, Class E up to 250 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 10 Gbit/s
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL
IEC 60603-7
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification		Part number Male	Drawing (dimensions in mm)
Han-Modular®, Han® RJ45 module, Single module		09 14 001 4623	
Data connectors, RJ Industrial RJ45 Gigalink connector set, Cat. 6 _A		AWG 28 ... AWG 24 09 45 400 1520	 Wire outer diameter $\leq 1.05 \text{ mm}$
Data connectors, RJ Industrial RJ45 connector set, Cat. 6		AWG 27 ... AWG 22 09 45 400 1560	 Wire outer diameter $\leq 1.5 \text{ mm}$

Features

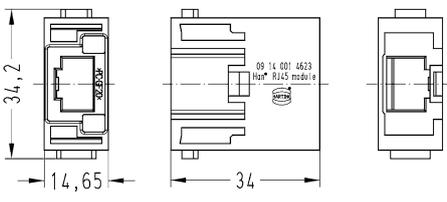
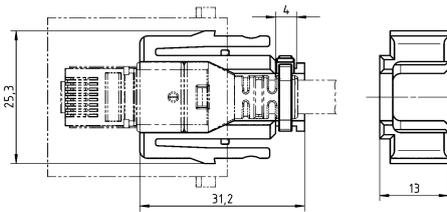
- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator
- Patch cables are assembled/removed without tools

Technical characteristics

Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

Identification	Part number	Male	Drawing (dimensions in mm)
Han-Modular®, Han® RJ45 module, Single module 	09 14 001 4623		
Han-Modular®, Han® RJ45 module, Adapter, for patch cable 	09 14 000 9966		

4x 2 Twisted Pair
 HARTING RJ Industrial®
 HARTING RJ Industrial®



Modular

Features

- Locking lever protection for RJ45 connector latch
- Very short plug design in combination with robust bend protection
- Fully EMC screened (aluminium-clad foil and braid)

Technical characteristics

Number of cores	8
Core structure	4x 2 Twisted Pair
Connector 1	HARTING RJ Industrial®
Connector 2	HARTING RJ Industrial®
Limiting temperature	-30 ... +75 °C unmoved, -5 ... +50 °C moved
Degree of protection acc. to IEC 60529	IP20
Transmission characteristics	Cat. 5e, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s
Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow
RoHS	compliant

Specifications and approvals

IEC 11801
 IEC 24702
 IEC 61935-2



Details

Other cable lengths on request!

Identification	Cable length	Part number	Drawing (dimensions in mm)
RJ45, Copper cable (round), Halogen-free, oil resistant, Pre-assembled on both sides	0.2 m	09 47 474 7001	
	0.3 m	09 47 474 7002	
	0.4 m	09 47 474 7003	
	0.5 m	09 47 474 7004	
	0.6 m	09 47 474 7005	
	0.7 m	09 47 474 7006	
	0.8 m	09 47 474 7007	
	0.9 m	09 47 474 7008	
	1 m	09 47 474 7009	
	1.5 m	09 47 474 7010	
	2 m	09 47 474 7011	
	2.5 m	09 47 474 7012	
	3 m	09 47 474 7013	
	3.5 m	09 47 474 7024	
	4 m	09 47 474 7014	
	5 m	09 47 474 7015	
	6 m	09 47 474 7016	
	7 m	09 47 474 7017	
	7.5 m	09 47 474 7018	
	8 m	09 47 474 7019	
	9 m	09 47 474 7020	
	10 m	09 47 474 7021	
	12 m	09 47 474 7035	
	15 m	09 47 474 7022	
	20 m	09 47 474 7023	
	25 m	09 47 474 7025	
30 m	09 47 474 7027		
35 m	09 47 474 7026		
40 m	09 47 474 7028		
50 m	09 47 474 7029		

4x 2 Twisted Pair
 HARTING RJ Industrial®
 HARTING RJ Industrial®



Modular

Features

- Locking lever protection for RJ45 connector latch
- Very short plug design in combination with robust bend protection
- Fully EMC screened (aluminium-clad foil and braid)

Technical characteristics

Number of cores	8
Core structure	4x 2 Twisted Pair
Connector 1	HARTING RJ Industrial®
Connector 2	HARTING RJ Industrial®
Limiting temperature	-30 ... +75 °C unmoved, -5 ... +50 °C moved
Degree of protection acc. to IEC 60529	IP20
Transmission characteristics	Cat. 6, Class E up to 250 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 10 Gbit/s
Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow
RoHS	compliant

Specifications and approvals

IEC 11801
 IEC 61156-6
 IEC 24702



Details

Other cable lengths on request!

Identification	Cable length	Part number	Drawing (dimensions in mm)
RJ45, Copper cable (round), Wiring 1:1, Halogen-free, oil resistant, Pre-assembled on both sides	0.2 m	09 47 474 7101	
	0.3 m	09 47 474 7102	
	0.4 m	09 47 474 7103	
	0.5 m	09 47 474 7104	
	0.6 m	09 47 474 7105	
	0.7 m	09 47 474 7106	
	0.8 m	09 47 474 7107	
	0.9 m	09 47 474 7108	
	1 m	09 47 474 7109	
	1.5 m	09 47 474 7110	
	2 m	09 47 474 7111	
	2.5 m	09 47 474 7112	
	3 m	09 47 474 7113	
	4 m	09 47 474 7114	
	5 m	09 47 474 7115	
	6 m	09 47 474 7116	
	7 m	09 47 474 7117	
	7.5 m	09 47 474 7118	
	8 m	09 47 474 7119	
	9 m	09 47 474 7120	
10 m	09 47 474 7121		
15 m	09 47 474 7122		
16 m	09 47 474 7124		
20 m	09 47 474 7123		
25 m	09 47 474 7126		
30 m	09 47 474 7125		
100 m	09 47 474 7199		

Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)
- Usable for Gigabit Ethernet cat. 6A
- Suitable for PoE++

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	50 V AC, 60 V DC
Rated voltage acc. to UL	30 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤10 mΩ
Contact resistance, shielding	≤10 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz, Cat. 7A, Class F _A up to 1.000 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 10 Gbit/s
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c : Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

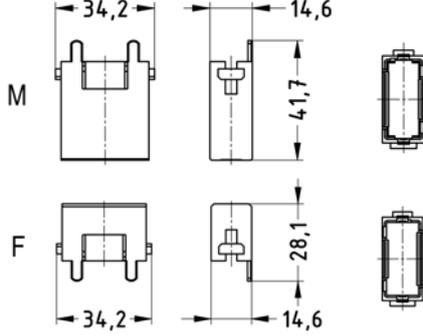
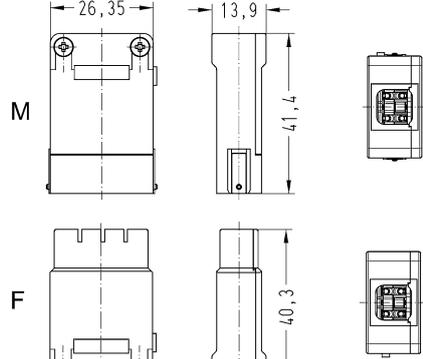
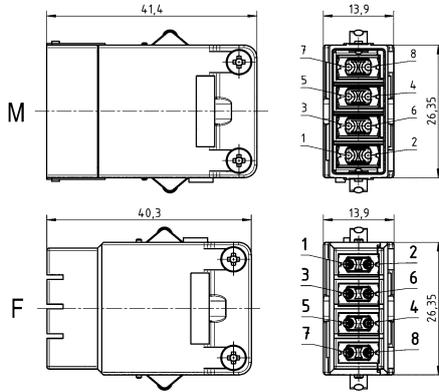
Modular

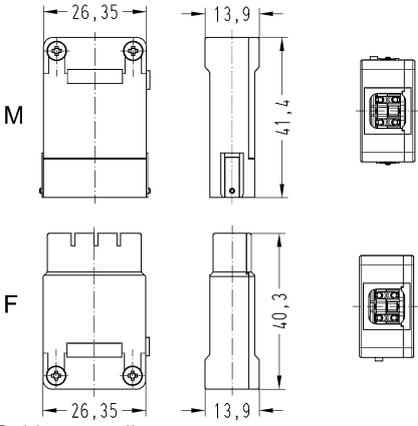
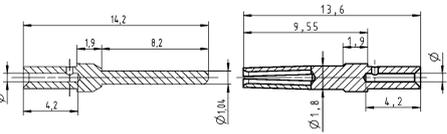
Number of contacts

8

5 A 50 V 0.8 kV 3
+ shielding

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Adapter module 		09 14 001 3011	09 14 001 3111	
Han® Gigabit insert, Crimp termination, Cat. 6A  Please order crimp contacts separately. Please order adapter module separately. Please order cable clamp or crimp flange separately.	0.09 ... 0.52	09 14 008 3011		 <p>Cable outer diameter ≤ 14 mm</p>
Han® Gigabit insert, Crimp termination, Cat. 6A  With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.	0.09 ... 0.52	09 14 008 3012	09 14 008 3112	 <p>Cable outer diameter ≤ 14 mm</p>

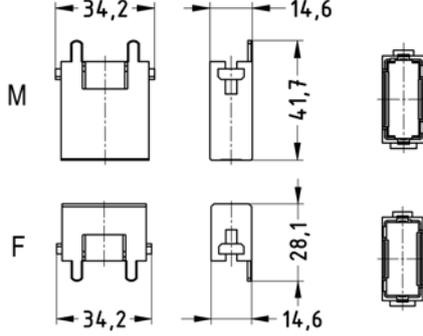
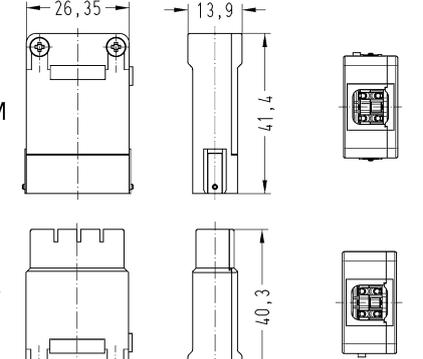
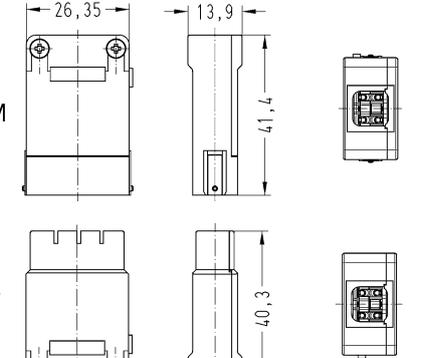
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han® Gigabit insert, Crimp termination, Cat. 6A  Please order crimp contacts separately. Please order adapter module separately.	0.09 ... 0.52		09 14 008 3111	 <p>M</p> <p>F</p> <p>Cable outer diameter ≤ 14 mm</p>															
D-Sub, Standard, Crimp contact, Turned 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	∅	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	∅	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

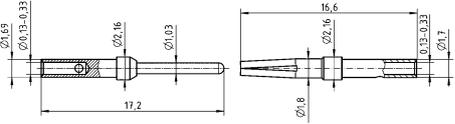
Number of contacts

8

5 A 50 V 0.8 kV 3
+ shielding

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Modular®, Adapter module</p> 		09 14 001 3011	09 14 001 3111	
<p>Han® Gigabit insert, Crimp termination, Cat. 7_A</p>  <p>Please order crimp contacts separately. Please order adapter module separately.</p>	0.09 ... 0.52	09 14 008 3031	09 14 008 3131	 <p>Cable outer diameter ≤ 14 mm</p>
<p>Han® Gigabit insert, Crimp termination, Cat. 7_A</p>  <p>With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.</p>	0.09 ... 0.52	09 14 008 3032	09 14 008 3132	 <p>Cable outer diameter ≤ 14 mm</p>

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
D-Sub, Crimp contact, Turned 	0.13 ... 0.33	09 93 000 5576	09 93 000 5476	

Modular

Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)

Technical characteristics

Number of contacts	20
Additional contacts	+ shielding
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Contact resistance, shielding	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	LCP, Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

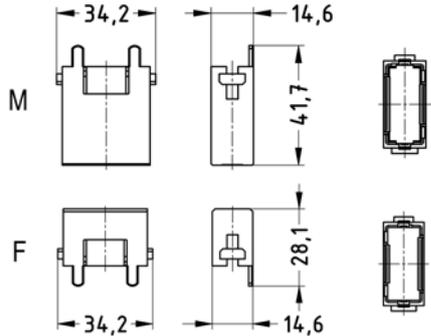
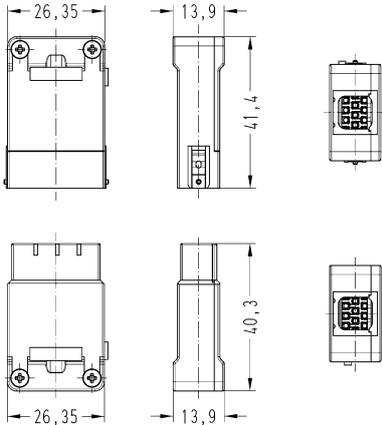
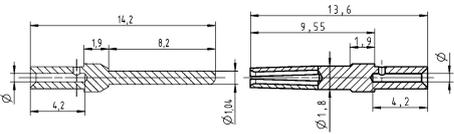
EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E102079
 DNV GL
 UL 1977 ECBT2.E235076

Number of contacts

20

4 A 32 V 0.8 kV 3
+ shielding

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Adapter module 		09 14 001 3011	09 14 001 3111																
Han® Shielded Module insert, Crimp termination  Please order crimp contacts separately.	0.09 ... 0.52	09 14 020 3013	09 14 020 3113																
D-Sub, Standard, Crimp contact, Turned 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	 <table border="1" data-bbox="995 1682 1449 1839"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	∅	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	∅	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

Number of contacts

27

2 A 16 V 0.8 kV 3
+ shielding

Modular

Features

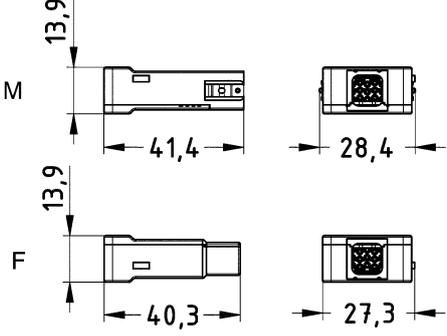
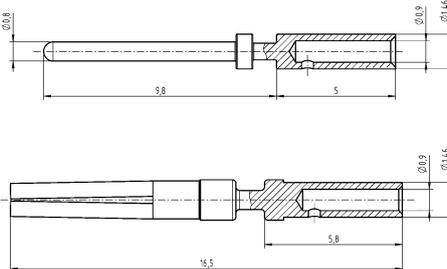
- Transmission of shielding separately from the hood's ground
- Suitable for the transmission of sensitive signals (e.g. bus signals)
- Higher density of crimping contacts

Technical characteristics

Number of contacts	27
Additional contacts	+ shielding
Rated current	2 A
Rated voltage	16 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance, shielding	≤10 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	LCP
Material (shielding)	Zinc die-cast, nickel-plated
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® High density shielded module, Crimp termination  Please order crimp contacts separately.	0.13 ... 0.33	09 14 027 3013	09 14 027 3113	
M12, Crimp contact, Turned, Pack contents: Single contact Contact surface: Gold plated 	0.13 ... 0.33	21 01 100 9020	21 01 100 9025	

Features

- Shielding bus separate from housing potential
- Usable for Megabit Ethernet cat. 5e
- Suitable for Han® B, Han® M, Han® EMC and Han® HPR hoods/housings, high construction

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Contact resistance, shielding	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Not suitable for hoods/housings low construction as well as Han-Modular® Eco, Han-Modular® Compact and Han-Modular® Twin.

Crimping tools see chapter 90

Remarks on the crimp technique

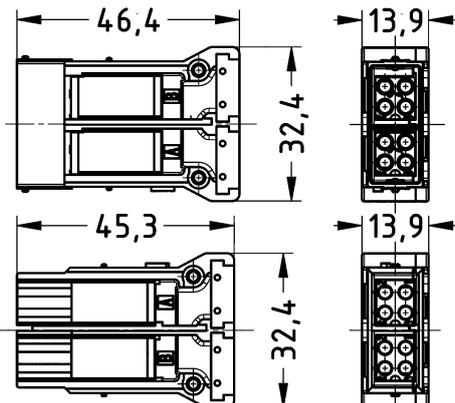
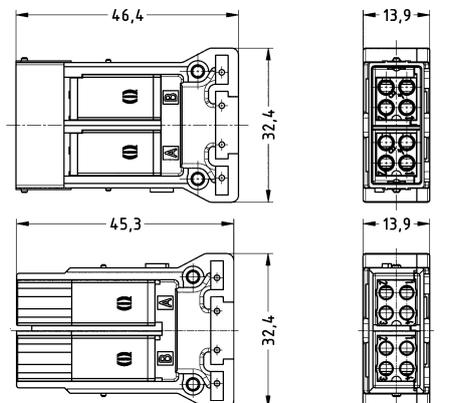
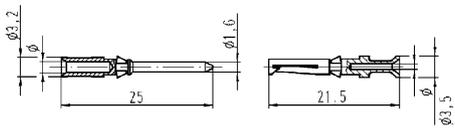
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

8

10 A 50 V 0.8 kV 3
+ shielding

Modular

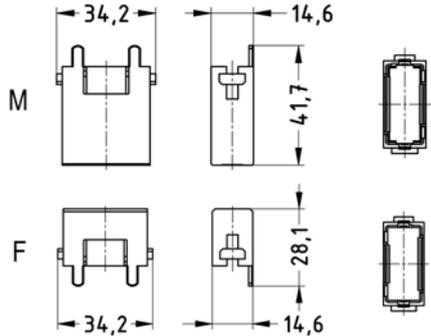
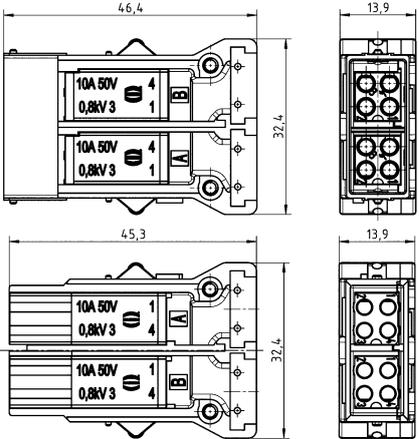
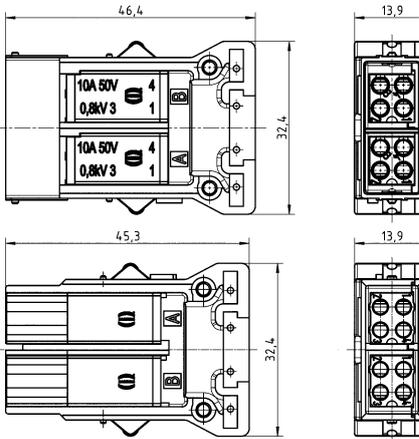
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
<p>Han® Megabit insert, 2x 4 contacts, 2 cable entries, Crimp termination</p>  <p>Please order crimp contacts separately. Please order adapter module separately.</p>	0.14 ... 2.5	09 14 008 3016	09 14 008 3116																						
<p>Han® Megabit insert, 2x 4 contacts, One entry, Crimp termination</p>  <p>2x 4 contacts Please order crimp contacts separately. Please order adapter module separately.</p>	0.14 ... 2.5	09 14 008 3021	09 14 008 3121																						
<p>Han D®, Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1" data-bbox="965 1758 1420 1915"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Number of contacts

8

10 A 50 V 0.8 kV 3
+ shielding

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Modular®, Adapter module</p> 		09 14 001 3011	09 14 001 3111	
<p>Han® Megabit insert, 2x 4 contacts, 2 cable entries, Crimp termination</p>  <p>With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.</p>	0.14 ... 2.5	09 14 008 3017	09 14 008 3117	
<p>Han® Megabit insert, 2x 4 contacts, One entry, Crimp termination</p>  <p>2x 4 contacts With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.</p>	0.14 ... 2.5	09 14 008 3022	09 14 008 3122	

Modular

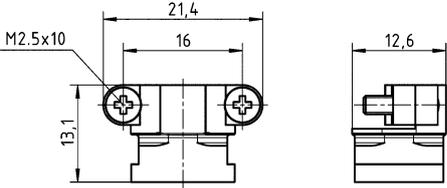
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 15 000 6124	09 15 000 6224																						
	0.5	09 15 000 6123	09 15 000 6223																						
	0.75	09 15 000 6125	09 15 000 6225																						
	1	09 15 000 6122	09 15 000 6222																						
	1.5	09 15 000 6121	09 15 000 6221																						
	2.5	09 15 000 6126	09 15 000 6226																						
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Technical characteristics

Material (accessories) Zinc die-cast
RoHS compliant

Details

09 14 000 9983, 61 03 000 0143 and 61 03 000 0148 only for modules with one cable entry!

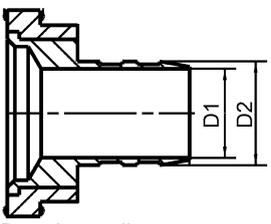
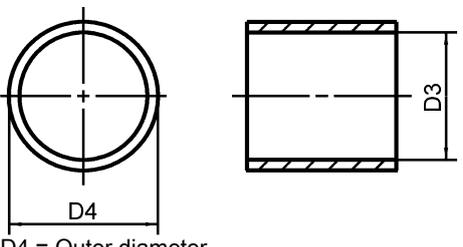
Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Cable clamp 	6 ... 10	09 14 000 9983	
Cable clamp, D-Sub 1 ... 4 	5 ... 7 7 ... 10 9 ... 12 11 ... 14	61 03 000 0141 61 03 000 0044 61 03 000 0143 61 03 000 0148	

Technical characteristics

RoHS compliant with exemption
 RoHS exemptions **6c**: Copper alloy containing up to 4 % lead by weight

Details

HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.

Identification	Inner diameter	Outer diameter	Part number	Drawing (dimensions in mm)		
D-Sub, Crimp flange, D-Sub 1 ... 4 	3 mm	4 mm	61 03 000 0062	 D1 = Inner diameter D2 = Outer diameter		
	3.5 mm	4.5 mm	61 03 000 0063			
	4 mm	5 mm	61 03 000 0064			
	4.5 mm	5.5 mm	61 03 000 0065			
	5 mm	6 mm	61 03 000 0066			
	5.5 mm	6.5 mm	61 03 000 0166			
	6 mm	7 mm	61 03 000 0067			
	6.5 mm	7.5 mm	61 03 000 0068			
	7 mm	8 mm	61 03 000 0069			
	7.5 mm	8.5 mm	61 03 000 0070			
	8 mm	9 mm	61 03 000 0071			
	8.5 mm	9.5 mm	61 03 000 0165			
	9 mm	10 mm	61 03 000 0072			
	D-Sub, Crimp ferrule 	5 mm	6 mm		61 03 000 0045	 D4 = Outer diameter D3 = Inner diameter
		5.5 mm	6.5 mm		61 03 000 0046	
6 mm		7 mm	61 03 000 0047			
6.5 mm		7.5 mm	61 03 000 0048			
7 mm		8 mm	61 03 000 0049			
7.5 mm		8.5 mm	61 03 000 0050			
8 mm		9 mm	61 03 000 0051			
8.5 mm		9.5 mm	61 03 000 0052			
9 mm		10 mm	61 03 000 0053			
9.5 mm		10.5 mm	61 03 000 0054			
10 mm		11 mm	61 03 000 0055			
10.5 mm		11.5 mm	61 03 000 0056			
11 mm		12 mm	61 03 000 0057			
11.5 mm		12.5 mm	61 03 000 0058			
12 mm		13 mm	61 03 000 0142			
12.5 mm		13.5 mm	61 03 000 0059			
13 mm		14 mm	61 03 000 0127			
13.7 mm		15 mm	61 03 000 0060			
14 mm		15 mm	61 03 000 0061			

Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)
- The four pole Han® Quintax contact is suitable for Ethernet cat. 5e and PROFIBUS when diagonally wiring of the data pairs.

Technical characteristics

Number of contacts	4
Additional contacts	+ shielding
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Contact resistance, shielding	≤10 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Metal
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

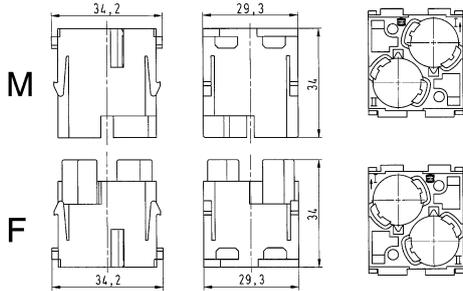
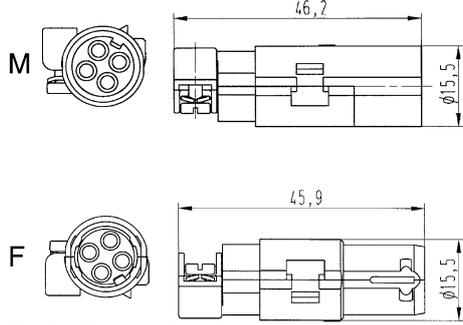
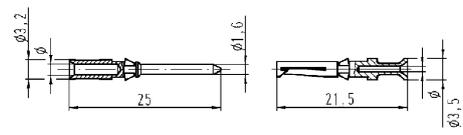
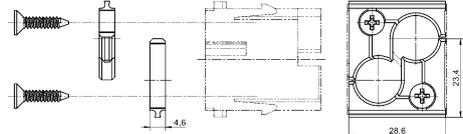
Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular®, Han-Quintax® module, Crimp termination 		09 14 002 3001	09 14 002 3101	 <p>M</p> <p>F</p> <p>Contact arrangement (view from termination side)</p>																					
Han-Quintax®, for Han D® crimp contacts  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 15 004 3013	09 15 004 3113	 <p>M</p> <p>F</p> <p>Cable diameter 3 ... 9.5 mm</p>																					
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1" data-bbox="957 1624 1420 1780"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han-Quintax®, Adapter, Metal  <p>Optional</p>		09 14 000 9915	09 14 000 9915																						

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Contact resistance, shielding	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Metal

Technical characteristics

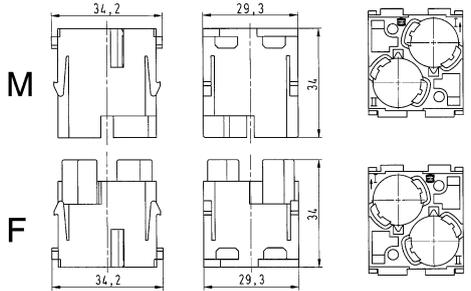
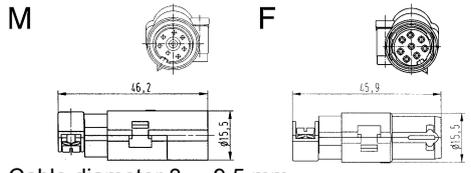
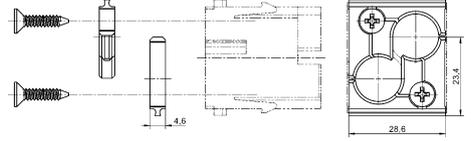
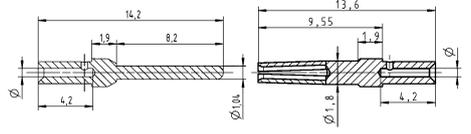
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL
 UL 1977 ECBT2.E102079
 CSA-C22.2 No. 182.3 ECBT8.E102079

Modular

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Han-Quintax® module, Crimp termination 		09 14 002 3001	09 14 002 3101	 <p>M</p> <p>F</p> <p>Contact arrangement (view from termination side)</p>															
Han-Quintax® High Density, for Han® D-Sub crimp contacts  <p>Please order crimp contacts separately.</p>	0.09 ... 0.52	09 15 008 3013	09 15 008 3113	 <p>M</p> <p>F</p> <p>Cable diameter 3 ... 9.5 mm</p>															
Han-Quintax®, Adapter, Metal 		09 14 000 9915	09 14 000 9915																
Optional D-Sub, Standard, Crimp contact, Turned 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	Ø	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Contact resistance, shielding	$\leq 10 \text{ m}\Omega$
Impedance	75 Ω
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Technical characteristics

RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight
-----------------	---

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

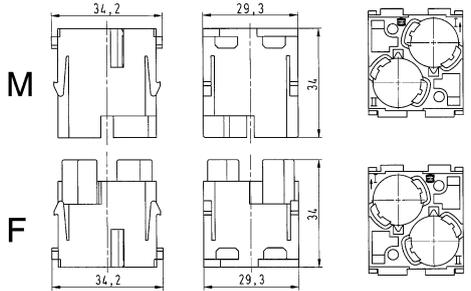
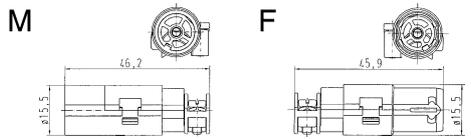
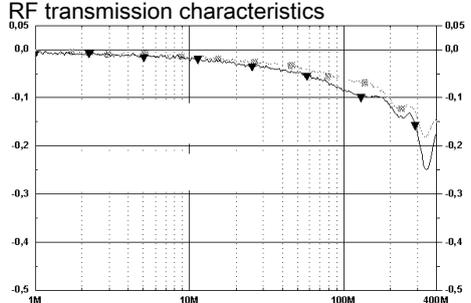
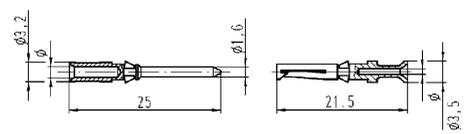
Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular®, Han-Quintax® module, Crimp termination 		09 14 002 3001	09 14 002 3101	 <p>M</p> <p>F</p> <p>Contact arrangement (view from termination side)</p>																					
Han® D Coax, Crimp termination, for Han D® crimp contacts  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 15 001 3013	09 15 001 3113	 <p>M</p> <p>F</p> <p>RF transmission characteristics</p>  <p>■ 75 Ohm Cable ▼ 75 Ohm Cable with Han D® Coax</p>																					
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1" data-bbox="957 1769 1428 1937"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Rated current	16 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Contact resistance, shielding	$\leq 10 \text{ m}\Omega$
Impedance	50 Ω
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Technical characteristics

RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight
-----------------	---

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

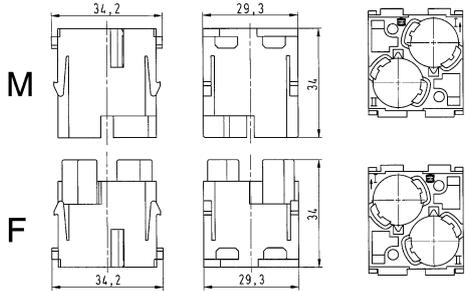
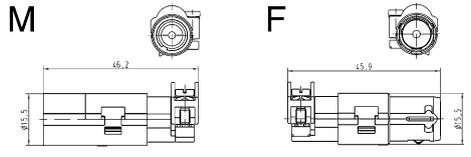
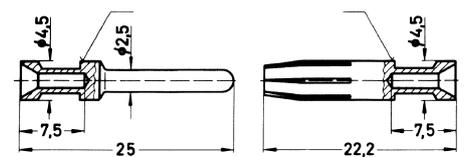
Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
<p>Han-Modular®, Han-Quintax® module, Crimp termination</p> 		09 14 002 3001	09 14 002 3101	 <p>M</p> <p>F</p> <p>Contact arrangement (view from termination side)</p>																											
<p>Han® E Coax, Crimp termination, for Han E® crimp contacts</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 15 001 3023	09 15 001 3123	 <p>M</p> <p>F</p> <table border="1"> <thead> <tr> <th>Han E® Coax with RG 213 cable (2.5 mm²)</th> <th>200 MHz</th> <th>500 MHz</th> <th>1.0 GHz</th> <th>1.2 GHz</th> <th>1.5 GHz</th> <th>2.0 GHz</th> <th>2.5 GHz</th> </tr> </thead> <tbody> <tr> <td>Return loss [dB]</td> <td>23.8</td> <td>21.1</td> <td>>18.7</td> <td>>17.7</td> <td>>16.4</td> <td>>14.1</td> <td>>12.0</td> </tr> <tr> <td>Attenuation [dB]</td> <td>0.07</td> <td>0.11</td> <td>0.17</td> <td>0.2</td> <td><0.23</td> <td><0.53</td> <td><2.0</td> </tr> </tbody> </table>	Han E® Coax with RG 213 cable (2.5 mm ²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz	Return loss [dB]	23.8	21.1	>18.7	>17.7	>16.4	>14.1	>12.0	Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0			
Han E® Coax with RG 213 cable (2.5 mm ²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz																								
Return loss [dB]	23.8	21.1	>18.7	>17.7	>16.4	>14.1	>12.0																								
Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0																								
<p>Han E®, Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 4	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>AWG</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section	AWG	Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
Conductor cross-section	AWG	Identification																													
0.14-0.37 mm ²	AWG 26-22	no groove																													
0.5 mm ²	AWG 20	no groove																													
0.75 mm ²	AWG 18	1 groove*																													
1 mm ²	AWG 18	1 groove																													
1.5 mm ²	AWG 16	2 grooves																													
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													

Number of contacts

4

1.5 A 50 V

Modular

Features

- Suitable for FOC and coaxial contacts acc. to EN 41626

Technical characteristics

Number of contacts	4
Rated current	1.5 A
Rated voltage	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Impedance	50 Ω , 75 Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

ATTENTION when using coaxial contacts:

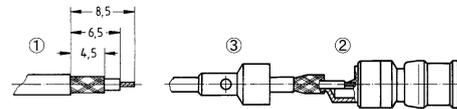
Male module 09 14 004 4501 with contacts 09 14 000 62xx or 09 69 28x 5xxx

Female module 09 14 004 4513 with contacts 09 14 000 61xx or 09 69 18x 5xxx







When removing the contacts, the two-piece module can be opened using a 7mm screwdriver. This destroys the module.

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

Assembly instructions for coaxial contact



- ① Stripping length
- ② Solder termination (during soldering max. +300 °C for 2 s)
- ③ Crimp ferrule

Identification	Part number		Drawing (dimensions in mm)					
	Male	Female						
Han-Modular®, Han® Multi module  Please order contacts separately.	09 14 004 4501	09 14 004 4512						
			Contact arrangement (view from termination side)					

Modular

Identification

Part number
Male Female

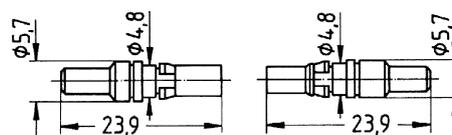
Drawing
(dimensions in mm)

DIN 41626,
Coaxial contact,
Solder/crimp termination,
for cables RG 174 U, 188 AU, 316 U,
50 Ohm,

Contact surface:
Gold plated



09 14 000 6211 09 14 000 6111

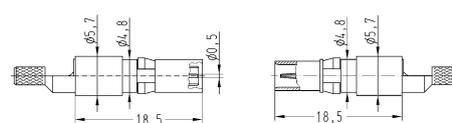


DIN 41626,
Coaxial contact,
Solder/crimp termination,
for cables RG 179 BU, 187 AU,
75 Ohm,

Contact surface:
Gold plated



09 14 000 6221 09 14 000 6121

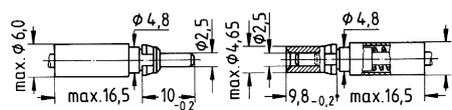


Wires	Shell ϕ mm	Internal wire ϕ mm	Dämpfung db/100 m bei		
			100MHz	200MHz	800MHz
50 Ω					
RG 174 / U	2.5	0.48			84
RG 188 A / U	2.6	0.54	29	40	
RG 316 / U	2.5	0.54		40	
75 Ω					
RG 179 B / U	2.55	0.3		41	
RG 187 A / U	2.7	0.3		41	

DIN 41626,
FO contact,
for 1 mm plastic fibre



20 10 001 4211 20 10 001 4221



DIN 41626,
FO contact,
for SI fibre (HCS®) 200/230 μ m



20 10 230 4211 20 10 230 4221

DIN 41626,
FO contact,
for GI fibre 50/125 μ m
for ceramic ferrule 62.5/125 μ m



20 10 125 4212 20 10 125 4222

Number of contacts

4

1.5 A 50 V

Modular

Features

- Suitable for FOC and coaxial contacts acc. to D-Sub

Technical characteristics

Number of contacts	4
Rated current	1.5 A
Rated voltage	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Impedance	50 Ω , 75 Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (locking)	Copper alloy
Material (contacts)	Copper alloy, PBFE / PBTP / PI
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

ATTENTION when using coaxial contacts:

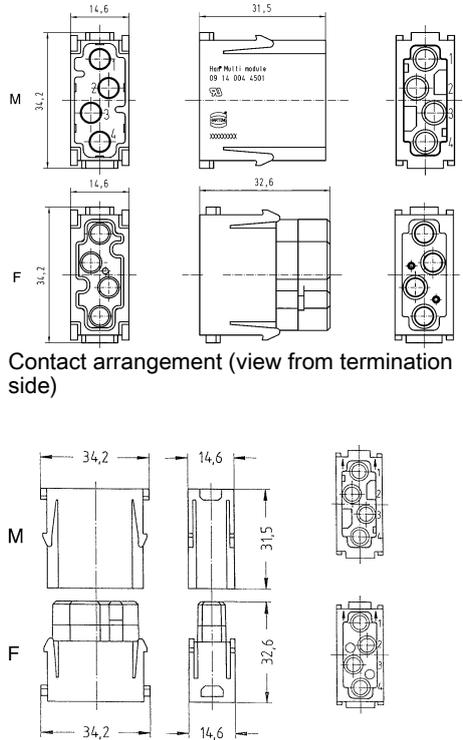

Male module 09 14 004 4501 with contacts 09 14 000 62xx or 09 69 28x 5xxx

Female module 09 14 004 4513 with contacts 09 14 000 61xx or 09 69 18x 5xxx

When removing the contacts, the two-piece module can be opened using a 7mm screwdriver. This destroys the module.

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

Modular

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han-Modular®, Han® Multi module</p>  <p>Please order contacts separately.</p>	09 14 004 4501	09 14 004 4513	 <p>Contact arrangement (view from termination side)</p> <p>Contact arrangement (view from termination side)</p>
<p>D-Sub, Coaxial contact, Solder / solder termination, for cables RG 58, 50 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 14 000 6215	09 14 000 6115	
<p>D-Sub, Mixed, Coaxial contact, Crimp/crimp termination, Straight Turned for cables RG 174 U, 188 AU, 316 U, 50 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 69 282 5140	09 69 182 5140	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>D-Sub, Mixed, Coaxial contact, Crimp/crimp termination, Straight Turned for cables RG 179 BU, 187 AU, 75 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 69 282 5230	09 69 182 5230	
<p>D-Sub, Mixed, Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 174 U, 188 AU, 316 U, 50 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 69 281 5140	09 69 181 5140	
<p>D-Sub, Mixed, Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 178 BU, 196 AU, 404 U, 50 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 69 281 5141	09 69 181 5141	
<p>D-Sub, Mixed, Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 58 CU, 141 AU, 50 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 69 281 5143	09 69 181 5143	
<p>D-Sub, Mixed, Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 179 BU, 187 AU, 75 Ohm,</p> <p>Contact surface: Gold plated</p> 	09 69 281 5230	09 69 181 5230	

Number of contacts

12

1.5 A 50 V

Modular

Features

- Suitable for FOC and coaxial contacts acc. to EN 41626

Technical characteristics

Number of contacts	12
Rated current	1.5 A
Rated voltage	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Impedance	50 Ω , 75 Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

ATTENTION when using coaxial contacts:

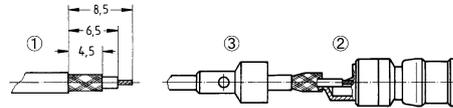
Male module 09 14 004 4501 with contacts 09 14 000 62xx

Female module 09 14 004 4512 with contacts 09 14 000 61xx

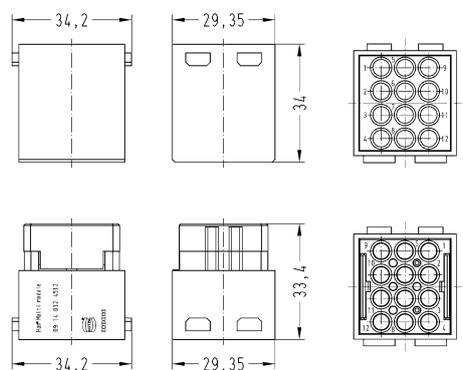
Due to the closed entry design of female insert the upper part has to be removed by screw driver before extracting the contacts.

Assembly instructions

for coaxial contact



- ① Stripping length
- ② Solder termination (during soldering max. +300 °C for 2 s)
- ③ Crimp ferrule

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Multi module, acc. to DIN 41626  Please order contacts separately.	09 14 012 4501	09 14 012 4512	 Contact arrangement (view from termination side)

Identification	Part number		Drawing (dimensions in mm)																																																					
	Male	Female																																																						
DIN 41626, Coaxial contact, Solder/crimp termination, for cables RG 174 U, 188 AU, 316 U, 50 Ohm, Contact surface: Gold plated	09 14 000 6211	09 14 000 6111																																																						
DIN 41626, Coaxial contact, Solder/crimp termination, for cables RG 179 BU, 187 AU, 75 Ohm, Contact surface: Gold plated	09 14 000 6221	09 14 000 6121	<table border="1"> <thead> <tr> <th rowspan="2">Wires</th> <th>Shell</th> <th>Internal wire</th> <th colspan="3">Dämpfung db/100 m bei</th> </tr> <tr> <th>∅ mm</th> <th>∅ mm</th> <th>100MHz</th> <th>200MHz</th> <th>800MHz</th> </tr> </thead> <tbody> <tr> <td>50 Ω</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RG 174 / U</td> <td>2.5</td> <td>0.48</td> <td></td> <td></td> <td>84</td> </tr> <tr> <td>RG 188 A / U</td> <td>2.6</td> <td>0.54</td> <td>29</td> <td>40</td> <td></td> </tr> <tr> <td>RG 316 / U</td> <td>2.5</td> <td>0.54</td> <td></td> <td>40</td> <td></td> </tr> <tr> <td>75 Ω</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RG 179 B / U</td> <td>2.55</td> <td>0.3</td> <td></td> <td>41</td> <td></td> </tr> <tr> <td>RG 187 A / U</td> <td>2.7</td> <td>0.3</td> <td></td> <td>41</td> <td></td> </tr> </tbody> </table>	Wires	Shell	Internal wire	Dämpfung db/100 m bei			∅ mm	∅ mm	100MHz	200MHz	800MHz	50 Ω						RG 174 / U	2.5	0.48			84	RG 188 A / U	2.6	0.54	29	40		RG 316 / U	2.5	0.54		40		75 Ω						RG 179 B / U	2.55	0.3		41		RG 187 A / U	2.7	0.3		41	
Wires	Shell	Internal wire	Dämpfung db/100 m bei																																																					
	∅ mm	∅ mm	100MHz	200MHz	800MHz																																																			
50 Ω																																																								
RG 174 / U	2.5	0.48			84																																																			
RG 188 A / U	2.6	0.54	29	40																																																				
RG 316 / U	2.5	0.54		40																																																				
75 Ω																																																								
RG 179 B / U	2.55	0.3		41																																																				
RG 187 A / U	2.7	0.3		41																																																				
DIN 41626, FO contact, for 1 mm plastic fibre	20 10 001 4211	20 10 001 4221																																																						
DIN 41626, FO contact, for SI fibre (HCS®) 200/230 µm	20 10 230 4211	20 10 230 4221																																																						
DIN 41626, FO contact, for GI fibre 50/125 µm for ceramic ferrule 62.5/125 µm	20 10 125 4212	20 10 125 4222																																																						

Number of contacts

3

Modular



Features

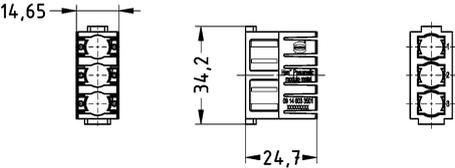
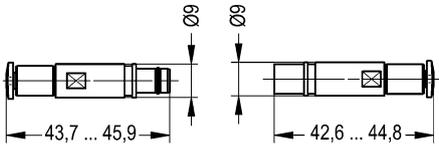
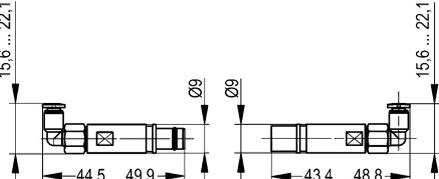
- for the transmission of clean and dry compressed air
- Female contacts with / without shut-off

Technical characteristics

Number of contacts	3
Limiting temperature	-40 ... +85 °C, -20 ... +85 °C
Mating cycles	≥10000
Tube inner diameter	3 mm, 4 mm, 6 mm
Tube outer diameter	3 mm, 4 mm, 6 mm
Material (insert)	Polycarbonate
Colour (insert)	Blue
Material (seal)	NBR
Material (contacts)	Brass
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

IEC 61984
EN 60664-1

Identification	Part number		Drawing (dimensions in mm)	
	Male	Female		
Han-Modular®, Han® Pneumatic module  <p>Please order contacts separately.</p>	09 14 003 3501	09 14 003 3501	 <p>Contact arrangement (view from mating side)</p>	
Pneumatic contact, Without shut-off Straight, Tube outer diameter 	3 mm 4 mm 6 mm	09 14 000 6353 09 14 000 6354 09 14 000 6356	09 14 000 6453 09 14 000 6454 09 14 000 6456	
Pneumatic contact, Without shut-off Angled, Tube outer diameter 	3 mm 4 mm 6 mm	09 14 000 7353 09 14 000 7354 09 14 000 7356	09 14 000 7453 09 14 000 7454 09 14 000 7456	

Identification		Part number		Drawing (dimensions in mm)
		Male	Female	
Pneumatic contact, With shut-off Straight, Tube outer diameter	3 mm		09 14 000 6463	
	4 mm		09 14 000 6464	
	6 mm		09 14 000 6466	
Pneumatic contact, With shut-off Angled, Tube outer diameter	3 mm		09 14 000 7463	
	4 mm		09 14 000 7464	
	6 mm		09 14 000 7466	
Pneumatic contact, Without shut-off Straight, Tube inner diameter	3 mm	09 14 000 6303	09 14 000 6403	
	4 mm	09 14 000 6304	09 14 000 6404	
	6 mm	09 14 000 6306	09 14 000 6406	
Pneumatic contact, With shut-off Straight, Tube inner diameter	3 mm		09 14 000 6413	
	4 mm		09 14 000 6414	
	6 mm		09 14 000 6416	

Modular

Modular

Features

- Suitable for HARTING SC contacts
- for GI-Fibre 50 - 62.5 / 125µm
- Insertion loss < 0.5 dB

Technical characteristics

Number of contacts	4
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

UL 1977 ECBT2.E235076
DNV GL

Details

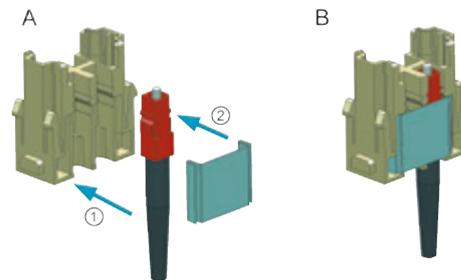
The male and female modules each use the same contacts.

Guide pins and bushes are recommended (see chapter 80).

Details

Assembly instructions

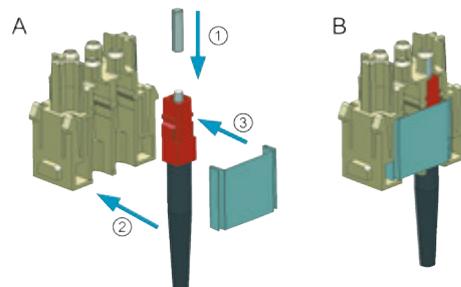
Male module



- A) Assemble the SC contact
Push the SC contact from the side into the relevant insert ①
Push the fixing plate from the side over the contacts ②
B) SC contact fixed in the module

Assembly instructions

Female module

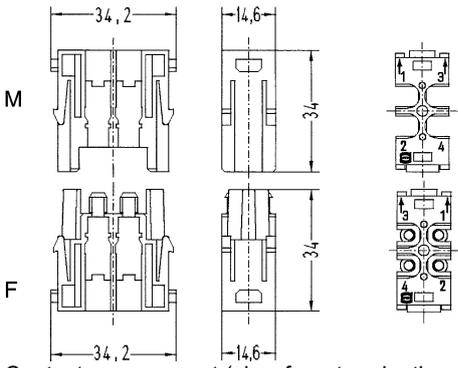
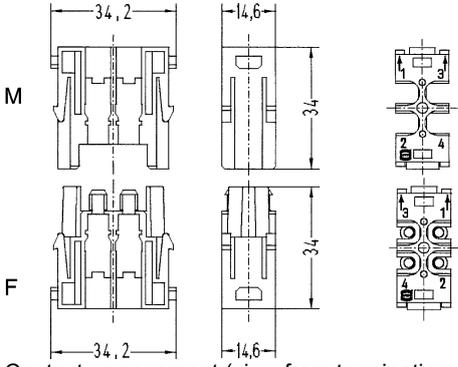



- A) Assemble the SC contact
Push the centering ferrule (included in delivery) on the SC contact ①
Push the SC contact from the side into the relevant insert ②
Push the fixing plate from the side over the contacts ③
B) SC contact fixed in the module

Number of contacts

4

Modular

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han-Modular®, Han® SC module</p>  <p>Please order contacts separately.</p>	09 14 004 4701	09 14 004 4712	 <p>Contact arrangement (view from termination side)</p>
<p>Han-Modular®, Han® SC module, with ceramic ferrule 62.5/125 µm</p>  <p>Please order contacts separately. Please order fixing plate separately.</p>		09 14 004 4711	 <p>Contact arrangement (view from termination side)</p>
<p>Han-Modular®, Han® SC module, with metal ferrule</p>  <p>Please order contacts separately.</p>		09 14 004 4713	
<p>SC contact, for 1 mm plastic fibre Crimp termination</p> 	20 10 001 5211		

Modular

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
SC contact, for 1 mm plastic fibre Fast termination	20 10 001 5217		
SC contact, for singlemode fibre 9/125 µm	20 10 125 5220		
SC contact, for GI fibre 50/125 µm for ceramic ferrule 62.5/125 µm	20 10 125 5211		
SC contact, for SI fibre (HCS®) 200/230 µm	20 10 230 5211		
Han-Modular®, Fixing plate, for SC module	09 14 000 9965	09 14 000 9965	

Features

- Suitable for HARTING LC contacts
- for GI-Fibre 50 - 62.5 / 125 µm and for singlemode fibre

Technical characteristics

Number of contacts	6
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6b: Lead as an alloying element in aluminium containing up to 0.4 % lead by weight

Details

The male and female modules each use the same contacts.

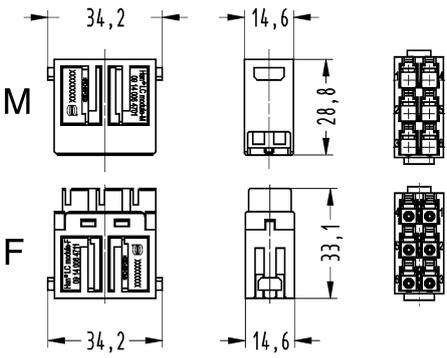

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

Modu-
lar

Number of contacts

6

Modular

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® LC module  Please order contacts separately.	09 14 006 4701	09 14 006 4711	 Contact arrangement (view from termination side)
LC contact, Singlemode for cable diameter up to 2 mm 	20 10 125 8221		
LC contact, Singlemode for cable diameter up to 3 mm 	20 10 125 8220		
LC contact, Multimode for cable diameter up to 2 mm 	20 10 125 8212		
LC contact, Multimode for cable diameter up to 3 mm 	20 10 125 8211		

Features

- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator
- Patch cables are assembled/removed without tools
- Auto-crossing
- Auto-negotiation
- Auto-polarity
- Store and Forward
- Fast Ethernet
- Full Gigabit Ethernet
- Non blocking
- Support of Jumbo-Frames (10 kBytes)
- Energy Efficient Ethernet acc. to IEEE 802.3az

Technical characteristics

Total number of ports	4
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Operating temperature	0 ... +60 °C
Storage temperature	-40 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP30, when mated
Nominal voltage	24 V DC
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s
Diagnostic display	Connection (Link), Data transfer (Act), Data transfer rate, Power connection
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c : Copper alloy containing up to 4 % lead by weight

Modular

Specifications and approvals

EN 60664-1
 IEC 61984
 DNV GL
 EN 55022 Radio disturbance characteristics
 EN 61000-4-2 Electrostatic discharge (ESD)
 EN 61000-4-3 Electromagnetic field
 EN 61000-4-4 Rapid transients (burst)
 EN 61000-4-5 Surge voltages
 EN 61000-4-6 conducted disturbances
 EN 61000-6-4 emission standard
 IEC 60068-2-6 Vibration (sinusoidal)
 IEC 60068-2-27 Shock
 IEEE 802.3

Modular



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® RJ45 module, Single module	09 14 001 4623		
Han-Modular®, Han® RJ45 module, Adapter, for patch cable	09 14 000 9966		
Han-Modular®, Han-Smart®, Switch US4		09 80 113 0400	

Number of contacts

7



Modu-
lar

Features

- Module for identifying industrial components
- Programming via the CANopen communication protocol
- Automatically detects baud rate
- Node ID configuration using LSS, acc. to DS305
- Status and diagnostics display
- Default Node ID: 127

Technical characteristics

Number of contacts	7
Operating temperature	-40 ... +70 °C
Storage temperature	-40 ... +70 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP30
Nominal voltage	24 V DC
Power consumption	<5 W
Memory	10 MB Flash
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Polycarbonate
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

- DIN EN 60721-3-3
- DIN EN 50102
- EN 61000-4-2 Electrostatic discharge (ESD)
- EN 61000-4-3 Electromagnetic field
- EN 61000-4-4 Rapid transients (burst)
- EN 61000-4-5 Surge voltages
- EN 61000-4-6 conducted disturbances

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han-Smart®, ID CAN, Memory module, Contact surface: Gold plated	09 80 015 0100		
Han-Modular®, Han-Smart®, ID CAN, Network module, Cage-clamp termination, Contact surface: Gold plated		09 80 115 0200	

Modular

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Update module, to update the male module		09 80 115 0201	

Number of contacts

5



Modular

Features

- Surge protection for two pairs of balanced signals
- Protects symmetric signals interfaces with electrical isolation

Technical characteristics

Number of contacts	5
Operating temperature	-40 ... +85 °C
Storage temperature	-40 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP20
Nominal current	0.5 A
Nominal voltage	24 V DC, 24 V AC
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

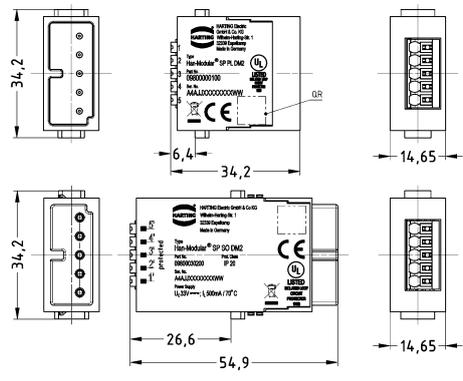
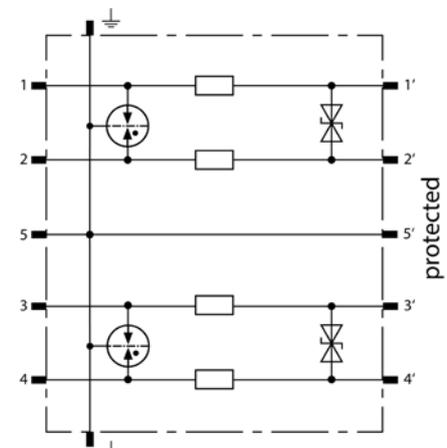
Details

The surge protection module protects up to 2 pairs of balanced signal interfaces with electrical isolation against lightning strikes or overvoltage events.

Preferred field of application is the protection of analogue signal interfaces like for 0/4-20 mA or differential signals.

The equipotential bonding will be led via the earthed hinged frame of the Han-Modular® system.

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Modular®, Han-Smart®, Han-Smart® Surge protection module, Two channels, Differential mode without common reference potential, Push-in-spring-cage termination</p> 	0.25 ... 1.5	09 80 000 0100	09 80 003 0200	  <p>Circuit diagram</p>

Number of contacts

5



Modu-
lar

Features

- Surge protection for four single lines
- Protects signals with common reference potential

Technical characteristics

Number of contacts	5
Operating temperature	-40 ... +85 °C
Storage temperature	-40 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP20
Nominal current	0.5 A
Nominal voltage	24 V DC
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

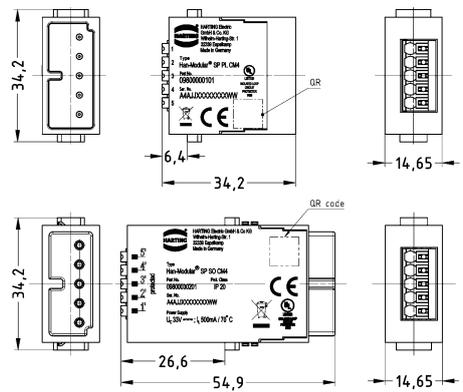
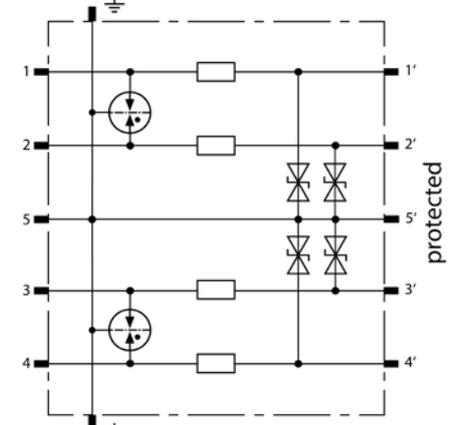
Details

The surge protection module protects up to 4 single lines with common reference potential and unbalanced interfaces against lightning strikes or overvoltages.

Preferred field of application is the protection of digital signals up to 24 VDC with a max load of 0.5 A / line.

The equipotential bonding will be led via the earthed hinged frame of the Han-Modular® system.

Modular

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Modular®, Han-Smart®, Han-Smart® Surge protection module, Four channels, Common reference potential, Push-in-spring-cage termination</p> 	0.25 ... 1.5	09 80 000 0101	09 80 003 0201	  <p>Circuit diagram</p>

Features

- Robust housing
- Compact design saves space
- Modular structure increases flexibility
- Simple and quick assembly
- Two-part hood

Technical characteristics

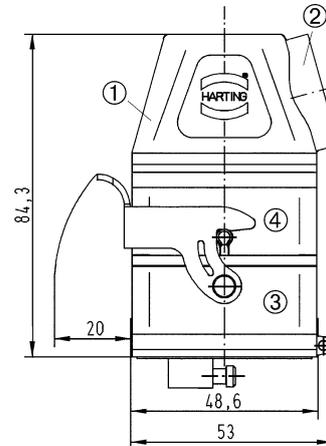
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, in locked position
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal
RoHS	compliant

Details

Conductor cross-section PE 0.5 ... 10 mm²

Details


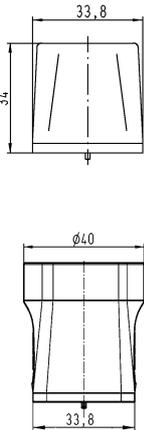


Conductor cross-section 10 mm² only with ferrule crimping tool
09 99 000 0374

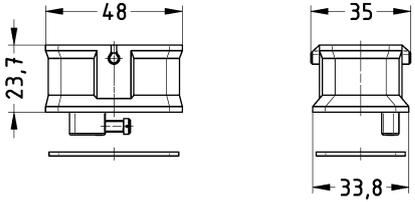
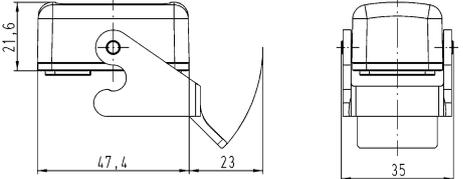


- ① Hood with side entry
- ② Cable entry M25
- ③ Bulkhead mounted housing with locking lever
- ④ Carrier hood

Single locking lever

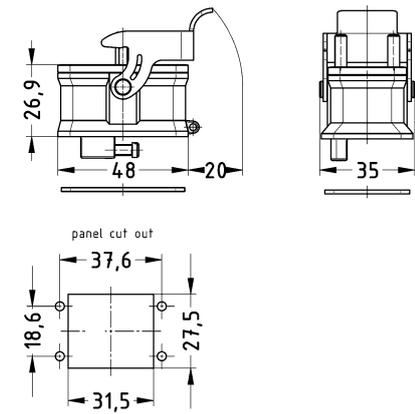
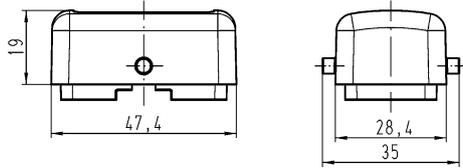
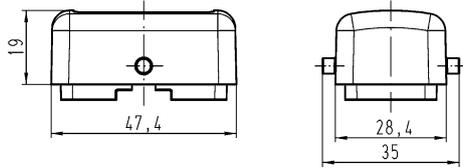

Modular

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
<p>Han-Modular® Compact, Hoods, Top entry, Pack contents: 4 screws are included within the delivery</p> 	<p>1x M25 1x M32</p>	<p>19 14 001 0401 19 14 001 0402</p>		
<p>Han-Modular® Compact, Hoods, Fixing hole for M4 screw, Top entry</p> 	<p>1x M32</p>	<p>19 14 001 0409</p>		
<p>Han-Modular® Compact, Hoods, Side entry, Pack contents: 4 screws are included within the delivery</p> 	<p>1x M25</p>	<p>19 14 001 0501</p>		
<p>Han-Modular® Compact, Hoods, Fixing hole for M4 screw, Side entry</p> 	<p>1x M25</p>	<p>19 14 001 0507</p>		

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Modular® Compact, Carrier hood 		09 14 001 0311	
Han-Modular® Compact, Protection cover, for carrier hoods, Thermoplastic 		09 14 001 5402	

Single locking lever

Modular

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular® Compact, Bulkhead mounted housings</p> 	<p>09 14 001 0301</p>	
<p>Han-Modular® Compact, Bulkhead mounted housings, Fixing hole for M4 screw</p> 	<p>09 14 001 0308</p>	
<p>Han-Modular® Compact, Protection cover, for bulkhead mounted housings, Thermoplastic</p> 	<p>09 14 001 5401</p>	
<p>Fixing bracket</p> 	<p>09 14 000 9947</p>	

Technical characteristics

Material (accessories) Polycarbonate

Technical characteristics

Colour (accessories) Red, Blue, Black, Yellow
RoHS compliant

Identification

Part number

Drawing (dimensions in mm)

Coding element, Red

09 14 000 9971



Coding element, Blue

09 14 000 9972



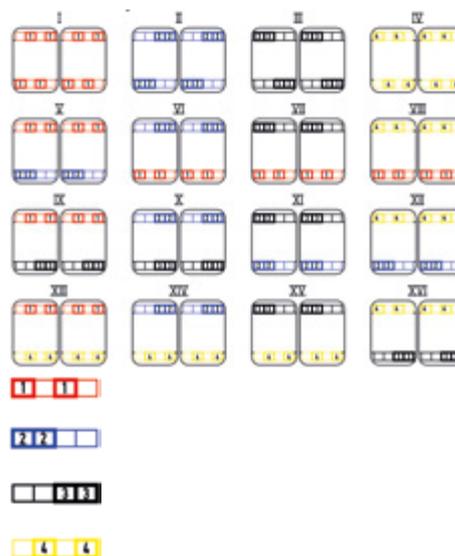
Coding element, Black

09 14 000 9973



Coding element, Yellow

09 14 000 9974



Modular

Features

- Robust housing
- Compact design saves space
- Modular structure increases flexibility
- Simple and quick assembly
- Two-part hood

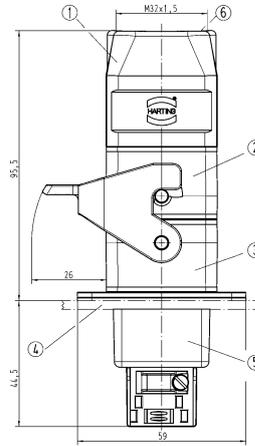
Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Aluminium die-cast, Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material (accessories)	Zinc die-cast
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Details

Conductor cross-section PE 0.5 ... 10 mm²

Conductor cross-section 10 mm² only with ferrule crimping tool 09 99 000 0374



- ① Hood with top entry
- ② Carrier hood
- ③ Bulkhead mounted housing with locking lever
- ④ Switch board panel
- ⑤ Panel feed through housings
- ⑥ Cable entry

Single locking lever



Modular

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Modular® Twin, Hoods, Top entry	1x M20 1x M25 1x M32	19 14 002 0400 19 14 002 0401 19 14 002 0402	
Han-Modular® Twin, Hoods, Side entry	1x M25	19 14 002 0501	
Han-Modular® Twin, Carrier hood		09 14 002 0311	
Han-Modular® Twin, Angled housing, Zinc die-cast	1x M32	09 14 002 0950 19 14 002 0952	
Shielded frame		09 14 000 9924	

Single locking lever



Modular

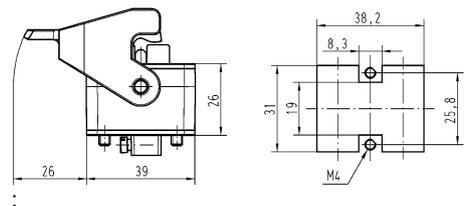
Identification

Part number

Drawing
(dimensions in mm)

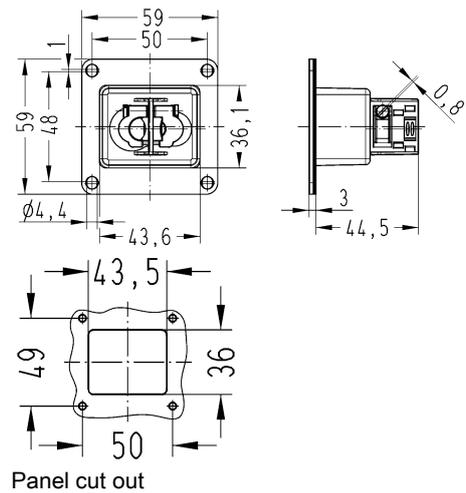
Han-Modular® Twin,
Bulkhead mounted housings,
Han-Easy Lock®

09 14 002 0301



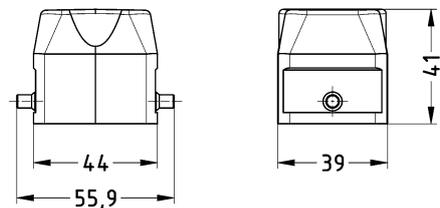
Han-Modular® Twin,
Panel feed through housing,
Zinc die-cast

09 14 000 9928



Han-Modular® Twin,
Protection cover,
for bulkhead mounted housings,
Metal

09 14 002 5401



Features

- Suitable for all Han-Modular® single modules
- The variant with PE connection uses pin 1 of the module as PE
- Slim, space saving construction type
- Low cost plastic hoods and housings

Technical characteristics

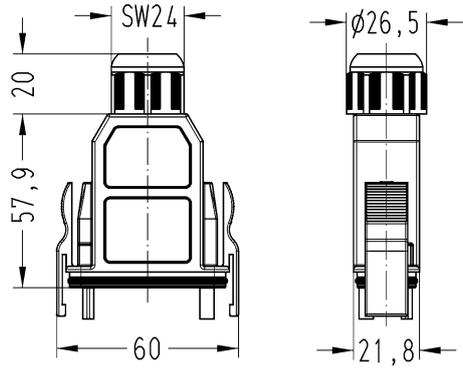
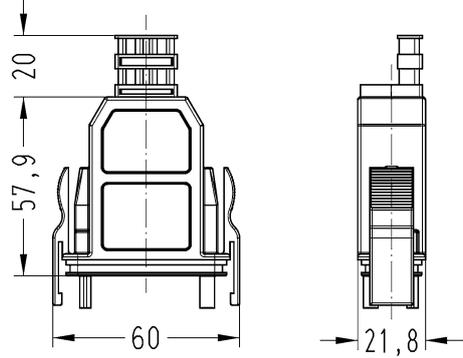
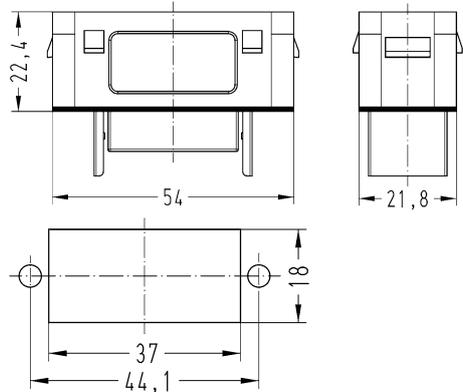
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP20
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey)
Material (seal)	NBR
Material (accessories)	Polycarbonate
Material flammability class acc. to UL 94	V-0
RoHS	compliant

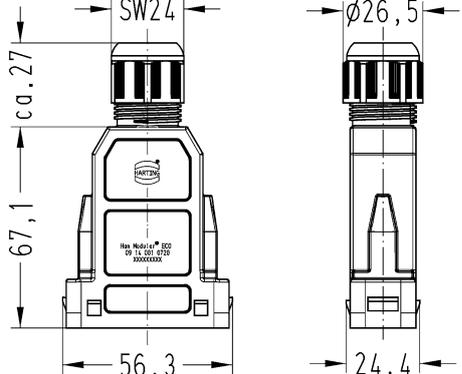
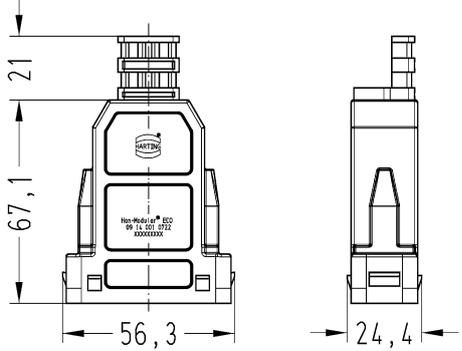
Specifications and approvals

EN 60664-1
IEC 61984

Snap-in latches

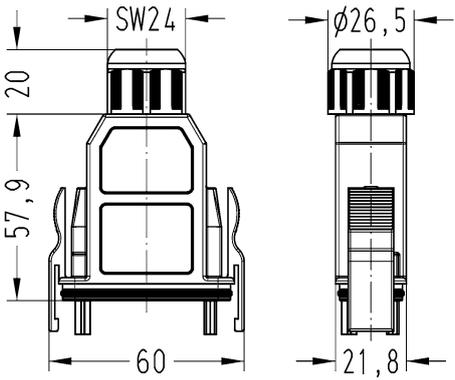
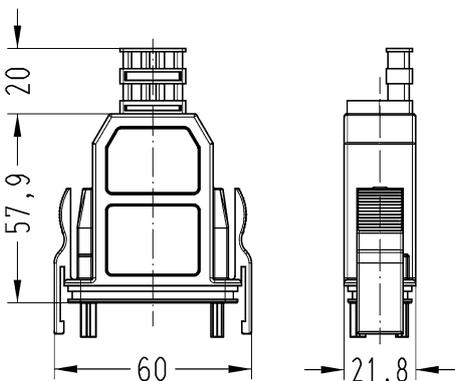
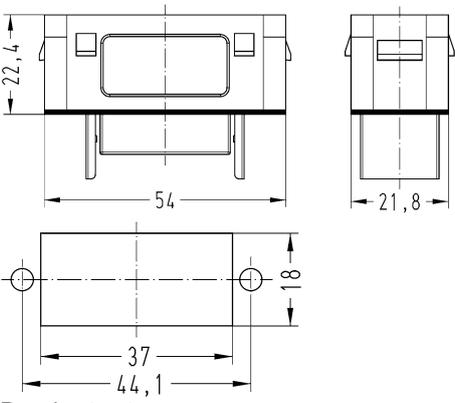
Modular

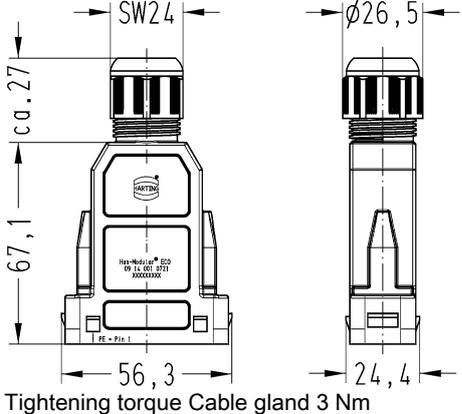
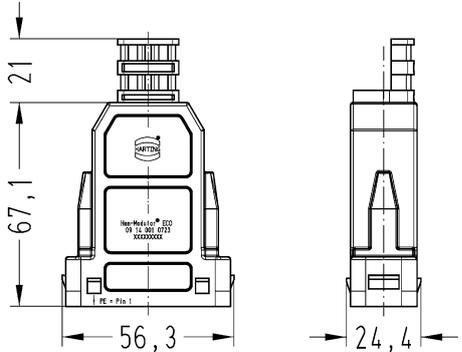
Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Modular® ECO, Hoods, With integrated cable gland, Top entry, IP65</p> 	1x Integrated	6 ... 13	09 14 001 0420	 <p>Tightening torque Cable gland 3 Nm</p>
<p>Han-Modular® ECO, Hoods, Top entry, IP20</p> 	1x	3 ... 14.5	09 14 001 0422	
<p>Han-Modular® ECO, Bulkhead mounted housings</p> 			09 14 001 0320	 <p>Panel cut out</p>

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Modular® ECO, Cable to cable housing, With integrated cable gland, Top entry, IP65</p> 	<p>1x Integrated</p>	<p>6 ... 13</p>	<p>09 14 001 0720</p>	 <p>Tightening torque Cable gland 3 Nm</p>
<p>Han-Modular® ECO, Cable to cable housing, Top entry, IP20</p> 	<p>1x</p>	<p>3 ... 14.5</p>	<p>09 14 001 0722</p>	
<p>Han-Modular®, Coding element, Pack contents: 8 pieces per frame</p> 			<p>09 14 000 9929</p>	

Snap-in latches

Modular

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Modular® ECO, Hoods, With PE identification (pin 1 = PE), With integrated cable gland, Top entry, IP65</p> 	1x Integrated	6 ... 13	09 14 001 0421	 <p>Tightening torque Cable gland 3 Nm</p>
<p>Han-Modular® ECO, Hoods, With PE identification (pin 1 = PE), Top entry, IP20</p> 	1x	3 ... 14.5	09 14 001 0423	
<p>Han-Modular® ECO, Bulkhead mounted housings, With PE identification (pin 1 = PE)</p> 			09 14 001 0321	 <p>Panel cut out</p>

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Modular® ECO, Cable to cable housing, With PE identification (pin 1 = PE), With integrated cable gland, Top entry, IP65</p> 	<p>1x Integrated</p>	<p>6 ... 13</p>	<p>09 14 001 0721</p>	 <p>Tightening torque Cable gland 3 Nm</p>
<p>Han-Modular® ECO, Cable to cable housing, With PE identification (pin 1 = PE), Top entry, IP20</p> 	<p>1x</p>	<p>3 ... 14.5</p>	<p>09 14 001 0723</p>	
<p>Han-Modular®, Coding element, Pack contents: 8 pieces per frame</p> 			<p>09 14 000 9929</p>	



Features

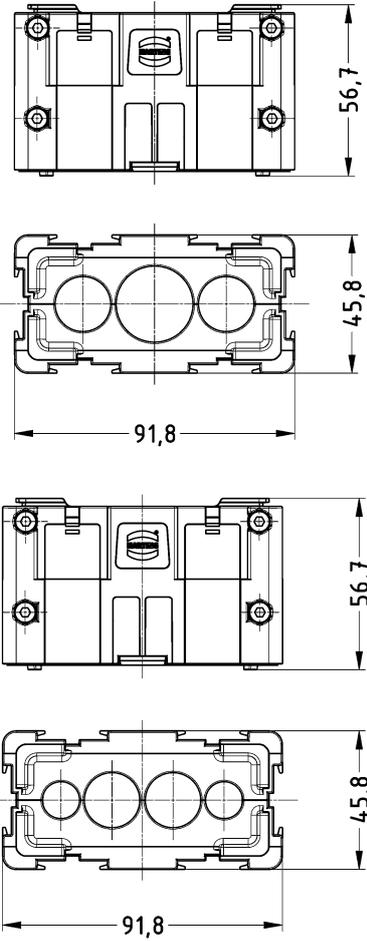
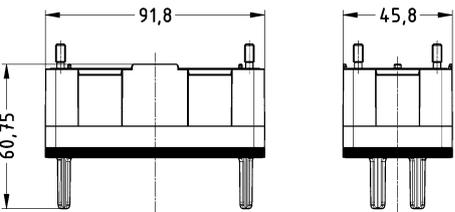
- Fast, easy and secure assembly
- Flexible building block system
- Suitable for Han-Modular® modules
- Over 100 modules available

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP54
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Colour (seal)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0

Specifications and approvals

IEC 61984
EN 45545-1 R22: HL1, HL2

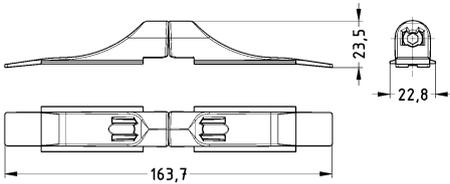
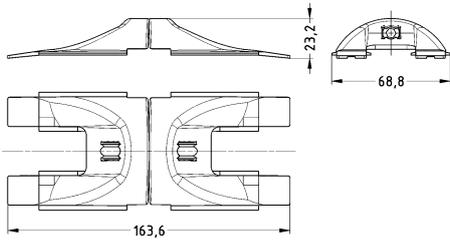
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Hoods, Top entry 	3x 4x	5 ... 24 4 ... 16	09 14 000 8013 09 14 000 8014	
Carrier hood, for 4 modules 			09 14 004 8001	

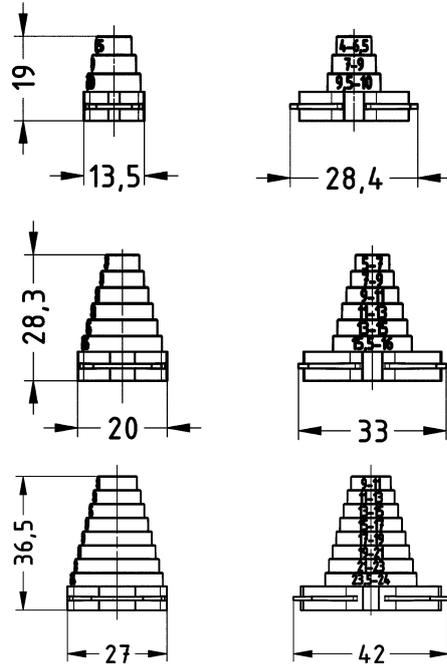
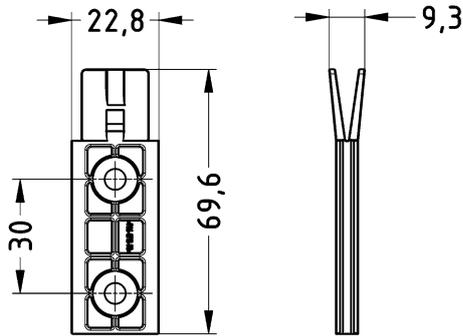
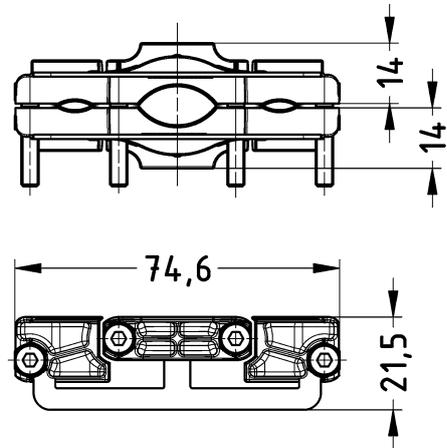
Technical characteristics

Material (seal)	NBR
Colour (seal)	RAL 9005 (jet black)
Material (locking)	Polyamide, Fibre-glass reinforced

Technical characteristics

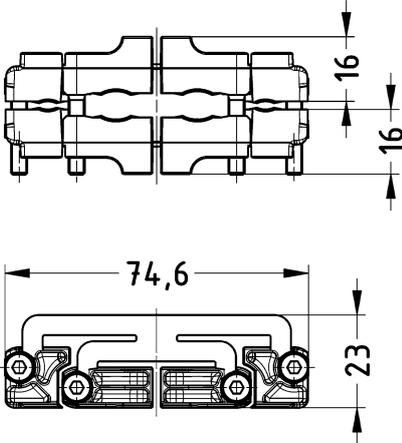
Colour (locking)	RAL 9005 (jet black)
Material (accessories)	Polyamide, Fibre-glass reinforced
Colour (accessories)	RAL 9005 (jet black)

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Locking element, Single 		09 14 000 8021	
Locking element, Double 		09 14 000 8022	

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Cable seal</p> 	<p>4 ... 10 5 ... 16 9 ... 24</p>	<p>09 14 000 8100 09 14 000 8200 09 14 000 8300</p>	
<p>Fixing, for the combination of two Flexboxes and for mounting the Flexbox</p> 		<p>09 14 000 8020</p>	
<p>Strain relief, 3 cable entries</p> 		<p>09 14 000 8033</p>	

Modular

Modular

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Strain relief, 4 cable entries</p> 		09 14 000 8034	

Features

- Blind mating connector system for drawer systems
- Highest flexibility due to a product range of over 100 connector modules
- Direct panel mounting without hoods and housings
- Leading centring system compensates for tolerances of +/- 2 mm
- Compatible with HMC components for 10.000 mating cycles

Technical characteristics

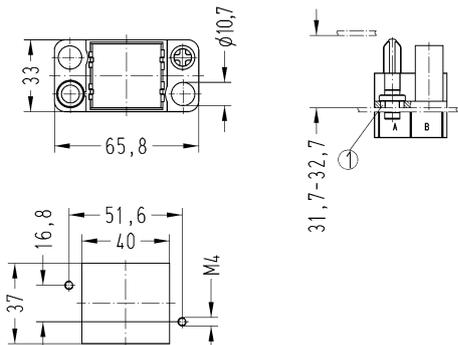
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Degree of protection acc. to IEC 60529	IP20
Lock-in range	±4 mm
Material (frames)	Polycarbonate
Material (accessories)	Zinc die-cast
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

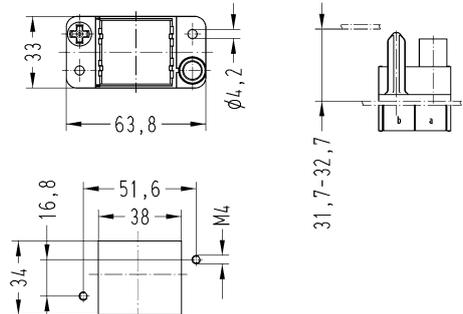
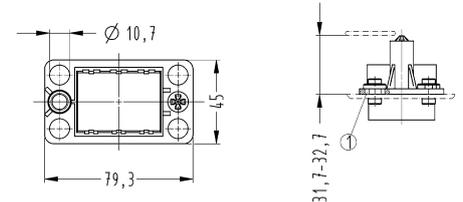
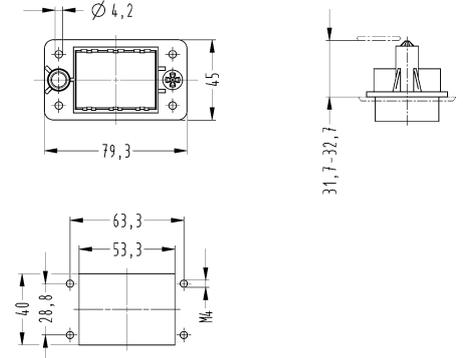
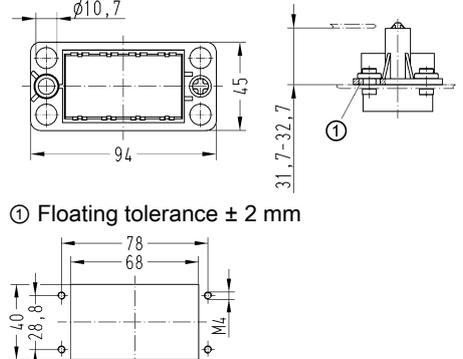
EN 60664-1
IEC 61984

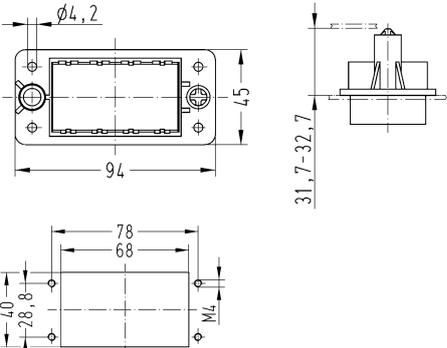
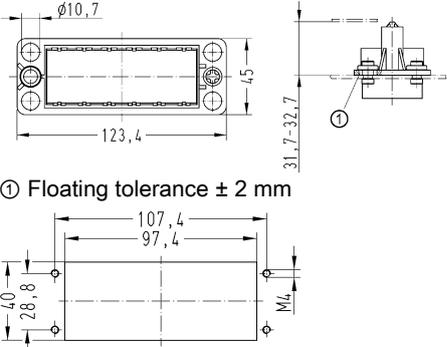
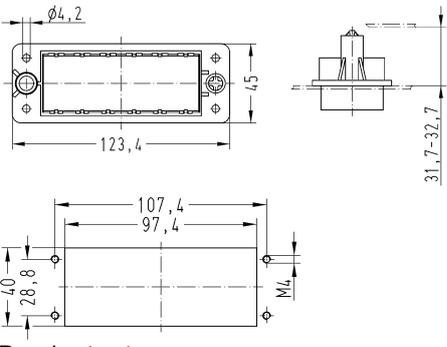
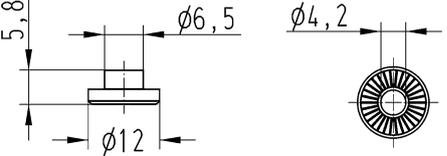
Details

The docking frame has no PE contact as it is not required in many drawer system applications.

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Docking frame, Float mount, for 2 modules, A ... B</p> 	<p>09 14 006 1701</p>	 <p>① Floating tolerance ± 2 mm Panel cut out</p>

Modular

Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Docking frame, Fixed, for 2 modules, a ... b		09 14 006 1711  Panel cut out
Han-Modular®, Docking frame, Float mount, for 3 modules, A ... C		09 14 010 1701  ① Floating tolerance ± 2 mm
Han-Modular®, Docking frame, Fixed, for 3 modules, a ... c		09 14 010 1711  Panel cut out
Han-Modular®, Docking frame, Float mount, for 4 modules, A ... D		09 14 016 1701  ① Floating tolerance ± 2 mm Panel cut out

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Docking frame, Fixed, for 4 modules, a ... d</p> 	09 14 016 1711	 <p>Panel cut out</p>
<p>Han-Modular®, Docking frame, Float mount, for 6 modules, A ... F</p> 	09 14 024 1701	 <p>① Floating tolerance ± 2 mm</p> <p>Panel cut out</p>
<p>Han-Modular®, Docking frame, Fixed, for 6 modules, a ... f</p> 	09 14 024 1711	 <p>Panel cut out</p>
<p>Han-Modular®, Float washer To enable the frame to be float mounted using standard M4 fixing screws</p>	09 14 000 9936	

Technical characteristics

Limiting temperature -40 ... +125 °C
 Degree of protection acc. to IEC IP20
 60529

Technical characteristics

Material (accessories) Thermoplastic
 Material flammability class acc. to UL 94 V-0

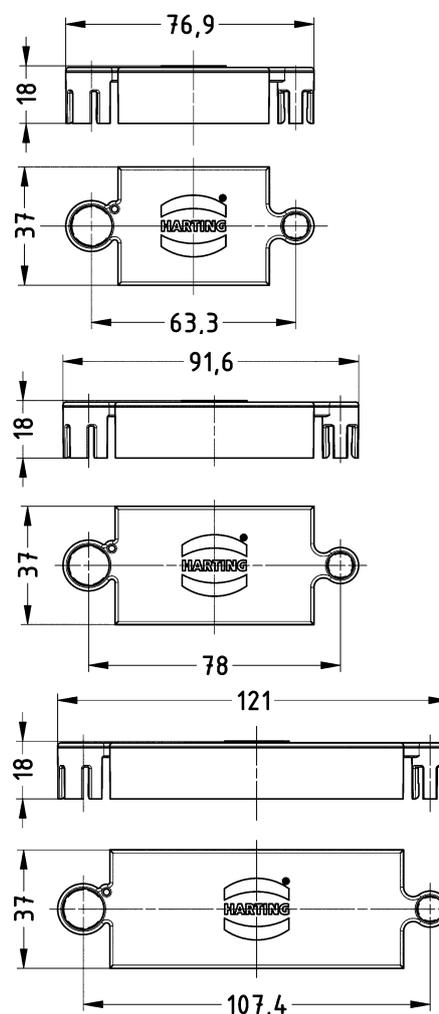
Identification	Size	Part number	Drawing (dimensions in mm)
----------------	------	-------------	----------------------------

Han-Modular®,
 Dust protection cover,
 for Han-Modular® plastic docking frame



10 B
 16 B
 24 B

09 14 010 5701
 09 14 016 5701
 09 14 024 5701



Features

- Blind mating connector system for drawer systems with test position
- Direct panel mounting without hoods and housings
- Solid leading guide pins and bushes
- Suitable for many modules of the Han-Modular® product series (Please contact your HARTING salesman for support to find your specific combination.)

Technical characteristics

Limiting temperature	-5 ... +55 °C
Mating cycles	≥500
Lock-in range	±4 mm
Material (frames)	Polycarbonate
Material (accessories)	Zinc die-cast
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984

Details

Due the plastic material used in the docking frame without PE, the panel will need to be grounded separately.

Details



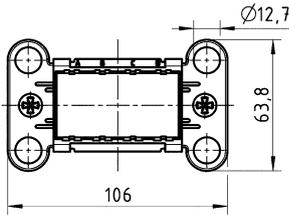
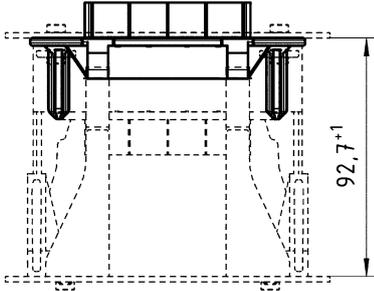
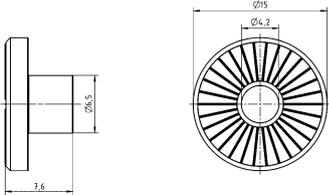
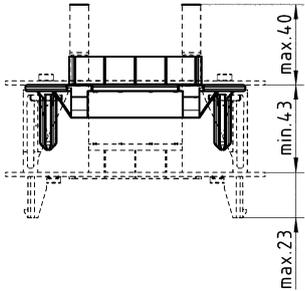
Position unmated
The drawer system and the modules are not mated.



Test position
The drawer system is in the so called test position – the modules are mated.



Working position
The drawer system is pushed completely into the rack – the modules remain mated.

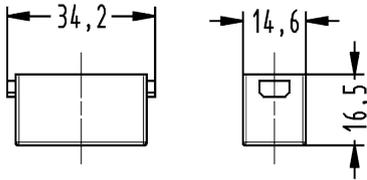
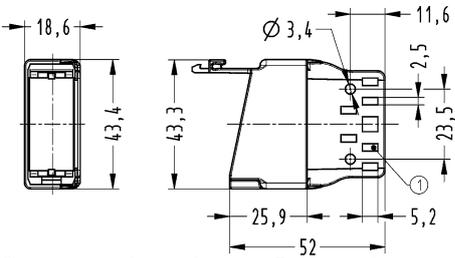
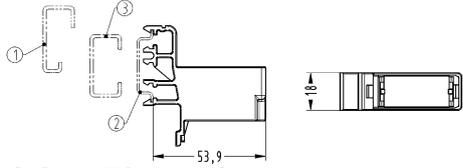
Identification	Part number	Drawing (dimensions in mm)
<p>Sliding frame, with test position, for 4 modules, Float mount, A ... D</p> 	09 14 016 1721	 <p>Technical drawing showing a top view of the sliding frame with test position. Dimensions: $\text{Ø}12,7$ (hole diameter), 63,8 (width), and 106 (length).</p>
<p>Sliding frame, with test position, for 4 modules, Movable side, a ... d</p> 	09 14 016 1731	 <p>Technical drawing showing a side view of the sliding frame with test position, movable side. Dimension: 92,7⁺¹ (height).</p>
<p>Han-Modular®, Float washer To enable the Sliding Frame to be float mounted using standard M4 fixing screws</p>	09 14 000 9986	 <p>Technical drawing showing a side view and a top view of the Han-Modular float washer. Side view dimensions: 7,6 (width), $\text{Ø}6,5$ (height). Top view dimensions: $\text{Ø}15$ (outer diameter), $\text{Ø}4,2$ (inner diameter).</p>
<p>Rail guide, for sliding frames for movable side</p> 	09 14 000 9987	 <p>Technical drawing showing a side view of the rail guide. Dimensions: max. 4,0 (height), min. 4,3 (height), max. 2,3 (width).</p>

Technical characteristics

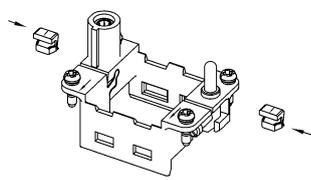
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (locking)	Polycarbonate

Technical characteristics

Material (accessories)	Stainless steel, Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Han® Dummy module</p> 	09 14 000 9950	
<p>Han-Modular®, Module locking system, With strain relief, Pack contents: 1 module locking system</p> 	09 14 000 0312	 <p>① For cable ties with max. 5 mm width</p>
<p>Han-Modular®, Module locking system, for rail, Pack contents: 1 module locking system</p> 	09 14 000 0313	 <p>① G-rail IEC 60715-G32 ② Rail IEC 60715-35 x 7.5 with 1 mm thickness or -35 x 15 with 1.5 mm thickness ③ C-rail IEC 60715-C30</p>
<p>Han® HPR enlarged, Frame, for up to 6 single modules, A ... F, Pack contents: 2x M4 screw, 2x washer SK S4, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 	09 11 000 9945	

Modular

Identification	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for up to 6 single modules, a ... f,</p> <p>Pack contents: 2x M4 screw, 2x washer SK S4, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p>	<p>09 11 000 9946</p>	
<p>Han-Modular®, Fixing, for Han-Modular® hinged frames,</p> <p>Pack contents: 20 pieces per frame</p>	<p>09 14 000 9960</p>	 <p>to fix the pre-assembled hinged frames</p>



Modular

Features

- Applicable as a guiding element for electrical power and signal modules in the Han-Modular® hinged frame plus
- Considerable time saving assembly compared to conventional guide pins / bushes
- Colour coding with 6 different colours

Technical characteristics

Limiting temperature	-40 ... +125 °C
Material (accessories)	Polycarbonate
Colour (accessories)	Grey, Red, Blue, Black, Yellow, Green
Material flammability class acc. to UL 94	V-0

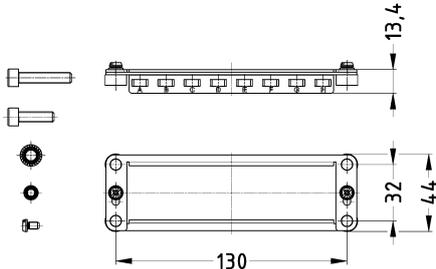
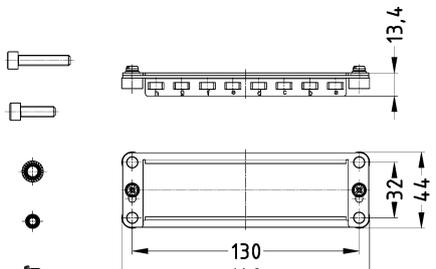
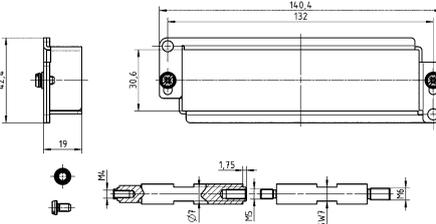
Identification		Part number	Drawing (dimensions in mm)
Han-Modular®, Guide element, for Han-Modular® hinged frames	Black	09 14 000 9993	
	Blue	09 14 000 9992	
	Green	09 14 000 9995	
	Grey	09 14 000 9990	
	Red	09 14 000 9991	
	Yellow	09 14 000 9994	

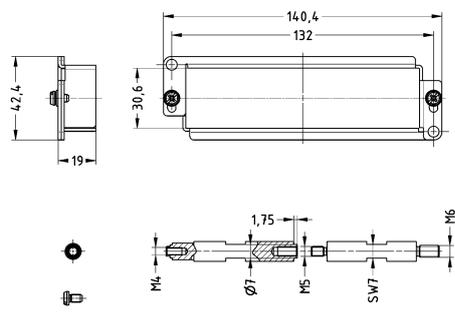
Technical characteristics

Material (accessories) Stainless steel

Technical characteristics

RoHS compliant

Identification	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for up to 8 single modules, A ... H, Pack contents: 2x M4 screw, 2x washer SK S4, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 	<p>09 11 000 9935</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for up to 8 single modules, a ... h, Pack contents: 2x M4 screw, 2x washer SK S4, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 	<p>09 11 000 9936</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for up to 8 single modules, A ... H, Pack contents: 2x M4/M5 distance bolts (A/F 7), 2x M5/M6 distance bolts (A/F 7), 4x M4 screw, 4x washer SK S4</p> 	<p>09 40 024 9931</p>	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm</p>

Identification	Part number	Drawing (dimensions in mm)
<p>Han® HPR EasyCon, Frame, for up to 8 single modules, a ... h,</p> <p>Pack contents: 2x M4/M5 distance bolts (A/F 7), 2x M5/M6 distance bolts (A/F 7), 4x M4 screw, 4x washer SK S4</p> 	<p>09 40 024 9932</p>	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm</p>

Modu-
lar

Technical characteristics

Material (accessories)	Zinc die-cast
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Details

PE connection (0.75 ... 2.5 mm²) with cable shoe

Identification

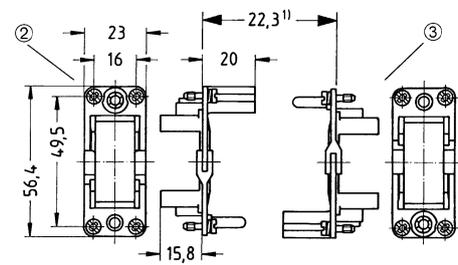
Frame,
for 1 module,
In housing Han® 10 A



Part number

09 14 000 0304

Drawing (dimensions in mm)



- ① Distance max. 23.5 mm
- ② Hood
- ③ Housing

Technical characteristics

Material (contacts) Copper alloy

Technical characteristics

RoHS compliant

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
----------------	--	-------------	----------------------------

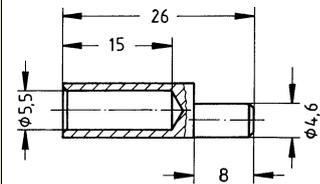
Han-Modular®,
Cable shoe,
for PE extension



for hoods/housings high construction only

16

09 14 000 9912



Please use pressing tools for non-insulated cable shoes following DIN 46230 with 16 mm² range (eg. K25, co. Klauke)

Contents

Page

Han® HsB

Han 07.2

Han
HsB

Features

- Screw termination with wire protection
- Suitable for power supply applications
- Termination with standard screw driver

Technical characteristics

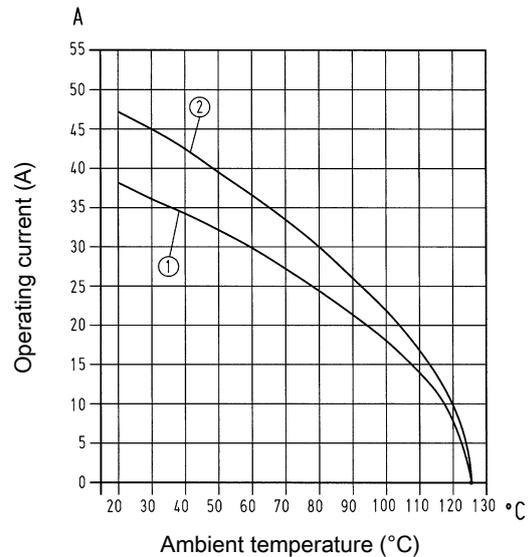
Number of contacts	6, 12
Rated current	35 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 4 mm²
 ② Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390

Number of contacts

6+

35 A 400/690 V 6 kV 3
35 A 500 V 6 kV 3

Han
HsB

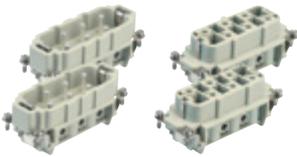
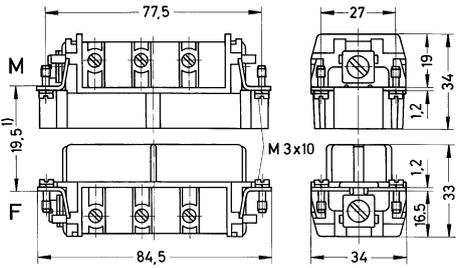
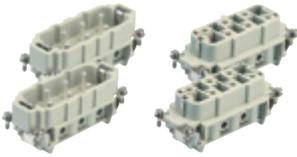
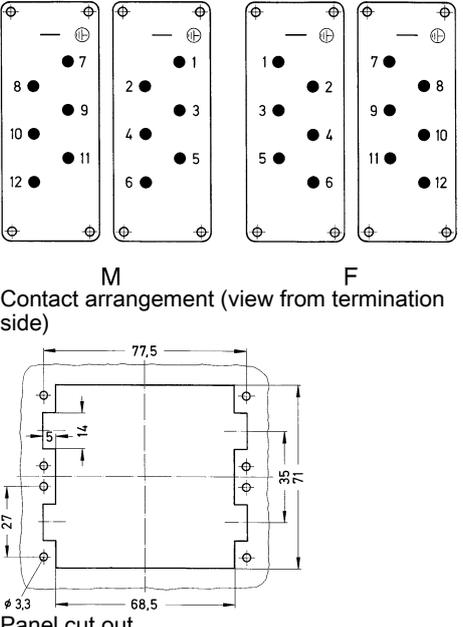
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® HsB, Screw termination, With wire protection, Contact surface: Silver plated 	1.5 ... 6	09 31 006 2601	09 31 006 2701	<p>1) distance for contact max. 21 mm Tightening torque Clamping screw 1.2 Nm</p> <p>M F Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

12+

35 A 400/690 V 6 kV 3
35 A 500 V 6 kV 3

Han
HsB

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® HsB, Screw termination, With wire protection, 1 ... 6</p> <p>Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	1.5 ... 6	09 31 006 2601	09 31 006 2701	 <p>1) distance for contact max. 21 mm Tightening torque Clamping screw 1.2 Nm</p>
<p>Han® HsB, Continuing marking, Screw termination, With wire protection, 7 ... 12</p> <p>Contact surface: Silver plated</p>  <p>You need two inserts for a complete assembly!</p>	1.5 ... 6	09 31 006 2611	09 31 006 2711	 <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Contents	Page
Han D® AV	Han 08.4
Han D® AV distributor	Han 08.9
Han E® AV	Han 08.11
Han® ES AV	Han 08.20
Accessories	Han 08.25

Han AV

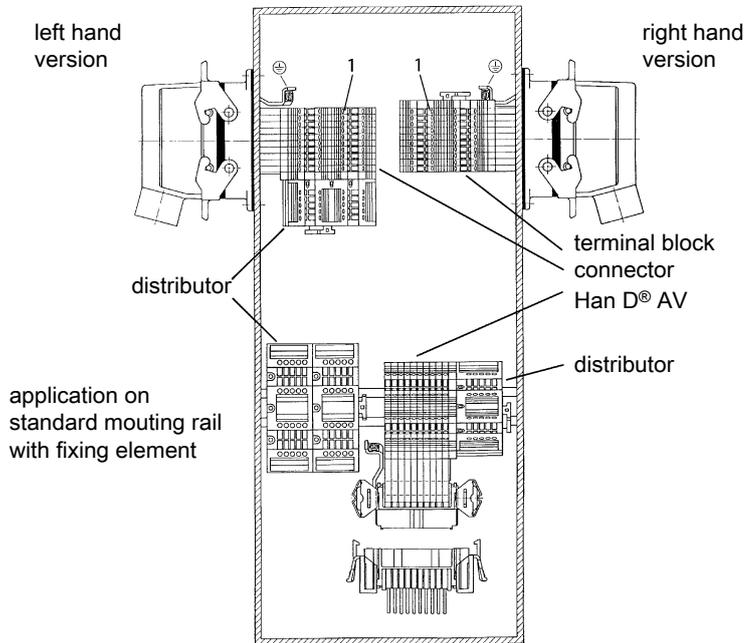
Arrangement in switch cabinet

Terminal block connector in left or right hand version; therefore identical pre-assembled interface cables can be used on both sides.

For application inside of a switch cabinet, on standard mounting rails in conjunction with Han Snap[®]

Mount the distributor on a standard mounting rail or on the terminal block connector Han D[®] AV!

The terminal block connectors can be supplied for left or right hand applications so that the PE terminal as well as the terminal for contact no. 1 will be accessible from the "top" in both types of installation.

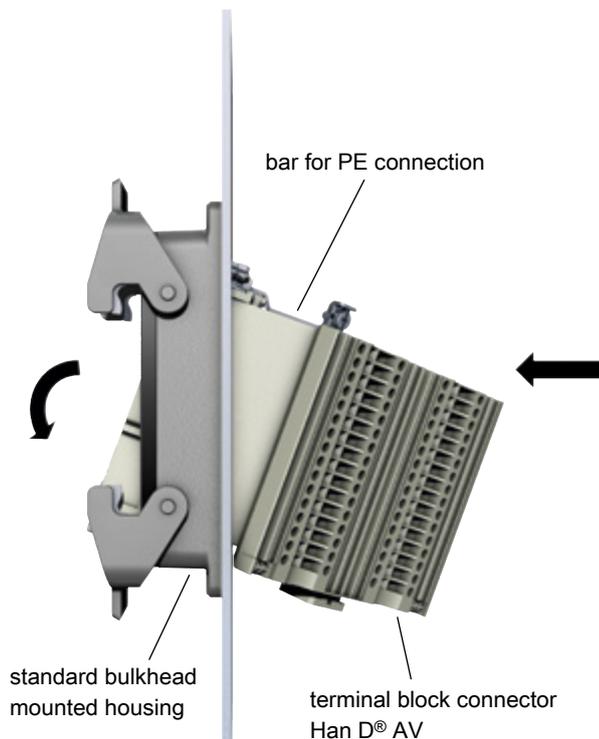


Assembly of terminal block connector

A separate pre-assembly is possible: Therefore, the distributor must be thread from the inside of the switch cabinet into the standard bulkhead mounted housing.

Note:

On one side of the distributor is a bar for PE connection. Insert the distributor – slightly inclined, the side without the PE conductor leading – from the rear into the bulkhead mounted housing!



Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Counterparts

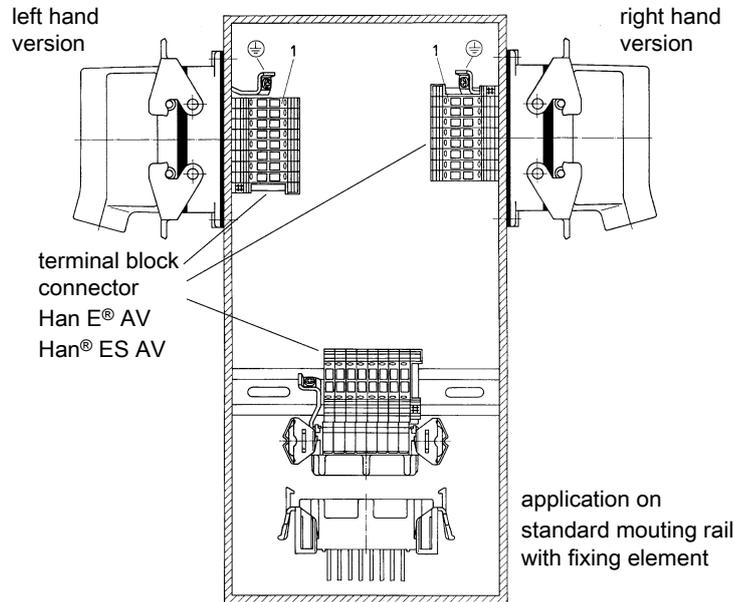
For suitable mating inserts of serie Han D[®] with crimp termination please refer to the chapter 02.

Arrangement in switch cabinet

Terminal block connector in left or right hand version; therefore identical pre-assembled interface cables can be used on both sides.

For application inside of a switch cabinet, on standard mounting rails in conjunction with Han Snap[®]

The terminal block connectors can be supplied for left or right hand applications so that the PE terminal as well as the terminal for contact no. 1 will be accessible from the “top” in both types of installation.



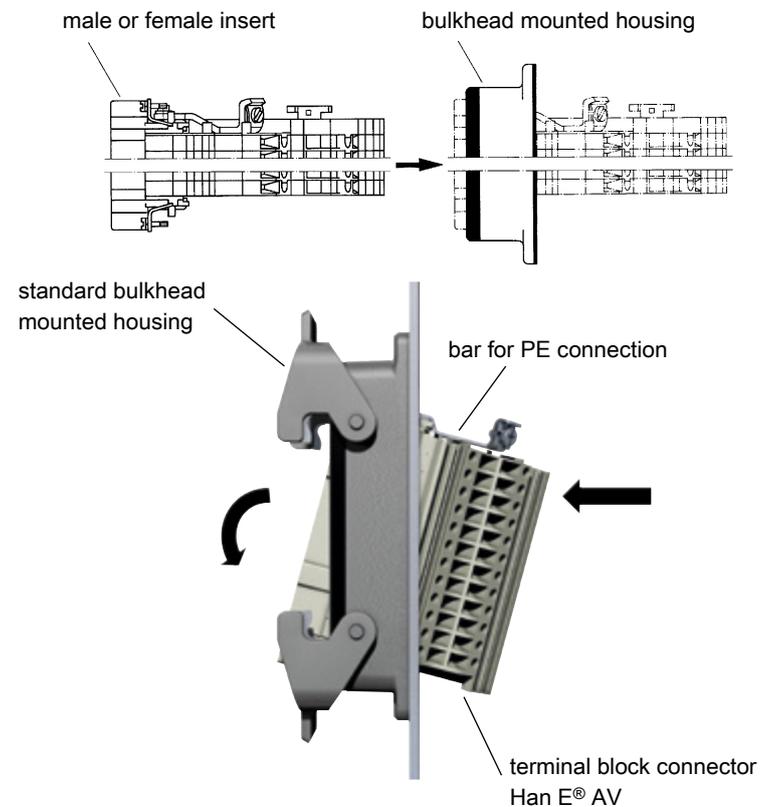
Assembly of terminal block connector

The terminal block connector is inserted into the standard bulkhead mounted housing and fastened – like any standard contact insert – with four fixing screws.

A separate pre-assembly is possible with Han E[®] AV and Han[®] ES AV, in the variants with 16 and 24 poles. Therefore, the distributor must be thread from the inside of the switch cabinet into the standard bulkhead mounted housing.

Note:

On one side of the distributor is a bar for PE connection. Insert the distributor – slightly inclined, the side without the PE conductor leading – from the rear into the bulkhead mounted housing!



Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Counterparts

For suitable mating inserts of series Han E[®] and Han[®] ES with screw, cage-clamp or crimp termination please refer to the chapter 03.

Features

- for left or right hand applications available
- PE and connecting terminal for contact no.1 are at the top in both types of installation
- Mountable in standard bulkhead mounted housings and on standard rails by using of fixing elements
- Screw termination with wire protection

Technical characteristics

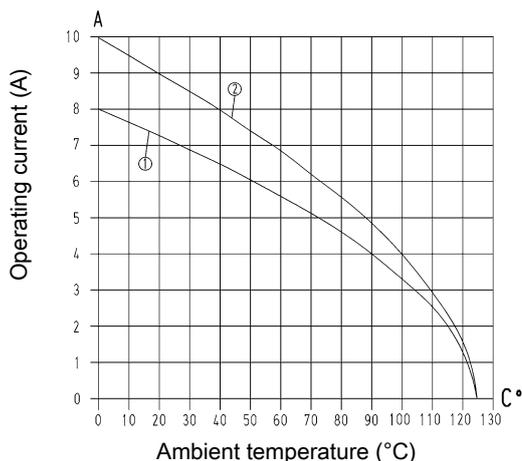
Number of contacts	40, 64
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤4 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

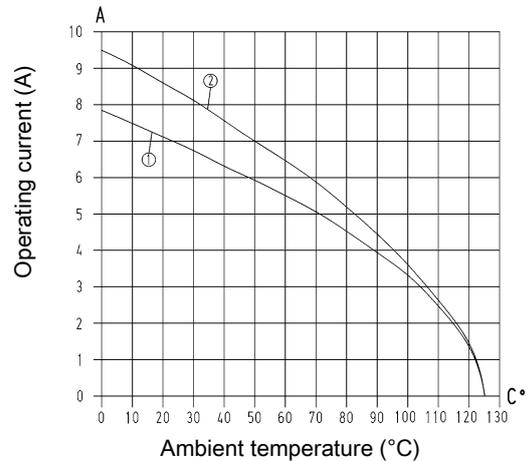
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han[®] 40 D AV Conductor cross-section 0.75 mm²
- ② Han[®] 40 D AV Conductor cross-section 1.5 mm²

Derating



- ① Han[®] 64 D AV Conductor cross-section 0.75 mm²
- ② Han[®] 64 D AV Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Stripping length 8 ... 11 mm

Tightening torque 0.5 Nm

Hoods/Housings see chapter 31

Identification strips

Multi contour (MK) the following identification strips may be used

- ♦ HARTING – 09 21 000 9971
- ♦ Murrplastik – KPX 5/10-5
- ♦ Weidmüller – DEK 5
- ♦ Phoenix – 4 K – DST 5
- ♦ Phoenix – DS 5
- ♦ Phoenix – ZB 5
- ♦ WAGO – WSB 5

Single contour (SK) the following identification strips may be used

- ♦ Murrplastik – KWI 5/10
- ♦ Murrplastik – KWI 5/10-5
- ♦ Murrplastik – KWI 8.6-5
- ♦ Wieland – 9705 A 5/10
- ♦ WAGO – Mini - WSB

Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Number of contacts

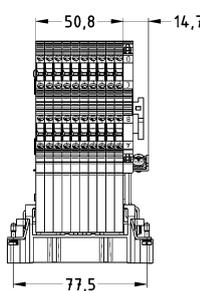
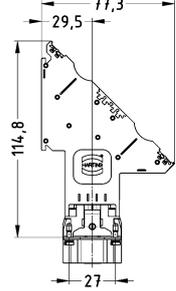
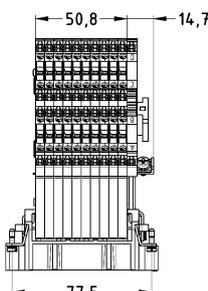
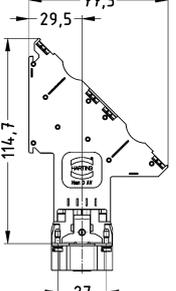
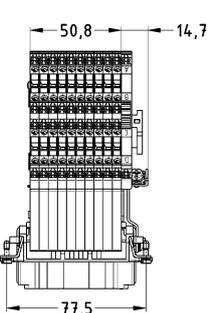
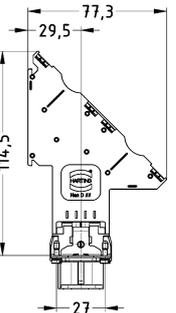
40+

10 A 250 V 4 kV 3

Han AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han D® AV, Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 21 040 4601	09 21 040 4701		
<p>Han D® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 21 040 4602	09 21 040 4702		

Han AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han D[®] AV, Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 21 040 4611	09 21 040 4711		
<p>Han D[®] AV, Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 21 040 4612	09 21 040 4712		
					


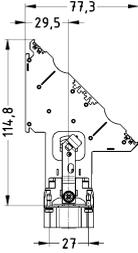

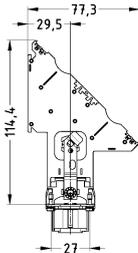

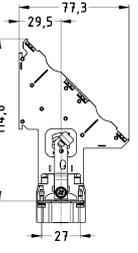

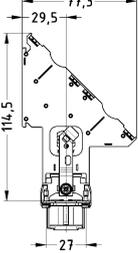
Number of contacts

64+

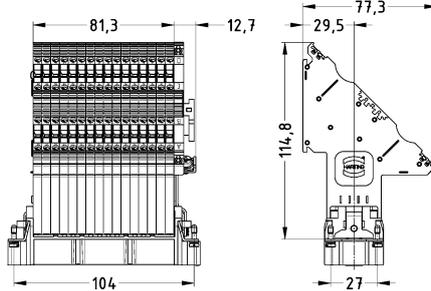
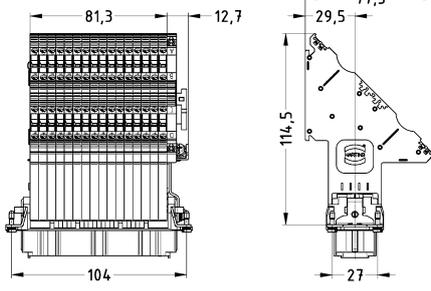
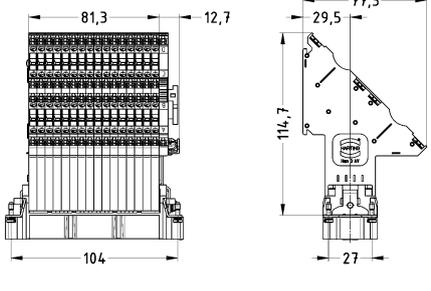
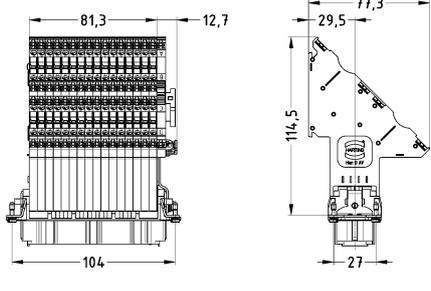


10 A 250 V 4 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han D [®] AV, Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 21 064 4601	09 21 064 4701		
					
Han D [®] AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 21 064 4602	09 21 064 4702		
					

Han AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D® AV, Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 21 064 4611	09 21 064 4711	
<p>Han D® AV, Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 21 064 4612	09 21 064 4712	
				
				

Features

- Easy mounting direct adjacent to terminal block connector Han D[®] AV
- By using of fixing elements mountable on standard rails
- Screw termination with wire protection

Technical characteristics

Rated current	16 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	not compliant, compliant

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Stripping length 8 ... 11 mm

Tightening torque 0.5 Nm

Identification strips

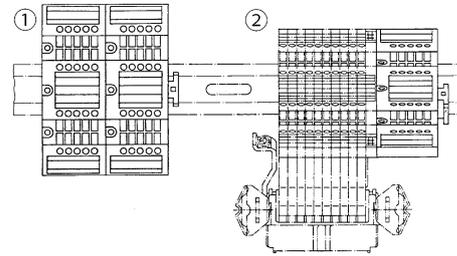
the following identification strips may be used

- ♦ HARTING – 09 21 000 9971
- ♦ Murrplastik – KPX 5/10-5
- ♦ Phoenix – 4 K – DST 5
- ♦ Phoenix – ZB 5
- ♦ Phoenix – DS 5

Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Mounting example



- ① Distributor On standard rail
- ② Distributor With terminal block connector Han D[®] AV

16 A 400/690 V 6 kV 3

Han
AV

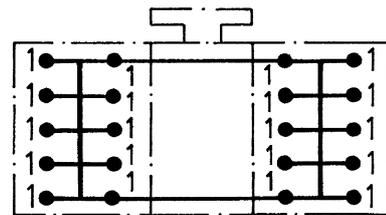


Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
----------------	--	-------------	----------------------------

Han D[®] AV, Distributor, 20 termination points, Screw termination, Contact surface: Tin plated, Optionally mountable to terminal block connectors

0.2 ... 2.5

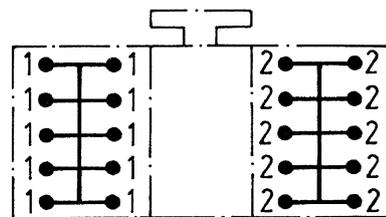
09 42 020 0111



Han D[®] AV, Distributor, 2 x 10 termination points, Screw termination, Contact surface: Tin plated, Optionally mountable to terminal block connectors

0.2 ... 2.5

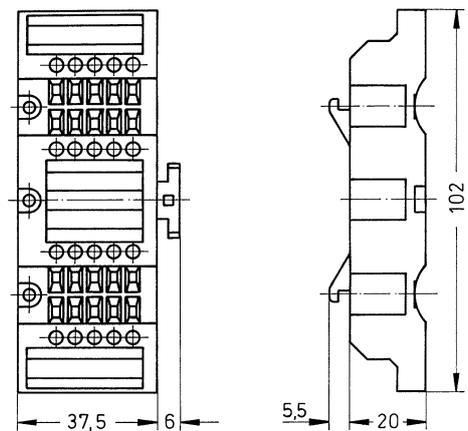
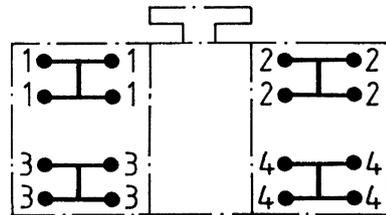
09 42 020 0121



Han D[®] AV, Distributor, 4x 4 termination points, Screw termination, Contact surface: Tin plated, Optionally mountable to terminal block connectors

0.2 ... 2.5

09 42 020 0131



Features

- for left or right hand applications available
- PE and connecting terminal for contact no.1 are at the top in both types of installation
- Mountable in standard bulkhead mounted housings and on standard rails by using of fixing elements
- Screw termination with wire protection

Technical characteristics

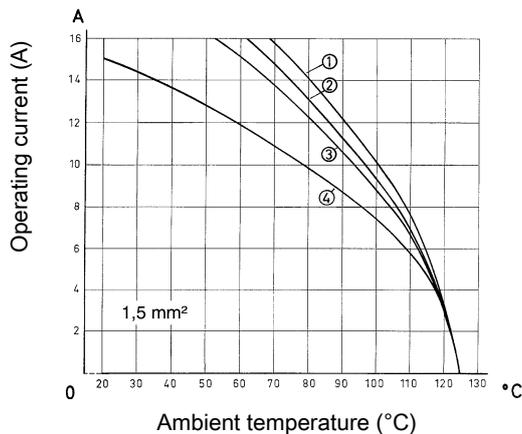
Number of contacts	6, 10, 16, 24
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 4 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

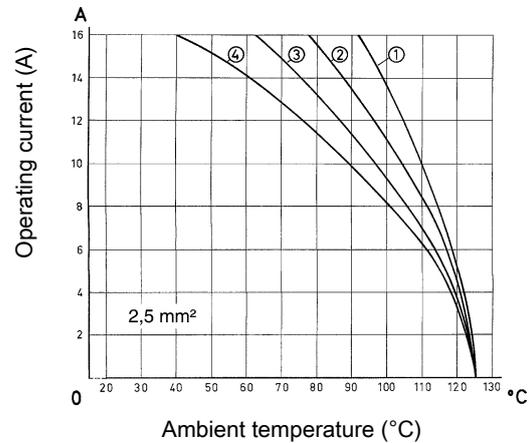
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han[®] 6 E AV
- ② Han[®] 10 E AV
- ③ Han[®] 16 E AV
- ④ Han[®] 24 E AV

Derating



- ① Han[®] 6 E AV
- ② Han[®] 10 E AV
- ③ Han[®] 16 E AV
- ④ Han[®] 24 E AV

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Stripping length 8 ... 11 mm

Tightening torque 0.5 Nm

Identification strips

Multi contour (MK) the following identification strips may be used

- ♦ HARTING 6 x 10 – 09 33 000 9971
- ♦ Murrplastik – KPX 6 / 10
- ♦ Weidmüller – DEK 6.5
- ♦ Phoenix – 4 K – DST 6

Single contour (SK) the following identification strips may be used

- ♦ Murrplastik – KWI 6/10
- ♦ Wieland – 9705 A/6.7

Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

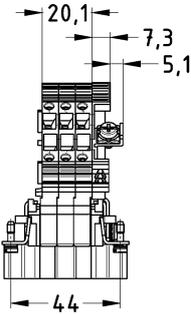
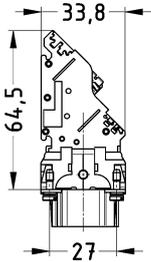
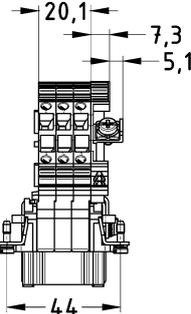
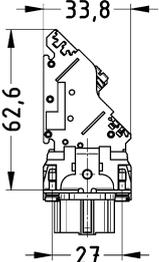
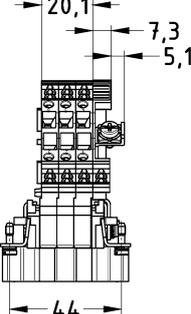
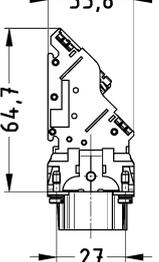
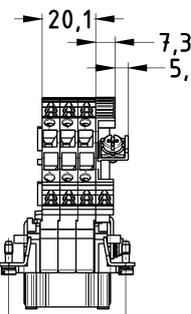
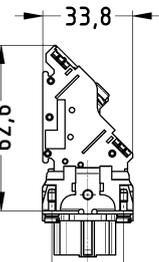
Number of contacts

6+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han E® AV, Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 006 4625	09 33 006 4725		
<p>Han E® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 006 4626	09 33 006 4726		
<p>Han E® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 006 4626	09 33 006 4726		
<p>Han E® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 006 4626	09 33 006 4726		





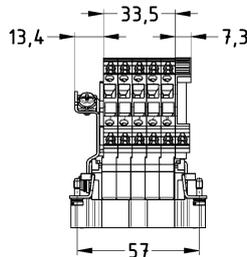

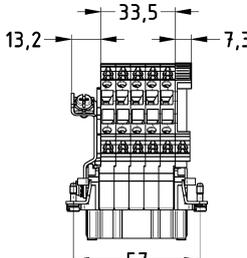

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han E® AV, Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 33 006 4635	09 33 006 4735		
<p>Han E® AV, Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 33 006 4636	09 33 006 4736		
					
					

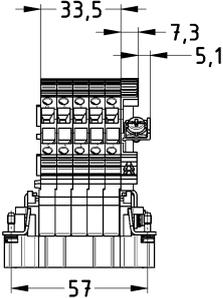
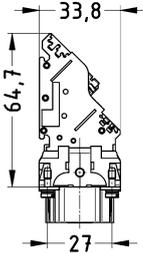
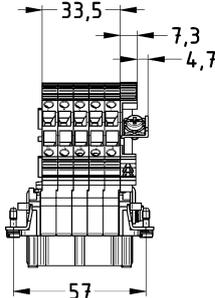
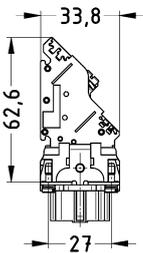
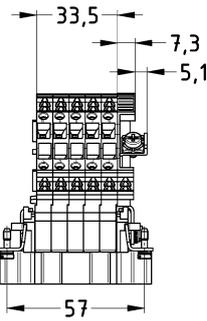
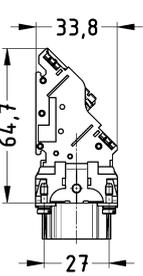
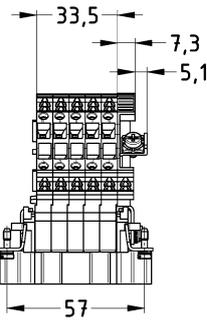
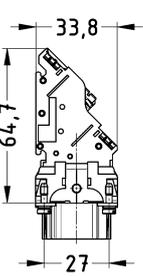
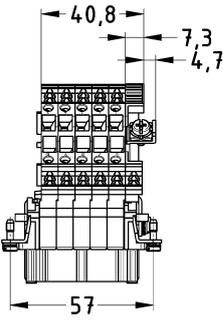
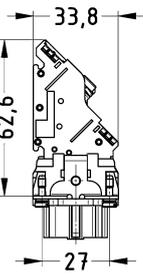
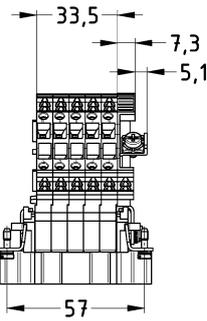
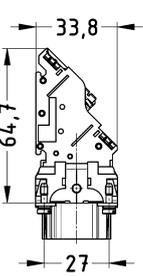
Number of contacts

10+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han E [®] AV, Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 33 010 4625	09 33 010 4725		
					
Han E [®] AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 33 010 4626	09 33 010 4726		
					
					

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han E® AV, Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 33 010 4635	09 33 010 4735		
					
					
<p>Han E® AV, Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p> 	0.2 ... 2.5	09 33 010 4636	09 33 010 4736		
					
					

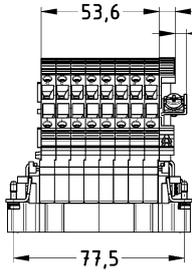
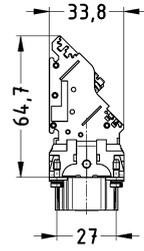
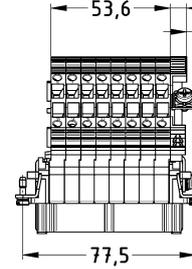

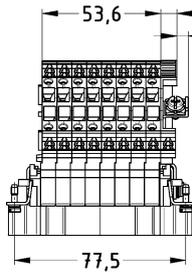
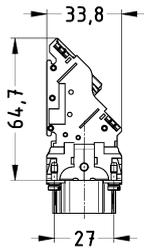
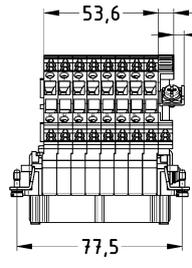

Number of contacts

16+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E® AV, Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 016 4625	09 33 016 4725	
<p>Han E® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 016 4626	09 33 016 4726	
<p>Han E® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 016 4626	09 33 016 4726	
<p>Han E® AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 016 4626	09 33 016 4726	

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han E® AV, Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 33 016 4635	09 33 016 4735		
					
Han E® AV, Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 33 016 4636	09 33 016 4736		
					

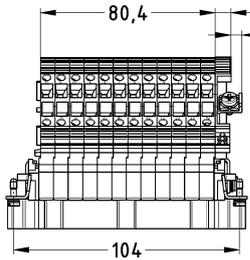

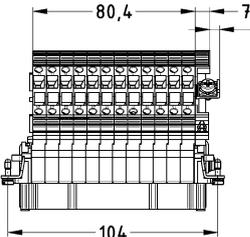

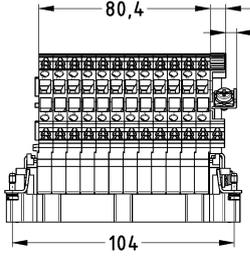

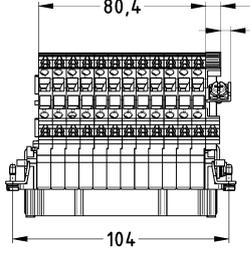

Number of contacts

24+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E[®] AV, Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 024 4625	09 33 024 4725	
<p>Han E[®] AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 024 4626	09 33 024 4726	
<p>Han E[®] AV, Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated</p>	0.2 ... 2.5	09 33 024 4626	09 33 024 4726	

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han E® AV, Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 33 024 4635	09 33 024 4735		
					
Han E® AV, Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0.2 ... 2.5	09 33 024 4636	09 33 024 4736		
					

Features

- for left or right hand applications available
- PE and connecting terminal for contact no.1 are at the top in both types of installation
- Mountable in standard bulkhead mounted housings and on standard rails by using of fixing elements
- Reliable cage clamp termination

Technical characteristics

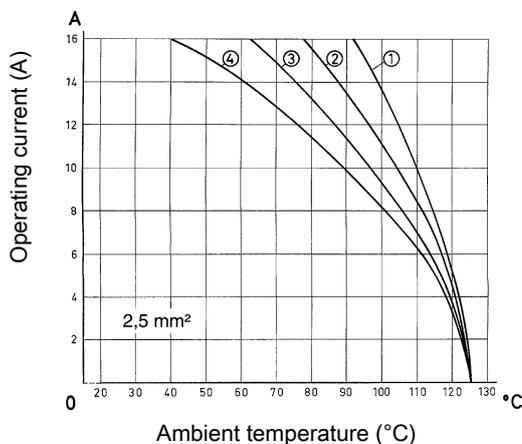
Number of contacts	6, 10, 16, 24
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current acc. to UL	12 A
Rated current acc. to CSA	12 A
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤4 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

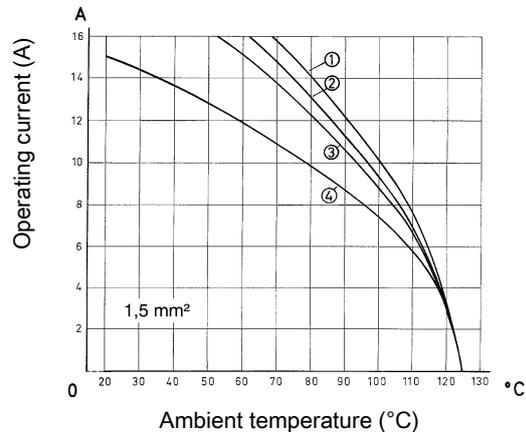
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 6 ES AV
- ② Han® 10 ES AV
- ③ Han® 16 ES AV
- ④ Han® 24 ES AV

Derating



- ① Han® 6 ES AV
- ② Han® 10 ES AV
- ③ Han® 16 ES AV
- ④ Han® 24 ES AV

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Stripping length 8 ... 11 mm

Identification strips

Single contour (SK) the following identification strips may be used

- ◆ HARTING – 09 33 000 9973 (6 x 15)
- ◆ Murrplastik – KWI 6/15
- ◆ Wieland – 9705 A/6.7

Identification

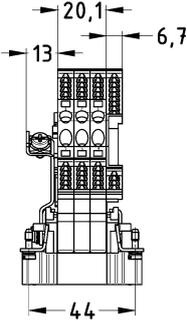
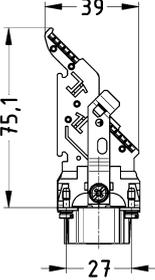
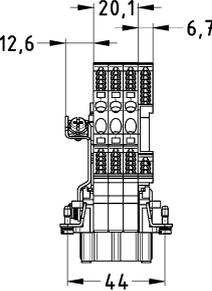
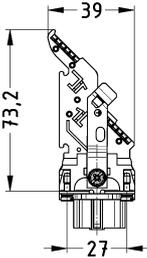
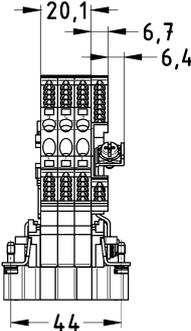
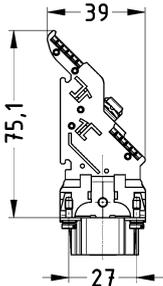
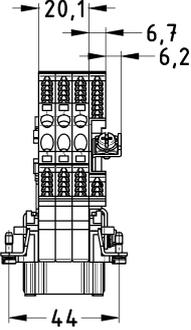
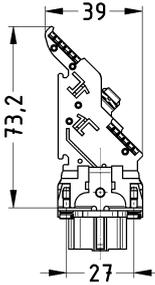
The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Number of contacts

6+

16 A 500 V 6 kV 3

Han AV

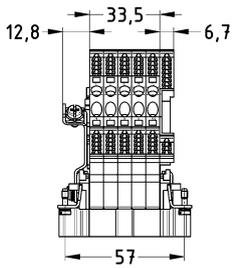

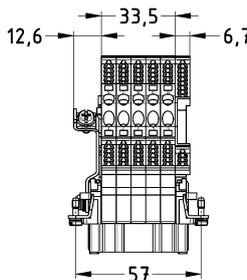
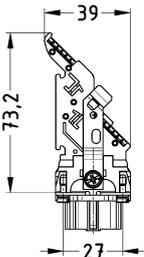
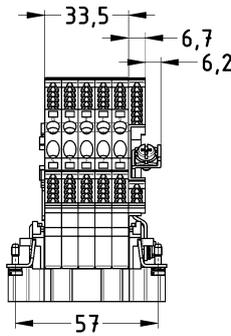
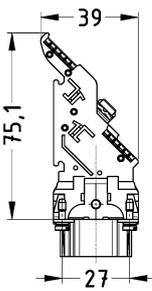
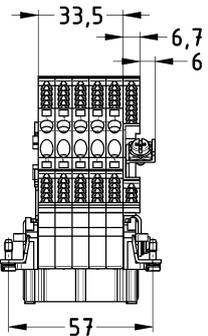
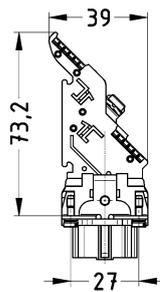
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han® ES AV, Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 006 4629	09 33 006 4729		
					
					
<p>Han® ES AV, Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 006 4639	09 33 006 4739		

Number of contacts

10+

16 A 500 V 6 kV 3

Han
AV

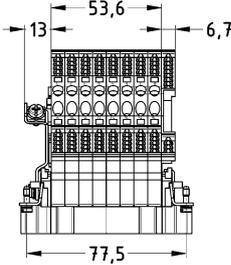

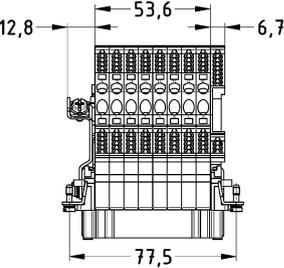

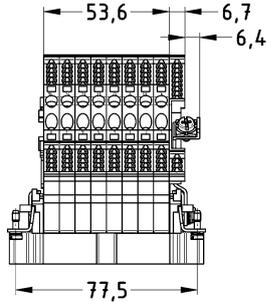
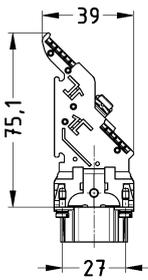
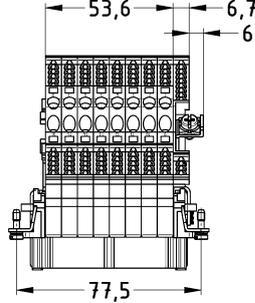
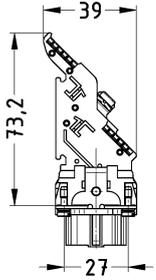
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han® ES AV, Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 010 4629	09 33 010 4729		
<p>Han® ES AV, Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 010 4639	09 33 010 4739		
<p>Han® ES AV, Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p> 	0.14 ... 2.5	09 33 010 4639	09 33 010 4739		
					

Number of contacts

16+

16 A 500 V 6 kV 3

Han AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han® ES AV, Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0.14 ... 2.5	09 33 016 4629	09 33 016 4729		
					
					
Han® ES AV, Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0.14 ... 2.5	09 33 016 4639	09 33 016 4739		
					
					

Number of contacts

24+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES AV, Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p>	0.14 ... 2.5	09 33 024 4629	09 33 024 4729	
<p>Han® ES AV, Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated</p>	0.14 ... 2.5	09 33 024 4639	09 33 024 4739	

Technical characteristics

RoHS compliant

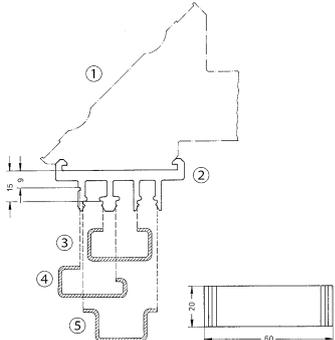
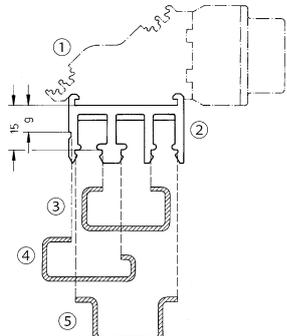
Details

There are moulded slots at the rear of the terminal block connectors and distributors to accept the fixing elements. When used these elements, for example, can be used to secure the connectors inside the switch cabinets on standard rails.

Details

For mounting

Terminal block connector Han E® AV / Han® ES AV
 Han® 6 E AV, Han® 6 ES AV = 1 fixing element
 Han® 10/16/24 E AV, Han® 10/16/24 ES AV = 2 fixing elements
 Terminal block connector Han D® AV
 Han® 40/64 D AV = 2 fixing elements
 Distributor = 1 fixing element

Identification	Part number	Drawing (dimensions in mm)
<p>Han D® AV Han D® AV Distributor, Fixing element</p> 	<p>09 33 000 9928</p>	 <p>① Terminal block connector Han D® AV ② Fixing element ③ C-rail IEC 60715-C30 ④ G-rail IEC 60715-G32 ⑤ Rail IEC 60715-35 x 7.5 or -35 x 15</p>
<p>Han E® AV / Han® ES AV, Fixing element</p> 	<p>09 33 000 9929</p>	 <p>① Terminal block connector Han E® AV ② Fixing element ③ C-rail IEC 60715-C30 ④ G-rail IEC 60715-G32 ⑤ Rail IEC 60715-35 x 7.5 or -35 x 15</p>

Technical characteristics


RoHS compliant

Identification	Part number	Drawing (dimensions in mm)
----------------	-------------	-------------------------------

Han D® AV,
Identification strip,
Multi contour (MK),
Pack contents:
88 pieces in one block




09 21 000 9971



Han E® AV,
Identification strip,
Multi contour (MK),
Pack contents:
64 pieces in one block




09 33 000 9971



Han® ES AV,
Identification strip,
Single contour (SK),
Pack contents:
64 pieces in one block



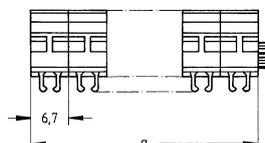
09 33 000 9973



Adapter,
To fit identification strips,
Single contour (SK)



09 33 000 9964
09 33 000 9965
09 33 000 9966
09 33 000 9967



09 33 000 9964 Han® 6 E AV a = 26.8 mm
09 33 000 9965 Han® 10 E AV a = 40.2 mm
09 33 000 9966 Han® 16 E AV a = 60.3 mm
09 33 000 9967 Han® 24 E AV a = 87.4 mm

Contents

Page

Staf®

Han 09.2

Staf

Features

- male insert with female contacts
- female insert with male contacts

Technical characteristics

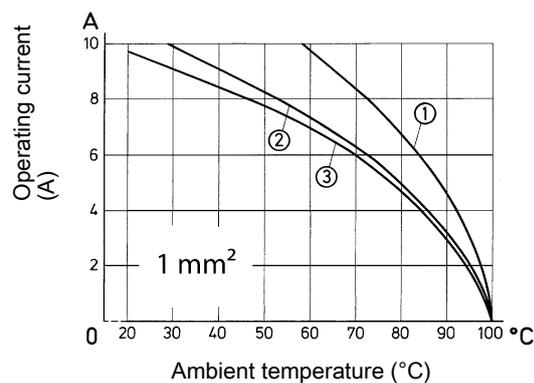
Number of contacts	6, 14, 20, 40
Rated current	10 A
Rated voltage	25 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	25 V AC, 60 V DC
Rated voltage acc. to UL	50 V
Rated voltage acc. to CSA	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +100 °C
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	Black
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	HB
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Staf® 6
- ② Staf® 14
- ③ Staf® 20

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details


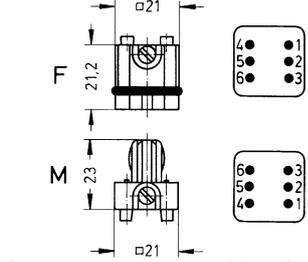
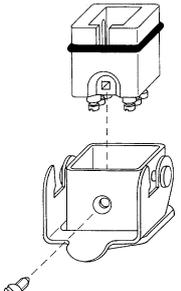
In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

6

10 A 25 V 0.8 kV 3

Staf

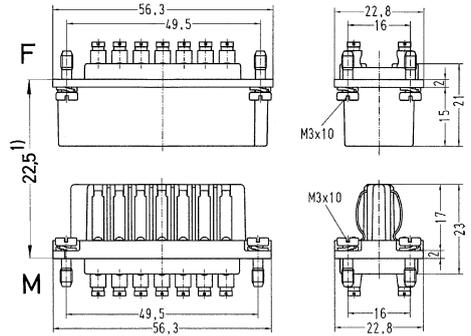
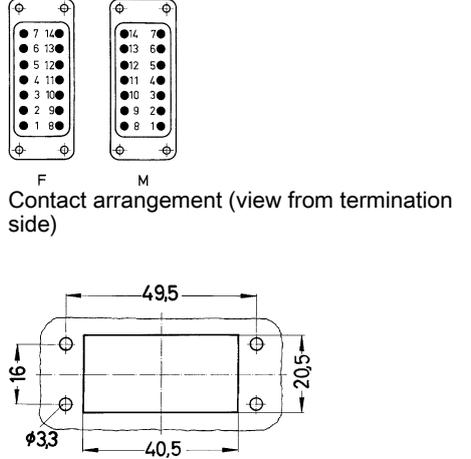
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated 	1.5	09 70 006 2813	09 70 006 2616	 <p>Contact arrangement (view from termination side)</p>
Staf®, Solder termination, Contact surface: Silver plated 	2.5	09 70 006 2812	09 70 006 2615	 <p>Contact arrangement (view from termination side)</p>  <p>Mounting example</p>

Number of contacts

14

10 A 25 V 0.8 kV 3

Staf

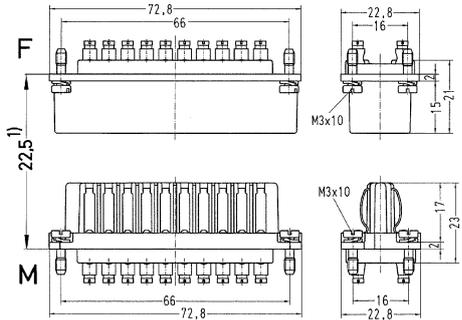
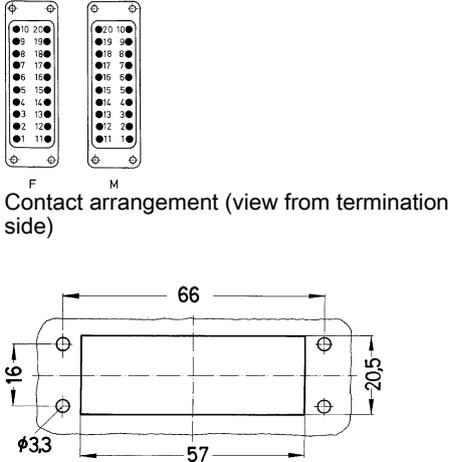
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated 	1.5	09 70 014 2811	09 70 014 2614	 <p>1) distance for contact max. 24 mm</p>
Staf®, Solder termination, Contact surface: Silver plated 	2.5	09 70 014 2810	09 70 014 2613	 <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

20

10 A 25 V 0.8 kV 3

Staf

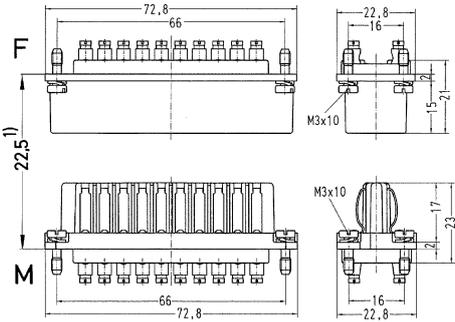
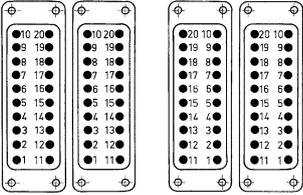
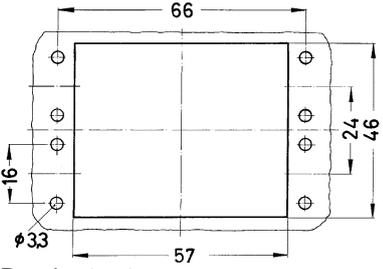
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated 	1.5	09 70 020 2817	09 70 020 2622	 <p>1) distance for contact max. 24 mm</p>
Staf®, Solder termination, Contact surface: Silver plated 	2.5	09 70 020 2816	09 70 020 2621	 <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

40

10 A 25 V 0.8 kV 3

Staf

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated  <p>You need two inserts for a complete assembly!</p>	1.5	09 70 020 2817	09 70 020 2622	 <p>1) distance for contact max. 24 mm</p>
Staf®, Solder termination, Contact surface: Silver plated  <p>You need two inserts for a complete assembly!</p>	2.5	09 70 020 2816	09 70 020 2621	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Contents	Page
Latching parts	Han 11.3
Plastic panel mounting	Han 11.5
Metal panel mounting	Han 11.6
Insert mounting.....	Han 11.7
Insert mounting with carrier element	Han 11.8
Shell housing	Han 11.10
Accessories	Han 11.15

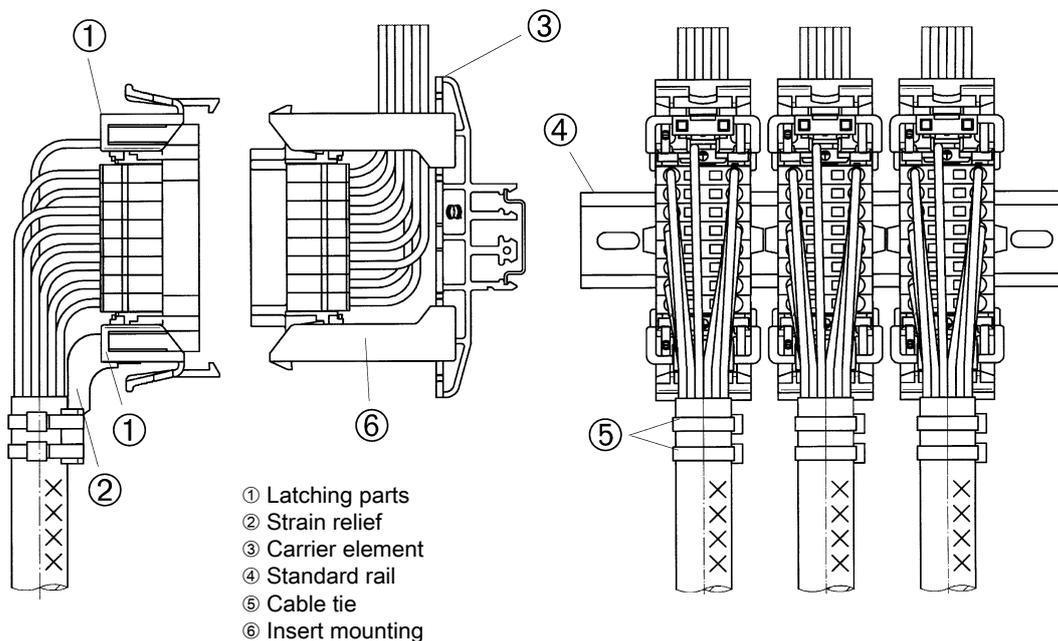
Note:

A connector mounted with Han-Snap® elements does not offer finger safe protection to the relevant standards. In this case protection against electric shock must be provided by the installation methods of the user. The fixing of the PE terminal must be conducted on equal side of the connector insert to avoid ground interruptions.

- The Han-Snap® system is ideal for connectors within closed electrical operating environments. These can be rooms, cabinets or termination boxes.
- The Han-Snap® components are an innovative design which offer the following advantages and characteristics:
 - reduction of material and assembly costs;
 - fast and easy installation;
 - preassembly of Han connectors;
 - secure and rigid mounting of Han connectors;
 - frequent use of latching systems is possible (up to several thousand cycles).
- The Han-Snap® elements are compatible with the standard inserts and terminal block connectors of the following series (named series Han B as follows)
 - Han D®, 40 and 64 pins
 - Han DD®
 - Han E®
 - Han® EE
 - Han® EEE
 - Han® ES
 - Han Hv E®
 - Han® Hv ES
 - Han® HsB
 - Han-Com®
 - Han-Modular®

- With the Han-Snap® adapter the following standard inserts are compatible (named series Han A as follows):
 - Han D®, 15 and 25 pins
 - Han A®, 10 and 16 pins
- The Han-Snap® elements are a mechanical system for the mounting assembly and security of Han connectors. Normally the elements are assembled to the connector insert using the standard insert fixing screws. If coding is required the standard fixing screws may be replaced by either code pins or guide pins and bushes.
- On free connectors the wires or cables can be secured to the strain relief element with standard cable ties of 5 mm width maximum.

Han-Snap® on standard rail





Features

- Compact design saves space
- Practical and easy handling
- Reduction of material and assembly costs

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP20
Retention force	200 N Without guiding, 300 N With guiding
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

IEC 60068-2-6 Vibration (sinusoidal)
IEC 60068-2-27 Shock

Details

Inserts can be mounted on the panel mounting part and the latching part with the standard insert mounting screws.

High mechanical security of the fixings.

No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

Label 9 x 20 mm may be fitted in both sides of each latching element. Label 7 x 20 mm may be fitted to the top of the latching part without the strain relief element.

Up to 2 cable ties with max. 5 mm width can be used on the strain relief.

Please note: The strain relief element should be assembled to the latching part at the end of the insert opposite to the ground screw.

Identification

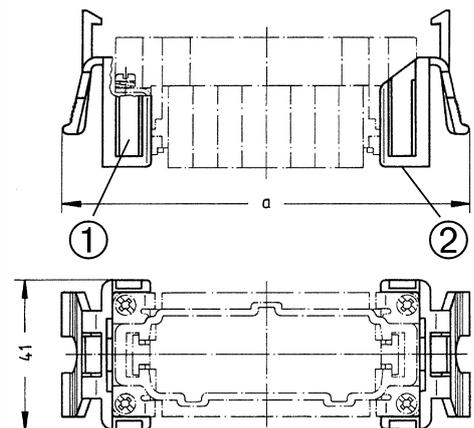
Han-Snap®,
Latching parts,
Pack contents:
2 latching parts



Part number

09 33 000 9987

Drawing (dimensions in mm)



- ① Slot for identification strip 9 x 20
- ② Slot for identification strip 7 x 20
- 6 B: a= 78.5
- 10 B: a= 91.5
- 16 B: a= 112.5
- 24 B: a= 138.5

Han-Snap

Identification

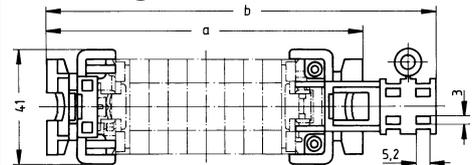
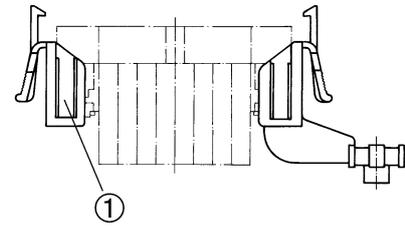
Part number

Drawing
(dimensions in mm)

Han-Snap®,
Latching parts,
With strain relief,
Pack contents:
1 latching part with strain relief,
1 latching part



09 33 000 9991

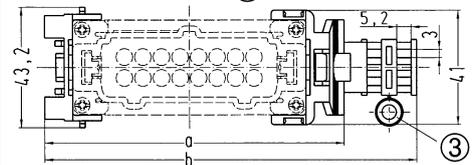
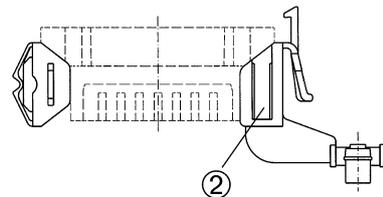


① Slot for identification strip 9 x 20
6 B: a=78.5; b=105
10 B: a=91.5; b=118
16 B: a=112.5; b=138.5
24 B: a=138.5; b=165

Han-Snap®,
Latching parts,
With strain relief,
and panel mounting parts,
Pack contents:
1 latching part with strain relief,
1 panel mounting part



09 33 000 9990



② Slot for identification strip 9 x 20
③ Distance bush
6 B: a=75; b=101
10 B: a=88; b=114
16 B: a=108.5; b=134.5
24 B: a=135; b=161



Features

- Snap element for sheet-metal cut out
- Compact design saves space
- Practical and easy handling
- Reduction of material and assembly costs

Technical characteristics

Limiting temperature	-40 ... +125 °C
Retention force	≥250 N in the sheet-metal cut out
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

IEC 60068-2-6 Vibration (sinusoidal)
IEC 60068-2-27 Shock

Details

Connector inserts and terminal block connectors can be fixed on elements for panel mounting with standard insert mounting screws.

High mechanical security of the fixings. No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

Connector assembly into the panel (sheet-metal) cut out or two parallel mounted rails is possible from mating or termination side.

Identification

Han-Snap®,
Panel mounting parts,

Pack contents:
2 plastic panel mounting parts sufficient for one insert or terminal block connector

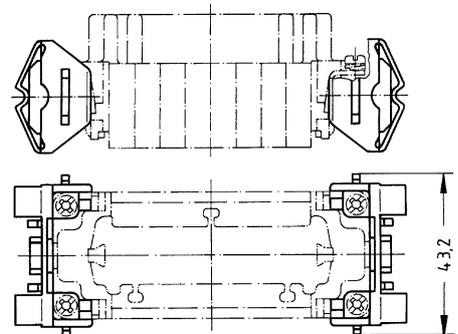


Size 10 A / 16 A by using the corresponding adapter!

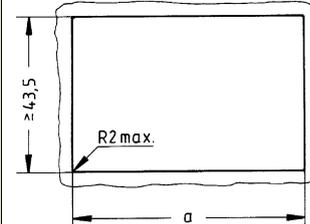
Part number

09 33 000 9985

Drawing (dimensions in mm)



Panel cut out
Sheet-metal thickness: 1.3 ... 3 mm



- 6 B: $a^{+0.5} = 65$
- 10 B: $a^{+0.5} = 78$
- 16 B: $a^{+0.5} = 98$
- 24 B: $a^{+0.5} = 125$
- 10 A: $a^{+0.5} = 81.5$
- 16 A: $a^{+0.5} = 98$



Features

- Snap element for sheet-metal cut out
- Compact design saves space
- Practical and easy handling
- Reduction of material and assembly costs

Technical characteristics

Limiting temperature	-40 ... +125 °C
Material (accessories)	Zinc die-cast
RoHS	compliant

Specifications and approvals

IEC 60068-2-6 Vibration (sinusoidal)
IEC 60068-2-27 Shock

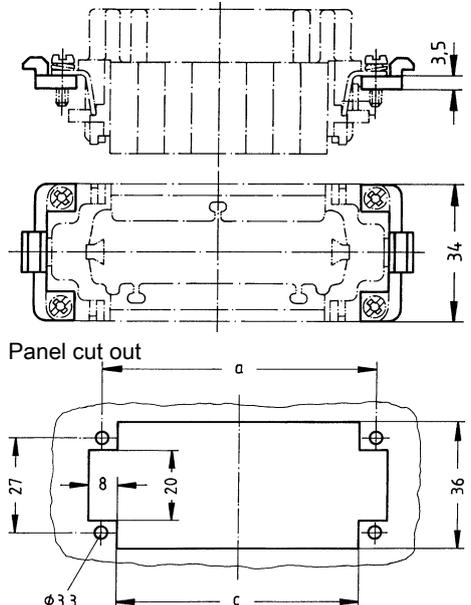
Details

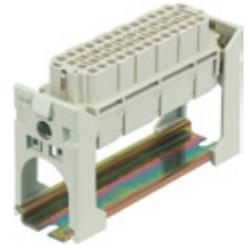
Connector inserts and terminal block connectors can be fixed on elements for panel mounting with standard insert mounting screws.

High mechanical security of the fixings.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

Connector assembly into the panel (sheet-metal) cut out or two parallel mounted rails is possible from mating or termination side.

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Snap®, Panel mounting parts, Pack contents: 2 metallic panel mounting parts sufficient for one insert or terminal block connector</p> 	<p>09 33 000 9984</p>	 <p>Panel cut out</p> <p>6 B: a=44; c=36 10 B: a=57; c=49 16 B: a=77.5; c=69.5 24 B: a=104; c=96</p>



Features

- Insert is mounted with carrier element
- A practical solution to fix the insert directly on a standard rail
- Insert can be assembled to Han-Snap® element with screw-driver
- Compact design saves space

Technical characteristics

Limiting temperature	-40 ... +125 °C
Retention force	≥300 N On rail (tension), ≥1.000 N On rail (pressure)
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

IEC 60068-2-6 Vibration (sinusoidal)
IEC 60068-2-27 Shock

Details

The insert mounting locks directly on standard rail 35 x 15 or 35 x 7.5 mm.

Inserts can be assembled on the insert mounting with the standard insert fixing screws.

High mechanical security of the fixings.

No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

The following labels may be fitted alternatively to the insert mounting parts for circuit identification purposes:
Label 7 x 20 mm or 9 x 20 mm

Identification

Han-Snap®,
Insert mounting,
Pack contents:
2 insert mounting parts

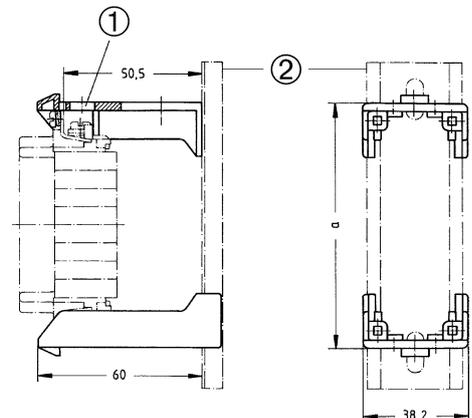


Size 10 A / 16 A by using the corresponding adapter!

Part number

09 33 000 9980

Drawing (dimensions in mm)



- ① Slot for identification strip
- ② Rail IEC 60715-35 x 7.5 or -35 x 15
- 6 B: a= 57
- 10 B: a= 70 / 10 A: a= 74
- 16 B / 16 A: a= 90.5
- 24 B: a= 117



Features

- Insert is mounted with carrier element
- A practical solution to fix the insert directly on a standard rail
- Insert can be assembled to Han-Snap® element with screw-driver
- Compact design saves space

Technical characteristics

Limiting temperature	-40 ... +125 °C
Retention force	≥450 N On rail
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

IEC 60068-2-6 Vibration (sinusoidal)
IEC 60068-2-27 Shock

Details

The carrier element is the basic element to mount the inserts in the cross direction on standard rails, for example:

- Caprail, 35 x 7.5 or 35 x 15 acc. to DIN EN 60 715
- C-rail, C 30 acc. to DIN EN 60 715
- G-rail, G 32 acc. to DIN EN 60 715

Where vibration is likely to be encountered, use the 35 x 15 mounting rails. When using the large carrier element, the 35 x 15 mounting rails are recommended to give greater stability.

Insert mounting type 6/10 is suitable for inserts of sizes Han 6 B and Han 10 B.

Insert mounting type 6/24 is suitable for all insert sizes: Han 6 B / 10 B / 16 B / 24 B, Han 16 A with the corresponding adapter.

Inserts can be assembled to the insert mountings with the standard insert mounting screws.

High mechanical security of the fixings. No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

The following labels may be fitted to the insert mounting parts for circuit identification purposes:

Label 7 x 20 mm or 9 x 20 mm

Identification

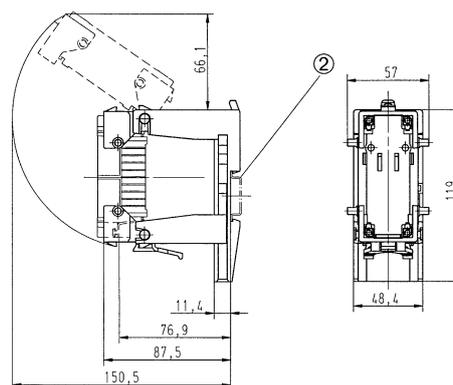
Han-Snap®,
Insert mounting,
Swinging,
for standard inserts



Part number

09 33 000 9801

Drawing
(dimensions in mm)

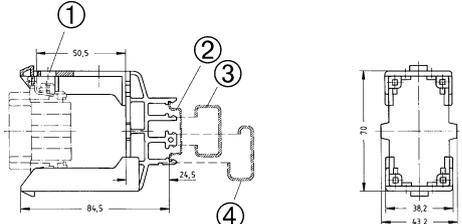
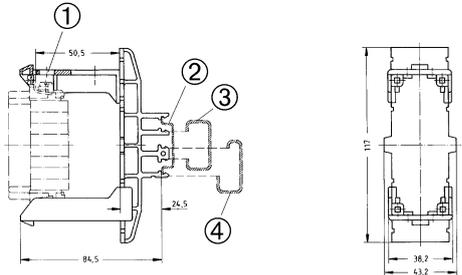


② Rail IEC 60715-35 x 7.5 or -35 x 15

Han-Snap®,
Insert mounting,
Swinging,
for Han-Modular® hinged frames



09 33 000 9803

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Snap®, Insert mounting, With carrier element, Type 6/10, Pack contents: 2 insert mounting parts, 1 carrier element</p> 	<p>09 33 000 9988</p>	 <ul style="list-style-type: none"> ① Slot for identification strip ② Rail IEC 60715-35 x 7.5 or -35 x 15 ③ C-rail IEC 60715-C30 ④ G-rail IEC 60715-G32
<p>Han-Snap®, Insert mounting, With carrier element, Type 6/24, Pack contents: 2 insert mounting parts, 1 carrier element</p> 	<p>09 33 000 9989</p>	 <ul style="list-style-type: none"> ① Slot for identification strip ② Rail IEC 60715-35 x 7.5 or -35 x 15 ③ C-rail IEC 60715-C30 ④ G-rail IEC 60715-G32

Features

- Ideal for use within closed electrical operation environments
- Allows use of preassembled cables
- Optimised cost of material and assembly
- Insert can be assembled to Han-Snap® element with screwdriver

Technical characteristics

Limiting temperature	-40 ... +125 °C
Retention force	≥300 N in locked position
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

IEC 60068-2-6 Vibration (sinusoidal)
IEC 60068-2-27 Shock

Details

2 identical half shells form a shell housing.

Each housing has 3 cable entries, one on top and one at each end. 2 x cable entries can be closed by enclosed blind plugs.

In the area of cable entries there are rectangular openings for mounting of cable ties up to max. 5 mm width.

In the mating area both housing shells are fixed by the standard insert fixing screws.

To release the half shells use screw driver (3.5 x 0.5).

Alternatively, Han® coding elements (code pins or guide pins and bushings) may be used.

High mechanical security of the fixings.

No functional impairment is caused by slight over tightening of the fixing screws. The blind plugs have slots for identification strips.

The following labels can be fitted: label 7 x 20 mm or 9 x 20 mm

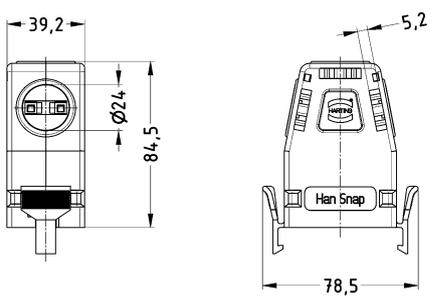
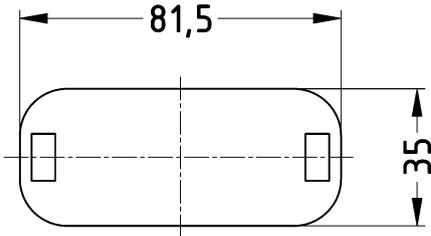
Size 16 A by using the corresponding adapter

Inserts can be assembled to the adapters with the standard insert fixing screws.

With the included screws the adapter can be fixed to the selected Han-Snap® element.

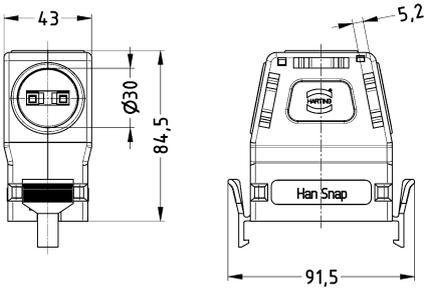
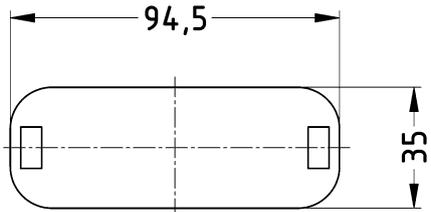
Snap-in latches

Han-Snap

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Snap®, Shell housing, Top/side entry, Pack contents: 2 half shells with blind plugs</p> 	<p>09 33 006 0401</p>	
<p>Han-Snap®, Protection cover, Thermoplastic</p> 	<p>09 33 006 5401</p>	

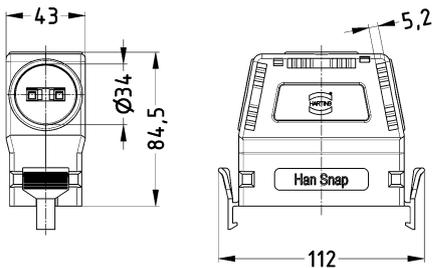
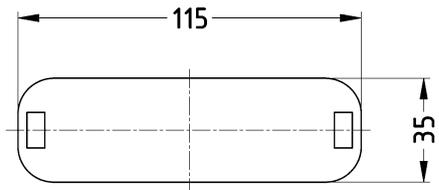
Snap-in latches

Han-Snap

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Snap®, Shell housing, Top/side entry, Pack contents: 2 half shells with blind plugs</p> 	<p>09 33 010 0401</p>	
<p>Han-Snap®, Protection cover, Thermoplastic</p> 	<p>09 33 010 5401</p>	

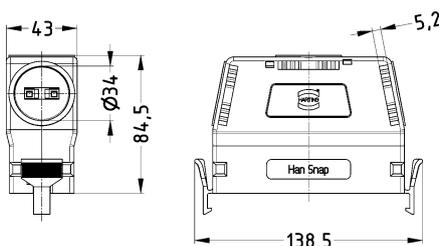
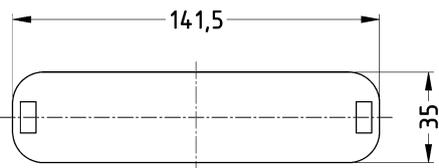
Snap-in latches

Han-Snap

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Snap®, Shell housing, Top/side entry, Pack contents: 2 half shells with blind plugs</p>  <p>Size 16 A by using the corresponding adapter!</p>	<p>09 33 016 0401</p>	
<p>Han-Snap®, Protection cover, Thermoplastic</p> 	<p>09 33 016 5401</p>	

Snap-in latches

Han-Snap

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Snap®, Shell housing, Top/side entry, Pack contents: 2 half shells with blind plugs</p> 	<p>09 33 024 0401</p>	
<p>Han-Snap®, Protection cover, Thermoplastic</p> 	<p>09 33 024 5401</p>	

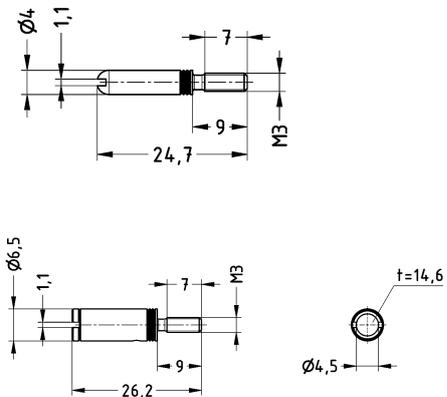
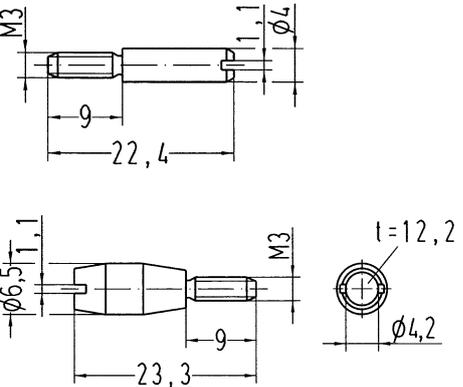
Technical characteristics

RoHS compliant with exemption

Technical characteristics

RoHS exemptions

6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Coding, With guide pins/bushes, for application "insert with screw adapter" with/ without grip frame</p> 	09 33 000 9808	09 33 000 9809	
<p>Han-Snap®, Coding, Only for swinging insert mountings</p> 	09 33 000 9956	09 33 000 9957	

Technical characteristics

Material (accessories) Polycarbonate

Technical characteristics

Colour (accessories) RAL 7032 (pebble grey)
RoHS compliant

Identification

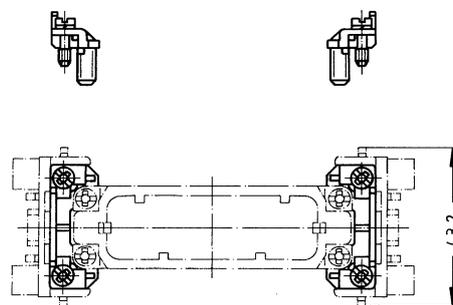
Part number

Drawing (dimensions in mm)

Han A®,
Adapter,
Pack contents:
2 adapters,
4 fixing screws



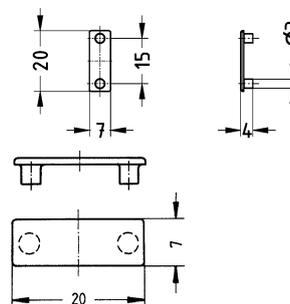
09 20 000 9933



Han-Snap®,
Identification strip,
Pack contents:
Single



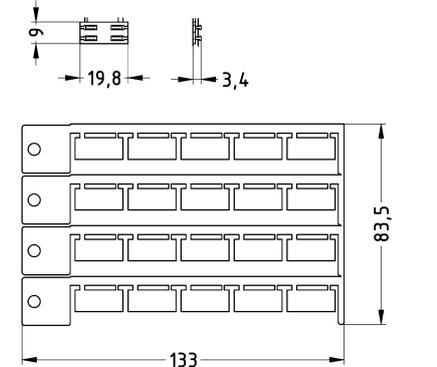
09 33 000 9981



Han-Snap®,
Identification strip,
Pack contents:
20 pieces in one block



09 33 000 9982



Contents	Page
Sockets.....	Han 12.2
Frames	Han 12.6
Data connectors	Han 12.10
Wires	Han 12.15
Gender changer.....	Han 12.18
Accessories	Han 12.19

Features

- Sockets for the European and international market
- Modular assembly
- Sockets to mount or snap into mounting plates

Technical characteristics

Mounting depth	62 mm, 30 mm, 20 mm, 43 mm
Supply voltage	250 V AC, 125 V AC, 240 V AC
Nominal frequency	50 Hz, 60 Hz
Nominal current	16 A, 15 A, 13 A, 5 A, 10 A
Material (hood/housing)	Thermoplastic
RoHS	compliant

Specifications and approvals

CE

Details

for detailed technical characteristics see following pages

Identification	Conductor cross-section (mm ²)	Part number	
Han-Port®, Socket, With LED display, Connection at the rear, Screw termination, Germany (VDE) , 62 mm / 250 V AC / 50 Hz / 16 A	6	39 50 001 0001	
Han-Port®, Socket, for assembly in front of main switch, Connection at the rear, Screw termination, Germany (VDE) , 62 mm / 250 V AC / 50 Hz / 16 A	6	39 50 001 0002	
Han-Port®, Socket, Finger safe, Screw termination, USA Japan , 30 mm / 125 V AC / 60 Hz / 15 A	2.5	39 50 001 0004	
Han-Port®, Socket, With LED display, Connection at the rear, Screw termination, France (UTE) , 62 mm / 250 V AC / 50 Hz / 16 A	6	39 50 001 0005	
Han-Port®, Socket, Finger safe, Screw termination, Great Britain (BS) , 30 mm / 250 V AC / 60 Hz, 50 Hz / 13 A	4	39 50 001 0006	
Han-Port®, Socket, Double, Finger safe, Screw termination, Italy (CEI 23-16) , 20 mm / 250 V AC / 50 Hz / 16 A	2.5	39 50 001 0007	

Han-Port

Identification	Conductor cross-section (mm ²)	Part number	
Han-Port®, Socket, Screw termination, Australia China , 20 mm / 240 V AC / 60 Hz, 50 Hz / 15 A	4	39 50 001 0009	
Han-Port®, Socket, Screw termination, India (IS) , 20 mm / 240 V AC / 50 Hz / 6 A	4	39 50 001 0321	
Han-Port®, Socket, Screw termination, Brazil , 30 mm / 250 V AC / 60 Hz / 10 A	2.5	39 50 001 0331	
Han-Port®, Socket, Screw termination, Israel , 30 mm / 250 V AC / 50 Hz / 16 A	2.5	39 50 001 0333	
Han-Port®, Socket, Spring clamp termination, Switzerland , 30 mm / 250 V AC / 50 Hz / 10 A	1.5	39 50 001 0012	
Han-Port®, Socket, Spring clamp termination, Denmark , 20 mm / 250 V AC / 50 Hz / 13 A	2.5	39 50 001 0017	

Identification	Conductor cross-section (mm ²)	Part number	
<p>Han-Port®, Socket, Spring clamp terminal, Screw termination, China , 43 mm / 250 V AC / 50 Hz / 10 A</p>	4	39 50 001 0458	
<p>Han-Port®, Socket, Screw termination, China , 43 mm / 250 V AC / 50 Hz / 10 A 1x RJ45 Cat.6 / 1x USB-A 3.0, enclosed separately</p>	4	39 50 012 0458	
<p>Han-Port®, Socket, Spring clamp terminal, Spring clamp termination, Germany (VDE) , 43 mm / 250 V AC / 50 Hz / 16 A</p>	2.5	39 50 001 0450	
<p>Han-Port®, Socket, Spring clamp termination, Germany (VDE) , 43 mm / 250 V AC / 50 Hz / 16 A 1x RJ45 Cat.6 / 1x USB-A 3.0, enclosed separately</p>	2.5	39 50 012 0450	

Features

- Suitable for rough industrial environments (degree of protection IP65 with closed cover)
- Modular assembly
- Various mounting plates with sockets and data interfaces available

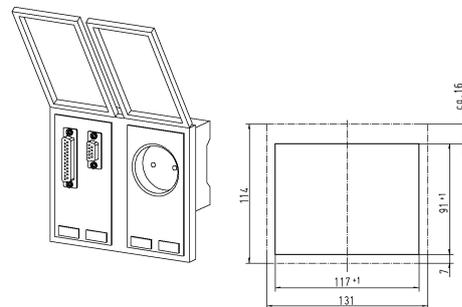
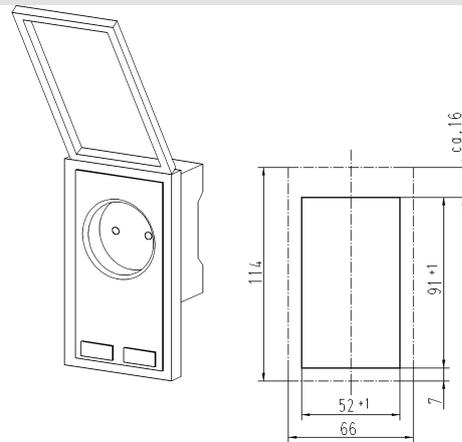
Technical characteristics

Limiting temperature	-10 ... +60 °C
Storage temperature	-25 ... +60 °C
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Thermoplastic, Zinc die-cast
Surface (hood/housing)	Smoothed surface
RoHS	compliant

Specifications and approvals

UL 508 NITW2.E472460
 CSA-C22.2 No. 14-95 NITW8.E472460

Details



Identification	Part number	
Han-Port®, Frames, Single, Plastic version, PBT black, Plastic cover, PC transparent	39 50 000 0300	
Han-Port®, Frames, Double, Plastic version, PBT black, Plastic cover, PC transparent	39 50 000 0400	
Han-Port®, Frames, Single, Plastic version, PBT black, Plastic cover, ABS metallic silver	39 50 000 0320	
Han-Port®, Frames, Double, Plastic version, PBT black, Plastic cover, ABS metallic silver	39 50 000 0420	

Identification

Part number

Han-Port®,
Frames,
Single,
Metal version, nickel plated (electrically conductive),
Transparent plastic cover

39 50 000 0100



Han-Port®,
Frames,
Double,
Metal version, nickel plated (electrically conductive),
Transparent plastic cover

39 50 000 0200



Identification	Part number	
Han-Port®, Frames, Single, Metal version, nickel plated (electrically conductive), Metal cover, nickel plated	39 50 000 0110	
Han-Port®, Frames, Double, Metal version, nickel plated (electrically conductive), Metal cover, nickel plated	39 50 000 0210	
Han-Port®, Frames, Single, Metal version, CPD black, Metal cover, CPD black	39 50 000 0120	

Features

- Standard interfaces for easy connection of devices
- Modular assembly
- Assembled data connectors to snap into the frame
- Frames with or without shielding plate

Technical characteristics

RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

UL 508 NRAQ2.E253944
CSA-C22.2 No. 142 NRAQ8.E253944



Details

D-Sub: < 125 V AC / 150 V DC / 3 A

Mounting depth 32 mm

RJ45: < 50 V AC/DC / 1 A

Mounting depth 32 mm

USB: < 30 V AC/DC / 1 A

Mounting depth 80 mm

Identification	Part number	
Han-Port®, Data connectors, Without shielding plate, D-Sub 1 (9-pin) female/male gender changer, D-Sub 1 (9-pin) female/male gender changer	39 50 003 0020	
Han-Port®, Data connectors, Without shielding plate, D-Sub 1 (9-pin) female/female gender changer	39 50 003 0024	
Han-Port®, Data connectors, Without shielding plate, D-Sub 1 (9-pin) female/male gender changer, D-Sub 3 (25-pin) female/male gender changer	39 50 003 0040	
Han-Port®, Data connectors, Without shielding plate, D-Sub 3 (25-pin) female/male gender changer	39 50 003 0074	
Han-Port®, Data connectors, Without shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 1 (9-pin) female/female gender changer, D-Sub 1 (9-pin) male/male gender changer	39 50 003 0111	
Han-Port®, Data connectors, Without shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 1 (9-pin) male/male gender changer, D-Sub 1 (9-pin) male/male gender changer, D-Sub 1 (9-pin) male/male gender changer	39 50 003 0129	

Han-Port

Identification

Part number

Han-Port®,
Data connectors,
Without shielding plate,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
D-Sub 1 (9-pin) female/male gender changer,
D-Sub 3 (25-pin) female/male gender changer

39 50 003 0170



Han-Port®,
Data connectors,
Without shielding plate,
D-Sub 1 (15-pin HD) female/male gender changer

39 50 003 0220



Identification	Part number	
<p>Han-Port®, Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, USB female/female gender changer, size A according to specification 3.0</p>	39 50 002 0093	
<p>Han-Port®, Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 1 (9-pin) male/male gender changer, D-Sub 1 (9-pin) male/male gender changer</p>	39 50 002 0117	
<p>Han-Port®, Data connectors, With shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e</p>	39 50 002 0120	
<p>Han-Port®, Data connectors, With shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e</p>	39 50 002 0122	
<p>Han-Port®, Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e</p>	39 50 002 0133	
<p>Han-Port®, Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 1 (9-pin) female/male gender changer</p>	39 50 002 0143	

Han-Port

Identification

Part number

Han-Port®,
Data connectors,
With shielding plate,
USB female/female gender changer, size A according to specification 3.0,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
D-Sub 3 (25-pin) female/male gender changer

39 50 002 0145



Han-Port®,
Data connectors,
With shielding plate,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
D-Sub 1 (9-pin) female/female gender changer

39 50 002 0163



Han-Port®,
Data connectors,
With shielding plate,
USB female/female gender changer, size A according to specification 3.0,
USB female/female gender changer, size A according to specification 3.0,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e

39 50 004 0097



D-Sub Standard Male With plastic hood
 D-Sub Standard Male With plastic hood

Han-Port

Technical characteristics

Number of cores	9
Connector 1	D-Sub, Standard, Male, With plastic hood
Connector 2	D-Sub, Standard, Male, With plastic hood, Female

Technical characteristics

RoHS compliant

Details

Other cable lengths on request!

Identification	Cable length	Part number	Drawing (dimensions in mm)
D-Sub, Standard, Copper cable (round), Pre-assembled on both sides, Male/male 	2 m	39 50 903 0010	
	5 m	39 50 903 0011	
D-Sub, Standard, Copper cable (round), Pre-assembled on both sides, Female/male 	2 m	39 50 903 0020	
	5 m	39 50 903 0021	

RJ45 Thermoplastic
RJ45 Thermoplastic

Han-
Port

Technical characteristics

Number of cores	8
Connector 1	RJ45, Thermoplastic
Connector 2	RJ45, Thermoplastic
Transmission characteristics	Cat. 6, Class E up to 250 MHz
RoHS	compliant

Details

Other cable lengths on request!

Identification	Cable length	Part number	Drawing (dimensions in mm)
RJ45, Copper cable (round), Pre-assembled on both sides 	2 m 5 m	39 50 903 0060 39 50 903 0061	

USB 2.0 Type A Male
 USB 2.0 Type A Male

Han-
Port

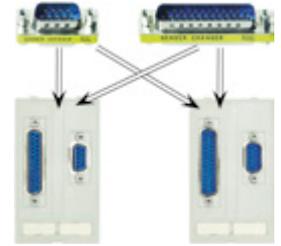
Technical characteristics

Connector 1	USB 2.0, Type A, Male
Connector 2	USB 2.0, Type A, Male
RoHS	compliant

Details

Other cable lengths on request!

Identification	Cable length	Part number	Drawing (dimensions in mm)
USB, Copper cable (round), Pre-assembled on both sides 	2 m 5 m	39 50 903 0050 39 50 903 0051	



Technical characteristics

RoHS compliant

Identification	Part number	
Han-Port®, Gender changer, D-Sub 1, 9-pin, Female/female	39 50 904 0030	
Han-Port®, Gender changer, D-Sub 1, 9-pin, Female/male	39 50 904 0031	
Han-Port®, Gender changer, D-Sub 1, 9-pin, Male/male	39 50 904 0032	
Han-Port®, Gender changer, D-Sub 3, 25-pin, Female/female	39 50 904 0050	
Han-Port®, Gender changer, USB female/female gender changer, size A according to specification 3.0	39 50 904 0020	
Han-Port®, Gender changer, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e	39 50 904 0010	

Technical characteristics

RoHS compliant

Specifications and approvals

UL 508 NRAQ2.E253944
CSA-C22.2 No. 142 NRAQ8.E253944

Identification

Part number

Han-Port®,
Identification strip,
Pack contents:
20 pieces per frame

39 50 000 0900



Han-Port®,
Blind plate,
With perforated cut-outs for gender changer RJ45, USB and
D-Sub 3

39 50 000 0851



Han-Port®,
Blind plate,
Free space for self assembly of connectors or switches: 45 x 75
mm

39 50 000 0890



Contents	Page
Han® Q 2/0 Crimp.....	Han 13.2
Han® Q 2/0 Crimp High Voltage	Han 13.4
Han® Q 2/0 Axial screw	Han 13.6
Han® Q 2/0 Axial screw High Voltage.....	Han 13.8
Han® Q 3/0 Crimp.....	Han 13.10
Han® Q 4/0 Crimp.....	Han 13.12
Han® Q 4/2 Crimp.....	Han 13.14
Han® Q 4/2 Axial screw	Han 13.17
Han® Q 5/0 Quick Lock	Han 13.19
Han® Q 5/0 Crimp.....	Han 13.21
Han® Q 7/0 Crimp.....	Han 13.24
Han® Q 8/0 Quick Lock	Han 13.26
Han® Q 8/0 Crimp.....	Han 13.28
Han® Q 12/0 Crimp/Quick Lock.....	Han 13.31
Han® Q 17/0 Crimp.....	Han 13.34
Han® Q High Density Crimp	Han 13.36
Han® Q Data RJ45	Han 13.38
Plastic hoods/housings.....	Han 13.40
Metal hoods / housings.....	Han 13.44
EMC hoods/housings	Han 13.48
Accessories	Han 13.51

Features

- High current rated compact designed connector
- Mating compatible to the axial screw version
- Suitable for Han® C crimp contacts
- Allows a cost optimised production of high quantities
- Finger safe male and female contacts
- 16 coding options

Technical characteristics

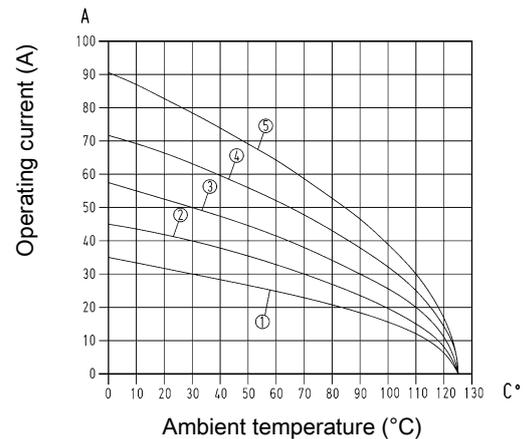
Number of contacts	2
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²
- ④ Conductor cross-section 6 mm²
- ⑤ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

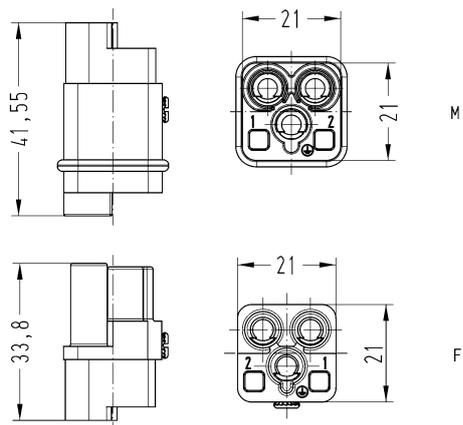
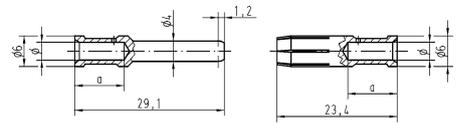
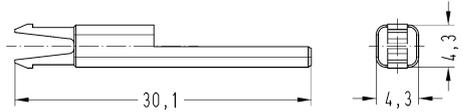
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2+

40 A 400 V 6 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® Q , 2/0, Crimp termination  Please order crimp contacts separately.	1.5 ... 10	09 12 002 3051	09 12 002 3151	 Contact arrangement (view from termination side)																		
Han® C , Crimp contact, Contact surface: Silver plated  Coding element 	1.5 2.5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table> 	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm ² AWG 16	1.75 mm	9.5 mm																				
2.5 mm ² AWG 14	2.25 mm	9.5 mm																				
4 mm ² AWG 12	2.85 mm	9.5 mm																				
6 mm ² AWG 10	3.5 mm	9.5 mm																				
10 mm ² AWG 8	4.3 mm	12 mm																				

Features

- High current rated compact designed connector
- Mating compatible to the axial screw version
- Suitable for Han® C crimp contacts
- Allows a cost optimised production of high quantities
- Finger safe male and female contacts
- 16 coding options
- for high voltages, please use heat shrink tube (included in delivery range)

Technical characteristics

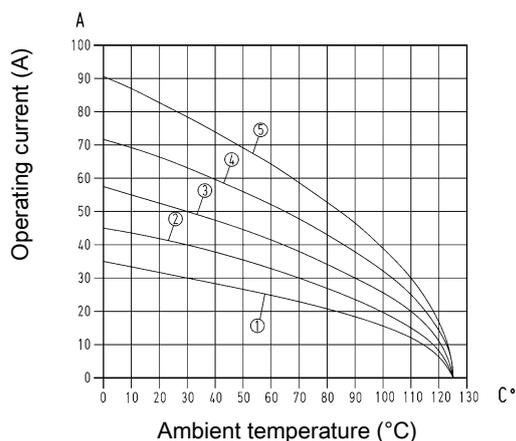
Number of contacts	2
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²
- ④ Conductor cross-section 6 mm²
- ⑤ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2+

40 A 830 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
<p>Han® Q , 2/0 High Voltage, Crimp termination, Pack contents: With heat shrink tube</p> <p>Please order crimp contacts separately.</p>	1.5 ... 10	09 12 002 3052	09 12 002 3152	<p>Contact arrangement (view from termination side)</p>																								
<p>Han® C , Crimp contact, Contact surface: Silver plated</p> <p>Coding element</p>	1.5 2.5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> <td></td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length		1.5 mm ² AWG 16	1.75 mm	9.5 mm		2.5 mm ² AWG 14	2.25 mm	9.5 mm		4 mm ² AWG 12	2.85 mm	9.5 mm		6 mm ² AWG 10	3.5 mm	9.5 mm		10 mm ² AWG 8	4.3 mm	12 mm	
Conductor cross-section	Ø	Stripping length																										
1.5 mm ² AWG 16	1.75 mm	9.5 mm																										
2.5 mm ² AWG 14	2.25 mm	9.5 mm																										
4 mm ² AWG 12	2.85 mm	9.5 mm																										
6 mm ² AWG 10	3.5 mm	9.5 mm																										
10 mm ² AWG 8	4.3 mm	12 mm																										

Features

- High current rated compact designed connector
- Mating compatible to the crimp version
- Finger safe male and female contacts
- 16 coding options
- No special tools required for axial-screw termination

Technical characteristics

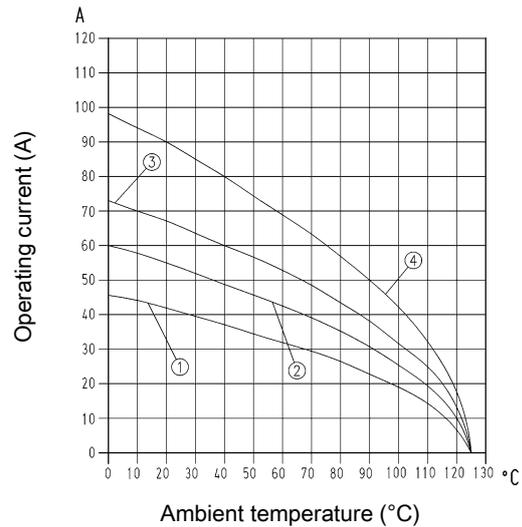
Number of contacts	2
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	400 V
Rated voltage acc. to CSA	400 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

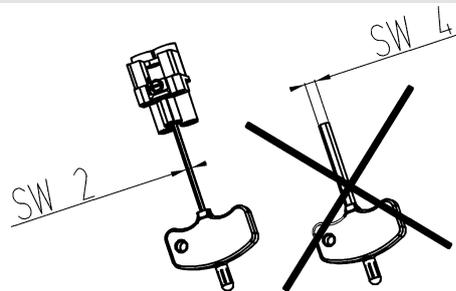


- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details



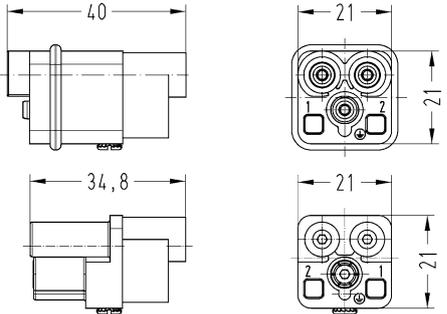
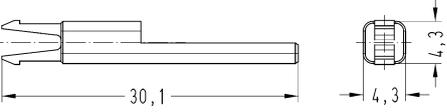
for termination please use only hexagonal screw driver with A/F 2
 If PE contact is not used: Please screw the PE contact maximal on both sides clockwise with a hexagonal screwdriver A/F 2.

Number of contacts

2+

40 A 400 V 6 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , 2/0, Axial screw termination, Contact surface: Silver plated 	1.5 ... 2.5 2.5 ... 6 4 ... 10	09 12 002 2655 09 12 002 2653 09 12 002 2651	09 12 002 2755 09 12 002 2753 09 12 002 2751	 <p>Stripping length 8 ... 9 mm Tightening torque 1.8 Nm</p>
Coding element 		09 12 000 9922		

Features

- High current rated compact designed connector
- Mating compatible to the crimp version
- Finger safe male and female contacts
- 16 coding options
- No special tools required for axial-screw termination
- for high voltages, please use heat shrink tube (included in delivery range)

Technical characteristics

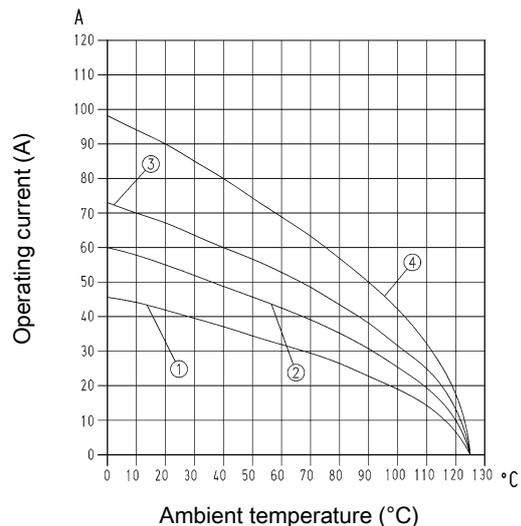
Number of contacts	2
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

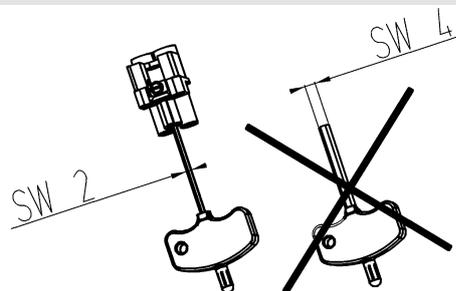


- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details



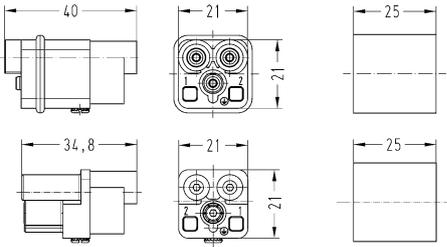
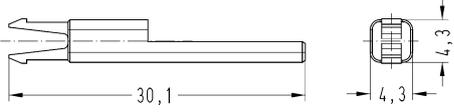
for termination please use only hexagonal screw driver with A/F 2
 2
 If PE contact is not used: Please screw the PE contact maximal on both sides clockwise with a hexagonal screwdriver A/F 2.

Number of contacts

2+

40 A 830 V 6 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® Q , 2/0 High Voltage, Axial screw termination, Pack contents: With heat shrink tube Contact surface: Silver plated</p> 	<p>1.5 ... 2.5 2.5 ... 6 4 ... 10</p>	<p>09 12 002 2656 09 12 002 2654 09 12 002 2652</p>	<p>09 12 002 2756 09 12 002 2754 09 12 002 2752</p>	 <p>Stripping length 8 ... 9 mm Tightening torque 1.8 Nm</p>
<p>Coding element</p> 		<p>09 12 000 9922</p>		

Features

- High current rated compact designed connector
- 4 coding options
- Suitable for Han® C crimp contacts
- Finger safe male and female contacts
- Leading PE crimp contact

Technical characteristics

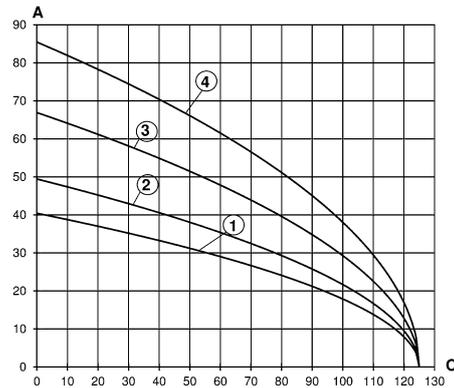
Number of contacts	3
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Crimping tools see chapter 90

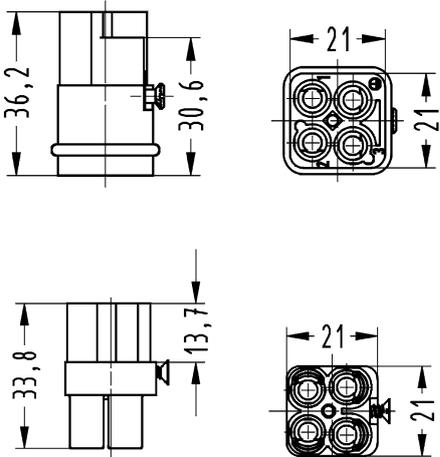
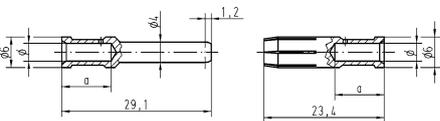

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

3+

40 A 400 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han® Q , 3/0, Crimp termination  <p>Please order crimp contacts separately.</p>	1.5 ... 10	09 12 003 3051	09 12 003 3151																									
Han® C , Crimp contact, Contact surface: Silver plated  <p>Coding element, Pack contents: 20 pieces per frame</p> 	1.5 2.5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> <td></td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> <td></td> </tr> </tbody> </table> 	Conductor cross-section	Ø	Stripping length		1.5 mm ² AWG 16	1.75 mm	9.5 mm		2.5 mm ² AWG 14	2.25 mm	9.5 mm		4 mm ² AWG 12	2.85 mm	9.5 mm		6 mm ² AWG 10	3.5 mm	9.5 mm		10 mm ² AWG 8	4.3 mm	12 mm	
Conductor cross-section	Ø	Stripping length																										
1.5 mm ² AWG 16	1.75 mm	9.5 mm																										
2.5 mm ² AWG 14	2.25 mm	9.5 mm																										
4 mm ² AWG 12	2.85 mm	9.5 mm																										
6 mm ² AWG 10	3.5 mm	9.5 mm																										
10 mm ² AWG 8	4.3 mm	12 mm																										

Features

- High current rated compact designed connector
- 4 coding options
- Suitable for Han® C crimp contacts
- Finger safe male and female contacts

Technical characteristics

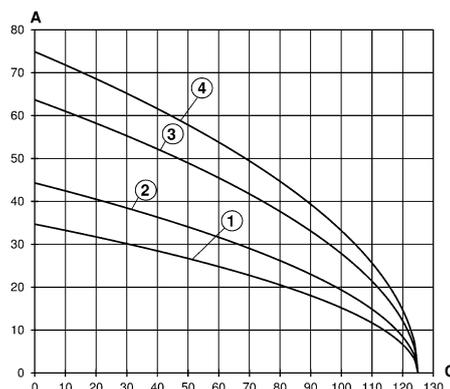
Number of contacts	4
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
UL 2237 PVVA2.E318390
CSA-C22.2 No. 182.3 PVVA8.E318390
DNV GL

Details

Attention! Only for thermoplastic hoods/housings!

Crimping tools see chapter 90

Remarks on the crimp technique

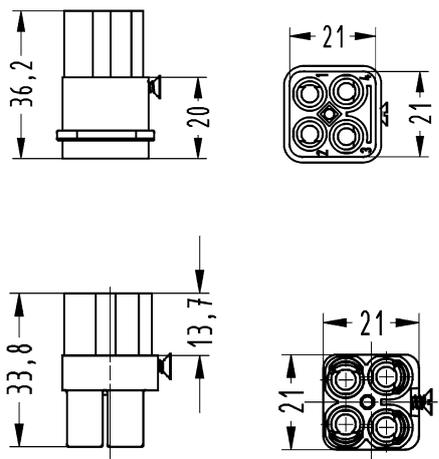
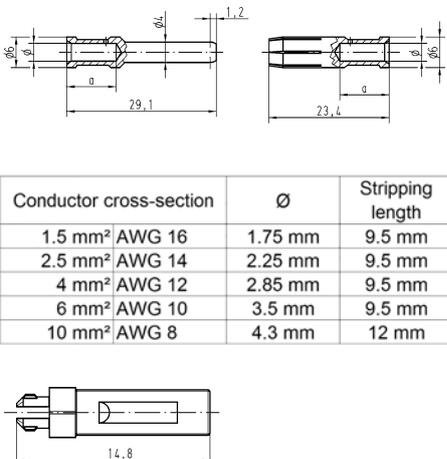
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

4

40 A 830 V 8 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han® Q , 4/0, Crimp termination  Please order crimp contacts separately.	1.5 ... 10	09 12 004 3051	09 12 004 3151																									
Han® C , Crimp contact, Contact surface: Silver plated  Coding element, Pack contents: 20 pieces per frame 	1.5 2.5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table border="1" data-bbox="997 1310 1444 1489"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td colspan="2">9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td colspan="2">12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length		1.5 mm ² AWG 16	1.75 mm	9.5 mm		2.5 mm ² AWG 14	2.25 mm	9.5 mm		4 mm ² AWG 12	2.85 mm	9.5 mm		6 mm ² AWG 10	3.5 mm	9.5 mm		10 mm ² AWG 8	4.3 mm	12 mm	
Conductor cross-section	Ø	Stripping length																										
1.5 mm ² AWG 16	1.75 mm	9.5 mm																										
2.5 mm ² AWG 14	2.25 mm	9.5 mm																										
4 mm ² AWG 12	2.85 mm	9.5 mm																										
6 mm ² AWG 10	3.5 mm	9.5 mm																										
10 mm ² AWG 8	4.3 mm	12 mm																										

Features

- Han® C power contacts
- Han D® signal contacts
- Finger safe male and female contacts
- Leading PE crimp contact
- Suitable for standard plastic hoods/housings or metal hoods/housings with additional PE terminating contact on the hoods/housings from the Han-Compact® series
- Mating compatible to the axial screw version

Technical characteristics

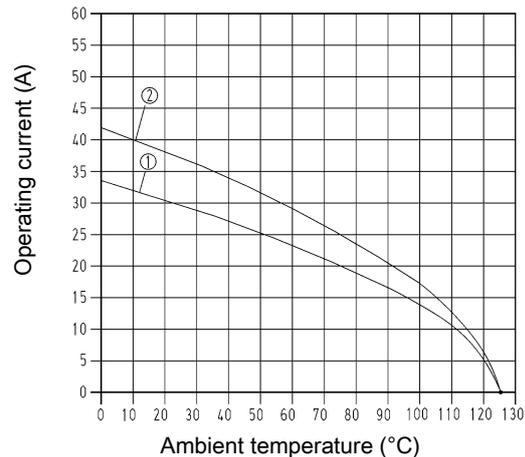
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	250 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ, ≤3 mΩ
Contact resistance, signal area	<3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Contact resistance Han D® crimp contact: ≤ 3 mΩ

Contact resistance Han® C crimp contact: ≤ 1 mΩ

Crimping tools see chapter 90

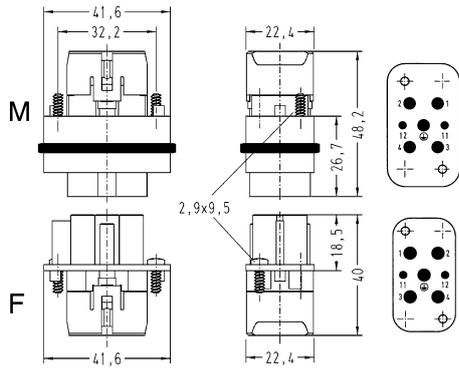
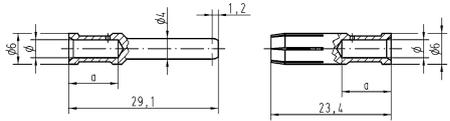
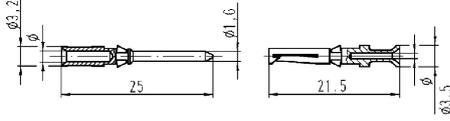
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

4+

40 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® Q , 4/2, Crimp termination  <p>Please order crimp contacts separately.</p>	1.5 ... 6, 0.14 ... 2.5 Signal	09 12 006 3041	09 12 006 3141	 <p>Contact arrangement (view from termination side)</p>																					
Han® C , Crimp contact, Contact surface: Silver plated 	1.5 2.5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table border="1" data-bbox="995 1279 1445 1447"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm ² AWG 16	1.75 mm	9.5 mm																							
2.5 mm ² AWG 14	2.25 mm	9.5 mm																							
4 mm ² AWG 12	2.85 mm	9.5 mm																							
6 mm ² AWG 10	3.5 mm	9.5 mm																							
10 mm ² AWG 8	4.3 mm	12 mm																							
Han D® , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1" data-bbox="995 1653 1445 1821"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 15 000 6124	09 15 000 6224																						
	0.5	09 15 000 6123	09 15 000 6223																						
	0.75	09 15 000 6125	09 15 000 6225																						
	1	09 15 000 6122	09 15 000 6222																						
	1.5	09 15 000 6121	09 15 000 6221																						
	2.5	09 15 000 6126	09 15 000 6226																						
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Features

- Compact design saves space
- No special tools required
- Mating compatible to the crimp version
- Suitable for standard plastic hoods/housings or metal hoods/housings with additional PE terminating contact on the hoods/housings from the Han-Compact® series
- With or without Han-Quick Lock® signal contacts

Technical characteristics

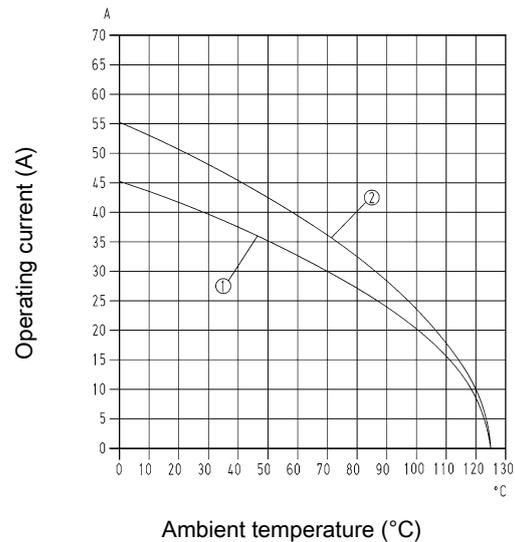
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤0.3 mΩ
Contact resistance, signal area	<3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

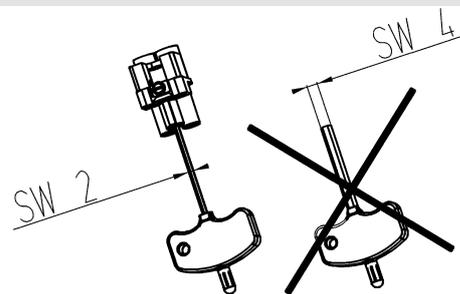


- ① Conductor cross-section 4 mm²
- ② Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details



for termination please use only hexagonal screw driver with A/F 2

If PE contact is not used: Please screw the PE contact maximal on both sides clockwise with a hexagonal screwdriver A/F 2.

Number of contacts

4+

40 A 400/690 V 6 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3



Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® Q , 4/2, Axial screw termination, Contact surface: Silver plated</p> <p>With Han-Quick Lock® signal contacts</p>	<p>2.5 ... 6, 0.25 ... 1.5 Signal 4 ... 10, 0.25 ... 1.5 Signal</p>	<p>09 12 006 2662 09 12 006 2663</p>	<p>09 12 006 2762 09 12 006 2763</p>	<p>Stripping length Power contacts 8 mm Stripping length Signal contacts 10 mm Tightening torque 1.8 Nm</p>
<p>Han® Q , 4/2, Axial screw termination, Contact surface: Silver plated Without signal contacts</p>	<p>2.5 ... 6 4 ... 10</p>	<p>09 12 006 2665 09 12 006 2666</p>	<p>09 12 006 2765 09 12 006 2766</p>	

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- No special tools required
- Mating compatible to the crimp version
- Vibration and shock resistant

Technical characteristics

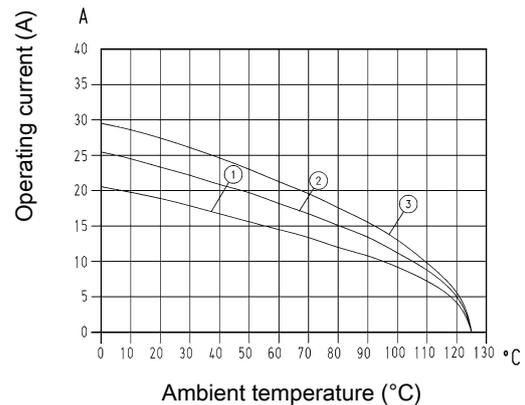
Number of contacts	5
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

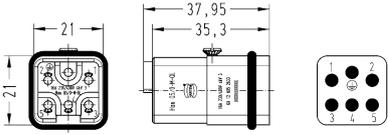
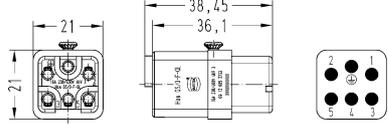
EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

5+

16 A 230/400 V 4 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® Q , 5/0, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Blue slide</p>	0.5 ... 2.5	09 12 005 2633	09 12 005 2733	<p>M</p>  <p>F</p>  <p>Stripping length 10 mm</p>
<p>Han® Q , 5/0, Han-Quick Lock® termination, Contact surface: Silver plated</p>  <p>Black slide</p>	0.25 ... 1.5	09 12 005 2634	09 12 005 2734	

Features

- Compact design saves space
- Suitable for Han E® crimp contacts
- 32 coding options without loss of contacts

Technical characteristics

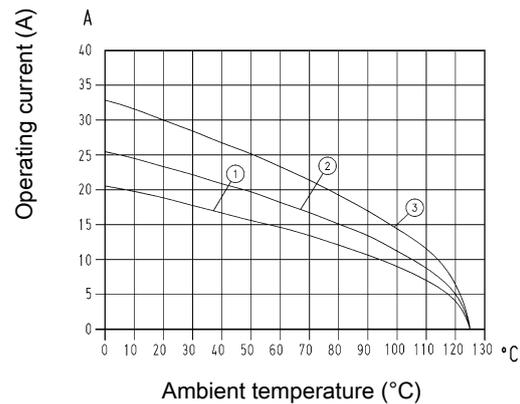
Number of contacts	5
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Polyamide (PA)
Colour (accessories)	Red
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

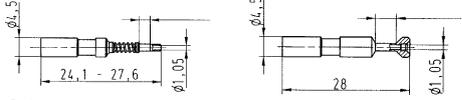
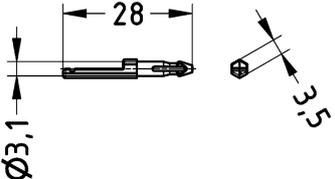
Number of contacts

5+

16 A 230/400 V 4 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
<p>Han® Q , 5/0, Crimp termination</p> <p>Please order crimp contacts separately. Please order coding pins separately.</p>	0.14 ... 2.5	09 12 005 3004	09 12 005 3104	<p>Contact arrangement (view from mating side)</p>																		
<p>Han E® , Crimp contact, Contact surface: Silver plated</p>	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202	<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm ²	AWG 26-22 no groove																					
0.5 mm ²	AWG 20 no groove																					
0.75 mm ²	AWG 18 1 groove*																					
1 mm ²	AWG 18 1 groove																					
1.5 mm ²	AWG 16 2 grooves																					
2.5 mm ²	AWG 14 3 grooves																					
3 mm ²	AWG 12 wide groove																					
4 mm ²	AWG 12 no groove																					
<p>Han E® , Crimp contact, Contact surface: Gold plated</p>	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223																			
<p>Han E® , Crimp contact, Relay contact , Contact surface: Silver plated</p>	0.75 ... 1 1.5	09 33 000 6109 09 33 000 6110																				

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
FO contact, for 1 mm plastic fibre 		20 10 001 3311	20 10 001 3321	 <p>Crimp zone</p>
Coding element, Pack contents: 20 pieces per frame 		09 12 000 9927	09 12 000 9927	

Features

- Compact design saves space
- Suitable for Han D® crimp contacts
- 6 coding options

Technical characteristics

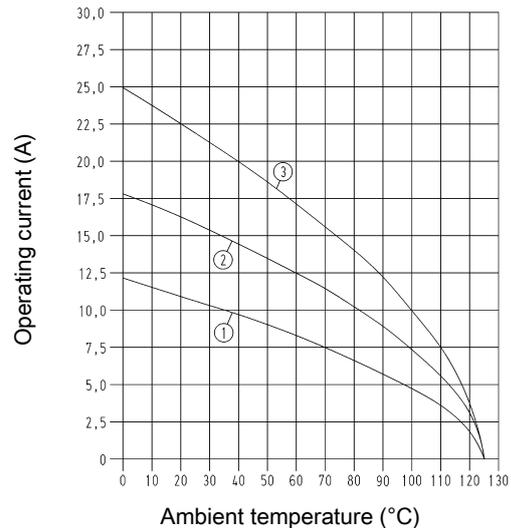
Number of contacts	7
Rated current	10 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.75 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Crimping tools see chapter 90

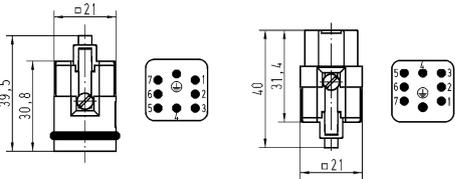
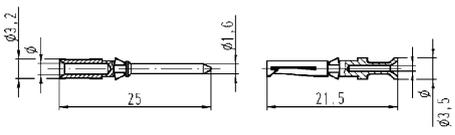
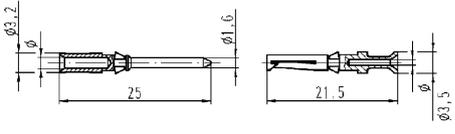

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

7+

10 A 400 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® Q , 7/0, Crimp termination  Please order crimp contacts separately.	0.14 ... 2.5	09 12 007 3001	09 12 007 3101	 Contact arrangement (view from termination side)																					
Han D® , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han D® , Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					
Coding element 		09 12 000 9901	09 12 000 9902																						

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- No special tools required
- Mating compatible to the crimp version
- Suitable for standard plastic hoods/housings or metal hoods/housings with additional PE terminating contact on the hoods/housings from the Han-Compact® series
- Leading PE crimp contact

Technical characteristics

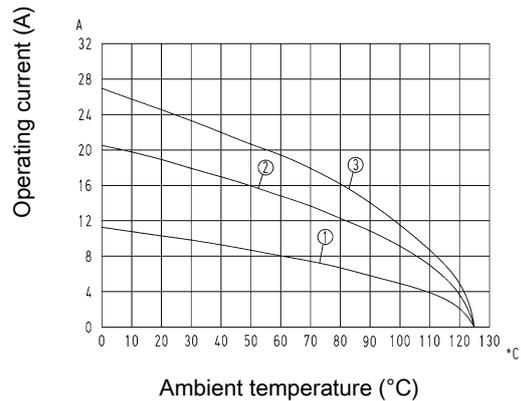
Number of contacts	8
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

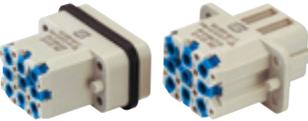
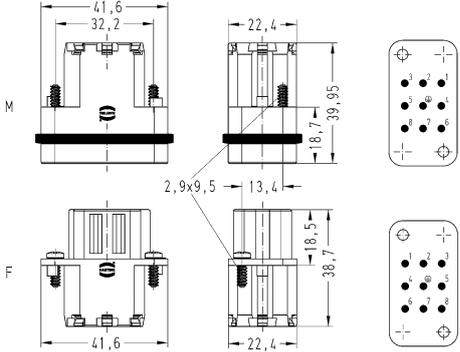
Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

8+

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , 8/0, Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0.5 ... 2.5	09 12 008 2633	09 12 008 2733	 Stripping length 10 mm
Han® Q , 8/0, Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0.25 ... 1.5	09 12 008 2634	09 12 008 2734	

Features

- Compact design saves space
- Suitable for Han E® crimp contacts
- Leading PE crimp contact
- ISO 23570 / DESINA conform product

Technical characteristics

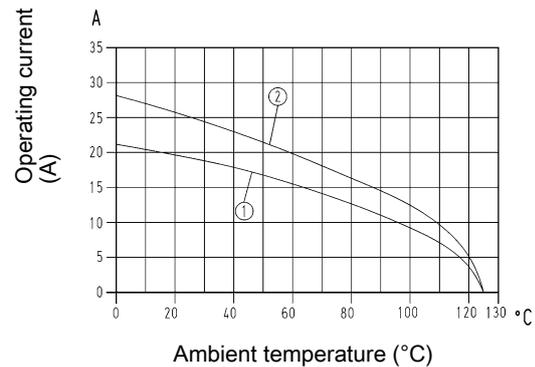
Number of contacts	8
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

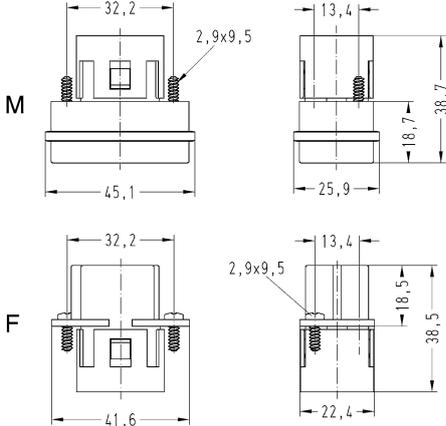

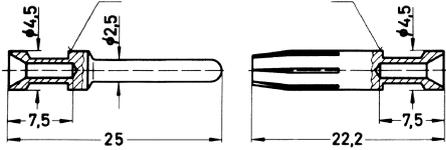
Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Number of contacts

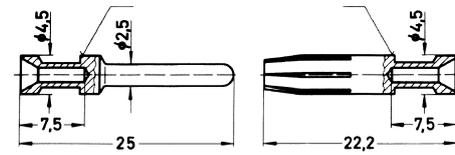
8+

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han [®] Q , 8/0, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 12 008 3001	09 12 008 3101	  Contact arrangement (view from termination side)																											
Han E [®] , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>AWG</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>no groove</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	AWG	Identification	0.14-0.37 mm ²	AWG 26-22	no groove	0.5 mm ²	AWG 20	no groove	0.75 mm ²	AWG 18	1 groove*	1 mm ²	AWG 18	1 groove	1.5 mm ²	AWG 16	2 grooves	2.5 mm ²	AWG 14	3 grooves	3 mm ²	AWG 12	wide groove	4 mm ²	AWG 12	no groove
Conductor cross-section	AWG	Identification																													
0.14-0.37 mm ²	AWG 26-22	no groove																													
0.5 mm ²	AWG 20	no groove																													
0.75 mm ²	AWG 18	1 groove*																													
1 mm ²	AWG 18	1 groove																													
1.5 mm ²	AWG 16	2 grooves																													
2.5 mm ²	AWG 14	3 grooves																													
3 mm ²	AWG 12	wide groove																													
4 mm ²	AWG 12	no groove																													

Han Q

Identification	Conductor cross-section (mm ²)	Part number	
		Male	Female
Han E®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 33 000 6117	09 33 000 6217
	0.5	09 33 000 6122	09 33 000 6222
	0.75	09 33 000 6115	09 33 000 6215
	1	09 33 000 6118	09 33 000 6218
	1.5	09 33 000 6116	09 33 000 6216
	2.5	09 33 000 6123	09 33 000 6223
	4	09 33 000 6119	09 33 000 6221




Conductor cross-section	AWG	Identification
0.14-0.37 mm ²	AWG 26-22	no groove
0.5 mm ²	AWG 20	no groove
0.75 mm ²	AWG 18	1 groove*
1 mm ²	AWG 18	1 groove
1.5 mm ²	AWG 16	2 grooves
2.5 mm ²	AWG 14	3 grooves
3 mm ²	AWG 12	wide groove
4 mm ²	AWG 12	no groove

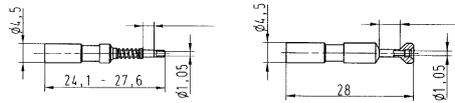
* on the back crimp collar

Stripping length 7.5 mm

Han E®, Crimp contact, Relay contact, Contact surface: Silver plated	0.75 ... 1	09 33 000 6109	
	1.5	09 33 000 6110	




FO contact, for 1 mm plastic fibre	20 10 001 3311	20 10 001 3321
---------------------------------------	----------------	----------------



Crimp zone

Han E® Han® EE Han® EEE , Coding pin	09 33 000 9954
---	----------------



for crimp inserts only
With loss of one contact

Features

- Suitable for Han D® crimp contacts
- PE contact with Han-Quick Lock® termination
- 16 coding options without loss of contacts

Technical characteristics

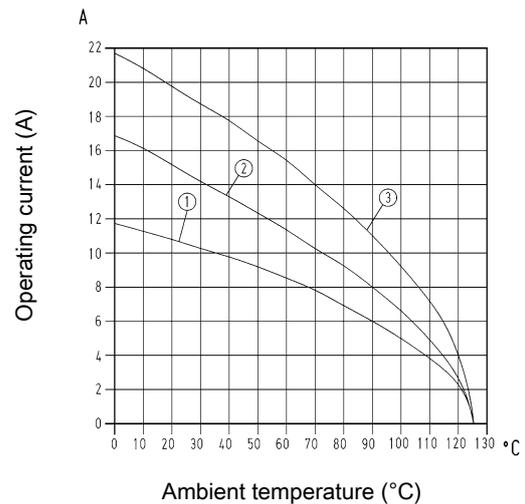
Number of contacts	12
Rated current	10 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.75 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Crimping tools see chapter 90

Remarks on the crimp technique

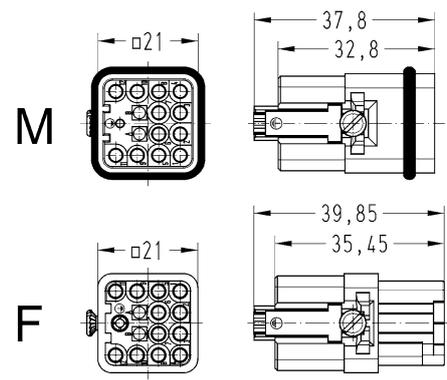
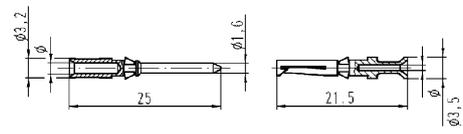
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

12+

10 A 400 V 6 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® Q , 12/0, With Han-Quick Lock® PE contact, Crimp termination  Blue slide Please order crimp contacts separately.	0.14 ... 2.5	09 12 012 3001	09 12 012 3101	 <p>M</p> <p>F</p> With Han-Quick Lock® PE contact : Conductor cross-section Blue slide 0.5 ... 2.5 Conductor cross-section Black slide 0.25 ... 1.5																					
Han® Q , 12/0, With Han-Quick Lock® PE contact, Crimp termination  Black slide Please order crimp contacts separately.	0.14 ... 2.5	09 12 012 3004	09 12 012 3104																						
Han D® , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D [®] , Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 15 000 6124	09 15 000 6224	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 000 6123	09 15 000 6223																							
0.75	09 15 000 6125	09 15 000 6225																							
1	09 15 000 6122	09 15 000 6222																							
1.5	09 15 000 6121	09 15 000 6221																							
2.5	09 15 000 6126	09 15 000 6226																							
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	<p>20 10 001 3211 + 20 10 001 3221</p>																					
Coding element, Pack contents: 20 pieces per frame		09 12 000 9924																							

Features

- Compact design saves space
- Suitable for Han D® crimp contacts
- Leading PE crimp contact

Technical characteristics

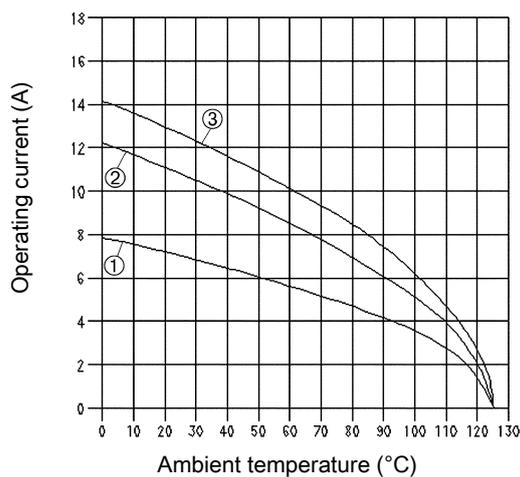
Number of contacts	17
Rated current	10 A
Rated voltage	160 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated voltage acc. to UL	250 V
Rated voltage acc. to CSA	250 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.5 mm²
- ② Conductor cross-section 1 mm²
- ③ Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

Crimping tools see chapter 90

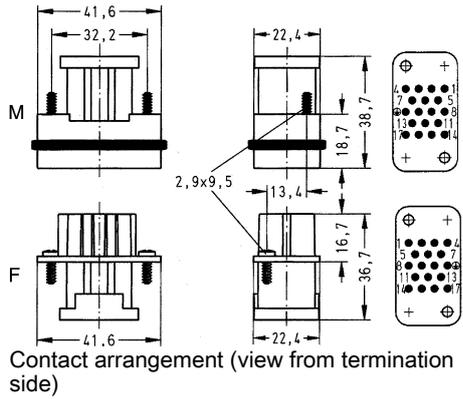
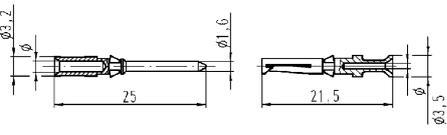
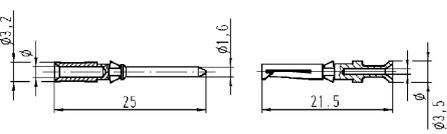

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

17+

10 A 160 V 2.5 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han [®] Q , 17/0, Crimp termination  Please order crimp contacts separately.	0.14 ... 2.5	09 12 017 3001	09 12 017 3101	 <p>Contact arrangement (view from termination side)</p>																					
Han D [®] , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han D [®] , Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 <p>20 10 001 3211 + 20 10 001 3221</p>																					

Features

- Easy handling of signal connectors in industrial environment
- High density of contacts
- Suitable for standard D-Sub crimp contacts
- One preleading contact

Technical characteristics

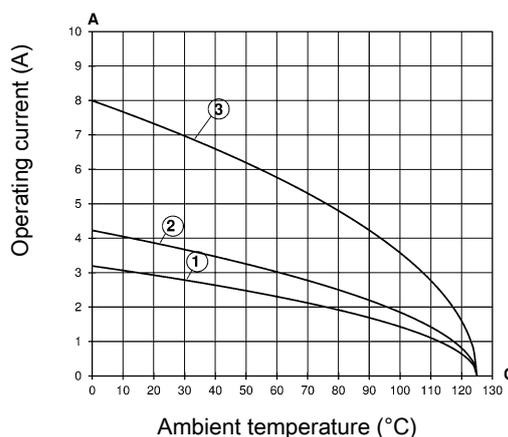
Number of contacts	21
Rated current	6.5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	50 V AC, 120 V DC
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Stamped contacts Conductor cross-section 0.14 mm²
- ② Stamped contacts Conductor cross-section 0.25 mm²
- ③ Turned contacts Conductor cross-section 0.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Crimping tools see chapter 90

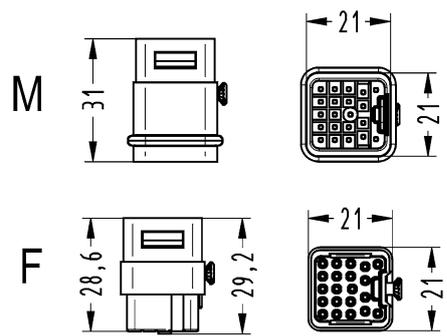
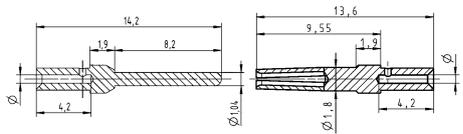
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

21

6.5 A 50 V 0.8 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
<p>Han® Q , High Density, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.09 ... 0.56	09 12 021 3001	09 12 021 3101																									
<p>D-Sub , Standard, Crimp contact</p> 	<p>0.09 ... 0.25 0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.25 ... 0.52</p>	<p>09 67 000 7576 09 67 000 7176 09 67 000 5576 09 67 000 8576 09 67 000 8176</p>	<p>09 67 000 7476 09 67 000 7276 09 67 000 5476 09 67 000 8476 09 67 000 8276</p>	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p> <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>max. insulation diameter</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>1.02</td> <td>2.5 mm + 0.5</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.52</td> <td>2.5 mm + 0.5</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm ²	1.02	2.5 mm + 0.5	0.25-0.52 mm ²	1.52	2.5 mm + 0.5
Wire gauge	∅	Stripping length																										
0.09-0.25 mm ²	0.64 mm	4 mm																										
0.13-0.33 mm ²	0.88 mm	4 mm																										
0.25-0.52 mm ²	1.13 mm	4 mm																										
0.33-0.82 mm ²	1.34 mm	4 mm																										
Wire gauge	max. insulation diameter	Stripping length																										
0.09-0.25 mm ²	1.02	2.5 mm + 0.5																										
0.25-0.52 mm ²	1.52	2.5 mm + 0.5																										

Features

- Combination connector: Ethernet connector based on RJ45 with up to 10 signal D-Sub contacts, crimp termination
- Turned D-Sub contacts of performance level 1
- Compact design saves space
- High density of contacts

Technical characteristics

Number of contacts	8
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Specifications and approvals

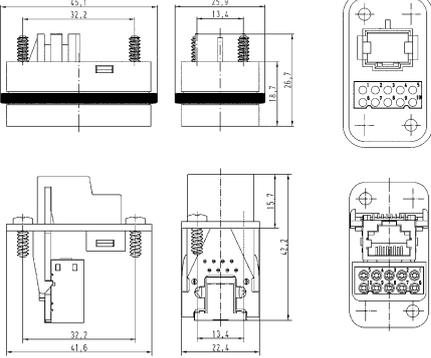
EN 60664-1
IEC 61984

Number of contacts

8

5 A 50 V 0.8 kV 3

Han Q

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
<p>Han® Q , Data RJ45, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.13 ... 0.52	09 12 011 3001	09 12 011 3111																
<p>D-Sub , Standard, Crimp contact</p> 	0.13 ... 0.33 0.25 ... 0.52	09 67 000 5576 09 67 000 8576	09 67 000 5476 09 67 000 8476	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Wire gauge	∅	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	∅	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

Features

- Hoods/housings for industrial applications
- Compact design saves space

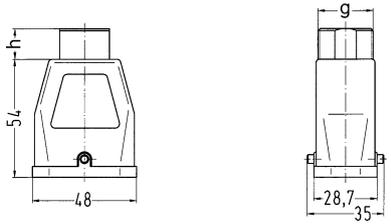
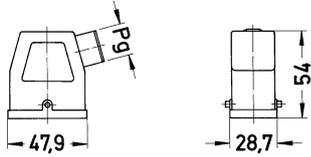
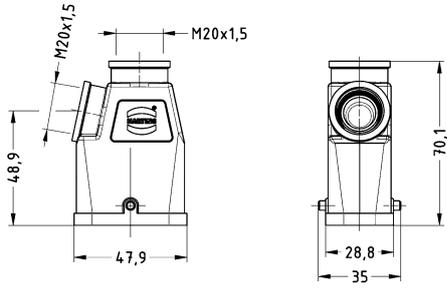
Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 12
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

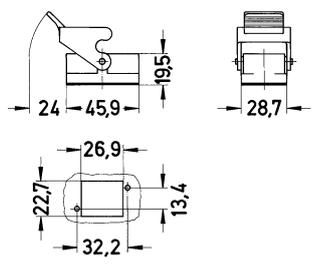
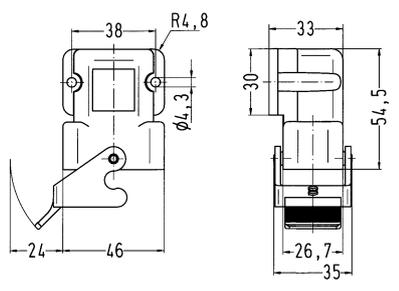
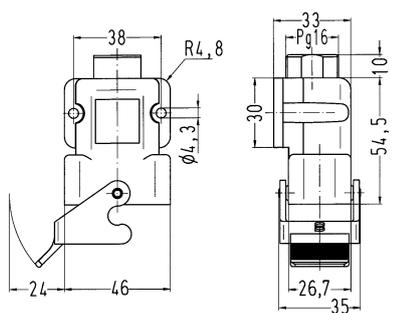
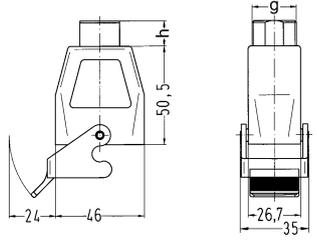
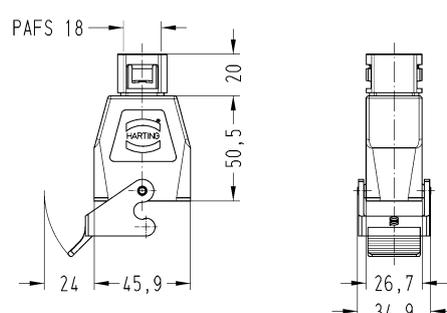
Specifications and approvals

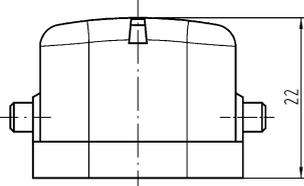
UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Hoods/housings for industrial applications
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han-Compact® , Hood, for Han-Compact® half cable gland, Top entry 	1x M25 1x Pg 16 1x Pg 21	19 12 008 0429 09 12 008 0427 09 12 008 0429		
Han-Compact® , Hood, for flexible conduits Adaptaflex PAFS18, Top entry 	1x PAFS 18	09 12 008 0428		
Han-Compact® , Hood, for Han-Compact® half cable gland, Side entry 	1x Pg 16	09 12 008 0527		
Han-Compact® , Hood, Top/side entry 	2x M20	19 12 008 0425		

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Compact®, Bulkhead mounted housing, Straight</p> 		09 12 008 0327	
<p>Han-Compact®, Bulkhead mounted housing, Angled</p> 		09 12 008 0902	
<p>Han-Compact®, Surface mounted housing, for Han-Compact® half cable gland, Angled entry</p> 	1x Pg 16	09 12 008 0901	
<p>Han-Compact®, Cable to cable housing, for Han-Compact® half cable gland, Top entry</p> 	1x M25 1x Pg 16	19 12 008 0729 09 12 008 0727	
<p>Han-Compact®, Cable to cable housing, for flexible conduits Adaptaflex PAFS18, Top entry</p> 	1x PAFS 18	09 12 008 0728	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Compact®, Protection cover, for bulkhead mounted housings, Thermoplastic</p> 		09 12 008 5407	
<p>for mounted male insert</p>			
<p>Han-Compact®, Protection cover, for bulkhead mounted housings, Thermoplastic</p> 		09 12 008 5408	
<p>for mounted female insert</p>			

Han Q

Features

- Hoods/housings for industrial applications
- Large space for cables
- Visible cabling
- Separate PE connection option

Technical characteristics

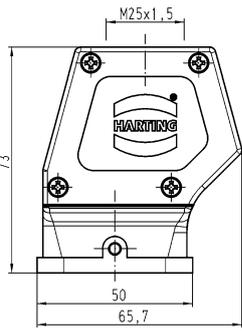
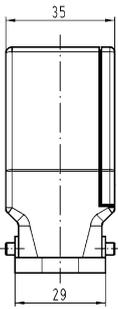
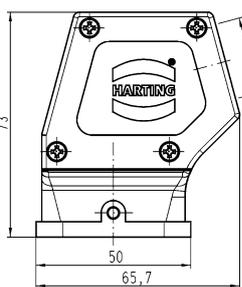
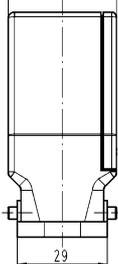

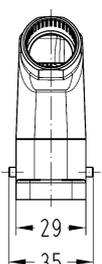
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Chromated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
RoHS	compliant

Specifications and approvals

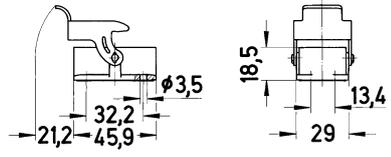
UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 ECBT8.E235076
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Hoods/housings for industrial applications
Single locking lever

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
<p>Han-Compact® , Hood, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry</p> 	1x M25	19 12 008 0426		
<p>Han-Compact® , Hood, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry</p> 	1x M25	19 12 708 0411		
<p>Han-Compact® , Hood, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry</p> 	1x M25	19 12 008 0526		
<p>Han-Compact® , Hood, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry</p> 	1x M25	19 12 708 0511		

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Compact®, Bulkhead mounted housing</p> 		<p>09 12 708 0301</p>	

Hoods/housings for industrial applications
Single locking lever

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact® , Hood, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry	1x M25	19 12 008 0411	
Han-Compact® , Hood, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry	1x M25	19 12 008 0511	
Han-Compact® , Bulkhead mounted housing		09 12 008 0301	

Features

- Hoods/Housings for higher EMC requirements
- Separate PE connection option
- High degree of flexibility due to two-part assembly

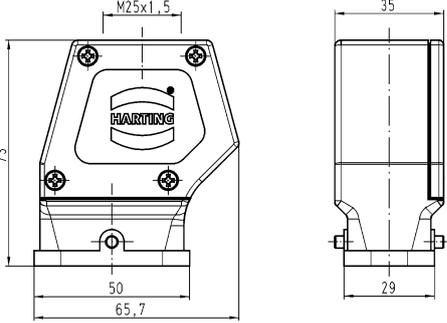
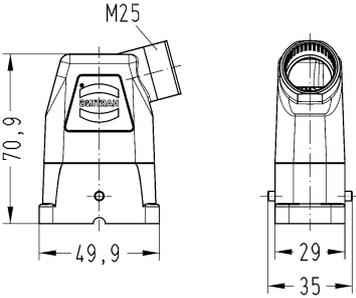
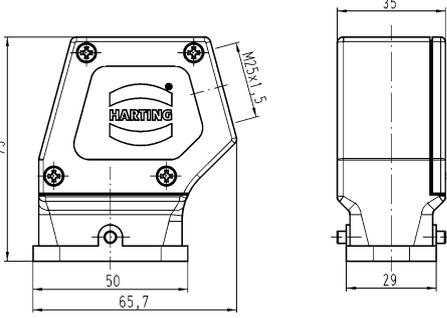
Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Material (locking)	Stainless steel
RoHS	compliant, compliant with exemption

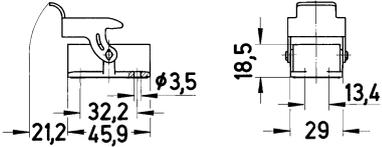
Specifications and approvals

UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390
 CSA-C22.2 No. 182.3 ECBT8.E235076
 CSA-C22.2 No. 182.3 PVVA8.E318390
 DNV GL

Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact®, Hood, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry	1x M25	19 12 008 0412	
Han-Compact®, Hood, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry	1x M25	19 12 008 0428	
Han-Compact®, Hood, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry	1x M25	19 12 008 0512	 
Han-Compact®, Hood, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry	1x M25	19 12 008 0528	 

Han Q

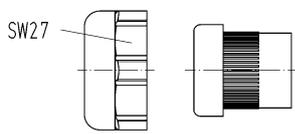
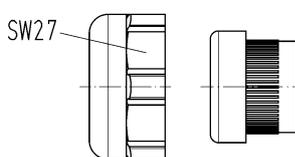
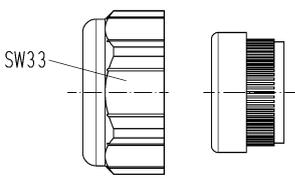
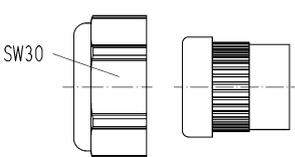
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Compact®, Bulkhead mounted housing</p> 		<p>09 12 008 0303</p>	

Technical characteristics

Limiting temperature -40 ... +100 °C
 Degree of protection acc. to IEC IP65
 60529

Technical characteristics

Material (cable glands) Thermoplastic
 Colour (accessories) Black
 RoHS compliant, compliant with exemption

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Compact® , Cable gland, for hoods, for cable to cable housing, Pg 16 	Pg 16 Pg 16 Pg 16	6.5 ... 9.5 9 ... 13 11.5 ... 15.5	09 00 000 5047 09 00 000 5156 09 00 000 5059	SW27 
Han-Compact® , Cable gland, for surface mounted housings, Pg 16 	Pg 16 Pg 16	6.5 ... 9.5 11.5 ... 15.5	09 00 000 5057 09 00 000 5058	SW27 
Han-Compact® , Cable gland, for hoods, for cable to cable housing, Pg 21 	Pg 21 Pg 21	14 ... 18 17 ... 20.5	09 00 000 5157 09 00 000 5158	SW33 
Han-Compact® , Cable gland, for hoods, for cable to cable housing, M25 	M25 M25 M25	6.5 ... 9.5 10.5 ... 14 14 ... 17	19 12 000 5156 19 12 000 5157 19 12 000 5158	SW30 

Han Q

Technical characteristics

Limiting temperature -40 ... +130 °C
 Degree of protection acc. to IEC IP65
 60529

Technical characteristics

Material (cable glands) Metal
 RoHS compliant with exemption

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
----------------	------	---------------------	-------------	----------------------------

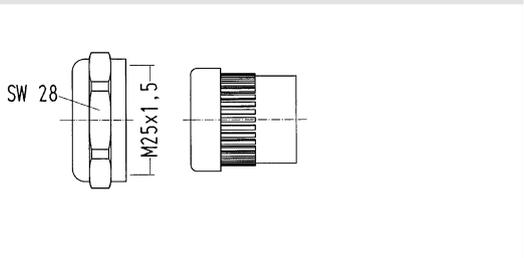
Han-Compact®,
 Cable gland,
 for hoods



M25
 M25

10.5 ... 14
 14 ... 17

19 12 000 5057
 19 12 000 5058



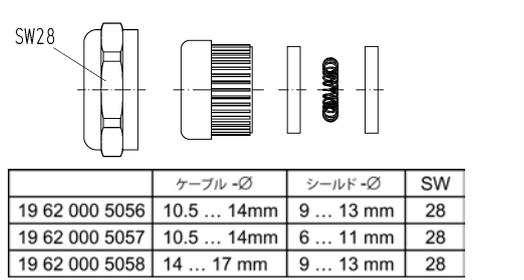
Han-Compact®,
 Cable gland,
 EMC version,
 for hoods



M25
 M25
 M25

10.5 ... 14
 10.5 ... 14
 14 ... 17

19 62 000 5056
 19 62 000 5057
 19 62 000 5058



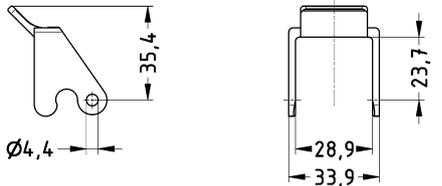
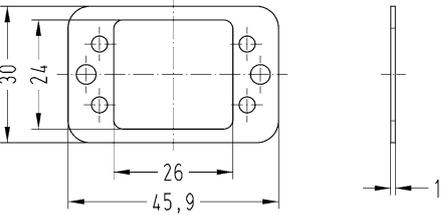
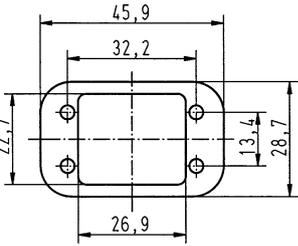
	ケーブル-Ø	シールド-Ø	SW
19 62 000 5056	10.5 ... 14mm	9 ... 13 mm	28
19 62 000 5057	10.5 ... 14mm	6 ... 11 mm	28
19 62 000 5058	14 ... 17 mm	9 ... 13 mm	28

Technical characteristics

Material (seal) NBR
 Colour (seal) Black

Technical characteristics

Material (accessories) Thermoplastic
 Colour (accessories) Black
 RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
Locking levers, Han® Q 8/0, Black 	Han-Compact®	09 00 000 5244	
Flange gasket, for bulkhead mounted plastic housings, angled, for surface mounted housings 	Han-Compact®	09 12 000 9911	
Flange gasket, for bulkhead mounted plastic housings, straight 	Han-Compact®	09 12 000 9912	

Han Q



Han
13
·
54

ASML's TWINSKAN NXE platform using Han® Q connectors is the industry's first production platform for extreme ultraviolet lithography (EUVL).

Contents	Page
Han® K 3/0.....	Han 14.4
Han® K 3/2.....	Han 14.6
Hoods/Housings for Han® K 3/0, Han® K 3/2	Han 14.8
Han® HC Modular 250.....	Han 14.11
Hoods/Housings for Han® HC Modular 250	Han 14.13
Han® HC Modular 350.....	Han 14.23
Hoods/Housings for Han® HC Modular 350	Han 14.28
Han® M hoods/housings for Han® HC Modular 350.....	Han 14.45
Han® HC Modular 650.....	Han 14.48
Hoods/Housings for Han® HC Modular 650	Han 14.52
Han® 24 HPR EasyCon.....	Han 14.59
Han® 24 HPR EasyCon - Accessories	Han 14.69
Han® 48 HPR	Han 14.70

Assembly instructions

Remarks on the axial screw termination see chapter 00

Step 1: The outer diameter of the cable must not exceed 19.5 mm.

Strip the cable by 19 mm.

Insert the cable through hood.

Step 2: Press the Han HC contact on the cable strand and apply tightening torque according table 1 by using a tightening torques tool. Take care that all cable strands fit completely inside the contact termination cavity. During assembling adhere the cable and the contact to minimise axial movement or twisting.

Step 3: Move the perforated plate across the HC contacts.

Step 4: Fit frame onto the hexagon shape of the HC contact. Coding can be arranged by turning the contact within 60° steps. Bolt the frame together with perforated plate.

Step 5: Push back the packet inside the good.

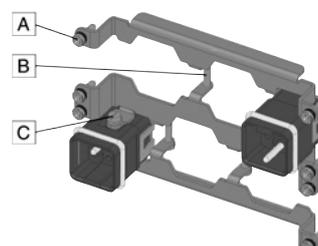
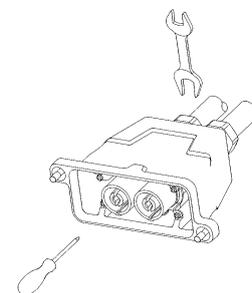
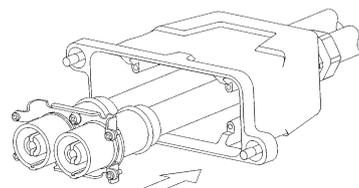
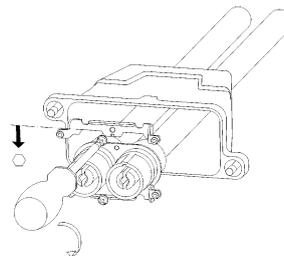
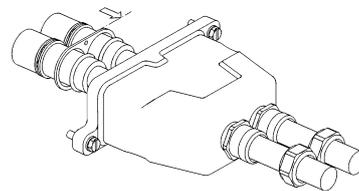
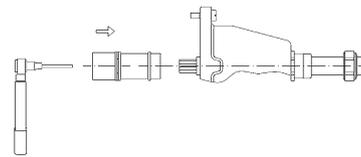

Step 6: Tighten the four M3 (tightening torque 0.5 Nm) screws and the cable gland according manufacturer recommendation.

During the assembly of the frame for 4 poles the following tightening torques have to be taken into consideration:

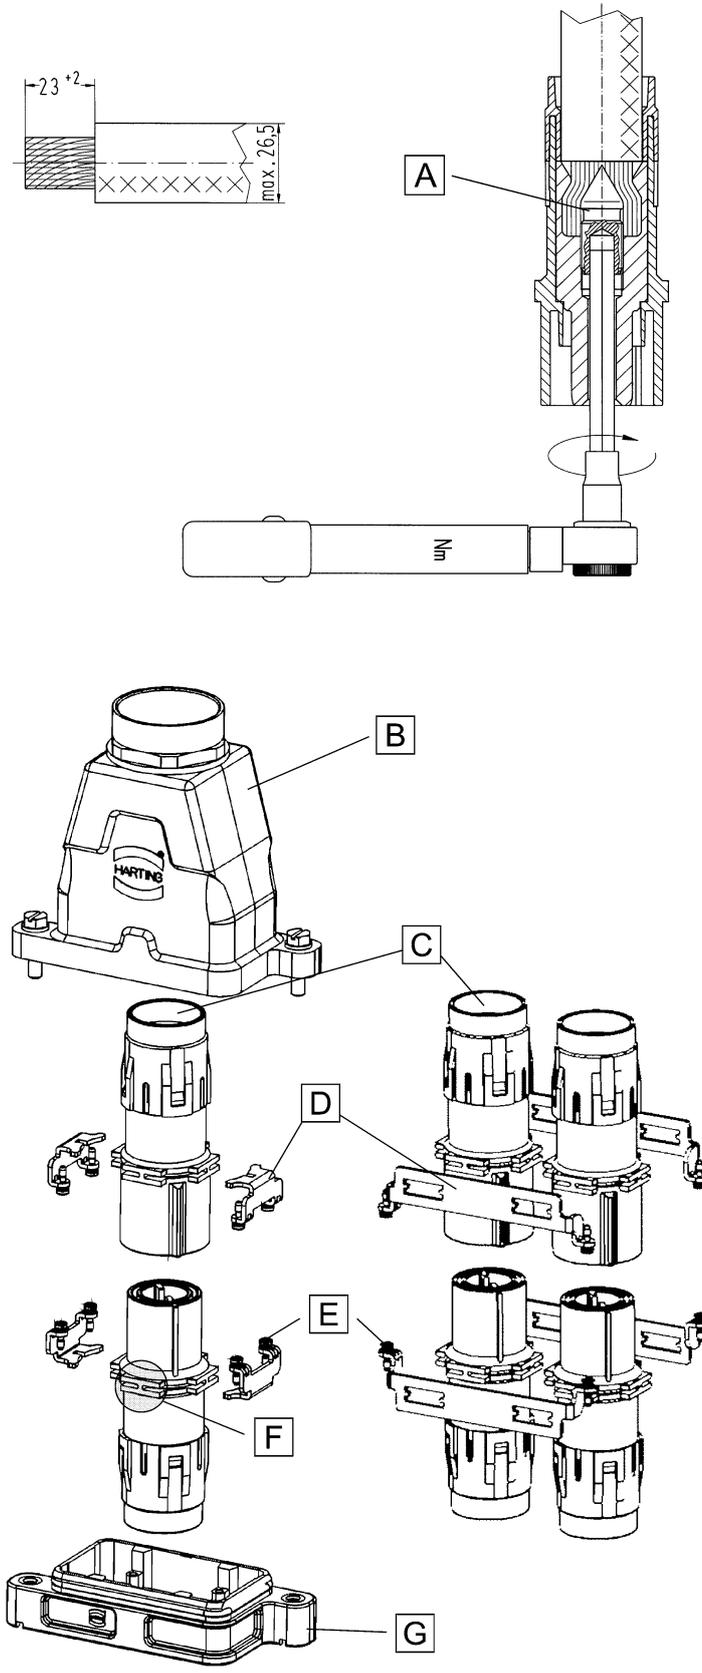
A = 0.5 Nm

B = 1.5 Nm

C = 0.25 Nm



Assembly instructions



1. Strip cable to 23+2 mm.

2. Push conductor through the cable gland and the housing. Push the stripped end of the conductor into the termination entry of the module until the insulation touches the contact.

3. To tighten the axial screw, a hexagonal wrench size 8 is needed. Insert the hexagonal wrench on the mating side of the contact. At the same time, push the conductor over the axial screw. The locking screw has to be tightened with the recommended tightening torque that is determined by the conductor's cross section.

4. Once the modules are terminated, they are mounted into the housing by using two metal frames (tightening torque of the fixing screws = 0.5 Nm). The modules have 4 pegs formed by 2 parallel ribs (each peg shapes like a "H"). Each rib takes 1 pole frame, where the lateral link has to go into the relief of the frame. The 2 pole frames have 2 cutouts on the wall which get fitted to the "H"-shaped pegs (see figure). The heads of the screws have to face the mating direction of the module. Coding can be established by rotating the contact by 90 degrees. Therefore it is important that the corresponding modules are assembled in the correct position otherwise mating is not possible.

5. After assembling the modules in the housing, the tightening torque of the locking screw can be checked and corrected if necessary.

6. After final assembly of the contacts, the user should ensure that the cable is adequately strain relieved to protect the contact from radial stress.

A - Axial screw, B - Hood, C - Termination entry, D - Frame, E - Fixing screws, F - parallel ribs with H-shape, G - Housings bulkhead mounting,

Features

- The ideal connector for transmission of high currents requiring little space
- The vertical and angled versions offer solutions for almost all applications
- The angled versions offer a space-saving 90° cable wiring

Technical characteristics

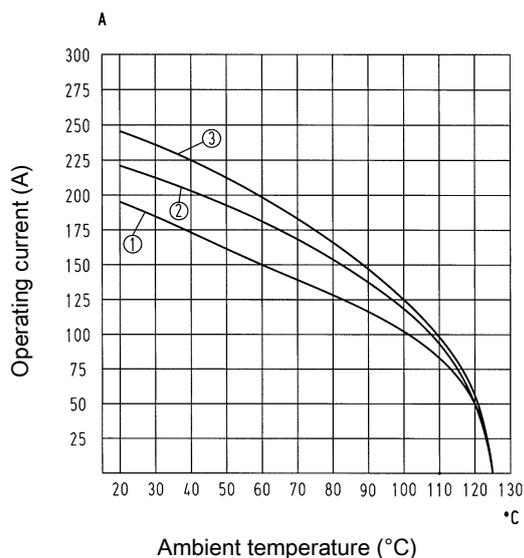
Number of contacts	3
Rated current	200 A
Rated voltage conductor-earth	1150 V
Rated voltage conductor-conductor	2000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	200 A
Rated current acc. to CSA	160 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
- ② Conductor cross-section 50 mm²
- ③ Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

ATTENTION! Only to be used with special Han® 24 HPR hoods and housings!

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 5) see chapter 90

Number of contacts

3

200 A 1.150/2.000 V 8 kV 3



Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Com®, Han® K 3/0, Straight, Axial screw termination, Contact surface: Silver plated</p>	35 ... 70	09 38 005 2621	09 38 005 2721	<p>Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm²</p>
<p>Han-Com®, Han® K 3/0, Angled, Axial screw termination, Contact surface: Silver plated</p>	35 ... 70	09 38 005 2622	09 38 005 2722	<p>Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm²</p>

Features

- The ideal connector for transmission of high currents requiring little space
- The vertical and angled versions offer solutions for almost all applications
- The angled versions offer a space-saving 90° cable wiring

Technical characteristics

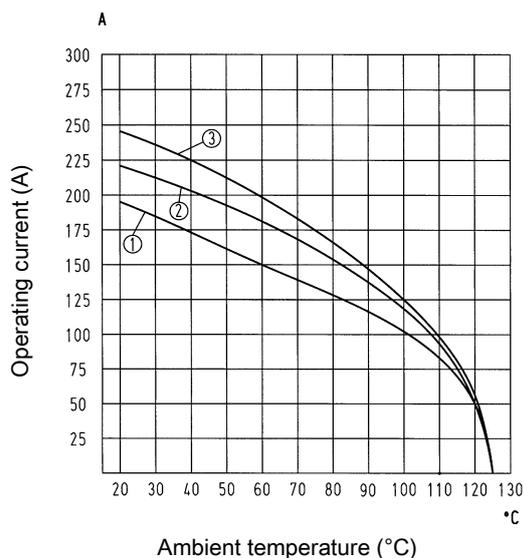
Number of contacts	3
Additional contacts	+ 2 additional signal contacts
Rated current	200 A
Rated voltage conductor-earth	1150 V
Rated voltage conductor-conductor	2000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to UL	200 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	160 A
Rated current acc. to CSA (signal)	16 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.2 \text{ m}\Omega$
Contact resistance, signal area	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
- ② Conductor cross-section 50 mm²
- ③ Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

ATTENTION! Only to be used with special Han® 24 HPR hoods and housings!

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 5) see chapter 90

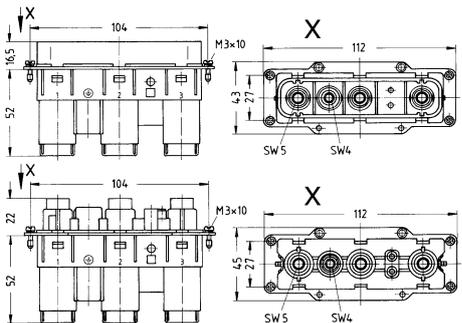
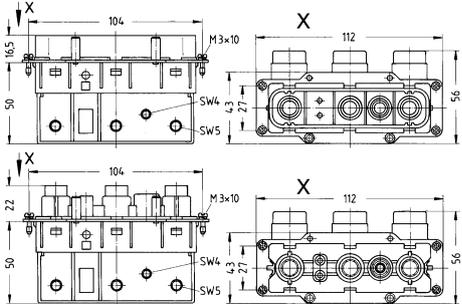
Hex key (A/F 4) for PE contact see chapter 90

Number of contacts

3+

200 A 1.150/2.000 V 8 kV 3
 + 2 additional signal contacts
 16 A 400 V 6 kV 3

Han
 HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Com®, Han® K 3/2, Straight, Axial screw termination / screw termination, Contact surface: Silver plated 	35 ... 70, 0.5 ... 2.5 Signal, 16 ... 35 PE	09 38 005 2601	09 38 005 2701	 <p>Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm² Signal contacts: Stripping length 7 mm, Tightening torque 0.5 Nm PE contact: Stripping length 14 mm, Tightening torque 6 Nm</p>
Han-Com®, Han® K 3/2, Angled, Axial screw termination / screw termination, Contact surface: Silver plated 	35 ... 70, 0.5 ... 2.5 Signal, 16 ... 35 PE	09 38 005 2602	09 38 005 2702	 <p>Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm² Signal contacts: Stripping length 7 mm, Tightening torque 0.5 Nm PE contact: Stripping length 14 mm, Tightening torque 6 Nm</p>

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

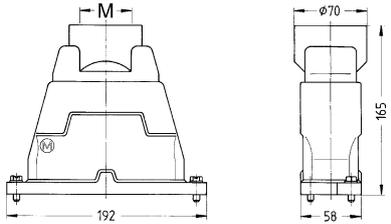
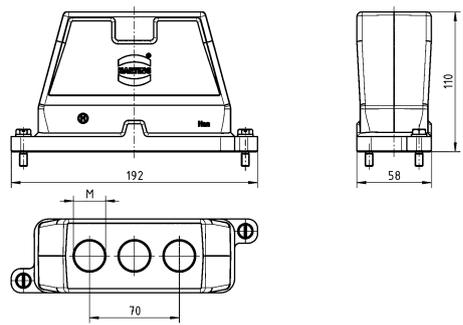
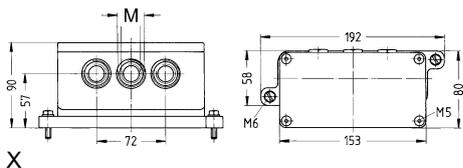
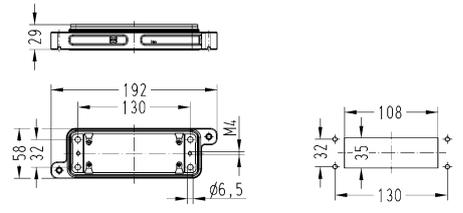
Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Special type, Top entry 	1x M63	19 40 024 0420	
Han® HPR, Hoods, Top entry 	3x M25 3x M25, 1x M20	19 40 024 0461 19 40 024 0471	
Han® HPR, Hoods, Special type, Angled entry 	3x M25	19 40 024 0631	
Han® HPR, Bulkhead mounted housings 		09 40 024 0311	

Han
HC

Identification

Cable entry

Part number

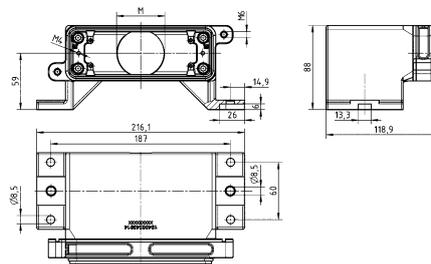
Drawing
(dimensions in mm)

Han® HPR,
Surface mounted housing,
Horizontal version,
Top entry



1x M50
3x M25
3x M25, 1x M20

19 40 024 0914
19 40 024 0931
19 40 024 0971

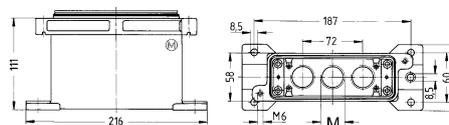


Han® HPR,
Surface mounted housing,
Top entry



3x M25
3x M25, 1x M20

19 40 024 1231
19 40 024 1271



Features

- Contacts for fine stranded wire
- Low mating forces
- Suitable for HPR® hoods and housings

Technical characteristics

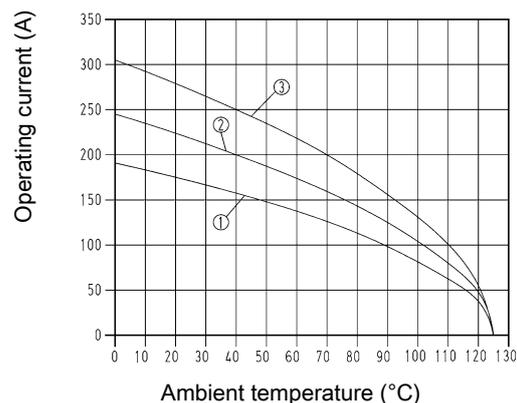
Rated current	250 A
Rated voltage	2000 V
Rated impulse voltage	12 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Wire outer diameter	$\leq 18 \text{ mm}$
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
 ② Conductor cross-section 50 mm²
 ③ Conductor cross-section 70 mm²
 4 contacts in Han® 24 HPR

Specifications and approvals

EN 60664-1
 IEC 61984
 EN 50124-1
 DNV GL

Details

Removal tool 09 99 000 0332 see chapter 90

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

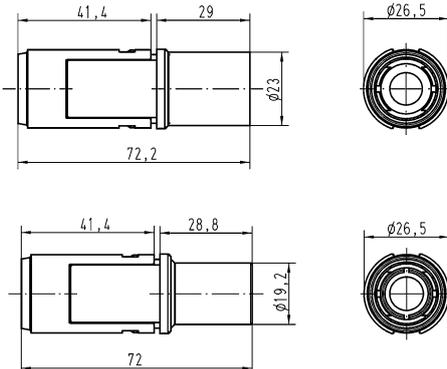
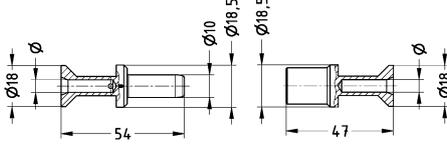
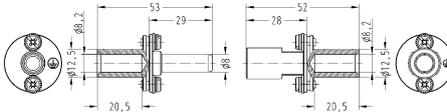
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

250 A 2.000 V 12 kV 3

Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																												
		Male	Female																													
Han® HC Modular, 250, Crimp termination  Please order crimp contacts separately.	10 ... 70	09 11 001 3021	09 11 001 3121																													
TC 250, Crimp contact, Contact surface: Silver plated 	10 16 25 35 50 70	09 11 000 6184 09 11 000 6185 09 11 000 6126 09 11 000 6127 09 11 000 6128 09 11 000 6129	09 11 000 6284 09 11 000 6285 09 11 000 6226 09 11 000 6227 09 11 000 6228 09 11 000 6229	 <table border="1" data-bbox="965 1220 1412 1422"> <thead> <tr> <th>Conductor cross-section</th> <th>Tool identification</th> <th>Stripping length A</th> <th>Ø</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>6</td> <td>22 mm</td> <td>4.3 mm</td> </tr> <tr> <td>16 mm²</td> <td>8</td> <td>22 mm</td> <td>5.5 mm</td> </tr> <tr> <td>25 mm²</td> <td>10</td> <td>22 mm</td> <td>7 mm</td> </tr> <tr> <td>35 mm²</td> <td>12</td> <td>22 mm</td> <td>8.45 mm</td> </tr> <tr> <td>50 mm²</td> <td>14</td> <td>22 mm</td> <td>10.25 mm</td> </tr> <tr> <td>70 mm²</td> <td>16</td> <td>22 mm</td> <td>11.75 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p> <p>Crimp zone acc. to DIN 46235</p>	Conductor cross-section	Tool identification	Stripping length A	Ø	10 mm ²	6	22 mm	4.3 mm	16 mm ²	8	22 mm	5.5 mm	25 mm ²	10	22 mm	7 mm	35 mm ²	12	22 mm	8.45 mm	50 mm ²	14	22 mm	10.25 mm	70 mm ²	16	22 mm	11.75 mm
Conductor cross-section	Tool identification	Stripping length A	Ø																													
10 mm ²	6	22 mm	4.3 mm																													
16 mm ²	8	22 mm	5.5 mm																													
25 mm ²	10	22 mm	7 mm																													
35 mm ²	12	22 mm	8.45 mm																													
50 mm ²	14	22 mm	10.25 mm																													
70 mm ²	16	22 mm	11.75 mm																													
TC 250, Crimp contact, PE contact, Contact surface: Silver plated 	16 35	09 11 000 6190 09 11 000 6104	09 11 000 6290 09 11 000 6204																													

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded

Technical characteristics

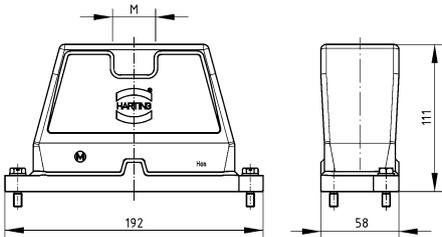


Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal, Aluminium die-cast, Stainless steel, Aluminium compliant
RoHS	

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Hoods/housings for harsh outdoor environments
Screw locking

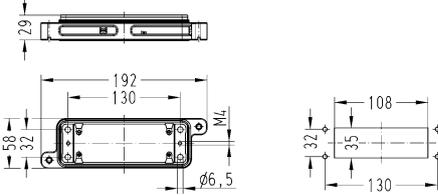
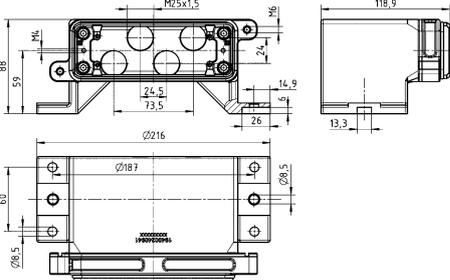

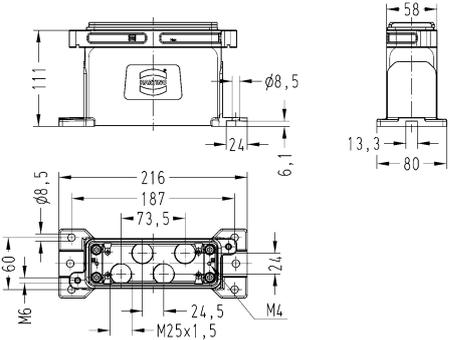
Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry 	4x M20 4x M25	19 40 024 0473 19 40 024 0474	
Han® HPR, Frame, for male inserts, 4x Han® HC Modular 250 		09 11 000 9925	 <p>Tightening torque Fixing screws M3: 0.5 Nm</p>
Han® HPR, Frame, for female inserts, 4x Han® HC Modular 250 		09 11 000 9942	 <p>Tightening torque Fixing screws M3: 0.5 Nm</p>

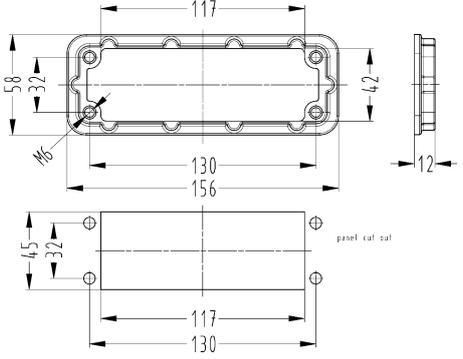




Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Bulkhead mounted housings 		09 40 024 0311	
Han® HPR, Surface mounted housing, Horizontal version, Top entry 	4x M25	19 40 024 0941	
Han® HPR, Surface mounted housing, Top entry 	4x M25	19 40 024 1242	

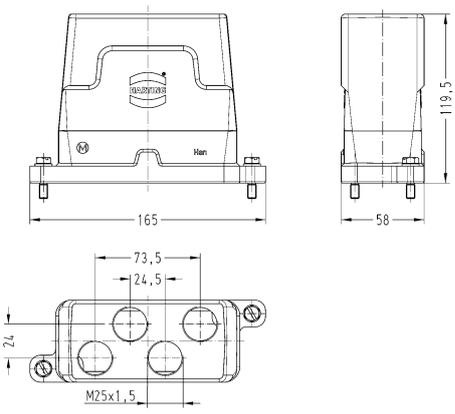
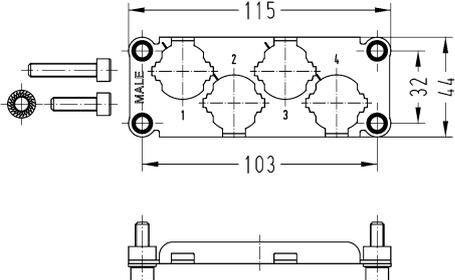
Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Mounting frames, Han® HPR, Thread M6</p> 		09 40 000 9955	
<p>Han® HPR, Frame, for female inserts, 4x Han® HC Modular 250</p> 		09 11 000 9926	 <p>Tightening torque Fixing screws M3: 0.5 Nm</p>
<p>Han® HPR, Frame, for male inserts, 4x Han® HC Modular 250</p> 		09 11 000 9941	 <p>Tightening torque Fixing screws M3: 0.5 Nm</p>



Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Enlarged, Top entry</p> 	<p>4x M25</p>	<p>19 40 016 0478</p>	
<p>Han® HPR enlarged, Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x washer SK S6</p> 		<p>09 11 000 9937</p>	 <p>Tightening torque Fixing screws M6: 10 Nm</p>

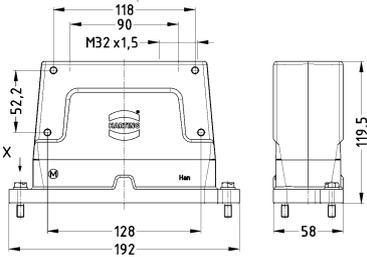
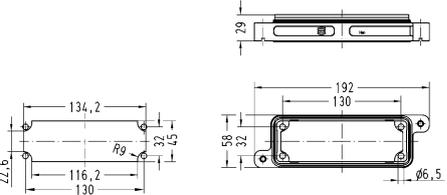
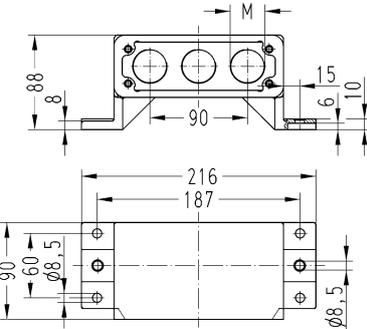
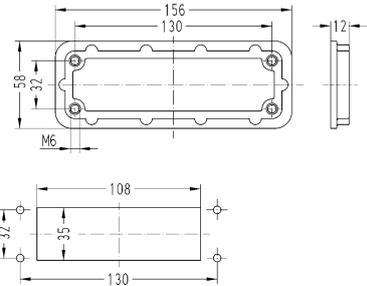
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Bulkhead mounted housings, Enlarged 		09 40 016 0368	
Han® HPR, Surface mounted housing, Horizontal version, Enlarged, Top entry 	4x M25	19 40 016 0978	
Mounting frames, Han® HPR, Thread M6  Han® HPR enlarged, Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 30, 4x washer SK S6 		09 40 000 9956 09 11 000 9938	<p>panel cut out</p> <p>Tightening torque Fixing screws M6: 10 Nm</p>

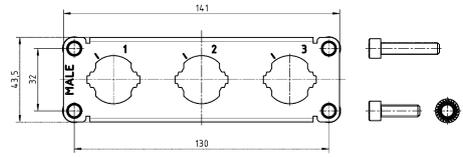
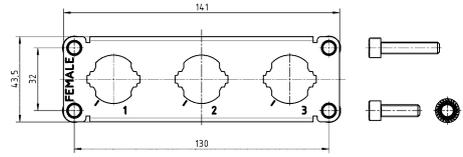
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Enlarged, Top entry</p> 	<p>3x M32</p>	<p>19 40 024 0468</p>	
<p>Han® HPR, Bulkhead mounted housings, Enlarged</p> 		<p>09 40 024 0368</p>	
<p>Han® HPR, Surface mounted housing, Horizontal version, Enlarged, Top entry</p>  <p>Bulkhead mounted housing 09 40 024 0368 not included, please order separately</p>	<p>3x M32</p>	<p>19 40 024 0968</p>	
<p>Mounting frames, Han® HPR, Thread M6</p> 		<p>09 40 000 9904</p>	 <p>Panel cut out</p>

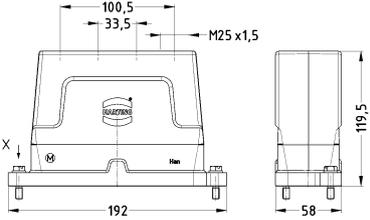
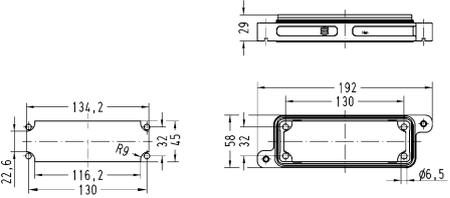
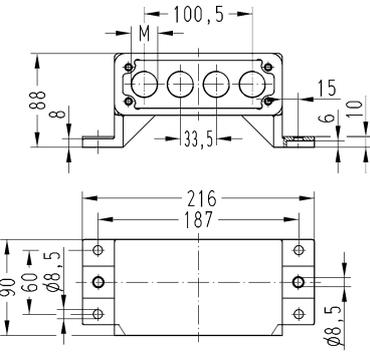
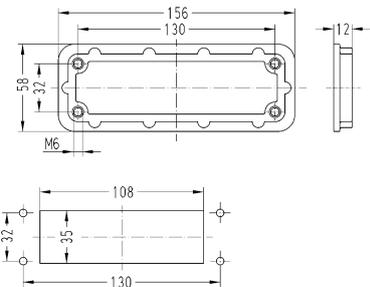


Han
HC

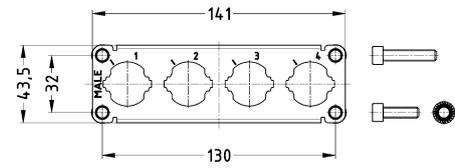
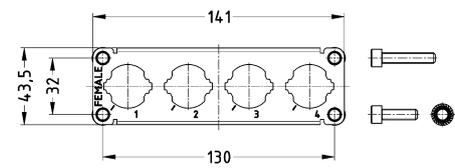
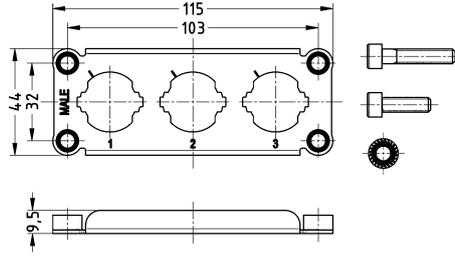
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x washer SK S6</p> 		09 11 000 9931	 <p>Tightening torque Fixing screw M6: 10 Nm</p>
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x washer SK S6</p> 		09 11 000 9932	 <p>Tightening torque Fixing screw M6: 10 Nm</p>

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Enlarged, Top entry</p> 	<p>4x M25</p>	<p>19 40 024 0478</p>	
<p>Han® HPR, Bulkhead mounted housings, Enlarged</p> 		<p>09 40 024 0368</p>	
<p>Han® HPR, Surface mounted housing, Horizontal version, Enlarged, Top entry</p>  <p>Bulkhead mounted housing 09 40 024 0368 not included, please order separately</p>	<p>4x M25</p>	<p>19 40 024 0978</p>	
<p>Mounting frames, Han® HPR, Thread M6</p> 		<p>09 40 000 9904</p>	 <p>Panel cut out</p>

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x washer SK S6</p> 		09 11 000 9927	 <p>Tightening torque Fixing screws M6: 10 Nm</p>
<p>Han® HPR enlarged, Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x washer SK S6</p> 		09 11 000 9928	 <p>Tightening torque Fixing screws M6: 10 Nm</p>
<p>Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 		09 11 000 9943	
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 		09 11 000 9944	

Features

- Contacts for fine stranded wire
- Low mating forces
- Suitable for HPR® hoods and housings
- UL approvals for axial-screw and screw termination

Technical characteristics

Rated current	350 A
Rated voltage	2000 V
Rated impulse voltage	12 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤0.3 mΩ, ≤0.2 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤22 mm, ≤19.5 mm
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

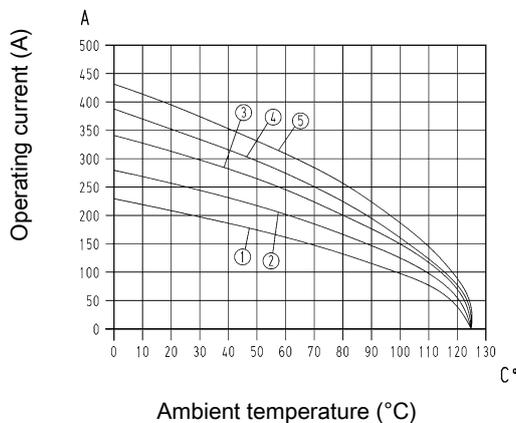
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

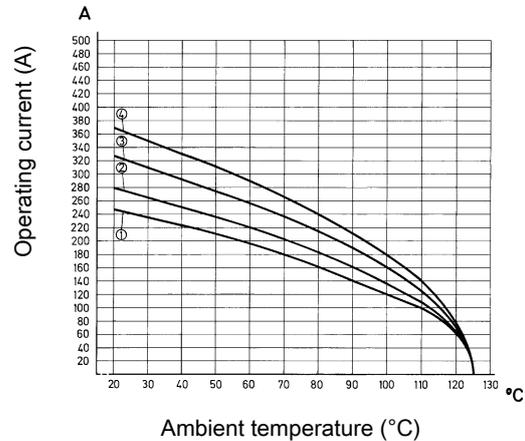
Crimp termination



- ① Conductor cross-section 35 mm²
 - ② Conductor cross-section 50 mm²
 - ③ Conductor cross-section 70 mm²
 - ④ Conductor cross-section 95 mm²
 - ⑤ Conductor cross-section 120 mm²
- Three contacts in Han® 24 HPR

Derating

Axial screw termination
Screw termination



- ① Conductor cross-section 50 mm²
 - ② Conductor cross-section 70 mm²
 - ③ Conductor cross-section 95 mm²
 - ④ Conductor cross-section 120 mm²
- Three contacts in Han® 24 HPR

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL
UL 1977 ECBT2.E235076

Details

Electrical data up to 350 A 4000 V 18 kV 3 by using a hexagonal adapter and the HARTING cable gland, in order to realise the clearance and creepage distance.

Contact resistance crimp contact: ≤ 0.3 mOhm

Contact resistance screw contact: ≤ 0.2 mOhm

Contact resistance axial screw contact: ≤ 0.2 mOhm

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 5) see chapter 90

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

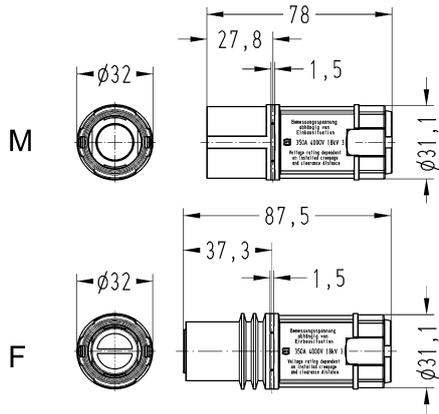
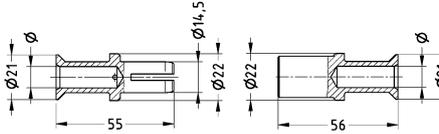
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

350 A 2.000 V 12 kV 3

Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® HC Modular, 350, Crimp termination  Please order crimp contacts separately.	25 ... 120	09 11 001 3001	09 11 001 3101	 max. wire outer diameter 22 mm																					
TC 350, Crimp contact, Contact surface: Silver plated 	25 35 50 70 95 120	09 11 000 6139 09 11 000 6140 09 11 000 6141 09 11 000 6142 09 11 000 6143 09 11 000 6144	09 11 000 6239 09 11 000 6240 09 11 000 6241 09 11 000 6242 09 11 000 6243 09 11 000 6244	 <table border="1" data-bbox="965 1310 1404 1512"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>25 mm²</td> <td>7</td> <td>26 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>26 mm</td> </tr> <tr> <td>50 mm²</td> <td>10</td> <td>28 mm</td> </tr> <tr> <td>70 mm²</td> <td>11.5</td> <td>28 mm</td> </tr> <tr> <td>95 mm²</td> <td>13.5</td> <td>30 mm</td> </tr> <tr> <td>120 mm²</td> <td>15.5</td> <td>24 mm</td> </tr> </tbody> </table> for stranded wire according to IEC 60228 Class 5 Crimp zone acc. to DIN 46235	Wire gauge	∅	Stripping length	25 mm ²	7	26 mm	35 mm ²	8.2	26 mm	50 mm ²	10	28 mm	70 mm ²	11.5	28 mm	95 mm ²	13.5	30 mm	120 mm ²	15.5	24 mm
Wire gauge	∅	Stripping length																							
25 mm ²	7	26 mm																							
35 mm ²	8.2	26 mm																							
50 mm ²	10	28 mm																							
70 mm ²	11.5	28 mm																							
95 mm ²	13.5	30 mm																							
120 mm ²	15.5	24 mm																							

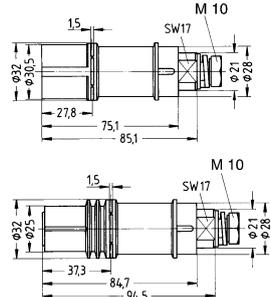
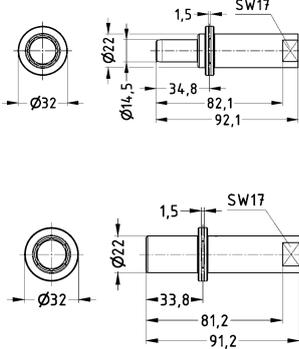
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
TC 350, Crimp contact, PE contact, Contact surface: Silver plated	35	09 11 000 6172	09 11 000 6272	



Han
HC

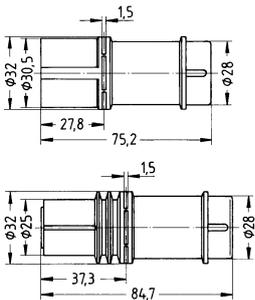

350 A 2.000 V 12 kV 3

Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® HC Modular, 350, Screw termination, Contact surface: Silver plated</p> 	120	09 11 001 2655	09 11 001 2755	 <p>Tightening torque 14 Nm Cable shoe ≤ 120 mm² Please ensure to hold up the contact with a wrench size 17 to apply the tightening torque</p>
<p>TC 350, Screw contact, PE contact, Contact surface: Silver plated</p> 	120	09 11 000 6158	09 11 000 6258	 <p>Tightening torque 14 Nm Cable shoe ≤ 120 mm² Please ensure to hold up the contact with a wrench size 17 to apply the tightening torque</p>

350 A 2.000 V 12 kV 3

Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han® HC Modular, 350, Axial screw termination, Contact surface: Silver plated 	35 ... 70 95 ... 120	09 11 001 2651 09 11 001 2652	09 11 001 2751 09 11 001 2752	 <p>Tightening torque</p> <table border="1"> <tr> <td>mm²</td> <td>35</td> <td>50</td> <td>70</td> <td>95</td> <td>120</td> </tr> <tr> <td>Nm</td> <td>8</td> <td>10</td> <td>12</td> <td>14</td> <td>16</td> </tr> </table> <p>max. wire outer diameter 19.5 mm Stripping length 19...20 mm</p>	mm ²	35	50	70	95	120	Nm	8	10	12	14	16
mm ²	35	50	70	95	120											
Nm	8	10	12	14	16											
TC 350, Axial screw contact, PE contact, Contact surface: Silver plated 	35 ... 70	09 11 000 6156	09 11 000 6256	 <p>Tightening torque</p> <table border="1"> <tr> <td>mm²</td> <td>35</td> <td>50</td> <td>70</td> </tr> <tr> <td>Nm</td> <td>8</td> <td>10</td> <td>12</td> </tr> </table> <p>Stripping length 19...20 mm</p>	mm ²	35	50	70	Nm	8	10	12				
mm ²	35	50	70													
Nm	8	10	12													

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

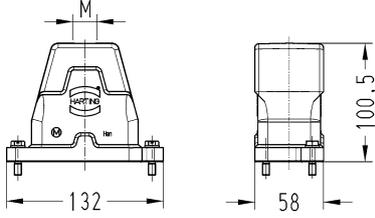
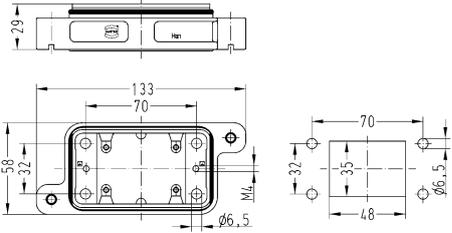
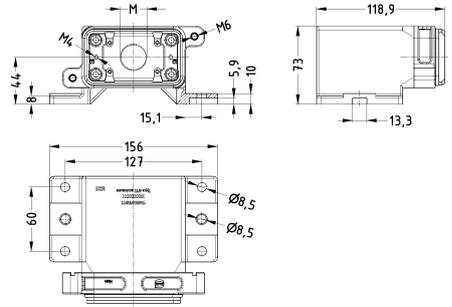
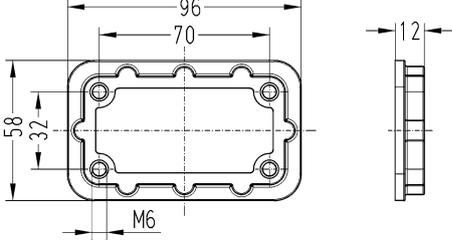
Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Aluminium die-cast, Metal
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL


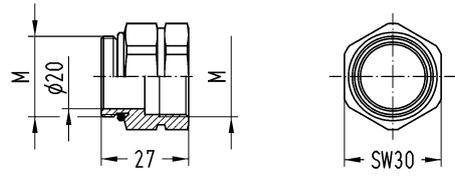
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry 	1x M25 1x M32		19 40 006 0411 19 40 006 0412	
Han® HPR, Bulkhead mounted housings 			09 40 006 0311	
Han® HPR, Surface mounted housing, Horizontal version, Top entry 	1x M25 1x M40		19 40 006 0911 19 40 006 0913	
Mounting frames, Han® HPR, Thread M6 			09 40 000 9901	



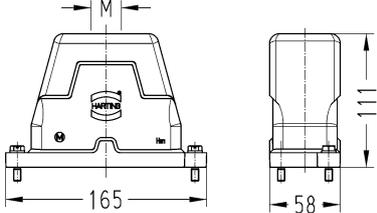
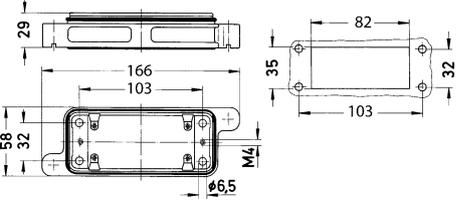
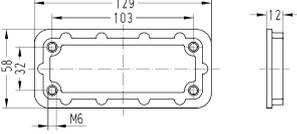


Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Frame, for male inserts, for female inserts, 1x Han® HC Modular 350</p> 			09 11 000 9951	 <p>Tightening torque Fixing screws M3: 0.5 Nm</p>
<p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M25 M32	19 36 000 5134 19 36 000 5135	

Han
14
·
30

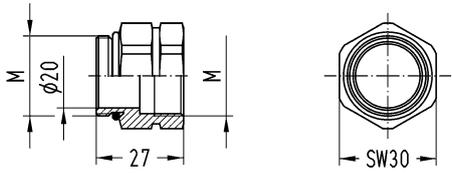
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry 	2x M25		19 40 016 0431	
Han® HPR, Bulkhead mounted housings 			09 40 016 0311	
Mounting frames, Han® HPR, Thread M6 			09 40 000 9903	 <p>Panel cut out</p> 
Han® HPR, Frame, for male inserts, for female inserts, 2x Han® HC Modular 350 			09 11 000 9952	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>



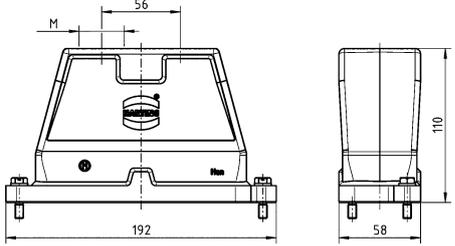
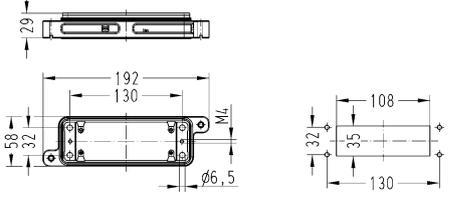
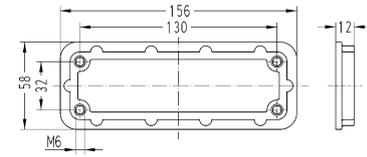
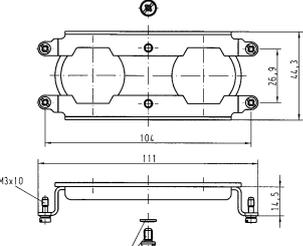
Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M25	19 36 000 5134	

Han
14
·
32

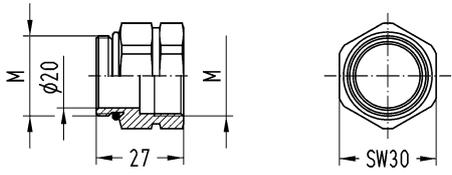
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han [®] HPR, Hoods, Top entry 	2x M32		19 40 024 0432	
Han [®] HPR, Bulkhead mounted housings 			09 40 024 0311	
Mounting frames, Han [®] HPR, Thread M6 			09 40 000 9904	 <p>Panel cut out</p>
Han [®] HPR, Frame, for male inserts, for female inserts, 2x Han [®] HC Modular 350 			09 11 000 9956	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>

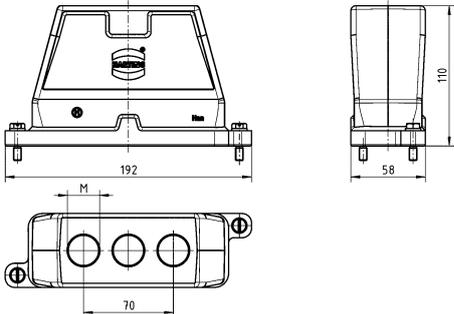
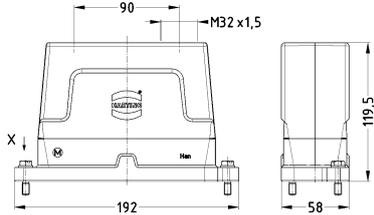
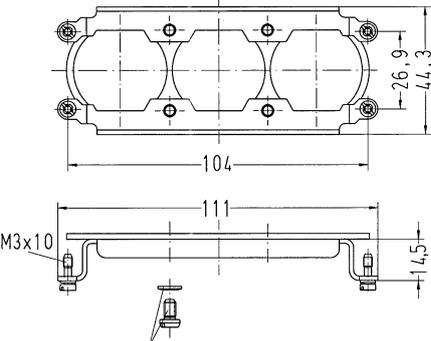


Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M32	19 36 000 5135	

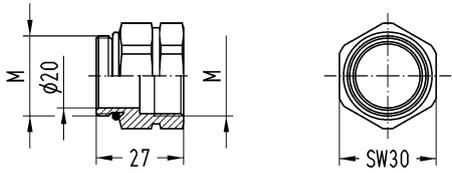
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry</p> 	3x M25		19 40 024 0461	
<p>Han® HPR, Hoods, Top entry, High construction</p> 	3x M32		19 40 024 0467	
<p>Han® HPR, Frame, for male inserts, for female inserts, 3x Han® HC Modular 350</p> 			09 11 000 9963	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>

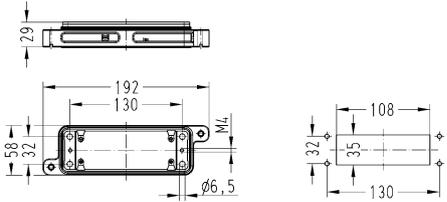
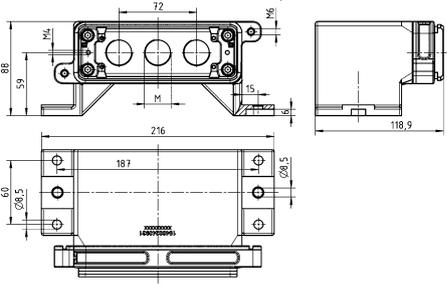
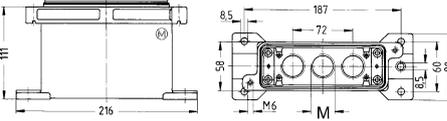
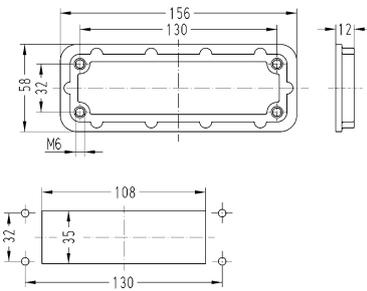


Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		<p>M25 M32</p>	<p>19 36 000 5134 19 36 000 5135</p>	

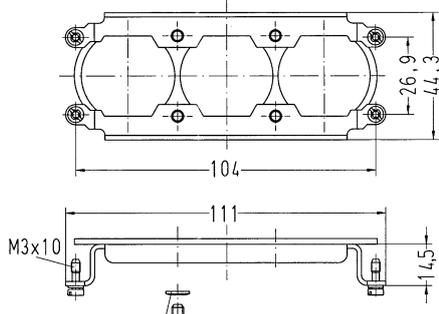
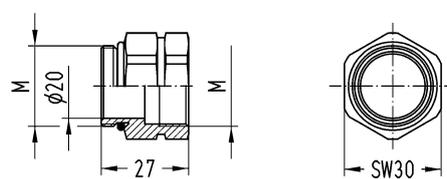
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han [®] HPR, Bulkhead mounted housings 			09 40 024 0311	
Han [®] HPR, Surface mounted housing, Horizontal version, Top entry 	3x M25		19 40 024 0931	
Han [®] HPR, Surface mounted housing, Top entry 	3x M25		19 40 024 1231	
Mounting frames, Han [®] HPR, Thread M6 			09 40 000 9904	 <p>Panel cut out</p>

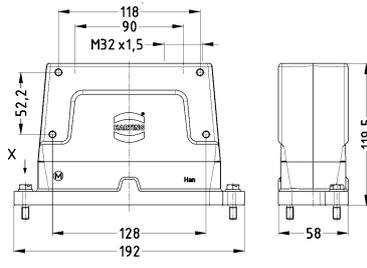
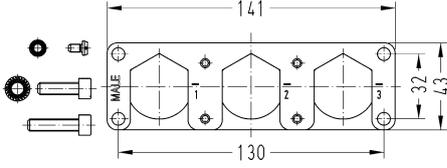
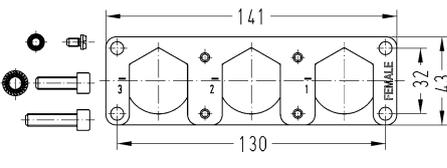
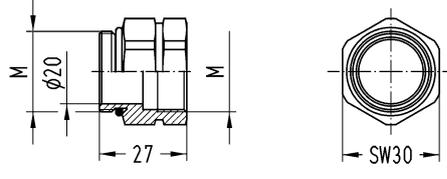


Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Frame, for male inserts, for female inserts, 3x Han® HC Modular 350</p> 			09 11 000 9963	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>
<p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M25	19 36 000 5134	

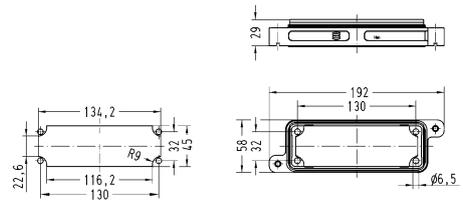
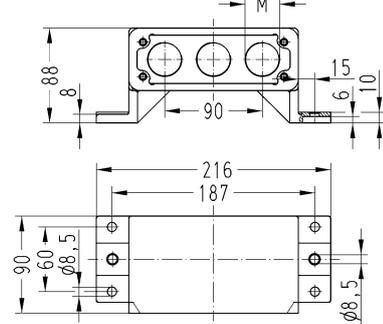
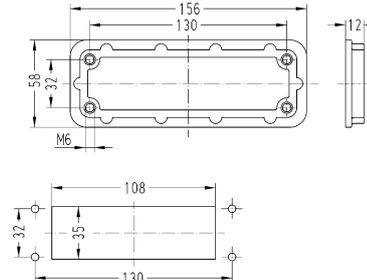
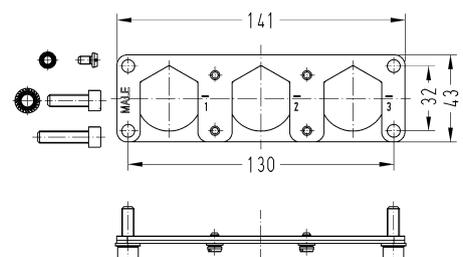
Hoods/housings for harsh outdoor environments
Screw locking

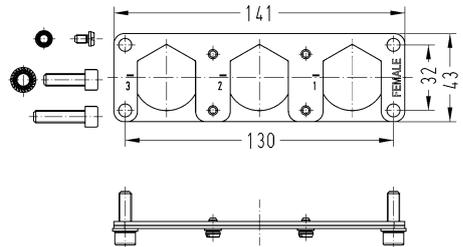
Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Enlarged, Top entry</p> 	3x M32		19 40 024 0468	
<p>Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 			09 11 000 9957	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 		M32	19 36 000 5135	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Hexagonal adapter, With O-ring</p> 				
<p>to reach the electrical data up to 4000 V 18 kV 3</p>				

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

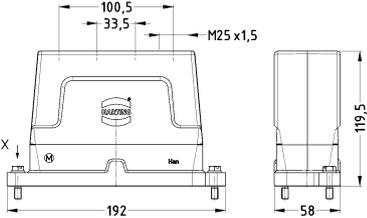
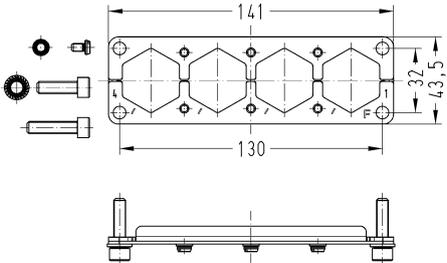
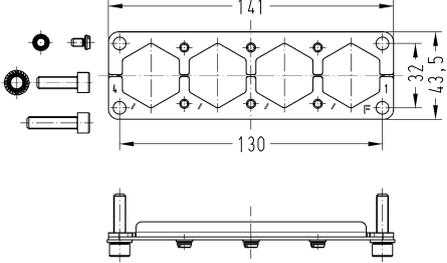
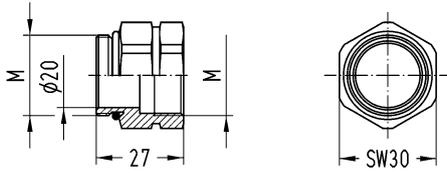
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Bulkhead mounted housings, Enlarged</p> 		09 40 024 0368	
<p>Han® HPR, Surface mounted housing, Horizontal version, Enlarged, Top entry</p>  <p>Bulkhead mounted housing 09 40 024 0368 not included, please order separately</p>	3x M32	19 40 024 0968	
<p>Mounting frames, Han® HPR, Thread M6</p>  <p>Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 		<p>09 40 000 9904</p> <p>09 11 000 9957</p>	 <p>Panel cut out</p>  <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 350,</p> <p>Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 		<p>09 11 000 9958</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>

Han
HC

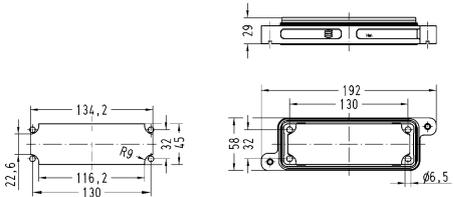
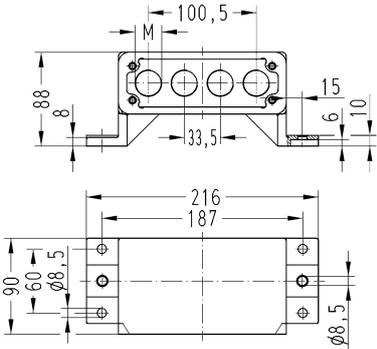
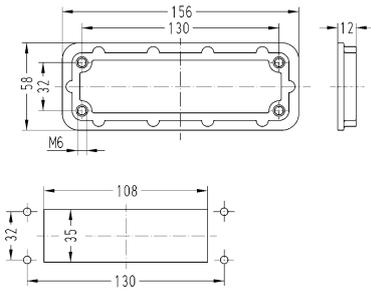
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

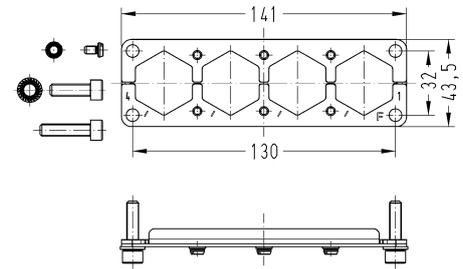
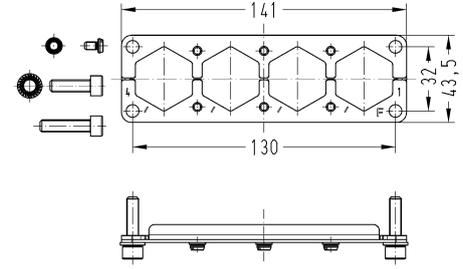
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Enlarged, Top entry</p> 	4x M25		19 40 024 0478	
<p>Han® HPR enlarged, Frame, for male inserts, 4x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x heat shrink tube</p>  <p>Han® HPR enlarged, Frame, for female inserts, 4x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x heat shrink tube</p>  <p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M25	<p>09 11 000 9964</p>  <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p> <p>09 11 000 9965</p>  <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p> <p>19 36 000 5134</p> 	

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Bulkhead mounted housings, Enlarged</p> 		09 40 024 0368	
<p>Han® HPR, Surface mounted housing, Horizontal version, Enlarged, Top entry</p>  <p>Bulkhead mounted housing 09 40 024 0368 not included, please order separately</p>	4x M25	19 40 024 0978	
<p>Mounting frames, Han® HPR, Thread M6</p> 		09 40 000 9904	 <p>Panel cut out</p>

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for male inserts, 4x Han® HC Modular 350,</p> <p>Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x heat shrink tube</p> 		09 11 000 9964	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for female inserts, 4x Han® HC Modular 350,</p> <p>Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x heat shrink tube</p> 		09 11 000 9965	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>

Features

- Hoods/housings for rough environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Locking lever made of high-quality stainless steel

Technical characteristics

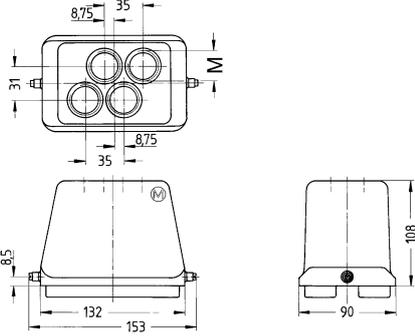

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Material (locking)	Stainless steel
Material (accessories)	Metal
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

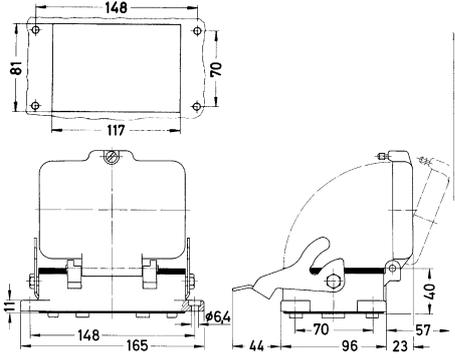

Hoods/housings for rough environments
Single locking lever

Han
HC

Identification	Cable entry	Part number High construction	Drawing (dimensions in mm)
<p>Han® M, Hoods, Top entry</p> 	<p>4x M25</p>	<p>19 37 048 0401</p>	
<p>Han® M, Frame, for male inserts, for female inserts, 4x HC 350 contacts + 2x Han® Q 5/0 in a hood</p> 		<p>09 11 000 9954</p>	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws Han® Q 5/0: 0.25 Nm Tightening torque Cross-tying screws 1.5 Nm</p>

Hoods/housings for rough environments
Single locking lever

Han
HC

Identification	Part number Low construction	Drawing (dimensions in mm)
<p>Han® M, Bulkhead mounted housings, With thermo-plastic cover</p> 	<p>09 37 048 0301</p>	
<p>Han® M, Frame, for male inserts, for female inserts, 4x HC 350 contacts + 2x Han® Q 5/0 in a bulkhead mounted housing</p> 	<p>09 11 000 9955</p>	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws Han® Q 5/0: 0.25 Nm Tightening torque Cross-tying screws 1.5 Nm</p>

Features

- Contacts for fine stranded wire
- Low mating forces
- Suitable for HPR® hoods and housings
- UL approvals for axial-screw and screw termination

Technical characteristics

Rated current	650 A
Rated voltage	4000 V
Rated impulse voltage	18 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤0.3 mΩ, ≤0.2 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Wire outer diameter	≤27 mm, ≤32 mm @ 240 mm ² , ≤26.5 mm
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

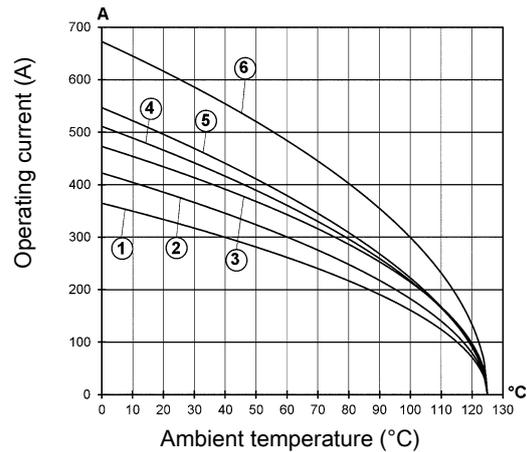
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

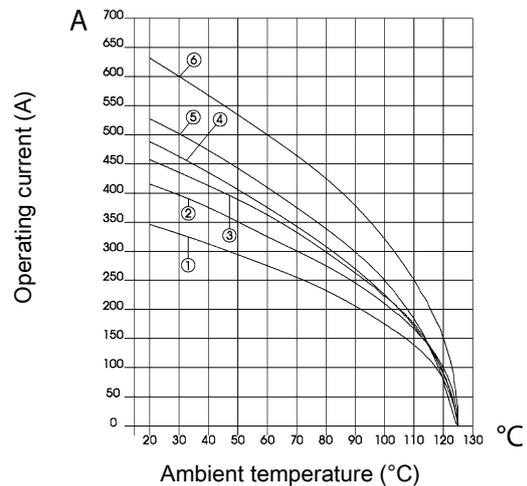
Measuring and testing techniques acc. to IEC 60512-5-2

Crimp termination



- ① Conductor cross-section 70 mm²
- ② Conductor cross-section 95 mm²
- ③ Conductor cross-section 120 mm²
- ④ Conductor cross-section 150 mm²
- ⑤ Conductor cross-section 185 mm²
- ⑥ Conductor cross-section 240 mm²

Screw termination / axial screw termination



- ① Conductor cross-section 70 mm²
- ② Conductor cross-section 95 mm²
- ③ Conductor cross-section 120 mm²
- ④ Conductor cross-section 150 mm²
- ⑤ Conductor cross-section 185 mm²
- ⑥ Conductor cross-section 240 mm²

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL
UL 1977 ECBT2.E235076

Details

Contact resistance crimp contact: ≤ 0.3 mOhm
Contact resistance screw contact: ≤ 0.2 mOhm
Contact resistance axial screw contact: ≤ 0.2 mOhm

Details

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 8) see chapter 90

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

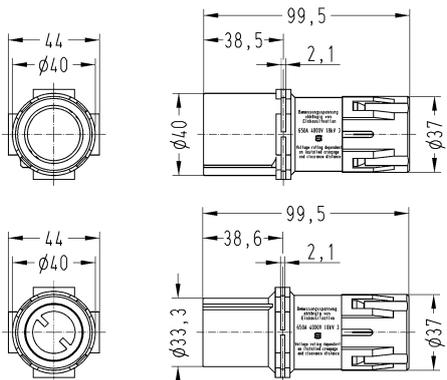
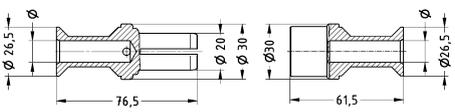
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

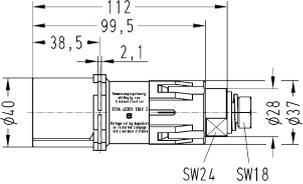
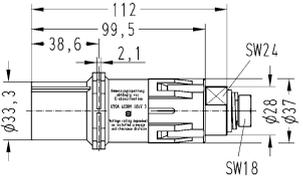
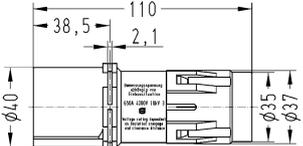
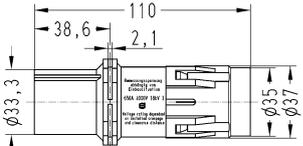
650 A 4.000 V 18 kV 3

Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
<p>Han® HC Modular, 650, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	70 ... 240	09 11 001 3012	09 11 001 3112	 <p>max. wire outer diameter 70...185 mm²: 27 mm max. wire outer diameter 240 mm²: 32 mm</p>																					
<p>TC 650, Crimp contact, Contact surface: Silver plated</p> 	70 95 120 150 185 240	09 11 000 6161 09 11 000 6162 09 11 000 6163 09 11 000 6164 09 11 000 6165 09 11 000 6168	09 11 000 6261 09 11 000 6262 09 11 000 6263 09 11 000 6264 09 11 000 6265 09 11 000 6268	 <table border="1" data-bbox="965 1310 1420 1534"> <thead> <tr> <th>Conductor cross-section</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>70 mm²</td> <td>11.5</td> <td>42 mm</td> </tr> <tr> <td>95 mm²</td> <td>13.5</td> <td>42 mm</td> </tr> <tr> <td>120 mm²</td> <td>15.5</td> <td>42 mm</td> </tr> <tr> <td>150 mm²</td> <td>17</td> <td>42 mm</td> </tr> <tr> <td>185 mm²</td> <td>19</td> <td>42 mm</td> </tr> <tr> <td>240 mm²</td> <td>21.5</td> <td>46 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60228 Class 5</p> <p>Crimp zone acc. to DIN 46235</p>	Conductor cross-section	∅	Stripping length	70 mm ²	11.5	42 mm	95 mm ²	13.5	42 mm	120 mm ²	15.5	42 mm	150 mm ²	17	42 mm	185 mm ²	19	42 mm	240 mm ²	21.5	46 mm
Conductor cross-section	∅	Stripping length																							
70 mm ²	11.5	42 mm																							
95 mm ²	13.5	42 mm																							
120 mm ²	15.5	42 mm																							
150 mm ²	17	42 mm																							
185 mm ²	19	42 mm																							
240 mm ²	21.5	46 mm																							

650 A 4.000 V 18 kV 3

Han
HC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han® HC Modular, 650, Screw termination, Contact surface: Silver plated 	240	09 11 001 2675	09 11 001 2775	  <p>Tightening torque 16 ... 18 Nm Cable shoe ≤ 240 mm² Please ensure to hold up the contact with a wrench size 24 to apply the tightening torque</p>												
Han® HC Modular, 650, Axial screw termination, Contact surface: Silver plated 	70 ... 120 150 ... 185	09 11 001 2671 09 11 001 2672	09 11 001 2771 09 11 001 2772	  <p>Tightening torque</p> <table border="1"> <tr> <td>mm²</td> <td>70</td> <td>95</td> <td>120</td> <td>150</td> <td>185</td> </tr> <tr> <td>Nm</td> <td>12</td> <td>14</td> <td>16</td> <td>17</td> <td>18</td> </tr> </table> <p>Stripping length 23 ... 25 mm max. wire outer diameter 26.5 mm</p>	mm ²	70	95	120	150	185	Nm	12	14	16	17	18
mm ²	70	95	120	150	185											
Nm	12	14	16	17	18											

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

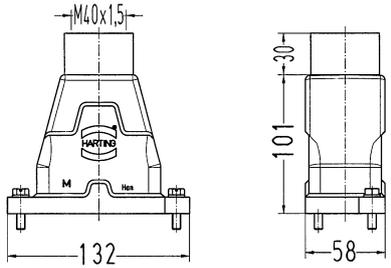
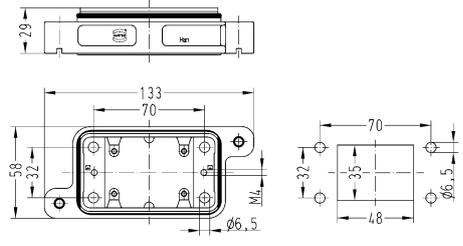
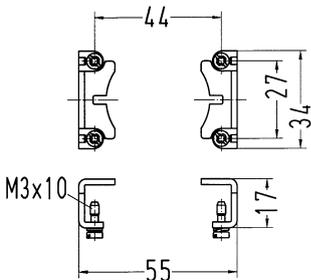
Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal, Aluminium die-cast
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

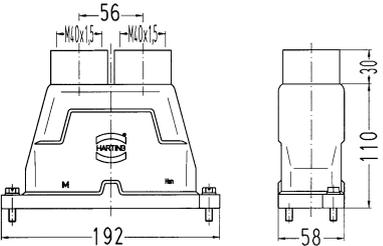
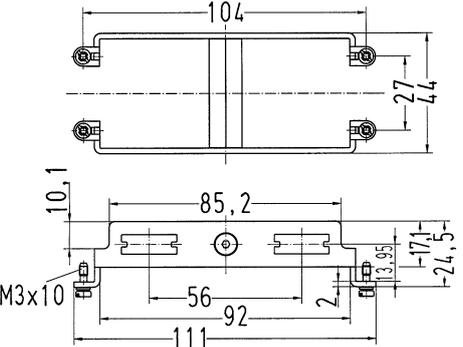
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, With adapter, Top entry</p> 	<p>1x M40</p>	<p>19 40 006 0418</p>	
<p>Han® HPR, Bulkhead mounted housings</p> 		<p>09 40 006 0314</p>	
<p>Han® HPR, Frame, for male inserts, for female inserts, 1x Han® HC Modular 650</p> 		<p>09 11 000 9971</p>	 <p>Tightening torque Fixing screws M3: 0.5 Nm</p>

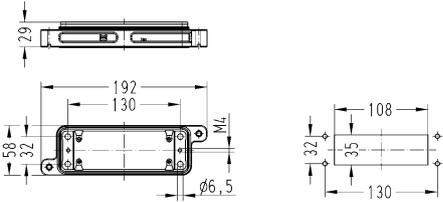
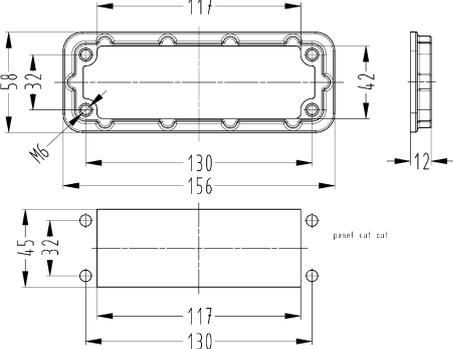
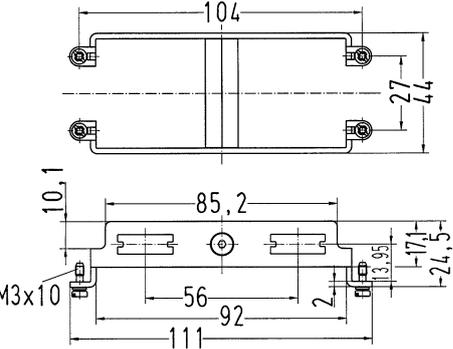
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, With adapter, Top entry 	2x M40	19 40 024 0438	
Han® HPR, Frame, for male inserts, for female inserts, 2x Han® HC Modular 650 		09 11 000 9972	 <p> Tightening torque Fixing screws M3: 0.5 Nm Tightening torque M4: 1.5 Nm </p>

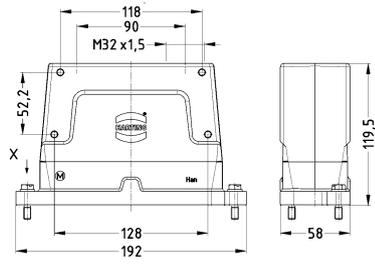
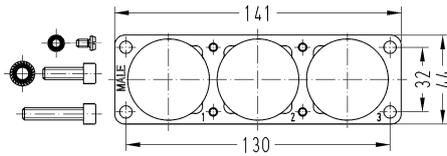
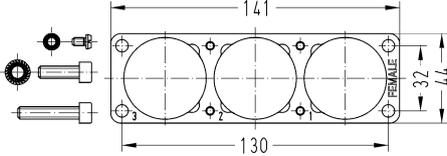
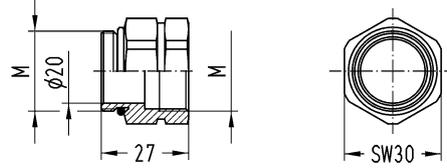
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Part number	Drawing (dimensions in mm)
Han [®] HPR, Bulkhead mounted housings 	09 40 024 0311	
Mounting frames, Han [®] HPR, Thread M6 	09 40 000 9955	
Han [®] HPR, Frame, for male inserts, for female inserts, 2x Han [®] HC Modular 650 	09 11 000 9972	 <p>Tightening torque Fixing screws M3: 0.5 Nm Tightening torque M4: 1.5 Nm</p>

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

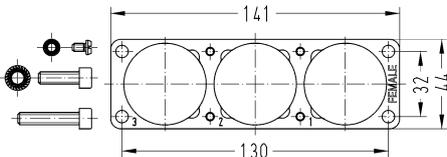



Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Enlarged, Top entry</p> 	3x M32		19 40 024 0468	
<p>Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p>  <p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p>  <p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M32	<p>09 11 000 9973</p> <p>09 11 000 9974</p> <p>19 36 000 5135</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>  <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p> 

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR, Bulkhead mounted housings, Enlarged 			09 40 024 0368	
Han® HPR, Surface mounted housing, Horizontal version, Enlarged, Top entry Bulkhead mounted housing 09 40 024 0368 not included, please order separately	3x M32		19 40 024 0968	
Mounting frames, Han® HPR, Thread M6 Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25 			09 40 000 9955 09 11 000 9973	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Han
HC

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 			09 11 000 9974	  <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Hexagonal adapter, With O-ring</p>  <p>to reach the electrical data up to 4000 V 18 kV 3</p>		M32	19 36 000 5135	 

Features

- Hoods/Housings for higher EMC requirements
- Easy assembly due to split hood and surface mounted housing
- Many assembly possibilities due to separate assembly panels
- External termination of PE termination on hood and surface mounted housing
- Ideal motor/drive connector for transportation sector
- Secure and a visible connection of screening braid of shielded cables
- Devided hood/housing ensures a user-friendly assembly process and simple inspection of the cable and screen connections on the "open system"
- More wiring space in comparison to the standard Han® HPR hoods and housings, ideally suitable for wagon couplings in the railway sector
- Use of standard inserts or Han-Modular® hinged frames
- Compatible with standard Han® HPR bulkhead mounted housings
- Shield connection and/or strain relief possible within the hood/housing

Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Stainless steel, Metal, Aluminium die-cast
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

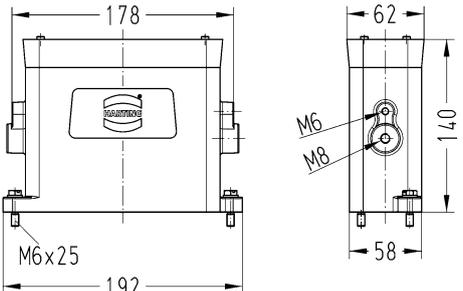
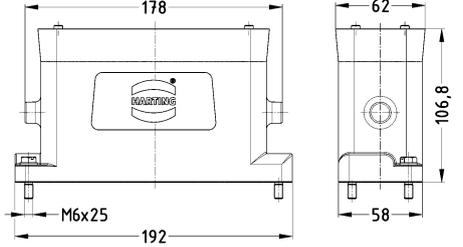
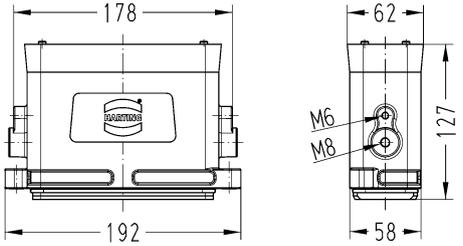
Details

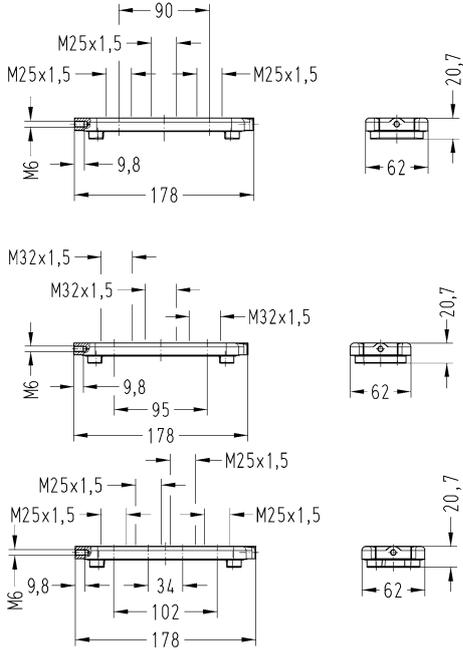
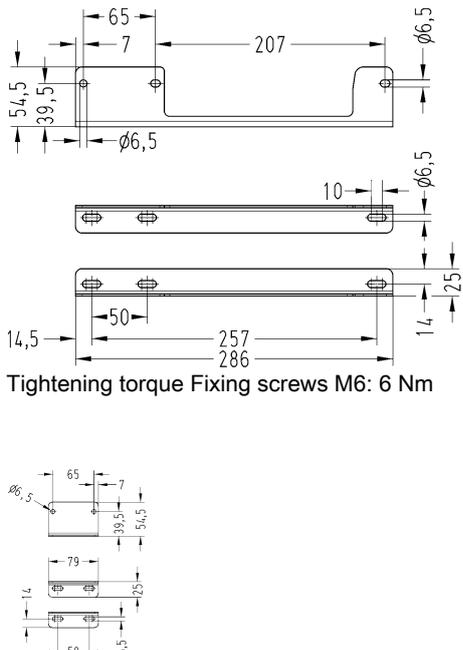
Insertion / Removal tool 09 99 000 0334 for shielding clamps
 see chapter 90

Hoods/housings for harsh outdoor environments
Screw locking



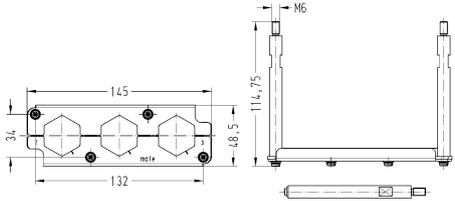
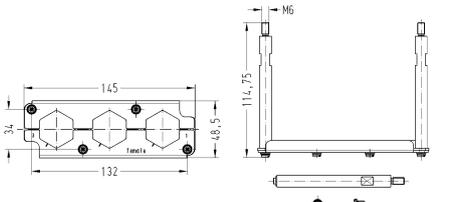
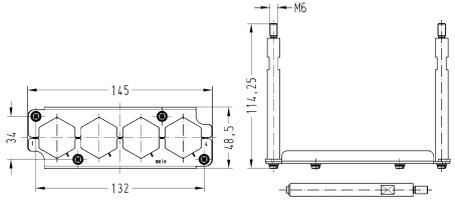
Han
HC

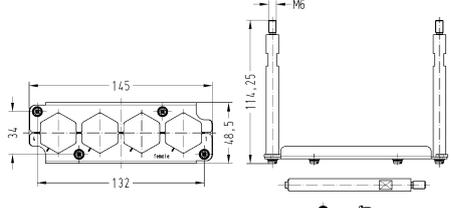
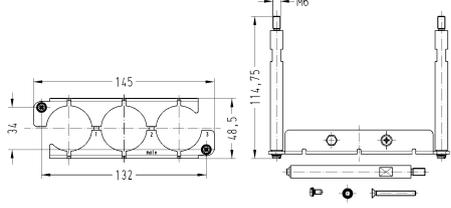
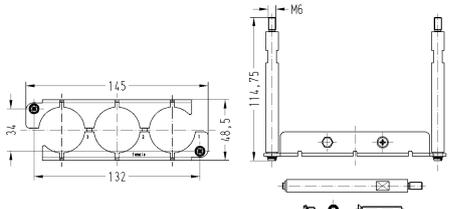
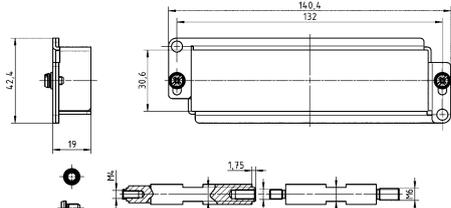


Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR EasyCon, Hoods</p> 		09 40 024 0451	 <p>Tightening torque Cover locking 6 Nm Tightening torque External PE 15 Nm</p>
<p>Han® HPR EasyCon, Hoods, Low construction</p> 		09 40 024 0454	
<p>Han® HPR EasyCon, Surface mounted housing</p> 		09 40 024 0951	 <p>Tightening torque Cover locking 6 Nm Tightening torque External PE 15 Nm</p>

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR EasyCon, Mounting cover, for surface mounted housings, for hoods</p> 	<p>3x M25 3x M32 4x M25</p>	<p>19 40 024 9901 19 40 024 9903 19 40 024 9902</p>	
<p>Han® HPR EasyCon, Mounting panel, Long version, for hoods, for surface mounted housings, Pack contents: 6x M6 screw, 6x washer SK S6</p>  <p>Han® HPR EasyCon, Mounting panel, Short version, for hoods, for surface mounted housings, Pack contents: 4x M6 screw, 4x washer SK S6</p> 		<p>09 40 000 9925</p> <p>09 40 000 9926</p>	 <p>Tightening torque Fixing screws M6: 6 Nm</p> <p>Tightening torque Fixing screws M6: 6 Nm</p>

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR EasyCon, Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 2x distance bolt (SW 7), 2x M4 screw, 2x washer SK S4</p> 		09 40 024 9903	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 2x distance bolt (SW 7), 2x M4 screw, 2x washer SK S4</p> 		09 40 024 9904	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 2x distance bolt (A/F 7), 4x M4 screw, 4x washer SK S4</p> 		09 40 024 9911	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 2x distance bolt (A/F 7), 4x M4 screw, 4x washer SK S4</p> 		09 40 024 9912	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for male inserts, 4x Han® HC Modular 350, Pack contents: 2x distance bolt (A/F 7), 4x M4 screw, 4x washer SK S4, 4x heat shrink tube</p> 		09 40 024 9913	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR EasyCon, Frame, for female inserts, 4x Han® HC Modular 350, Pack contents: 2x distance bolt (A/F 7), 4x M4 screw, 4x washer SK S4, 4x heat shrink tube</p> 		09 40 024 9914	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 2x distance bolt (A/F 7), 2x M4 screw, 2x washer SK S4, 2x M4 countersunk screw</p> 		09 40 024 9921	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 2x distance bolt (A/F 7), 2x M4 screw, 2x washer SK S4, 2x M4 countersunk screw</p> 		09 40 024 9922	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm</p>
<p>Han® HPR EasyCon, Frame, for up to 8 single modules, A ... H, Pack contents: 2x M4/M5 distance bolts (A/F 7), 2x M5/M6 distance bolts (A/F 7), 4x M4 screw, 4x washer SK S4</p> 		09 40 024 9931	 <p>Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm</p>

Han
HC

Identification

Cable entry

Part number

Drawing
(dimensions in mm)

Han® HPR EasyCon,
Frame,
for up to 8 single modules,
a ... h,

Pack contents:

2x M4/M5 distance bolts (A/F 7),

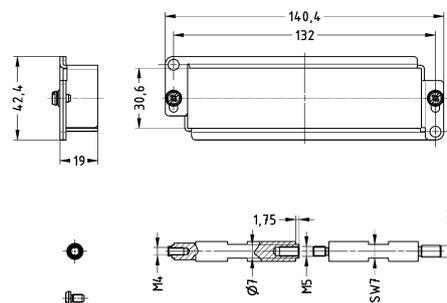
2x M5/M6 distance bolts (A/F 7),

4x M4 screw,

4x washer SK S4



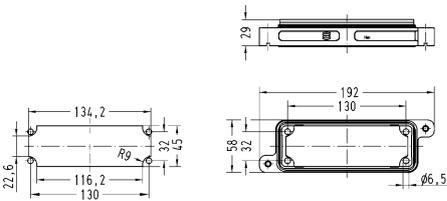
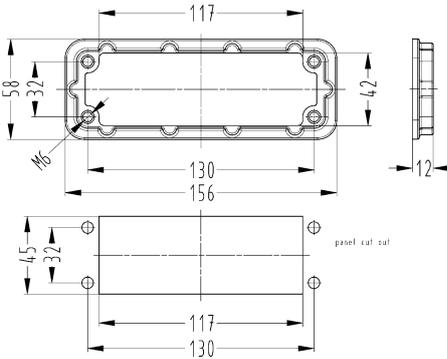
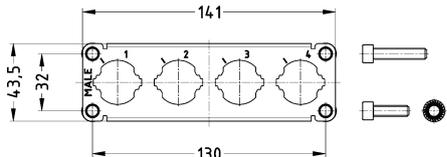
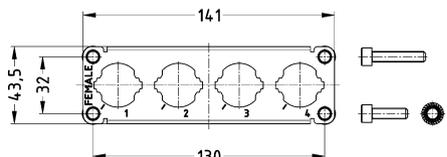
09 40 024 9932



Tightening torque Distance bolt 6 Nm
Tightening torque Fixing screws M4: 1.5 Nm
Tightening torque M4: 1.5 Nm

Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

Identification	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Bulkhead mounted housings, Enlarged</p> 	<p>09 40 024 0368</p>	
<p>Mounting frames, Han® HPR, Thread M6</p> 	<p>09 40 000 9955</p>	
<p>Han® HPR enlarged, Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x washer SK S6</p> 	<p>09 11 000 9927</p>	 <p>Tightening torque Fixing screws M6: 10 Nm</p>
<p>Han® HPR enlarged, Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x washer SK S6</p> 	<p>09 11 000 9928</p>	 <p>Tightening torque Fixing screws M6: 10 Nm</p>

Han
HC

Identification

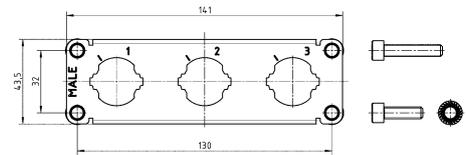
Part number

Drawing
(dimensions in mm)

Han® HPR enlarged,
Frame,
for male inserts,
3x Han® HC Modular 250,
Pack contents:
4x cheese-head screw M6 x 20,
4x cheese-head screw M6 x 25,
4x washer SK S6



09 11 000 9931

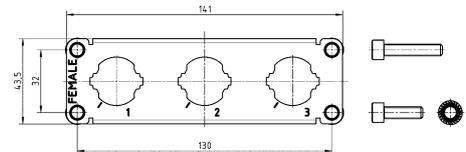


Tightening torque Fixing screw M6: 10 Nm

Han® HPR enlarged,
Frame,
for female inserts,
3x Han® HC Modular 250,
Pack contents:
4x cheese-head screw M6 x 20,
4x cheese-head screw M6 x 25,
4x washer SK S6



09 11 000 9932

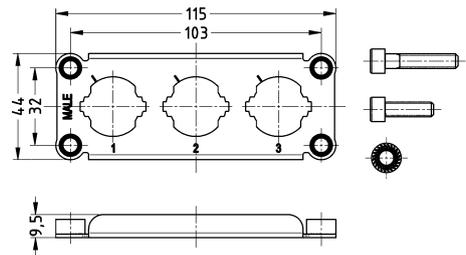


Tightening torque Fixing screw M6: 10 Nm

Han® HPR enlarged,
Frame,
for male inserts,
3x Han® HC Modular 250,
Pack contents:
4x cheese-head screw M6 x 20,
4x cheese-head screw M6 x 30,
4x washer SK S6



09 11 000 9943



Han® HPR enlarged,
Frame,
for female inserts,
3x Han® HC Modular 250,
Pack contents:
4x cheese-head screw M6 x 20,
4x cheese-head screw M6 x 30,
4x washer SK S6

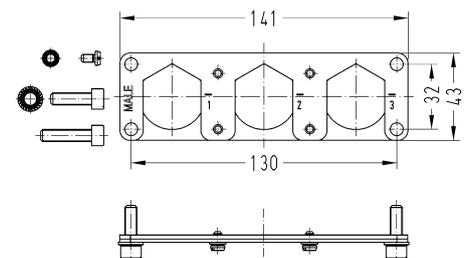


09 11 000 9944

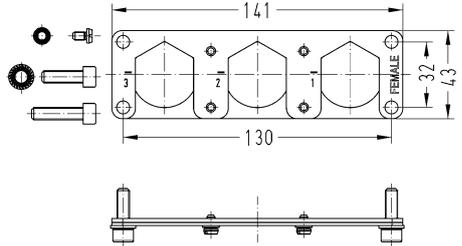
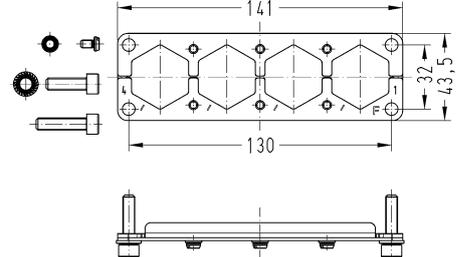
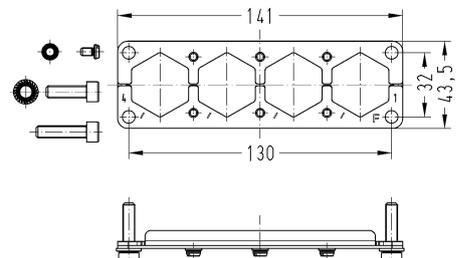
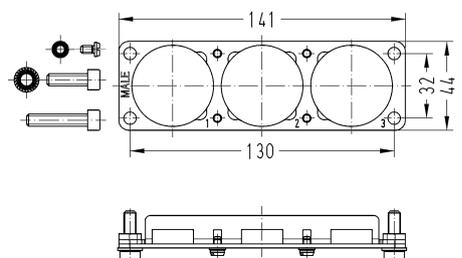
Han® HPR enlarged,
Frame,
for male inserts,
3x Han® HC Modular 350,
Pack contents:
4x M4 screw,
4x washer SK S4,
4x washer SK S6,
4x cheese-head screw M6 x 20,
4x cheese-head screw M6 x 25



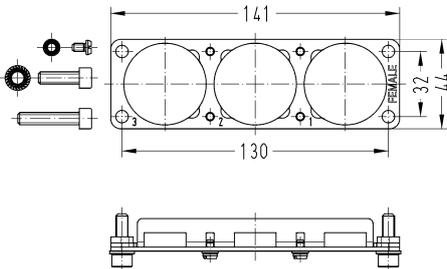
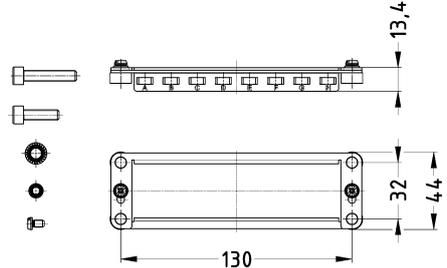
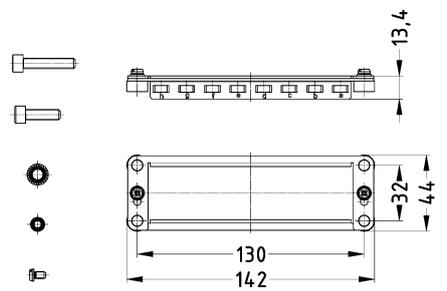
09 11 000 9957



Tightening torque Fixing screws M6: 10 Nm
Tightening torque Screws M4: 1.5 Nm

Identification	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 	<p>09 11 000 9958</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for male inserts, 4x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x heat shrink tube</p> 	<p>09 11 000 9964</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for female inserts, 4x Han® HC Modular 350, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25, 4x heat shrink tube</p> 	<p>09 11 000 9965</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 	<p>09 11 000 9973</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>

Han
HC

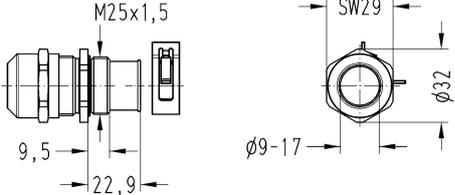
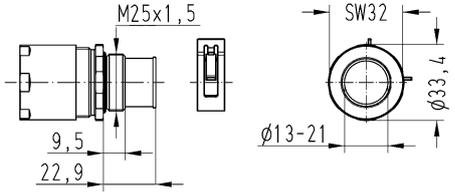
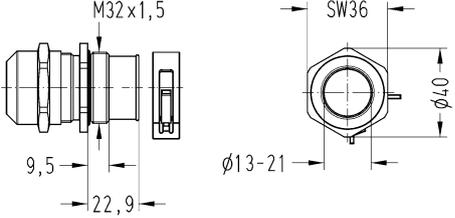
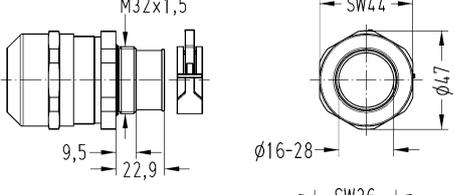
Identification	Part number	Drawing (dimensions in mm)
<p>Han® HPR enlarged, Frame, for female inserts, 3x Han® HC Modular 650,</p> <p>Pack contents: 4x M4 screw, 4x washer SK S4, 4x washer SK S6, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 25</p> 	<p>09 11 000 9974</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for up to 8 single modules, A ... H,</p> <p>Pack contents: 2x M4 screw, 2x washer SK S4, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 	<p>09 11 000 9935</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>
<p>Han® HPR enlarged, Frame, for up to 8 single modules, a ... h,</p> <p>Pack contents: 2x M4 screw, 2x washer SK S4, 4x cheese-head screw M6 x 20, 4x cheese-head screw M6 x 30, 4x washer SK S6</p> 	<p>09 11 000 9936</p>	 <p>Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm</p>

Features

- Secure and a visible connection of screening braid of shielded cables

Technical characteristics

Material (seal)	EPDM
Material (cable glands)	Brass, nickel plated
Material (clamping ring)	Polyamide
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
Han® HPR EasyCon, Cable gland, EMC version, 10 Nm 	M25	9 ... 17	19 00 000 5013		
	M25	13 ... 21	19 00 000 5019		
Han® HPR EasyCon, Cable gland, EMC version, 20 Nm 	M32	13 ... 21	19 00 000 5014		
	M32	16 ... 28	19 00 000 5022		
	M32	17 ... 22.5	19 00 000 5015		
					

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Vibration resistant acc. to IEC 61373 category 1B (Category 2 possible with usage of M6 distance bolts)

Technical characteristics

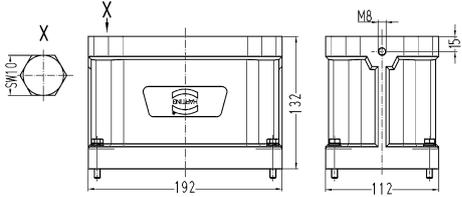
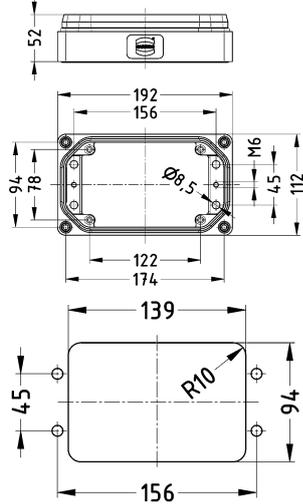
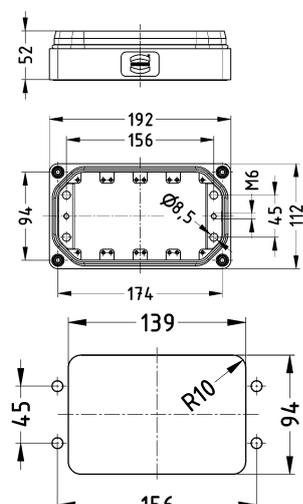
Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Aluminium, Metal
RoHS	compliant

Specifications and approvals

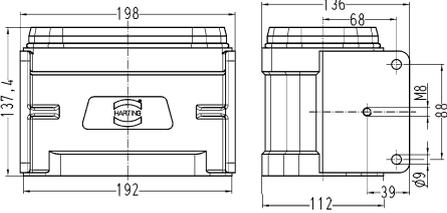

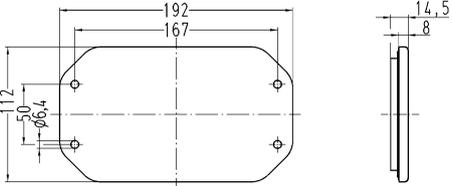
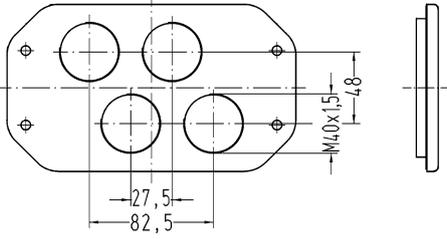
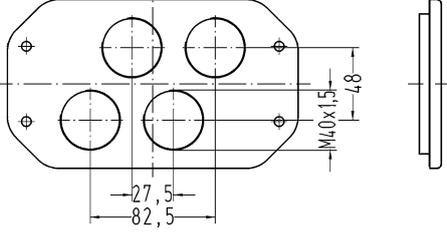
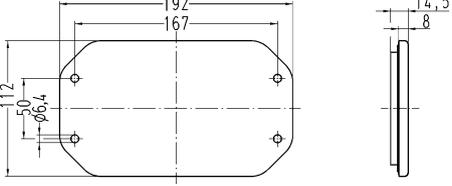
DNV GL

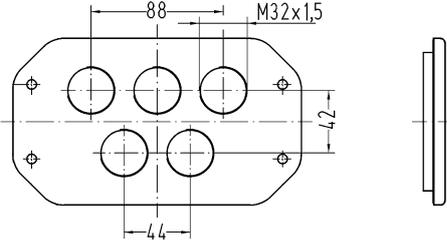
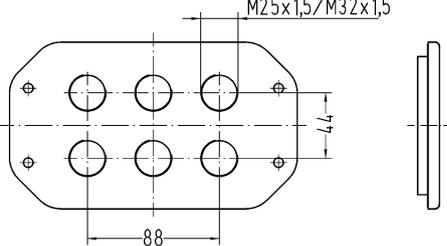
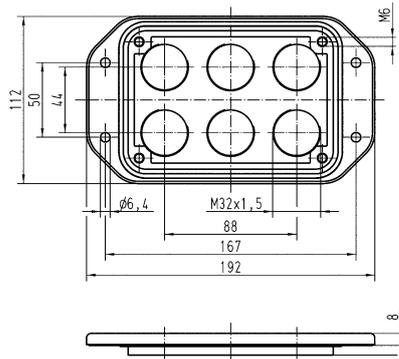
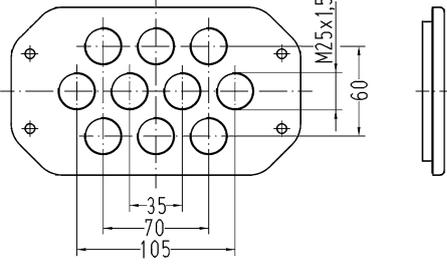
Hoods/housings for harsh outdoor environments
Screw locking

Han
HC

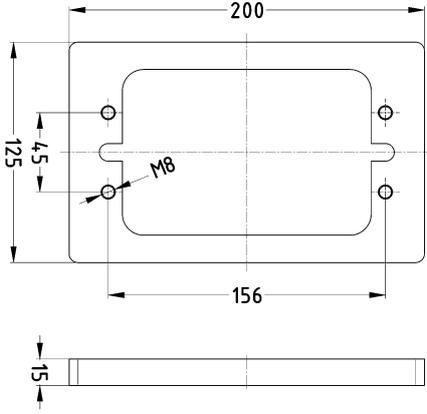
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry</p> 		09 40 048 0451	
<p>Han® HPR, Bulkhead mounted housings</p> 		09 40 048 0311	 <p>Panel cut out</p>
<p>Han® HPR, Bulkhead mounted housings, for 4 standard inserts - size 16 B</p> 		09 40 048 0331	 <p>Panel cut out</p>

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Surface mounted housing, Horizontal version, Top entry</p> 		09 40 048 0951	
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		09 40 048 5401	
<p>Han® HPR, Mounting cover, Distance bolt M5, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p> 		09 40 048 9803	 <p>Basic size for above mentioned covers</p>
<p>Han® HPR, Mounting cover, Distance bolt M5, for male inserts, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p> 	4x M40	19 40 048 9801	
<p>Han® HPR, Mounting cover, Distance bolt M5, for female inserts, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p> 	4x M40	19 40 048 9901	
<p>Han® HPR, Mounting cover, Distance bolt M6, Without cable entry, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p>		09 40 048 9801	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Mounting cover, Distance bolt M6, 5 cable entries, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p> 	<p>5x M32</p>	<p>19 40 048 9812</p>	
<p>Han® HPR, Mounting cover, Distance bolt M6, 6 cable entries, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p> 	<p>6x M25 6x M32</p>	<p>19 40 048 9820 19 40 048 9822</p>	 
<p>Han® HPR, Mounting cover, Distance bolt M6, 10 cable entries, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers</p> 	<p>10x M25</p>	<p>19 40 048 9860</p>	

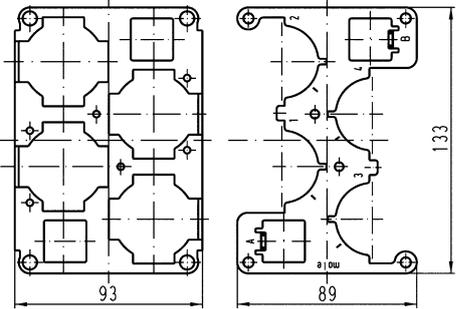
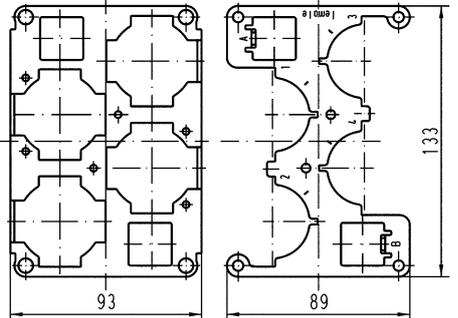

Han
HC

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Mounting frames, Han® HPR, Thread M8</p> 		<p>09 40 000 9965</p>	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® HPR, Frame, for male inserts, 6x Han® HC Modular 350	09 40 048 9806		
Han® HPR, Frame, for male inserts, 5x Han® HC Modular 350 + 1x Han® HC Modu- lar 350 PE	09 40 048 9809		
Han® HPR, Frame, for male inserts, 4x HC 350 contacts + 2x Han® Q 5/0	09 40 048 9810		
Han® HPR, Frame, for male inserts, 10x Han® HC Modular 350	09 40 048 9860		

Han
HC

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® HPR, Frame, for female inserts, 6x Han® HC Modular 350		09 40 048 9906	
Han® HPR, Frame, for female inserts, 5x Han® HC Modular 350 + 1x Han® HC Modu- lar 350 PE		09 40 048 9909	
Han® HPR, Frame, for female inserts, 4x HC 350 contacts + 2x Han® Q 5/0		09 40 048 9910	
Han® HPR, Frame, for female inserts, 10x Han® HC Modular 350		09 40 048 9960	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han® HPR, Frame, for male inserts, 4x HC 650 contacts + 2x Han® Q 5/0</p> 	09 40 048 9811		
<p>Han® HPR, Frame, for female inserts, 4x HC 650 contacts + 2x Han® Q 5/0</p> 		09 40 048 9911	
<p>Han® HPR, Frame, for 4 standard inserts - size 16 B</p>  <p>Suitable for hoods and surface mounted housings in conjunction with cover 09 40 048 9803/19 40 048 9801/19 40 048 9901 only</p>	09 40 048 9912	09 40 048 9912	

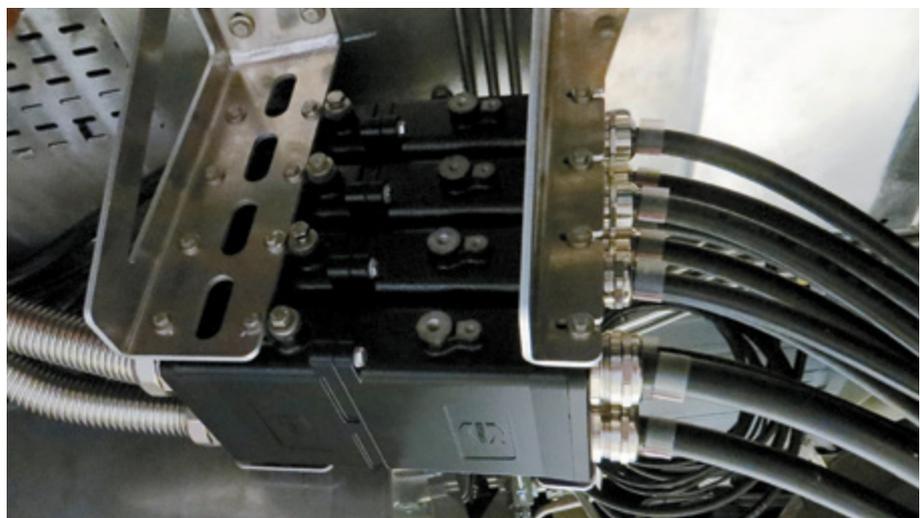
Innovative High Current Connectors for Power Transmission on Trains

Han
HC

Photo courtesy: Stadtwerke München, Munich

The Split hood and housing "open system" of the Han® 24HPR EasyCon with the innovative concept for shielded cables is an excellent solution for the versatile power requirements and the rapid moving operational cycle on Trains.

In use are the approved Han® HC Modular 350A and 650A Crimp-Contacts.



Contents	Page
Han-Power® S with 1x Han® Q 4/2.....	Han 15.2
Han-Power® S with 2x Han® Q 4/2.....	Han 15.4
Han-Power® S with 1x Han® Q 4/2 with maintenance switch.....	Han 15.6
Han-Power® S with 1x Han® Q 4/2 and on/off Switch.....	Han 15.8
Han-Power® S with 1x Han® Q 4/2, metal.....	Han 15.10
Han-Power® S with 1x Han® Q 8/0.....	Han 15.12
Han-Power® S with 2x Han® Q 8/0.....	Han 15.14
Han-Power® T with 3x HARTING PushPull (V4) Power.....	Han 15.16
Han-Power® T with 3x Han® Q 2/0.....	Han 15.18
Han-Power® T with 3x Han® Q 4/0.....	Han 15.20
Han-Power® T with 3x Han® Q 5/0.....	Han 15.22
Han-Power® T with 3x Han® Q 7/0.....	Han 15.24
Han-Power® T with 3x Han® Q 4/2.....	Han 15.26
Han-Power® T with 5x Han® Q 4/2.....	Han 15.28
Han-Power® T with 3x Han-Modular® Twin.....	Han 15.30
Accessories.....	Han 15.32

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry
- Cable to cable housings with male insert and hood with female insert

Technical characteristics

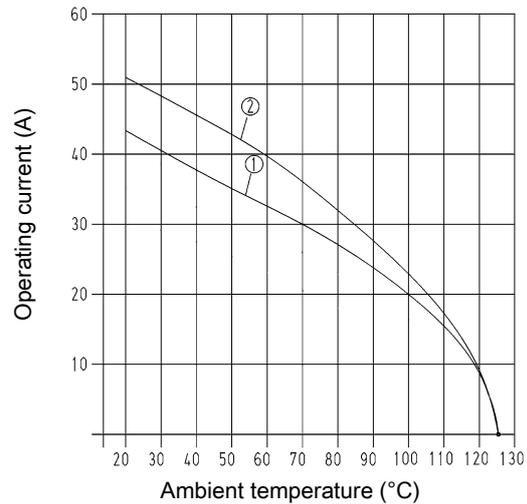
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
- ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

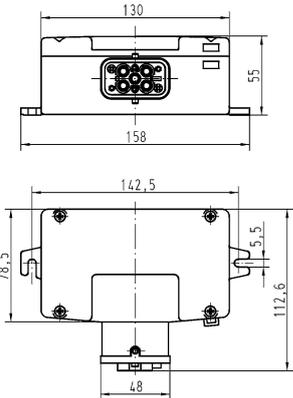

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

4+

40 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3

Han-Power

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
<p>Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Hoods</p> 	<p>2.5 ... 4 4 ... 6</p>	<p>09 12 008 4804 09 12 008 4806</p>	  <p>Wiring diagram</p>

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry
- Cable to cable housings with male insert and hood with female insert

Technical characteristics

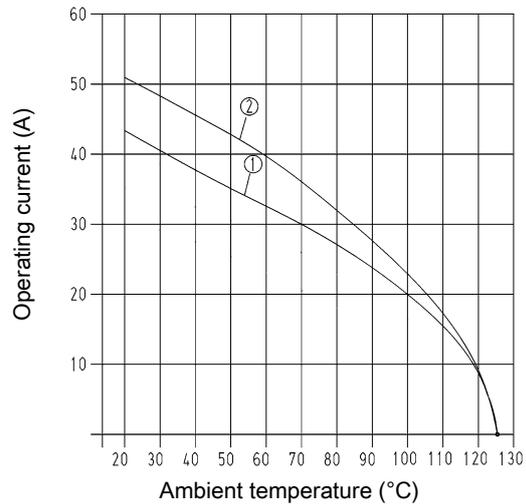
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
- ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

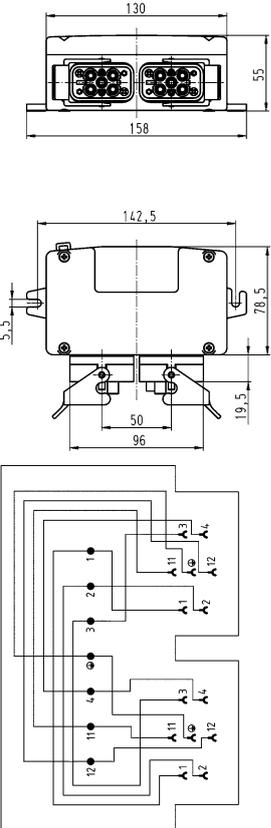
This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

4+

40 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3

Han-Power

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
<p>Han-Power® S , Energy distributor, With 2x Han® Q 4/2, Female insert, in Han-Compact® Housings, bulkhead mounting</p> 	<p>4 ... 6</p>	<p>09 12 008 4807</p>	 <p>Wiring diagram</p>

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools

Technical characteristics

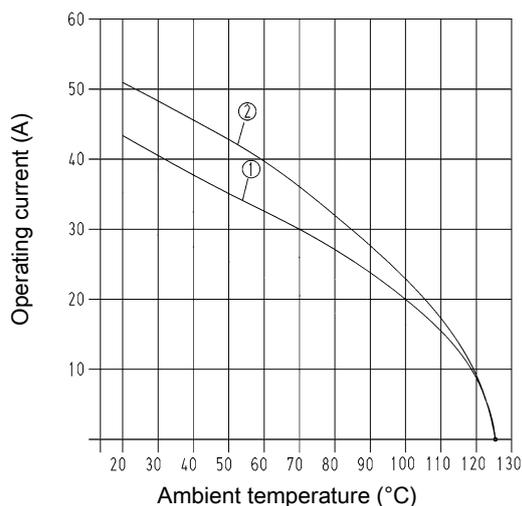
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	5 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	2
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	2
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	250 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-25 ... +55 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
- ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Technical data of switches

Electrical data acc. to IEC 61058-1 (VDE 0630 sect. 1)

for switch-disconnectors

Rated voltage 250 V~ / 400 V~

Rated current 16 (10) A / 10 (5) A

Han-Power® S with 1x Han® Q 4/2 with maintenance switch

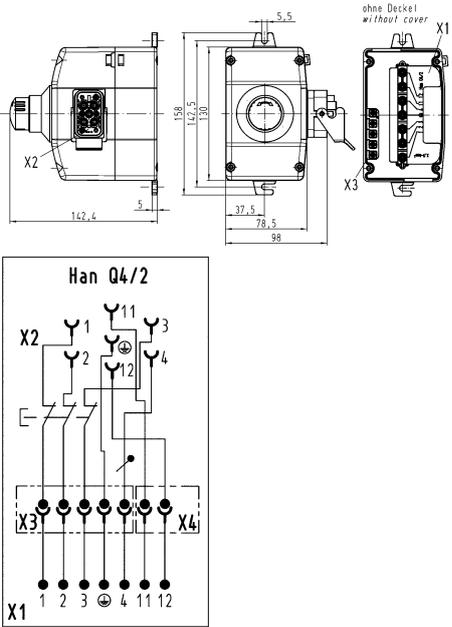


Number of contacts

4+

5 A 230/400 V 4 kV 2
 + 2 additional signal contacts
 10 A 250 V 4 kV 2

Han-Power

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
<p>Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Hoods, With maintenance switch</p> 	<p>4 ... 6</p>	<p>09 12 008 4620</p>	 <p>Wiring diagram</p>

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools

Technical characteristics

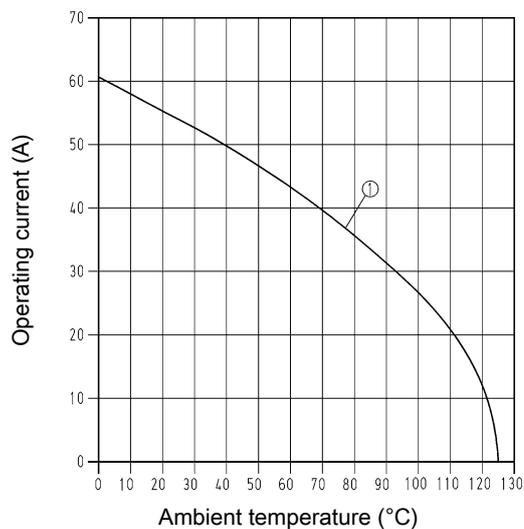
Number of contacts	4
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Energy supply Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Power side

Electrical data acc. to EN 61984

Interface to connector

10 A 230/400 V 4 kV 3

Frequency 50 Hz

Energy bus

50 A 230/400 V 4 kV 3

Max. operating temperature -5°C ... 60°C

Degree of protection

acc. to DIN EN 60529 IP65

Mechanical working life ≥ 500 mating cycles

Security fixing

nach IEC 60127-1;

nach UL 4248-1 / UL 512

nach CSA C22.2 no. 39

Rated current 10 A

Rated voltage 250 V

Technical data of switches

Electrical data acc. to IEC 60947

16 A 750 V 0.5 kA

Rated current 16 A

Rated voltage 750 V

Rated short-circuit current 0.5 kA

Mechanical working life 10 000 operations

Han-Power® S with 1x Han® Q 4/2 and on/off Switch

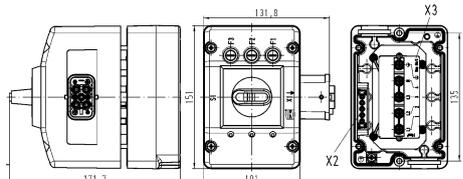
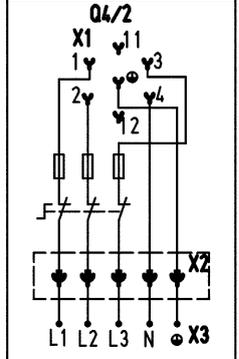


Number of contacts

4+

10 A 230/400 V 4 kV 3

Han-Power

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
<p>Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Hoods, On/off Switch</p> 	<p>10</p>	<p>09 12 008 4650</p>	  <p>Wiring diagram</p>

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools

Technical characteristics

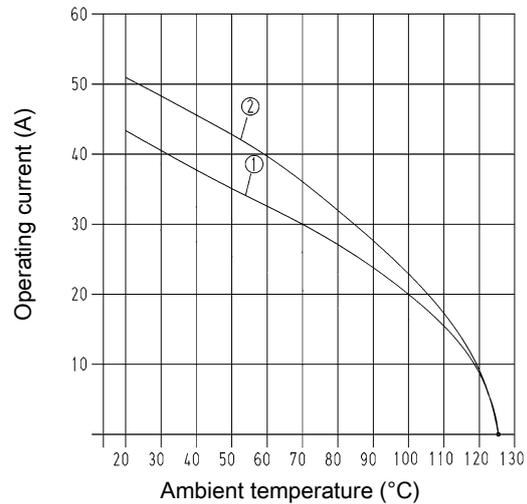
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Rated voltage acc. to CSA	250 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
- ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

4+

40 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3

Han-Power


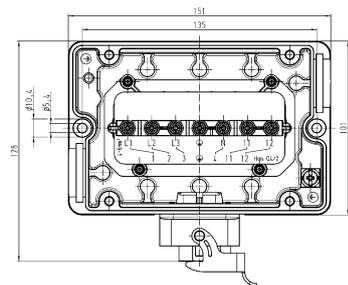
Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
----------------	--	-------------	----------------------------

Han-Power® S ,
 Energy distributor,
 With 1x Han® Q 4/2,
 Female insert,
 in Han-Compact® Housings, bulkhead
 mounting



4 ... 6

09 12 008 4901




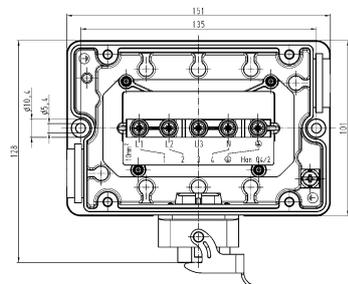
Wiring diagram

Han-Power® S ,
 Energy distributor,
 With 1x Han® Q 4/2,
 Female insert,
 in Han-Compact® Housings, bulkhead
 mounting,
 Without signal contacts



10

09 12 008 4951



Wiring diagram

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry

Technical characteristics

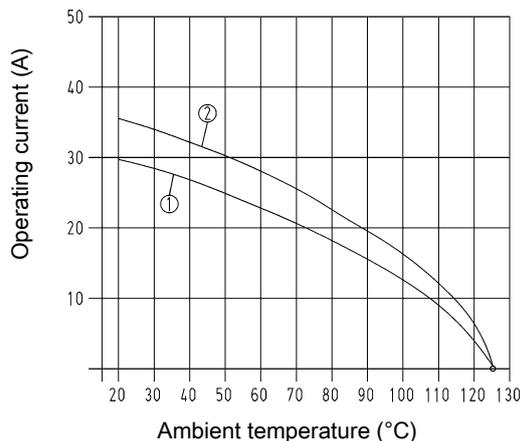
Number of contacts	8
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	25 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA), Fibre-glass reinforced
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 8/0 Conductor cross-section 2.5 mm²
- ② Han® Q 8/0 Conductor cross-section 4 mm²
- ③ Han® Q 8/0 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

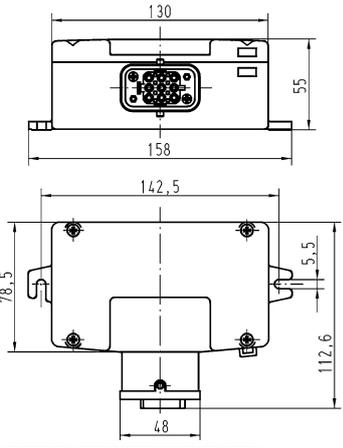
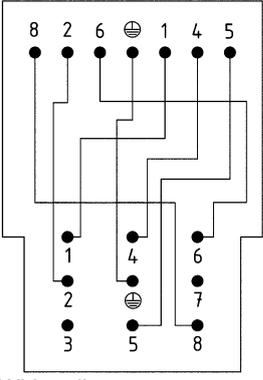
This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

8+

25 A 500 V 6 kV 3

Han-Power

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
<p>Han-Power® S , Energy distributor, With 1x Han® Q 8/0, Female insert, in Han-Compact® Hoods</p> 	<p>2.5 ... 4 4 ... 6</p>	<p>09 12 008 4801 09 12 008 4811</p>	  <p>Wiring diagram</p>

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry

Technical characteristics

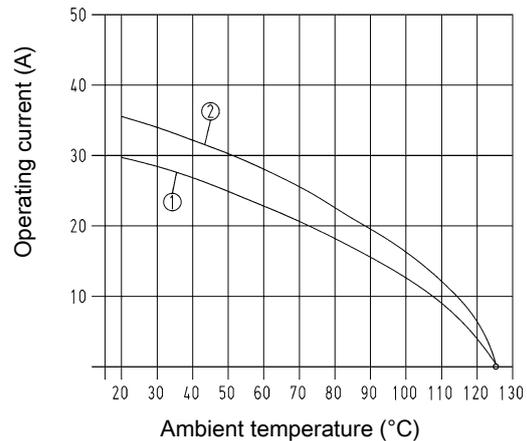
Number of contacts	6
Termination method	IDC insulation displacement termination, for stranded wires according to IEC 60228 Class 5
Rated current	25 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 8/0 Conductor cross-section 2.5 mm²
- ② Han® Q 8/0 Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to IEC 60228 Class 5. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

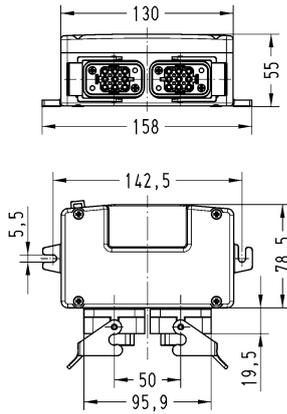
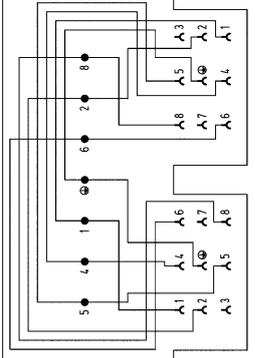
This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

6+

25 A 500 V 6 kV 3

Han-Power

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
<p>Han-Power® S , Energy distributor, With 2x Han® Q 8/0, Female insert, in Han-Compact® Housings, bulkhead mounting</p> 	<p>2.5 ... 4</p>	<p>09 12 008 4802</p>	 <p>Wiring diagram</p> 

Technical characteristics

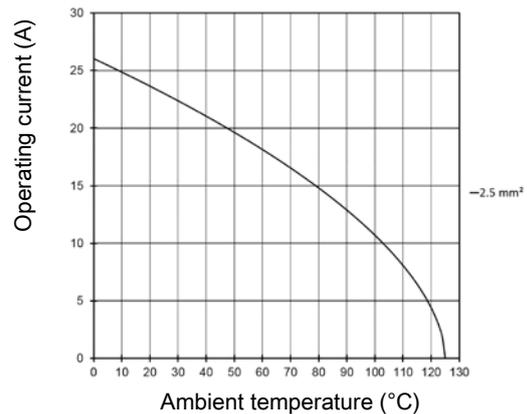
Number of contacts	4
Rated current	12 A
Rated voltage	48 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Polyamide (PA)
Colour (hood/housing)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984



Han-Power® T with 3x HARTING PushPull (V4) Power

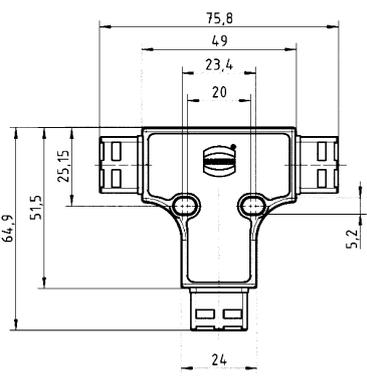


Number of contacts

4

12 A 48 V 1.5 kV 3

Han-Power

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Power® T , Energy distributor, With 3x HARTING PushPull Power, Bulkhead mounted housing</p> 	<p>09 12 008 4770</p>	

Features

- One connection for the power input, the power output and to connect with the device
- 2 power contacts
- Plastic housings are integrated in the moulding

Technical characteristics

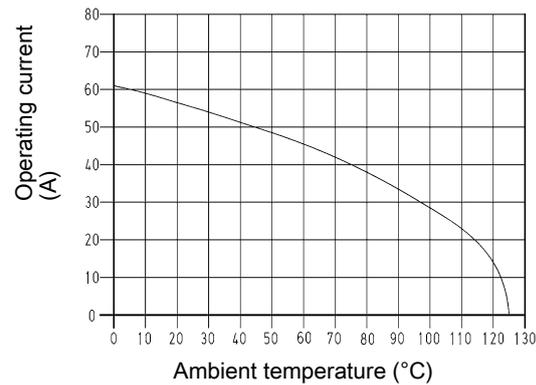
Number of contacts	2
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (hood/housing)	Polyamide (PA)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 2237 PVVA.E318390
CSA-C22.2 No. 182.3 PVVA7.E318390



Number of contacts

2+

40 A 400 V 6 kV 3

Han-Power

Identification

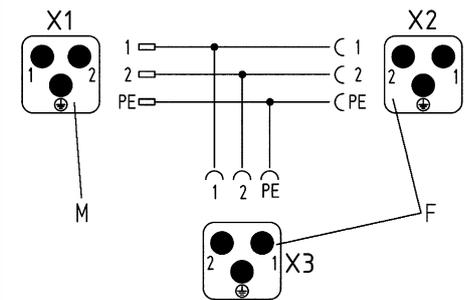
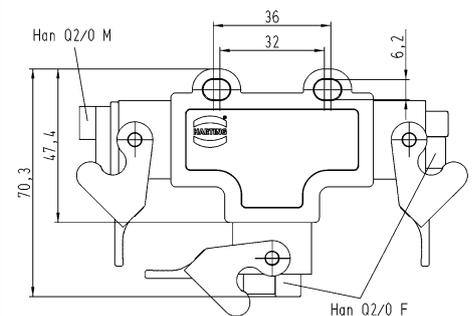
Han-Power® T,
Energy distributor,
With 3x Han® Q 2/0,
In Han® 3 A Housings, bulkhead mounting



Part number

09 12 008 4752

Drawing
(dimensions in mm)



Wiring diagram

Technical characteristics

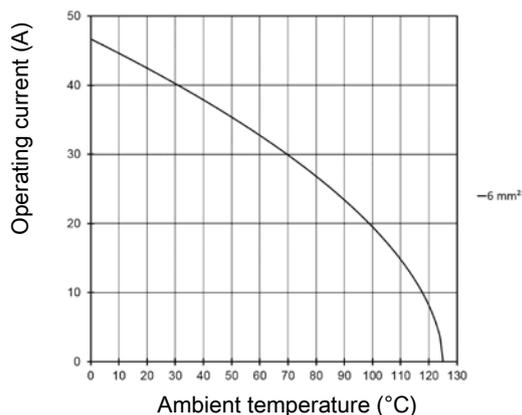
Han-Power	Number of contacts	4
	Rated current	40 A
	Rated voltage	830 V
	Rated impulse voltage	8 kV
	Pollution degree	3
	Insulation resistance	>10 ⁸ Ω
	Limiting temperature	-40 ... +125 °C
	Mating cycles	≥500
	Material (hood/housing)	Polyamide (PA)
	Colour (hood/housing)	RAL 9005 (jet black)
	Material (seal)	NBR
	Material (locking)	Polyamide (PA)
	Material (contacts)	Copper alloy
	Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption	

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984



Number of contacts

4+

40 A 830 V 8 kV 3

Han-Power

Identification

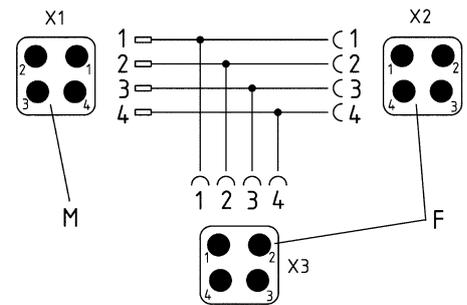
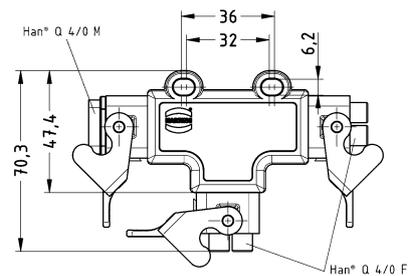
Han-Power® T,
Energy distributor,
With 3x Han® Q 4/0,
In Han® 3 A Housings, bulkhead mounting



Part number

09 12 008 4756

Drawing
(dimensions in mm)



Wiring diagram

Features

- One connection for the power input, the power output and to connect with the device
- Plastic housings are integrated in the moulding

Technical characteristics

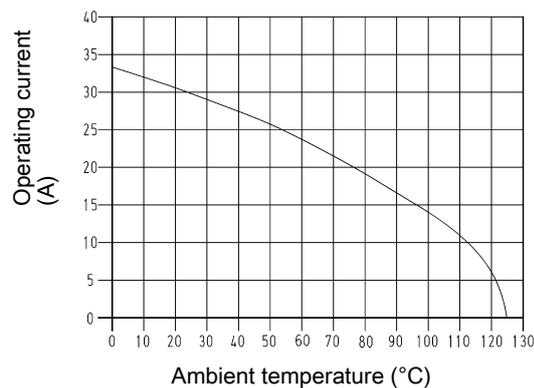
Number of contacts	5, 4
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (hood/housing)	Polyamide (PA)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 2237 PVVA.E318390
 CSA-C22.2 No. 182.3 PVVA7.E318390



Number of contacts

5+

16 A 230/400 V 4 kV 3

Han-Power

Identification

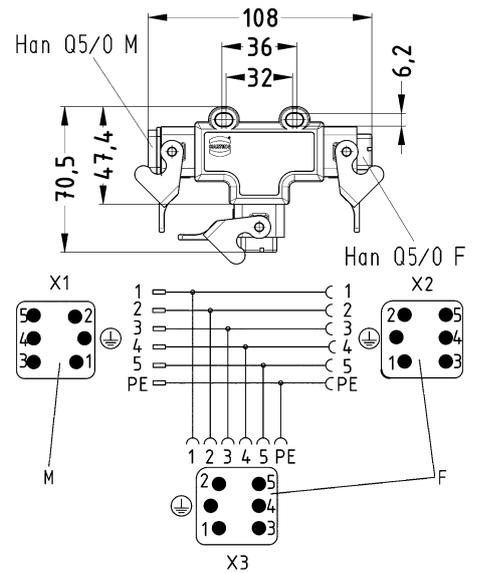
Part number

Drawing
(dimensions in mm)

Han-Power® T ,
Energy distributor,
With 3x Han® Q 5/0,
In Han® 3 A Housings, bulkhead mounting,
5-pin



09 12 008 4753

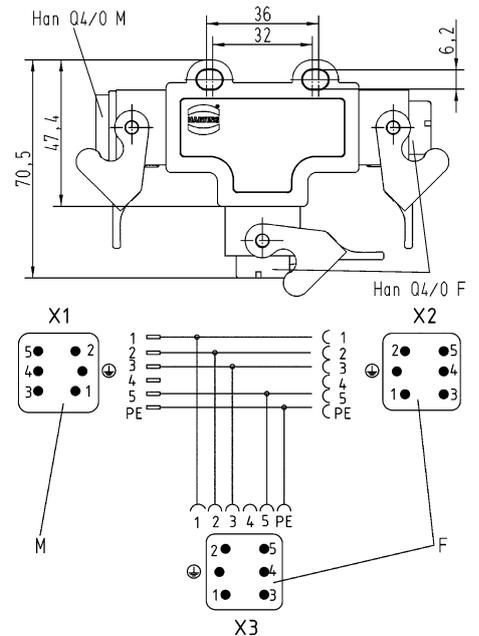


Wiring diagram

Han-Power® T ,
Energy distributor,
With 3x Han® Q 5/0,
In Han® 3 A Housings, bulkhead mounting,
4-pin



09 12 008 4751



Wiring diagram

Technical characteristics

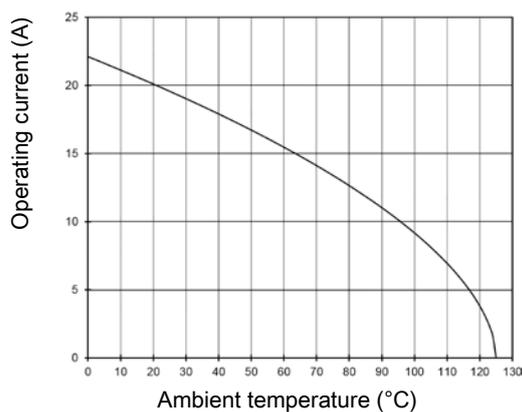
Han-Power	Number of contacts	7
	Rated current	10 A
	Rated voltage	400 V
	Rated impulse voltage	6 kV
	Pollution degree	3
	Insulation resistance	>10 ⁸ Ω
	Limiting temperature	-40 ... +125 °C
	Mating cycles	≥500
	Material (hood/housing)	Polyamide (PA)
	Colour (hood/housing)	RAL 9005 (jet black)
	Material (seal)	NBR
	Material (locking)	Polyamide (PA)
	Material (contacts)	Copper alloy
RoHS	compliant with exemption	

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Number of contacts

7+

10 A 400 V 6 kV 3

Han-Power

Identification

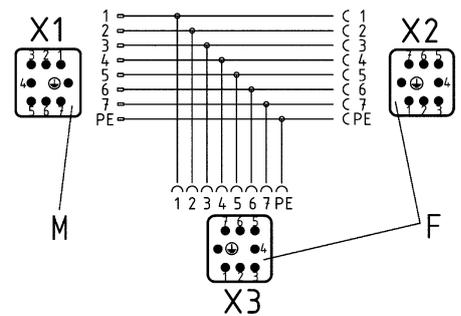
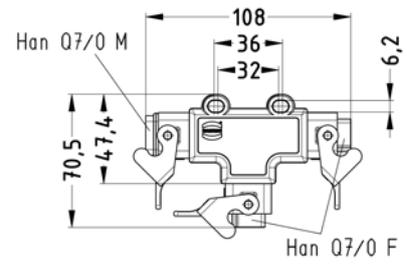
Han-Power® T ,
Energy distributor,
With 3x Han® Q 7/0,
In Han® 3 A Housings, bulkhead mounting



Part number

09 12 008 4757

Drawing
(dimensions in mm)



Wiring diagram

Features

- One connection for the power input, the power output and to connect with the device
- Finger safe male and female contacts
- 4 power contacts
- 2 signal contacts
- Metal hoods / housings

Technical characteristics

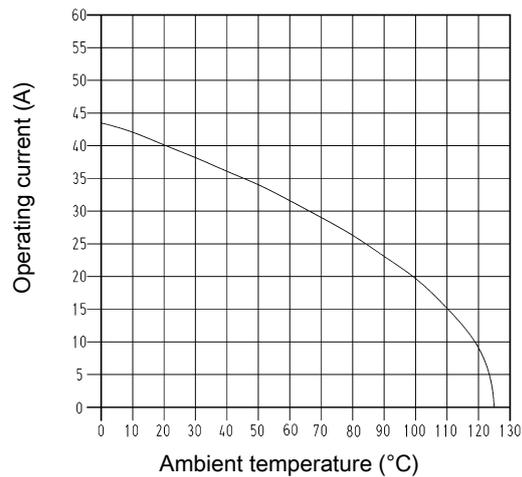
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Rated voltage acc. to CSA	250 V
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 2237 PVVA.E318390
 CSA-C22.2 No. 182.3 PVVA7.E318390



Number of contacts

4+

40 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3

Han-Power

Identification

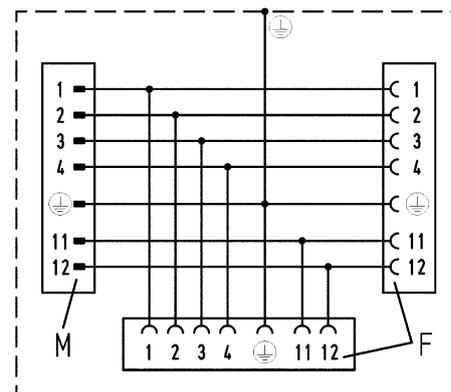
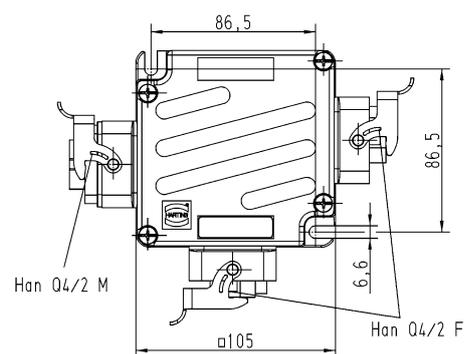
Han-Power® T,
 Energy distributor,
 With 3x Han® Q 4/2,
 in Han-Compact® Housings, bulkhead mounting



Part number

09 12 008 4720

Drawing
 (dimensions in mm)



Wiring diagram

Features

- The product doesn't have an internal overcurrent and short-circuit protection device.
- Overload and short-circuit protection measures are the responsibility of the user (electrician).
- Maximum let-through energy of the short-circuit protection device (I^2t) shall not exceed 211600 A²s.
- Assembly and installation must be carried out by a qualified electrician.
- The distributor box may only be operated when it is fastened.
- Do not plug/unplug under voltage/load, do not apply voltage when not plugged in, unused connections must be closed with a cover cap.

Technical characteristics

Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Rated current	17 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	2 A
Rated voltage (signal)	24 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	24 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	24 V
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +40 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide (PA)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide (PA)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

EN 60664-1
IEC 61984
UL 2237 PVVA.E318390
CSA-C22.2 No. 182.3 PVVA7.E318390



Number of contacts

4+

17 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 2 A 24 V 4 kV 3

Han-Power

Identification

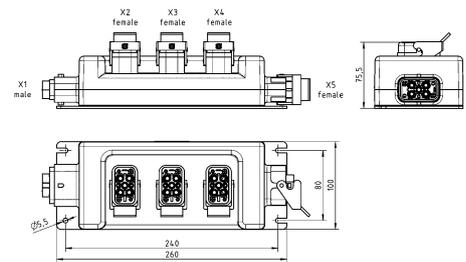
Han-Power® T,
 Energy distributor,
 With 5x Han® Q 4/2,
 in Han-Compact® Housings, bulkhead mounting



Part number

61 12 203 0007 00

Drawing
 (dimensions in mm)



Features

- One connection for the power input and the power output
- 1 T-connection to device
- 3 power contacts
- 4 signal contacts
- Metal hoods / housings
- Locking levers: Han-Easy Lock®

Technical characteristics

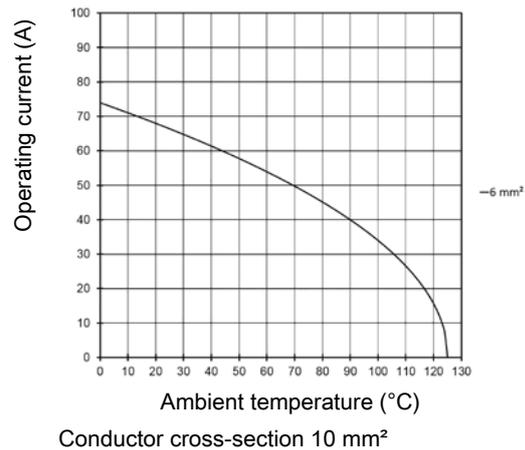
Number of contacts	3
Additional contacts	+ 4 additional signal contacts
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate (PC), Stainless steel
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984



Number of contacts

3

40 A 400/690 V 6 kV 3
 + 4 additional signal contacts
 16 A 400 V 6 kV 3

Han-Power

Identification

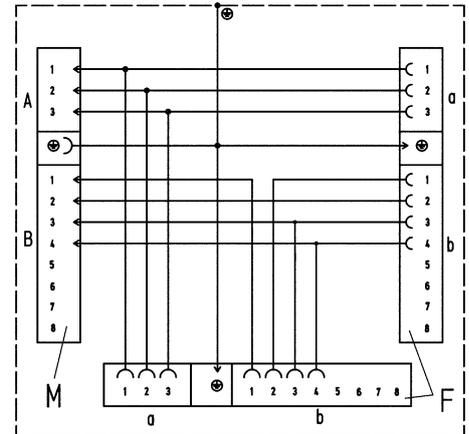
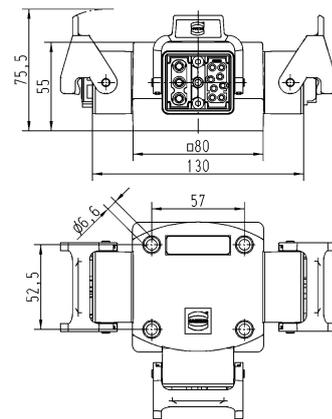
Han-Power® T ,
 Energy distributor,
 With 3x Han-Modular® Twin,
 Bulkhead mounted housing



Part number

09 12 008 4760

Drawing
 (dimensions in mm)



Wiring diagram

Technical characteristics

Material (seal) NBR
Colour (seal) Black

Technical characteristics

Material (accessories) NBR
Colour (accessories) Black
RoHS compliant


Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
----------------	---------------------	-------------	-------------------------------

Grommet,
Han-Power® S



7 ... 10
10 ... 13
13 ... 16
16 ... 19
19 ... 22

09 12 000 9969
09 12 000 9970
09 12 000 9971
09 12 000 9972
09 12 000 9973



Dummy plugs,
Han-Power® S



09 12 000 9974

Contents	Page
Module overview for applications with Han® HMC	Han 16.3
Han D® HMC	Han 16.5
Han DD® HMC.....	Han 16.8
Han E® HMC	Han 16.13
Han® ES Press HMC.....	Han 16.18
Han® EEE HMC.....	Han 16.23
Contacts	Han 16.26
Han® HMC hoods/housings.....	Han 16.30
Docking frame	Han 16.39

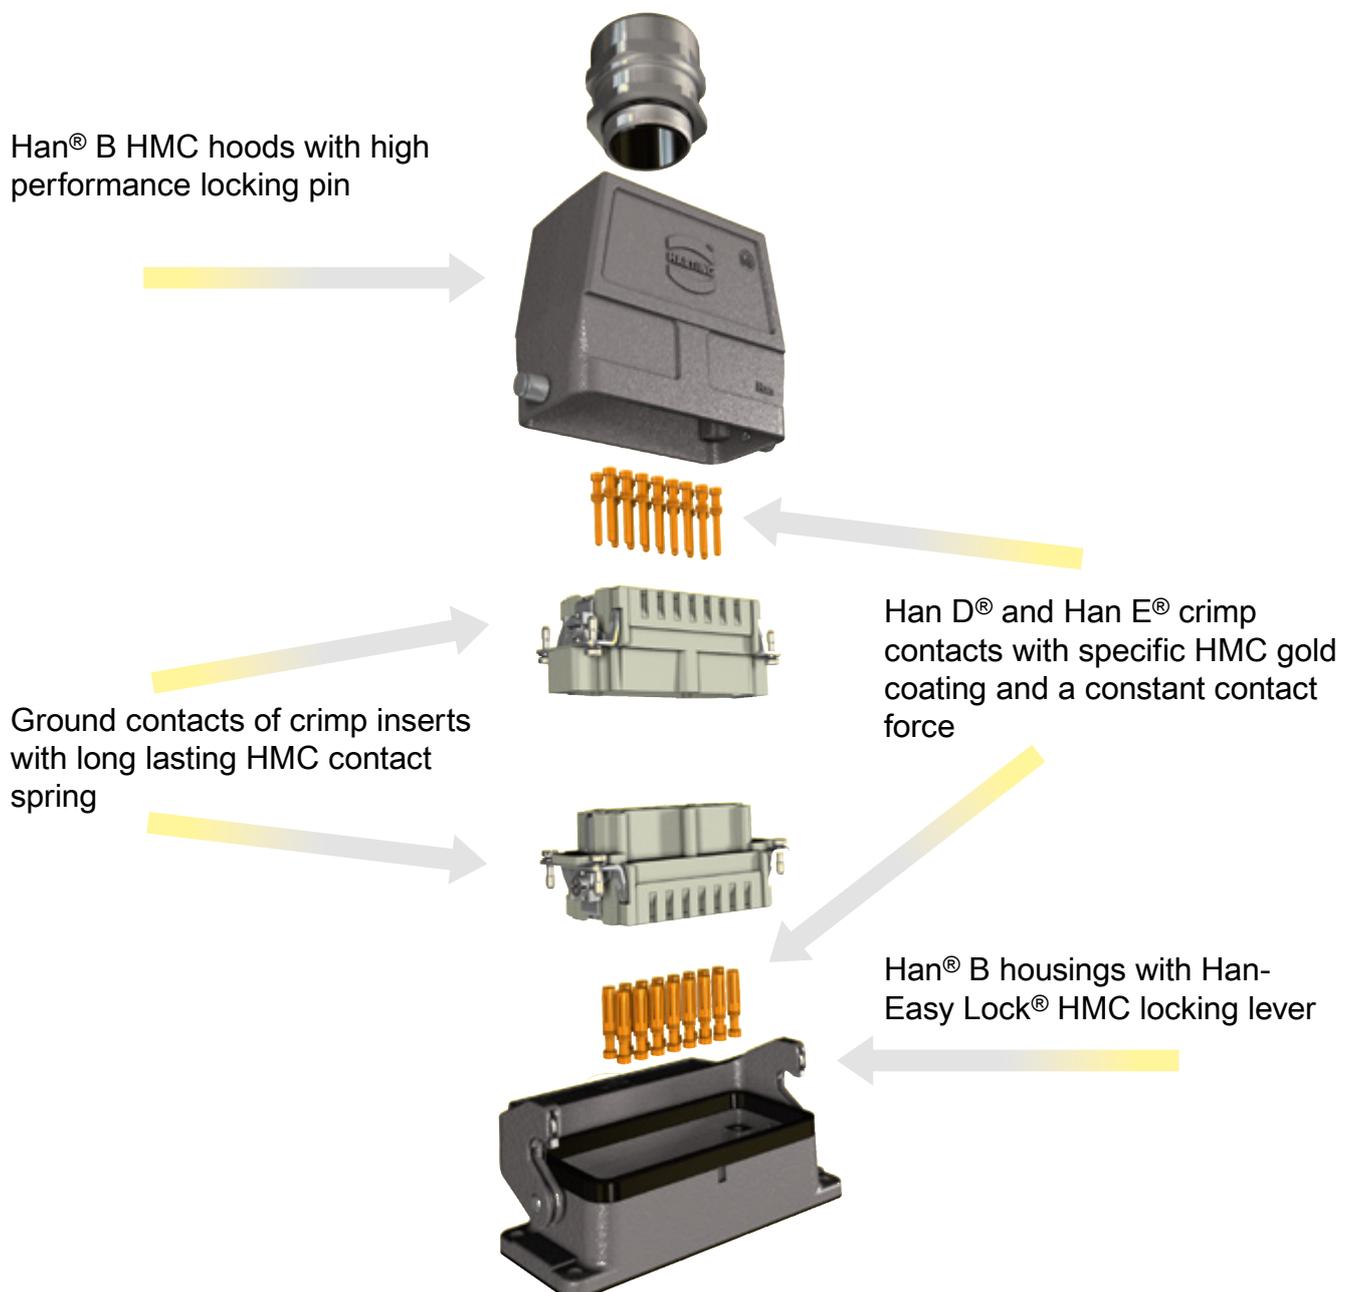
Features

This series Han® HMC (High Mating Cycles) is a connector series specifically aiming at industrial applications for 10,000 mating cycles.

Benefits:

- High mechanical robustness
- Simple and easy understandable design
- Optimized concept for signal and power transmission
- Low mating and unmating forces
- High contact density

General Description



Module overview for applications with Han® HMC



Han
HMC

Series	Han E® module	Han® EE module	Han E® Protected module	Han® EEE module
Number of contacts	6	8	6	20
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Crimp terminal 
Rated current	16 A	16 A	16 A	16 A
Rated voltage	500 V	400 V	830 V	500 V
Wire gauge	0.14 ... 4 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²
Male insert (M)	09 14 006 3001	09 14 008 3001	09 14 006 3041	09 14 020 3001
Female insert (F)	09 14 006 3101	09 14 008 3101	09 14 006 3141	09 14 020 3101
Series	Han DD® module	Han® DDD module	Han® High Density module	
Number of contacts	12	17	25	
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	
Rated current	10 A	10 A	4 A	
Rated voltage	250 V	160 V	50 V	
Wire gauge	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.08 ... 0.52 mm ²	
Male insert (M)	09 14 012 3001	09 14 017 3001	09 14 025 3001	
Female insert (F)	09 14 012 3101	09 14 017 3101	09 14 025 3101	
Series	Han® 40 A Crimp module	Han® C module	Han® CC Protected module	Han® CD module
Number of contacts	2	3	4	3 / 4
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Crimp terminal 
Rated current	40 A	40 A	40 A	40 A / 10 A
Rated voltage	1000 V	690 V	830 V	830 V / 830 V
Wire gauge	1.5 ... 10 mm ²	1.5 ... 10 mm ²	1.5 ... 6 mm ²	0.15 ... 6 mm ² / 0.14 ... 2.5 mm ²
Male insert (M)	09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001
Female insert (F)	09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101

Han
16
·
3

For more technical details see chapter 06



Module overview for applications with Han® HMC



Han
HMC

Series	Han® GigaBit HMC module	Han® GigaBit HMC module	Han® GigaBit HMC module	Han® GigaBit HMC module
Numbers of contacts	8	8	8	8
Termination	Crimp termination 	Crimp termination shielded 	Crimp termination 	Crimp termination shielded 
Wire gauge	Ethernet Cat. 6A 0.08 ... 0.52 mm ²	Ethernet Cat. 6A 0.08 ... 0.52 mm ²	Ethernet Cat. 7 0.08 ... 0.52 mm ²	Ethernet Cat. 7 0.08 ... 0.52 mm ²
Male insert (M)	09 14 208 3011	09 14 208 3012	09 14 208 3031	09 14 220 3032
Female insert (F)	09 14 208 3111	09 14 208 3112	09 14 208 3131	09 14 220 3132

Series	Han® MegaBit HMC module	Han® MegaBit HMC module	Han® Shielded HMC module	
Numbers of contacts	2 x 4	2 x 4	20	
Termination	Crimp termination 	Crimp termination shielded 	Crimp termination 	
Wire gauge	Ethernet Cat. 5e 0.14 ... 2.5 mm ²	Ethernet Cat. 5e 0.14 ... 2.5 mm ²	0.08 ... 0.52 mm ²	
Male insert (M)	09 14 208 3016	09 14 208 3017	09 14 220 3013	
Female insert (F)	09 14 208 3116	09 14 208 3117	09 14 220 3113	

Series	Hinged frame HMC 6 B	Hinged frame HMC 10 B	Hinged frame HMC 16 B	Hinged frame HMC 24 B
Number of modules	2	3	4	6
				
Marking (A...F)	09 14 206 0303	09 14 210 0303	09 14 216 0303	09 14 224 0303
Marking (a...f)	09 14 206 0313	09 14 210 0313	09 14 216 0313	09 14 224 0313

Series	Docking frame 6 B	Docking frame 10 B	Docking frame 16 B	Docking frame 24 B
Number of modules	2	3	4	6
				
Marking (A...F)	09 14 006 1701	09 14 010 1701	09 14 016 1701	09 14 024 1701
Marking (a...f)	09 14 006 1711	09 14 010 1711	09 14 016 1711	09 14 024 1711

Han
16
·
4

For more technical details see chapter 06

Features

- High density of contacts
- Time saving rapid termination by use of crimping contacts
- for requirements up to 250 V / 10 A
- for hoods/housings in the Han[®] B HMC series
- Han D[®] HMC contacts available with special HMC gold plating for 10.000 mating cycles

Technical characteristics

Number of contacts	40, 64
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

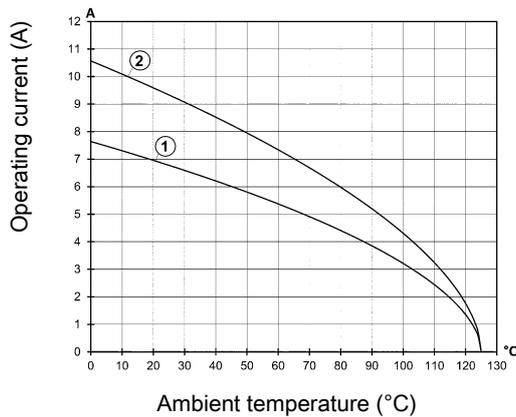
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

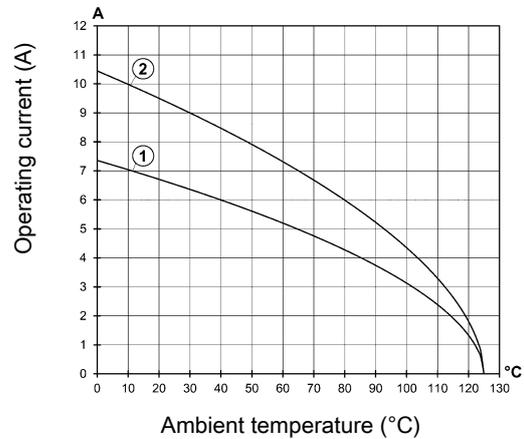
Han[®] 40 D HMC



- ① 0.75 mm²
- ② 1.5 mm²

Derating

Han[®] 64 D HMC



- ① 0.75 mm²
- ② 1.5 mm²

Specifications and approvals

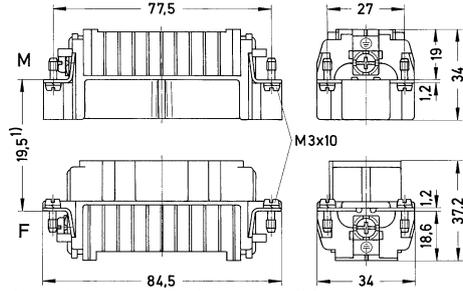

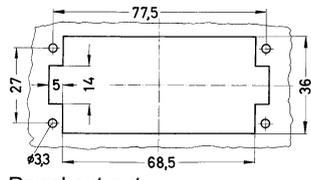
EN 60664-1
 IEC 61984
 EN 175301-801
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

40+

10 A 250 V 4 kV 3

Han
HMC

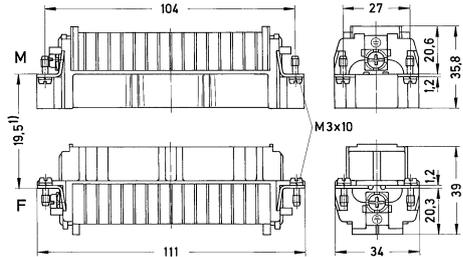
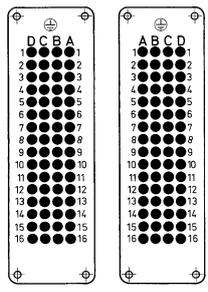
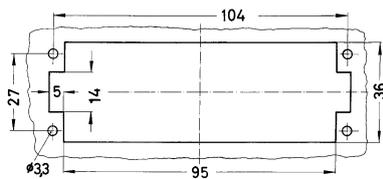
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D[®] HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 21 240 3001	09 21 240 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

64+

10 A 250 V 4 kV 3

Han
HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han D® HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 21 264 3001	09 21 264 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Features

- High density of contacts
- Time saving rapid termination by use of crimping contacts
- for requirements up to 250 V / 10 A
- for hoods/housings in the Han[®] B HMC series
- Han D[®] HMC contacts available with special HMC gold plating for 10.000 mating cycles

Technical characteristics

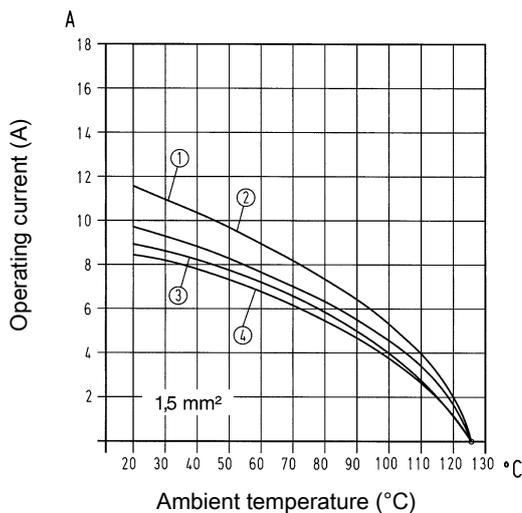
Number of contacts	24, 42, 72, 108
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

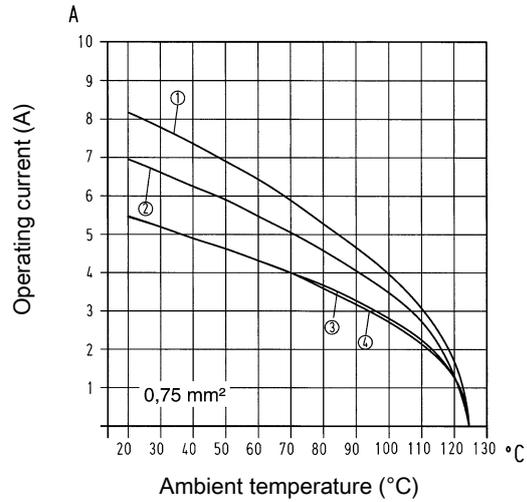
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han[®] 24 DD HMC
- ② Han[®] 42 DD HMC
- ③ Han[®] 72 DD HMC
- ④ Han[®] 108 DD HMC

Derating



- ① Han[®] 24 DD HMC
- ② Han[®] 42 DD HMC
- ③ Han[®] 72 DD HMC
- ④ Han[®] 108 DD HMC

Specifications and approvals

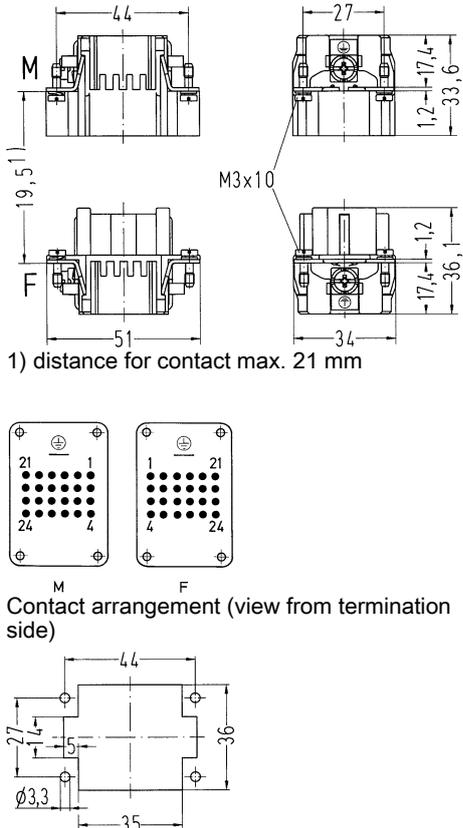
EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Number of contacts

24+

10 A 250 V 4 kV 3

Han HMC

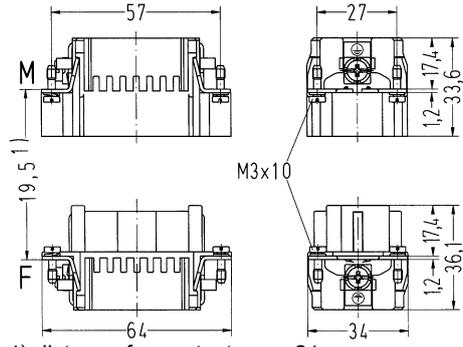


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD® HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 224 3001	09 16 224 3101	 <p>1) distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

42+

10 A 250 V 4 kV 3

Han
HMC

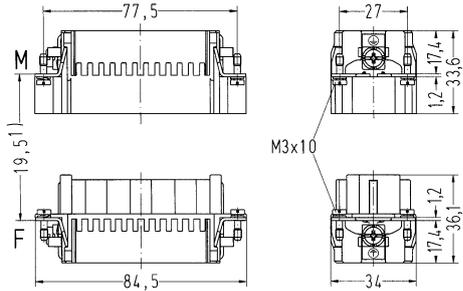

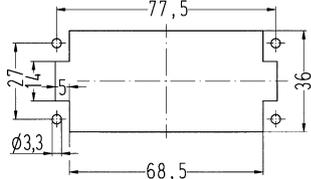
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD[®] HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 242 3001	09 16 242 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

72+

10 A 250 V 4 kV 3

Han
HMC

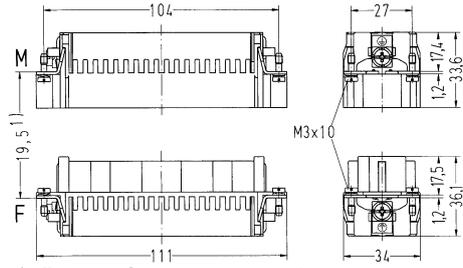
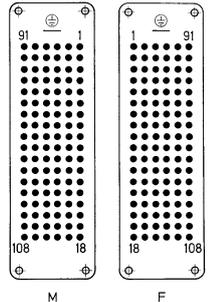
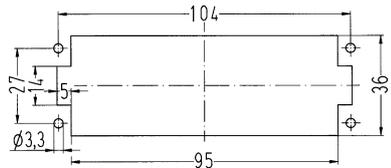
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD® HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 272 3001	09 16 272 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Number of contacts

108+

10 A 250 V 4 kV 3

Han
HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han DD[®] HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 16 208 3001	09 16 208 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out for use without Hoods/Housings</p>

Features

- Time saving rapid termination by use of crimping contacts
- for hoods/housings in the Han[®] B HMC series
- Han E[®] HMC contacts available with special HMC gold plating for 10.000 mating cycles

Technical characteristics

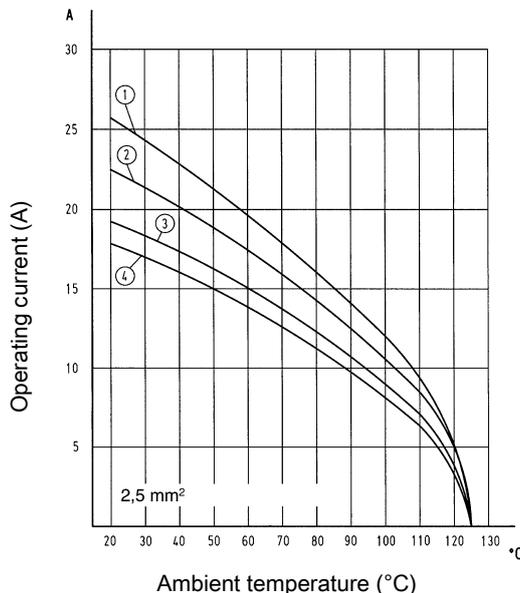
Number of contacts	6, 10, 16, 24
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

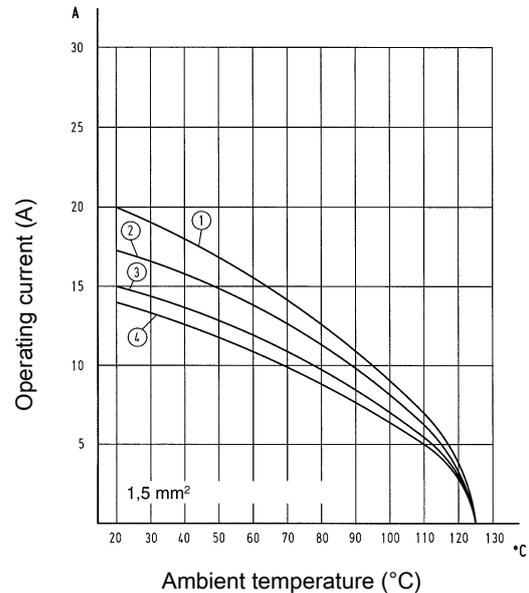
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han[®] 6 E HMC
- ② Han[®] 10 E HMC
- ③ Han[®] 16 E HMC
- ④ Han[®] 24 E HMC

Derating



- ① Han[®] 6 E HMC
- ② Han[®] 10 E HMC
- ③ Han[®] 16 E HMC
- ④ Han[®] 24 E HMC

Specifications and approvals

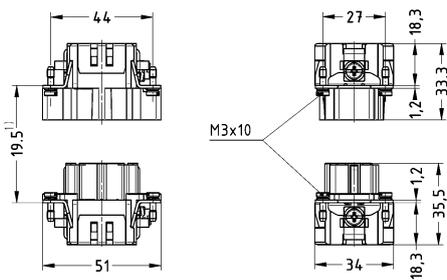


EN 60664-1
IEC 61984
DNV GL

Number of contacts

6+

16 A 500 V 6 kV 3

Han
HMC

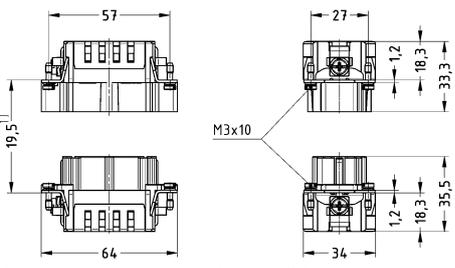

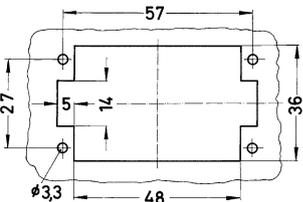
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E[®] HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 33 206 2602	09 33 206 2702	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

10+

16 A 500 V 6 kV 3

Han HMC

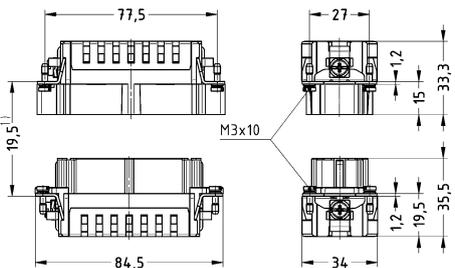
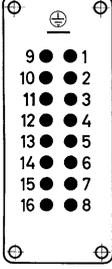
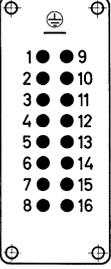
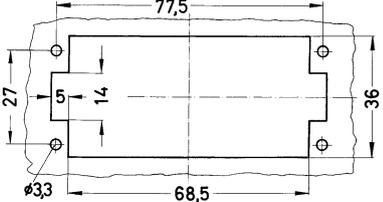
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E® HMC, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 33 210 2602	09 33 210 2702	 <p>1) distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

16+

16 A 500 V 6 kV 3

Han
HMC

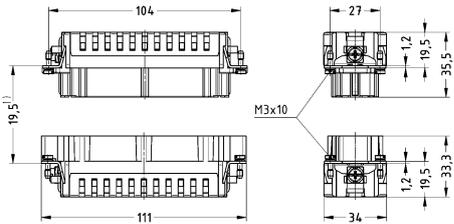
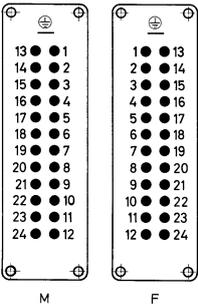
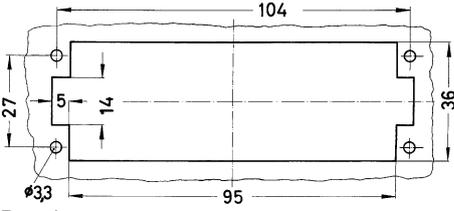
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® HMC, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 4	09 33 216 2602	09 33 216 2702	 <p>1) distance for contact max. 21 mm</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>M</p> </div> <div style="text-align: center;">  <p>F</p> </div> </div> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

24+

16 A 500 V 6 kV 3

Han HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® HMC, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 33 224 2602	09 33 224 2702	 <p>1) distance for contact max. 21 mm</p>  <p>M Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Features

- Han® ES Press: Easy bridging functionality of contacts by means of plug-in jumpers directly on the connector
- Rapid termination technology without tools for a time saving assembly and for optimal processreliability

Technical characteristics

Number of contacts	6, 10, 16, 24
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0

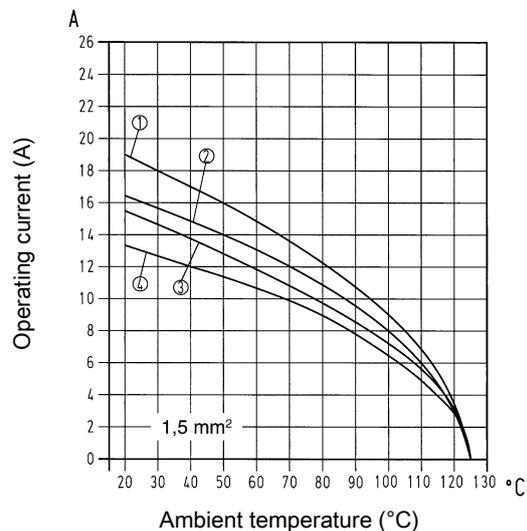
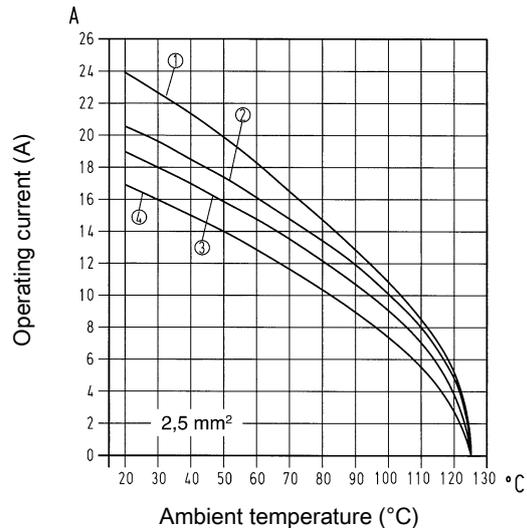
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

Han® ES Press



- ① Han® 6 ES Press
- ② Han® 10 ES Press
- ③ Han® 16 ES Press Han® 32 ES Press
- ④ Han® 24 ES Press Han® 48 ES Press

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

Number of contacts

6+

16 A 500 V 6 kV 3

Han
HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES Press HMC, Cage-clamp termination, Contact surface: HMC gold plated</p> <p>for hoods/housings high construction only Blue slide</p>	0.14 ... 2.5	09 33 206 2648	09 33 206 2748	<p>Distance for contact max. 21 mm</p> <p>M F</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Number of contacts

10+

16 A 500 V 6 kV 3

Han
HMC

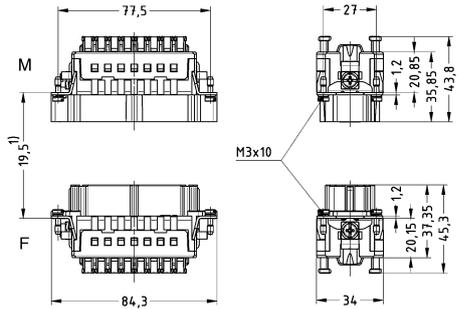
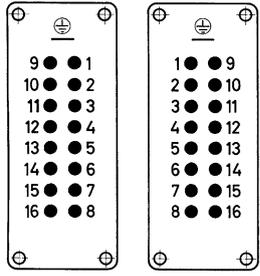
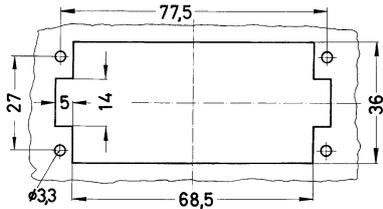
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES Press HMC, Cage-clamp termination, Contact surface: HMC gold plated</p> <p>for hoods/housings high construction only Blue slide</p>	0.14 ... 2.5	09 33 210 2648	09 33 210 2748	<p>Distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Number of contacts

16+

16 A 500 V 6 kV 3

Han HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES Press HMC, Cage-clamp termination, Contact surface: HMC gold plated</p>  <p>for hoods/housings high construction only Blue slide</p>	0.14 ... 2.5	09 33 216 2648	09 33 216 2748	 <p>Distance for contact max. 21 mm</p>  <p>M F</p> <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

24+

16 A 500 V 6 kV 3

Han
HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han® ES Press HMC, Cage-clamp termination, Contact surface: HMC gold plated</p> <p>for hoods/housings high construction only Blue slide</p>	0.14 ... 2.5	09 33 224 2648	09 33 224 2748	<p>Distance for contact max. 21 mm</p> <p>Contact arrangement (view from termination side)</p> <p>Panel cut out</p>

Features

- Time saving rapid termination by use of crimping contacts
- Coded insert
- for hoods/housings in the Han® B HMC series
- Han E® HMC contacts available with special HMC gold plating for 10.000 mating cycles

Technical characteristics

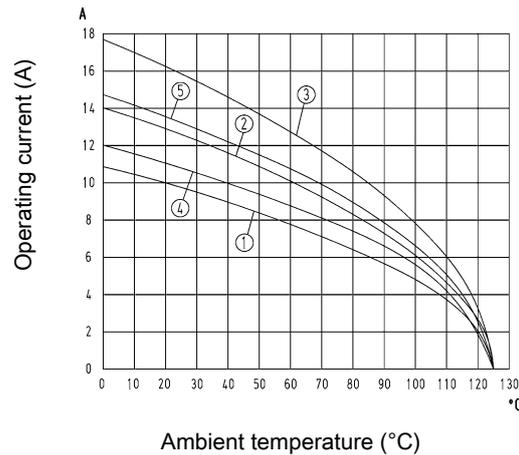
Number of contacts	40, 64
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 64 EEE HMC 1.5 mm²
- ② Han® 64 EEE HMC 2.5 mm²
- ③ Han® 64 EEE HMC 4 mm²
- ④ Han® 40 EEE HMC 1.5 mm²
- ⑤ Han® 40 EEE HMC 2.5 mm²

Specifications and approvals

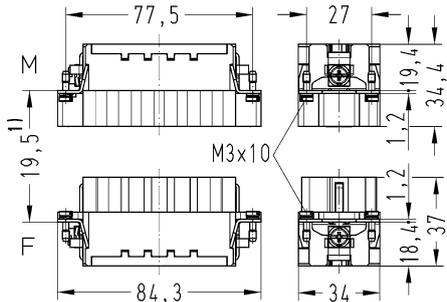

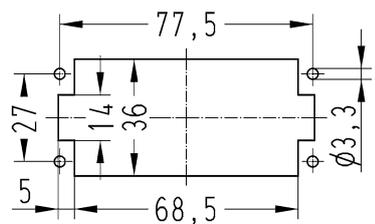
EN 60664-1
IEC 61984

Number of contacts

40+

16 A 500 V 6 kV 3

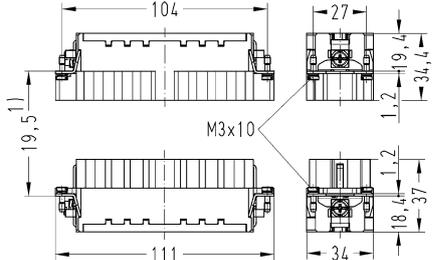
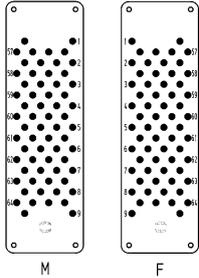
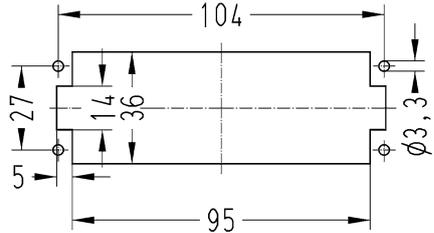
Han
HMC

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE HMC, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 32 240 3001	09 32 240 3101	 <p>1) distance for contact max. 21 mm</p>  <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>

Number of contacts

64+

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE HMC, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 32 264 3001	09 32 264 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out

Technical characteristics

Contact resistance	≤3 mΩ
Mating cycles with other HMC components	≥10000
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Details

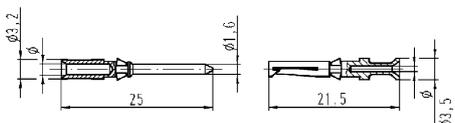
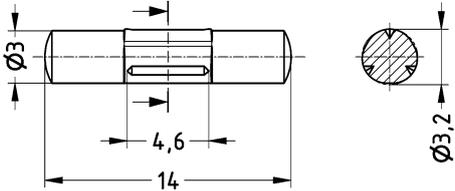
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D® HMC, Crimp contact, Contact surface: HMC gold plated 	0.14 ... 0.37	09 15 200 6124	09 15 200 6224	 <table border="1" data-bbox="965 1299 1420 1456"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
	Wire gauge	∅	Stripping length																						
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																						
	0.5 mm ² AWG 20	1.1 mm	8 mm																						
	0.75 mm ² AWG 18	1.3 mm	8 mm																						
	1 mm ² AWG 18	1.45 mm	8 mm																						
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
0.5	09 15 200 6123	09 15 200 6223																							
0.75	09 15 200 6125	09 15 200 6225																							
1	09 15 200 6122	09 15 200 6222																							
1.5	09 15 200 6121	09 15 200 6221																							
2.5	09 15 200 6126	09 15 200 6226																							
Han D® Han DD®, Coding pin  <p>Only for crimp termination With loss of one contact</p>			09 33 000 9915																						

Technical characteristics

Contact resistance	≤1 mΩ
Mating cycles with other HMC components	≥10000
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																				
		Male	Female																					
Han E® HMC, Crimp contact, Contact surface: HMC gold plated	0.14 ... 0.37	09 33 200 6117	09 33 200 6217																					
	0.5	09 33 200 6122	09 33 200 6222																					
	0.75	09 33 200 6115	09 33 200 6215																					
	1	09 33 200 6118	09 33 200 6218																					
	1.5	09 33 200 6116	09 33 200 6216																					
	2.5	09 33 200 6123	09 33 200 6223																					
	4	09 33 200 6119	09 33 200 6221																					
					<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove	
	Conductor cross-section	Identification																						
	0.14-0.37 mm ²	AWG 26-22 no groove																						
0.5 mm ²	AWG 20 no groove																							
0.75 mm ²	AWG 18 1 groove*																							
1 mm ²	AWG 18 1 groove																							
1.5 mm ²	AWG 16 2 grooves																							
2.5 mm ²	AWG 14 3 grooves																							
3 mm ²	AWG 12 wide groove																							
4 mm ²	AWG 12 no groove																							
				<p>* on the back crimp collar</p> <p>Stripping length 7.5 mm</p>																				
Han E® Han® EE Han® EEE, Coding pin			09 33 000 9954																					
for crimp inserts only With loss of one contact																								

Technical characteristics

Contact resistance	≤1 mΩ
Mating cycles with other HMC components	≥10000
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

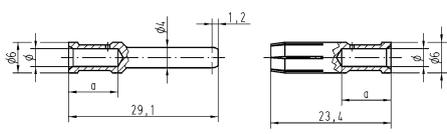
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han® C HMC, Crimp contact, Contact surface: HMC gold plated 	1.5	09 32 200 6114	09 32 200 6224	 <table border="1" data-bbox="965 1160 1420 1288"> <thead> <tr> <th colspan="2">Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm²</td> <td>AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm²</td> <td>AWG 8</td> <td>4.3 mm</td> <td>15 mm</td> </tr> </tbody> </table>	Wire gauge		∅	Stripping length	1.5 mm ²	AWG 16	1.75 mm	9.5 mm	2.5 mm ²	AWG 14	2.25 mm	9.5 mm	4 mm ²	AWG 12	2.85 mm	9.5 mm	6 mm ²	AWG 10	3.5 mm	9.5 mm	10 mm ²	AWG 8	4.3 mm	15 mm
	Wire gauge		∅		Stripping length																							
	1.5 mm ²	AWG 16	1.75 mm		9.5 mm																							
	2.5 mm ²	AWG 14	2.25 mm		9.5 mm																							
	4 mm ²	AWG 12	2.85 mm		9.5 mm																							
6 mm ²	AWG 10	3.5 mm	9.5 mm																									
10 mm ²	AWG 8	4.3 mm	15 mm																									
2.5	09 32 200 6115	09 32 200 6225																										
4	09 32 200 6119	09 32 200 6229																										
6	09 32 200 6118	09 32 200 6228																										
10	09 32 200 6117	09 32 200 6227																										

Technical characteristics

Contact resistance ≤10 mΩ
 Mating cycles with other HMC components ≥10000

Technical characteristics

Material (contacts) Copper alloy
 RoHS compliant with exemption
 RoHS exemptions **6c**: Copper alloy containing up to 4 % lead by weight

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
D-Sub, Crimp contact, Straight Turned, Contact surface: HMC gold plated 	0.08 ... 0.21	09 67 000 7570	09 67 000 7470	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.08 - 0.21 mm²</td> <td>AWG 28-24</td> <td>4 mm</td> </tr> <tr> <td>0.13 - 0.33 mm²</td> <td>AWG 26-22</td> <td>4 mm</td> </tr> <tr> <td>0.33 - 0.52 mm²</td> <td>AWG 22-20</td> <td>4 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.08 - 0.21 mm ²	AWG 28-24	4 mm	0.13 - 0.33 mm ²	AWG 26-22	4 mm	0.33 - 0.52 mm ²	AWG 22-20	4 mm
	Wire gauge	∅	Stripping length													
	0.08 - 0.21 mm ²	AWG 28-24	4 mm													
	0.13 - 0.33 mm ²	AWG 26-22	4 mm													
0.33 - 0.52 mm ²	AWG 22-20	4 mm														
0.13 ... 0.33	09 67 000 5570	09 67 000 5470														
0.33 ... 0.52	09 67 000 8570	09 67 000 8470														

Features

- Metal hoods / housings
- Locking levers: Han-Easy Lock® with special locking reel
- Field of application: for excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
- Distinguishing feature: hoods/housings colour-coded grey (RAL 7037)

Technical characteristics

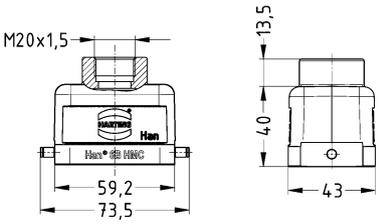
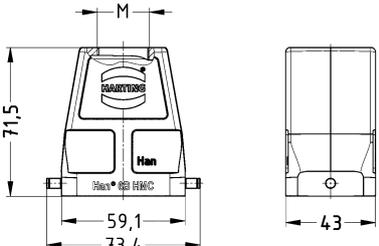
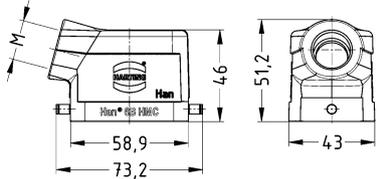
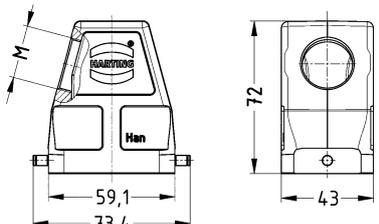
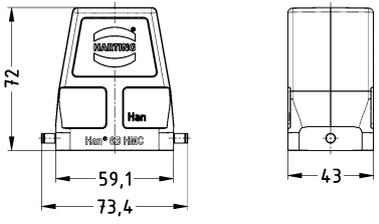

Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥10000
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

Specifications and approvals

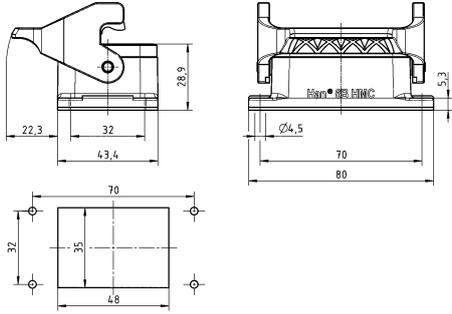
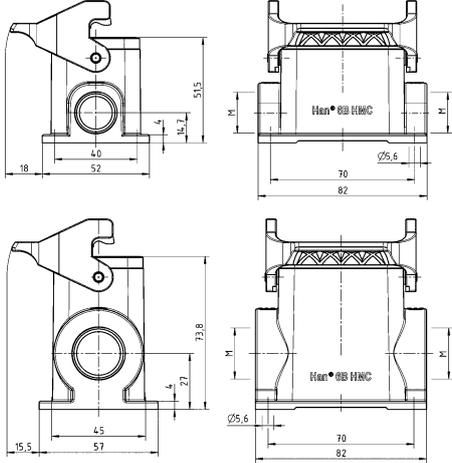
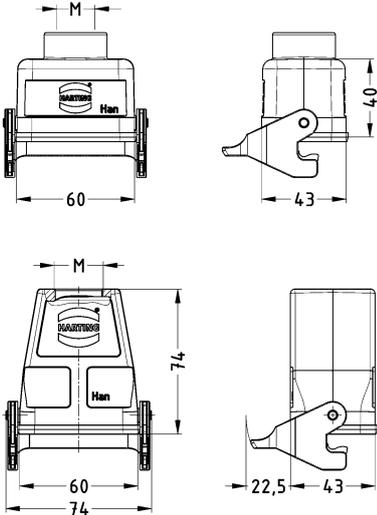
DNV GL

Special hoods and housings for high mating cycles
Single locking lever

Han
HMC

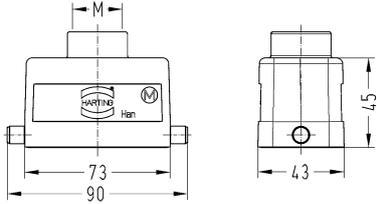
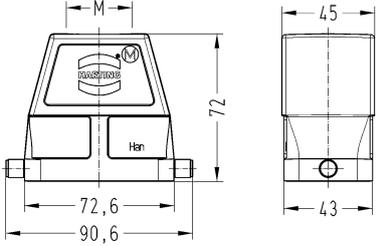
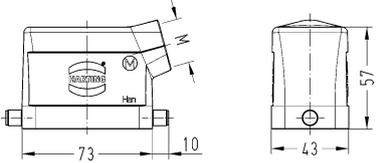
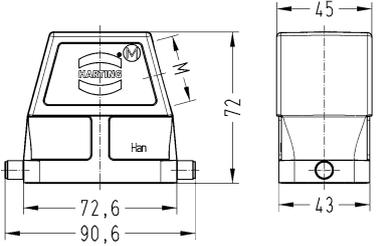
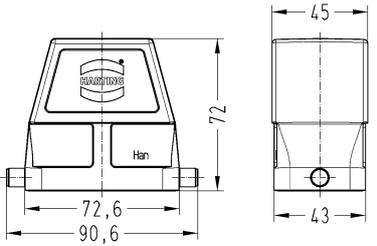
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® HMC, Hoods, Top entry 	1x M20 1x M25 1x M32	19 30 206 1440	19 30 206 0446 19 30 206 0447		
Han® HMC, Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 206 1540 19 30 206 1541	19 30 206 0546 19 30 206 0547		
Han® HMC, Hoods 			09 30 206 0801		

Han
HMC

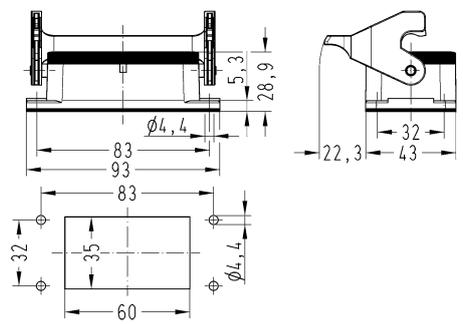
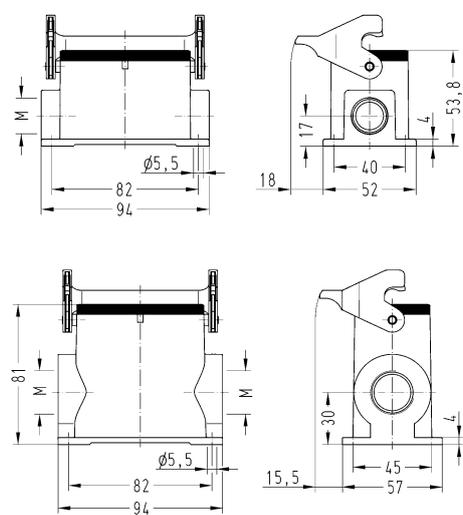
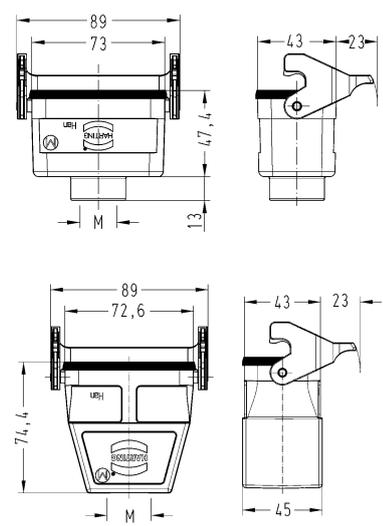
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC, Bulkhead mounted housings, Han-Easy Lock® 		09 30 206 0301		 <p>Panel cut out</p>
Han® HMC, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 206 1290	19 30 206 1250 19 30 206 0291 19 30 206 0292	
Han® HMC, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 206 1750	19 30 206 0756 19 30 206 0757	

Special hoods and housings for high mating cycles
Single locking lever

Han
HMC

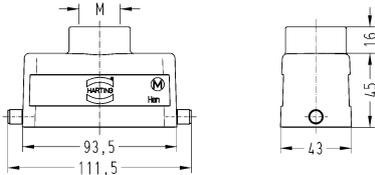




Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC, Hoods, Top entry 	1x M20 1x M25 1x M32	19 30 210 1440 19 30 210 1441	19 30 210 0447	 
Han® HMC, Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 210 1540 19 30 210 1541	19 30 210 0547	 
Han® HMC, Hoods, Without cable entry 			09 30 210 0803	

Han
HMC

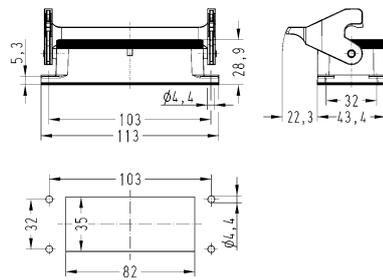
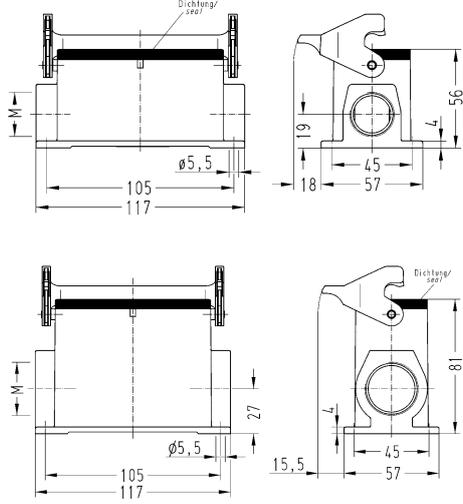
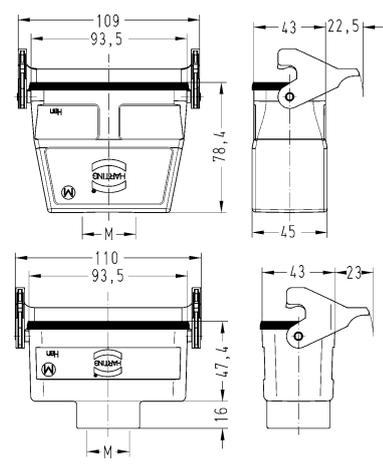
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC, Bulkhead mounted housings, Han-Easy Lock® 		09 30 210 0305		 <p>Panel cut out</p>
Han® HMC, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 210 1250 19 30 210 1290	19 30 210 0291 19 30 210 0292	
Han® HMC, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25	19 30 210 1750	19 30 210 0756	

Special hoods and housings for high mating cycles
Single locking lever

Han
HMC

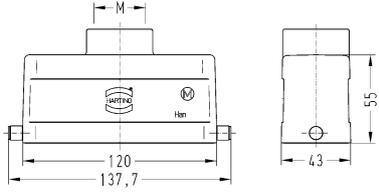
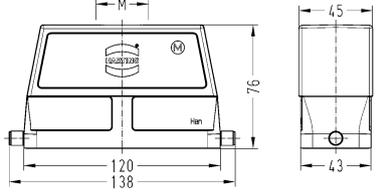
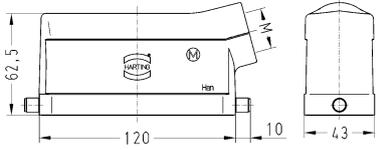
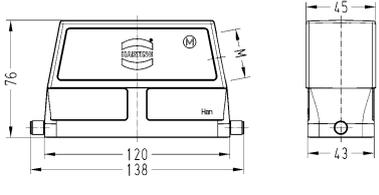
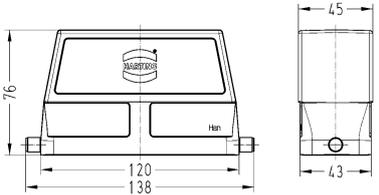
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® HMC, Hoods, Top entry 	1x M25 1x M32 1x M40	19 30 216 1441 19 30 216 1442	19 30 216 0447 19 30 216 0448		
Han® HMC, Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 216 1541 19 30 216 1542	19 30 216 0547 19 30 216 0548		
Han® HMC, Hoods, Without cable entry 			09 30 216 0803		

Han
HMC

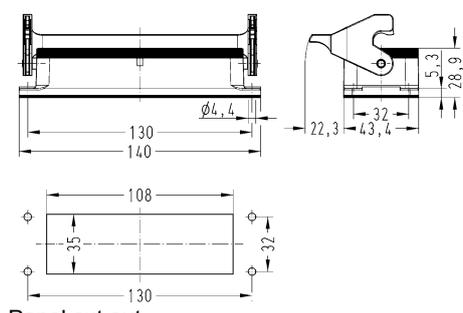
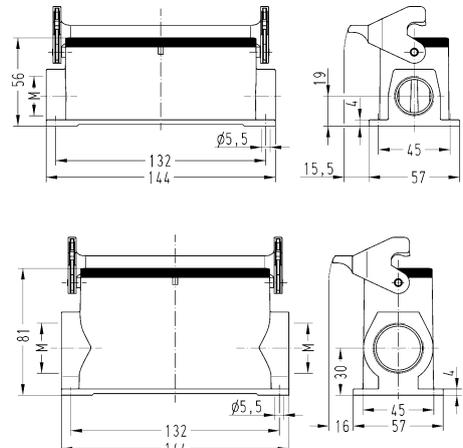
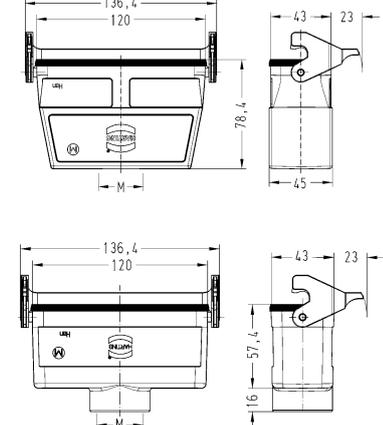
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC, Bulkhead mounted housings, Han-Easy Lock® 		09 30 216 0307		 <p>Panel cut out</p>
Han® HMC, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32	19 30 216 1251 19 30 216 1291	19 30 216 0252 19 30 216 0291 19 30 216 0292	
Han® HMC, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32	19 30 216 1751 19 30 216 1752	19 30 216 0757	

Special hoods and housings for high mating cycles
Single locking lever

Han
HMC

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC, Hoods, Top entry 	1x M32 1x M40	19 30 224 1442	19 30 224 0447 19 30 224 0448	 
Han® HMC, Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 224 1541 19 30 224 1542	19 30 224 0547 19 30 224 0548	 
Han® HMC, Hoods, Without cable entry 			09 30 224 0803	

Han
HMC

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC, Bulkhead mounted housings, Han-Easy Lock® 		09 30 224 0307		 <p>Panel cut out</p>
Han® HMC, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 224 1251 19 30 224 1291	19 30 224 0292	
Han® HMC, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32	19 30 224 1752	19 30 224 0757	

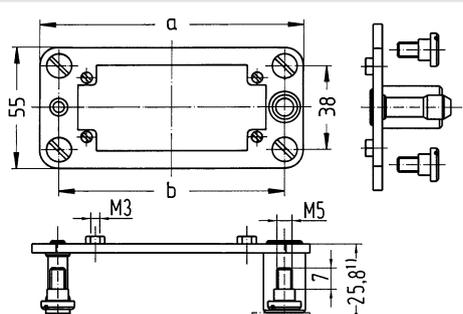
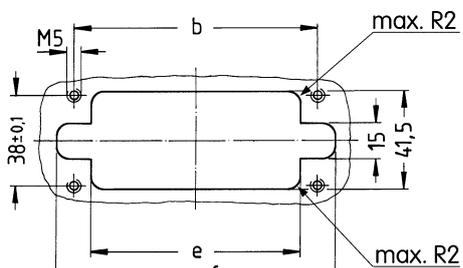


Features

- Suitable for all inserts of the series Han E®, Han E® HMC, Han EE®, Han EE® HMC, Han EEE®, Han EEE® HMC, Han ES, Han D® (size B), Han D® HMC, Han DD®, Han DD® HMC, Han-Com®, Han® HsB, Han-Modular®
- Due to the floating system of the docking frame the PE connection of the mounting base has to be installed separately.
- Inserts are protected against mechanical damage

Technical characteristics

Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (accessories)	Stainless steel
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Identification	Size	Part number	Drawing (dimensions in mm)
Docking frame, Pack contents: 1 frame, 4 cheese head shoulder screws (Steel, zinc plated) to fix the docking frame  Pull-in-range x-axis: ± 1.5 mm Pull-in-range y-axis: ± 1.5 mm	06 B 10 B 16 B 24 B	09 30 006 1704 09 30 010 1704 09 30 016 1704 09 30 024 1704	 Distance for electrical and FO contacts max. 27 mm; for Han-Modular® series max. 26.5 mm 6 B: a=86; b=69 10 B: a=99; b=82 16 B: a= 119.5 ; b= 102.5 24 B: a=146; b=129  6 B: b= 69; e= 54.5; f= 84 10 B: b= 82; e= 67.5; f= 97 16 B: b= 102.5; e= 88; f= 117.5 24 B: b= 129; e= 114.5; f= 144

Contents	Page
Han® High Temp inserts	Han 17.3
Han® High Temp contacts	Han 17.8
Han® High Temp hoods/housings.....	Han 17.9

Description

High
Temp

We used high-quality materials with wide temperature ranges to produce connectors that are uniquely suited for a wide variety of applications.

These connectors can withstand temperatures up to 200 °C – so they can be used directly in machines and facilities that would otherwise require cumbersome and complex constructions.

For our users, this delivers direct advantages:

- The electro-mechanical design process is optimized.
Machine parts which are exposed to high temperatures can be designed modularly.
- The work process is optimized
since lower wiring complexity results in reduced maintenance costs.
- The after-sales phase is optimized
because this more service-friendly approach results in less outages and down times.

Design overview

The basic structure of the Han® High Temp connector consists of a bulkhead mounted housing and a cable-side hood.

Hoods and housings:

The aluminium die-cast hoods and housings feature a highly compressed surface with excellent non-stick properties. It also has a special non-stick coating on the bulkhead-side seal which allows easy handling without significant sticking.

Inserts:

The Han® High Temp series features very rugged contact inserts, which are really the heart of any connector. The LCP injection-moulded insert delivers outstanding temperature resistance coupled with excellent mechanical stability.

Contacts:

Our new temperature resistant contacts, for either screw or crimp terminations, ensure reliable connections with minimal contact resistance even at extreme temperatures.



Han® High Temp connectors
remain robust and reliable for their entire lifespan!

Features

- for extreme temperatures up to 200 °C
- All piece parts (contacts, insert material, hoods and housings, seals and grounding elements) are designed in a temperature resistant way

Technical characteristics

Number of contacts	6, 10, 16, 24
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +200 °C With Han® High Temp components
Mating cycles	≥500
Material (insert)	LCP
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

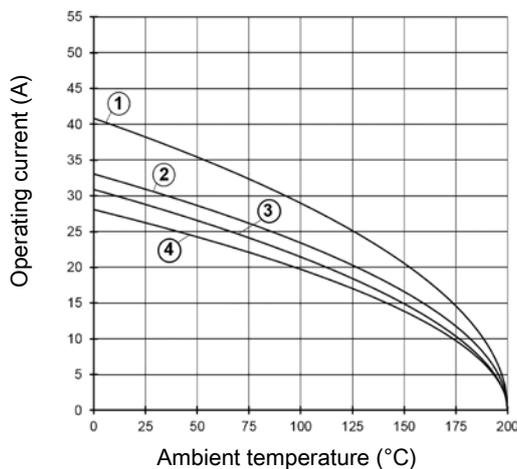
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

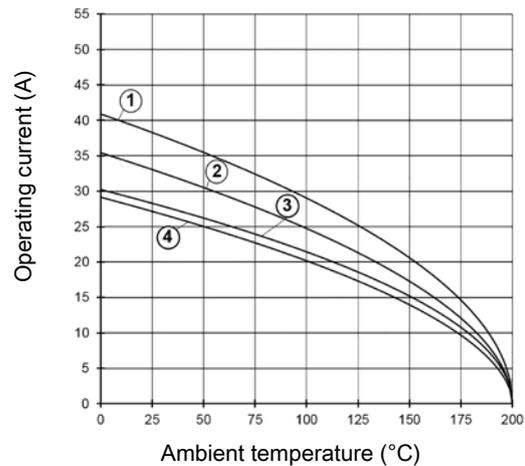
Crimp termination



- ① Han® 6 E High Temp 2.5 mm²
- ② Han® 10 E High Temp 2.5 mm²
- ③ Han® 16 E High Temp 2.5 mm²
- ④ Han® 24 E High Temp 2.5 mm²

Derating

Screw termination



- ① Han® 6 E High Temp 2.5 mm²
- ② Han® 10 E High Temp 2.5 mm²
- ③ Han® 16 E High Temp 2.5 mm²
- ④ Han® 24 E High Temp 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Han® High Temp crimp inserts are only for use with the special Han® High Temp crimp contacts.

Tightening torque 0.5 Nm

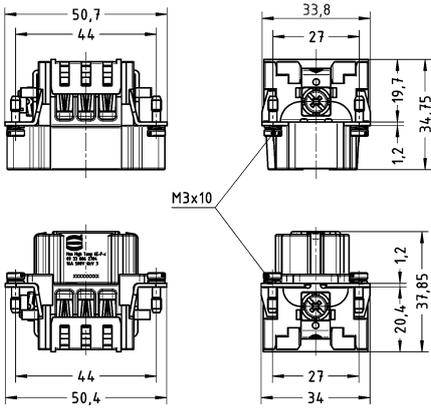
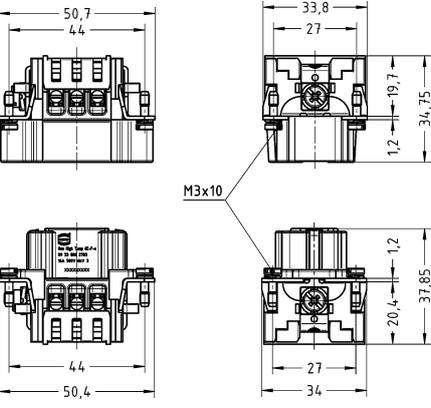
Tightening torque PE screw 1.2 Nm

Number of contacts

6+

16 A 500 V 6 kV 3

High
Temp

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E® High Temp, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.5 ... 2.5	09 33 806 2604	09 33 806 2704	
<p>Han E® High Temp, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 33 806 2603	09 33 806 2703	

Number of contacts

10+

16 A 500 V 6 kV 3

High Temp

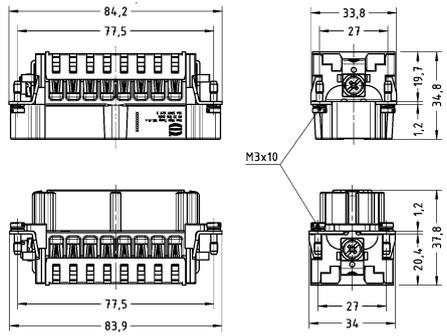
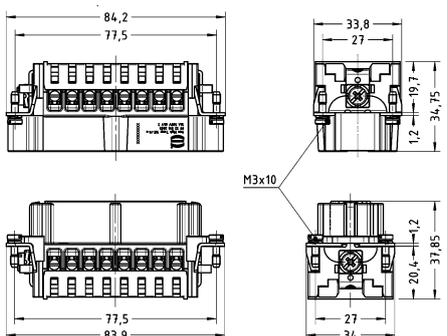
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E® High Temp, Crimp termination</p> <p>Please order crimp contacts separately.</p>	0.5 ... 2.5	09 33 810 2604	09 33 810 2704	
<p>Han E® High Temp, Screw termination, With wire protection, Contact surface: Silver plated</p>	0.75 ... 2.5	09 33 810 2603	09 33 810 2703	

Number of contacts

16+

16 A 500 V 6 kV 3

High
Temp

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
<p>Han E® High Temp, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.5 ... 2.5	09 33 816 2604	09 33 816 2704		
<p>Han E® High Temp, Screw termination, With wire protection, Contact surface: Silver plated</p> 	0.75 ... 2.5	09 33 816 2603	09 33 816 2703		

Number of contacts

24+

16 A 500 V 6 kV 3

High Temp

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han E® High Temp, Crimp termination</p> <p>Please order crimp contacts separately.</p>	0.5 ... 2.5	09 33 824 2604	09 33 824 2704	
<p>Han E® High Temp, Screw termination, With wire protection, Contact surface: Silver plated</p>	0.75 ... 2.5	09 33 824 2603	09 33 824 2703	

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

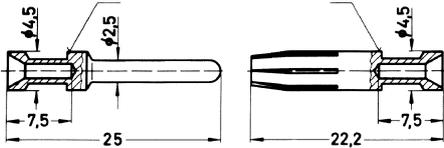
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																			
		Male	Female																				
Han E® High Temp, Crimp contact, Contact surface: Silver plated 	0.5	09 33 800 6121	09 33 800 6220																				
	0.75	09 33 800 6114	09 33 800 6214																				
	1	09 33 800 6105	09 33 800 6205																				
	1.5	09 33 800 6104	09 33 800 6204																				
	2.5	09 33 800 6102	09 33 800 6202																				
		<table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22 no groove</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20 no groove</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18 1 groove*</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18 1 groove</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16 2 grooves</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14 3 grooves</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12 wide groove</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12 no groove</td> </tr> </tbody> </table>		Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22 no groove	0.5 mm ²	AWG 20 no groove	0.75 mm ²	AWG 18 1 groove*	1 mm ²	AWG 18 1 groove	1.5 mm ²	AWG 16 2 grooves	2.5 mm ²	AWG 14 3 grooves	3 mm ²	AWG 12 wide groove	4 mm ²	AWG 12 no groove		
Conductor cross-section	Identification																						
0.14-0.37 mm ²	AWG 26-22 no groove																						
0.5 mm ²	AWG 20 no groove																						
0.75 mm ²	AWG 18 1 groove*																						
1 mm ²	AWG 18 1 groove																						
1.5 mm ²	AWG 16 2 grooves																						
2.5 mm ²	AWG 14 3 grooves																						
3 mm ²	AWG 12 wide groove																						
4 mm ²	AWG 12 no groove																						
		* on the back crimp collar Stripping length 7.5 mm																					

Features

- for extreme temperatures up to 200 °C
- All piece parts (contacts, insert material, hoods and housings, seals and grounding elements) are designed in a temperature resistant way
- Hoods/Housings, corrosion resistant metal

Technical characteristics

Limiting temperature	-40 ... +125 °C, -40 ... +200 °C With Han® High Temp components
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	FPM
Colour (seal)	Red
Material (locking)	Stainless steel
RoHS	compliant

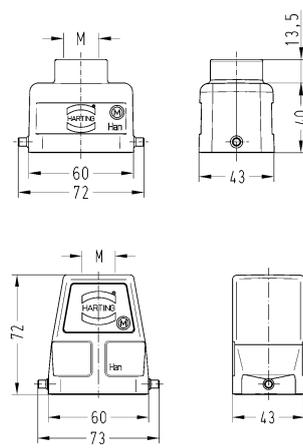
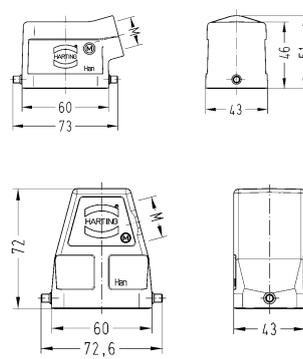
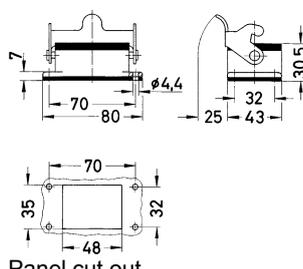
Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

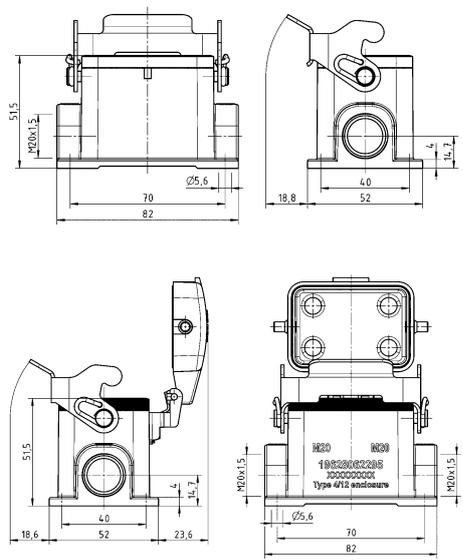
High
Temp

Single locking lever

High Temp

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M20 1x M25 1x M32	19 62 806 1440	19 62 806 0446 19 62 806 0447		
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M20 1x M25 1x M32	19 62 806 1540 19 62 806 1541	19 62 806 0546 19 62 806 0547		
Han® High Temp, Bulkhead mounted housings 		09 62 806 0391		 <p>Panel cut out</p>	



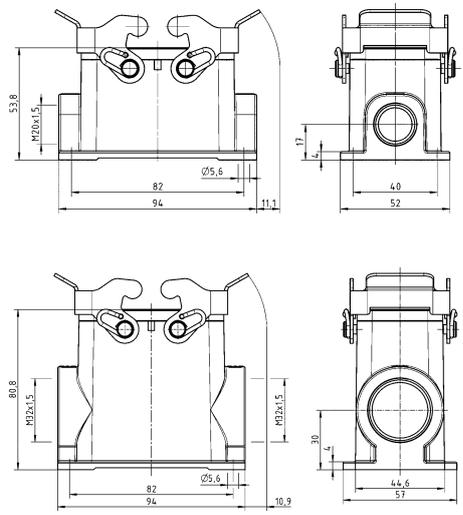
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® High Temp, Surface mounted housing, Side entry 	1x M20 2x M20	19 62 806 1291 19 62 806 2295		

High Temp

Double locking lever

High Temp












Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp, Hoods, Top entry	1x M20 1x M25 1x M32 1x M40	19 62 810 1420 19 62 810 1421	19 62 810 0426 19 62 810 0427 19 62 810 0428	
Han® EMC/B Han® High Temp, Hoods, Side entry	1x M20 1x M25 1x M32	19 62 810 1520	19 62 810 0526 19 62 810 0527	
Han® High Temp, Bulkhead mounted housings		09 62 810 0391		<p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® High Temp, Surface mounted housing, Side entry 	1x M20 2x M32	19 62 810 1235	19 62 810 0292	



Double locking lever

High Temp

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M25 1x M32 1x M40	19 62 816 1421	19 62 816 0427 19 62 816 0428	 	 
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M25 1x M32 1x M40	19 62 816 1521	19 62 816 0527 19 62 816 0528	 	 
Han® High Temp, Bulkhead mounted housings 		09 62 816 0391		 	 <p>Panel cut out</p>

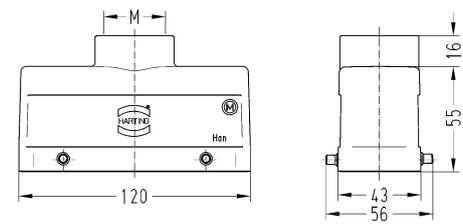
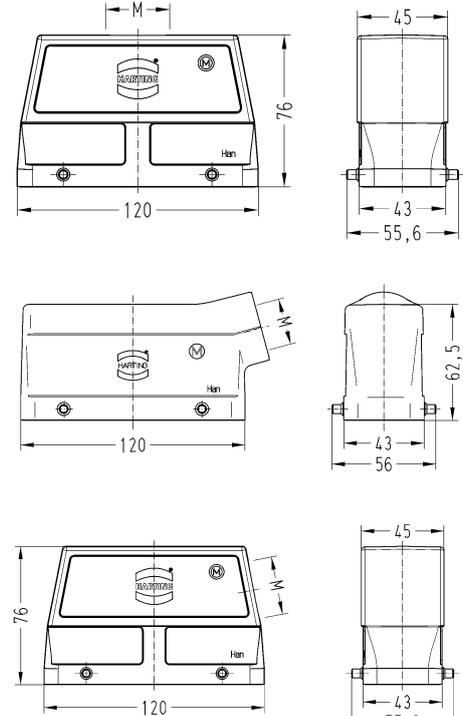
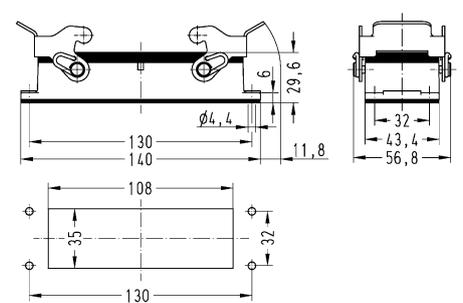


Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® High Temp, Surface mounted housing, Side entry	2x M32		19 62 816 0292	

High Temp

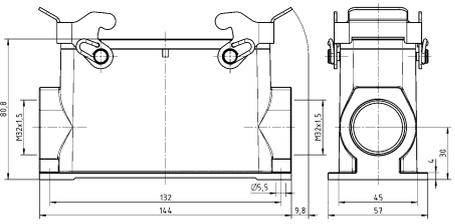
Double locking lever

High Temp

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M32 1x M40 1x M50	19 62 824 1422	19 62 824 0427 19 62 824 0428 19 62 824 0429		
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M25 1x M32 1x M40	19 62 824 1521	19 62 824 0527 19 62 824 0528		
Han® High Temp, Bulkhead mounted housings 		09 62 824 0391		 <p>Panel cut out</p>	



High Temp

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® High Temp, Surface mounted housing, Side entry 	2x M32		19 62 824 0292	

Contents	Page
Han-Brid® Cu	Han 19.6
Han-Brid® FO	Han 19.10
Han-Brid® Quintax 3 A	Han 19.13
Han-Brid® Quintax 3 A with coaxial contacts	Han 19.15
Han-Brid® Quintax 3 A with Han-Quintax® contacts	Han 19.18
Han-Brid® Quintax 3 A with Han-Quintax® HD contacts	Han 19.20
Han-Brid® RJ45 C	Han 19.21
Han-Brid® USB	Han 19.24
Han-Brid® FireWire	Han 19.25
Han® 4 A SC	Han 19.26
Hoods/Housings, metal Han® 3 A	Han 19.29
Hoods/Housings, thermoplastic Han® 3 A	Han 19.31
Han® M hoods/housings	Han 19.33
Han® EMC hoods/housings	Han 19.34
Han-INOX® hoods/housings	Han 19.35
Han® HPR hoods/housings	Han 19.36

Data interfaces

Han-Brid

Han-Brid® F.O.

- Is suitable for all HP Versatile Link (Horizontal Package) transmitters and receivers
- Data rates: Standard 12 Mbit/s, suitable for all common fieldbus systems
- Insert allows integration of HP standard contacts for POF and HCS®* fibres
- Temperature range -40 °C ... +70 °C

Han-Brid® Cu

- For termination of a shielded twisted pair
- Insert for 2x Han D® male or female contacts
- Connection of the shield by means of shielding plate and fixing clamps
- Connection of the device side can be realized either by a printed circuit board as a modular version or as part of the appliance PCB
- Insert for bulkhead mounted housing or the coupling housing are always equipped with a screening spring

Bus Terminator

- Active bus terminator in male and female version
- Standard Han® 3 A hoods and housings
- Power supply to the termination network via electrical contacts of Han-Brid®
- Integrated, galvanically separated DC/DC converter 24 V / 5 V

Han-Brid® Quintax 3 A

- Possibility to terminate shielded four/eight wires conductors
- Possibility to terminate Coax cable with large diameter
- Suitable for all 4-wire bus systems
- Suitable for shielded cable conductor diameter 3 – 9.5 mm
- Transmission of shielding separately from the hood's ground
- Connections are carried out acc. to DIN EN 50 173, Cat. 5
- Temperature range -40 °C ... +70 °C

Han-Brid® RJ45 C

- Suitable for standard RJ 45 Plug and Jack, shielded version
- Connections provided for conductors acc. to DIN EN 50 173, Cat. 5
- Termination from the device side is carried out via a PCB, two versions are possible: modular version or as part of the appliance PCB
- Assembly with standard tools
- Insert for 2 Han-D® male or female contacts offers the combination with electrical bus connector
- Rated current 10 A
- Rated voltage 24 V
- termination side 0.14 - 2.5 mm²

Han-Brid® USB

- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie

Han-Brid® FireWire

- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie
- Compatible to IEEE 1394

Han® 4 A SC

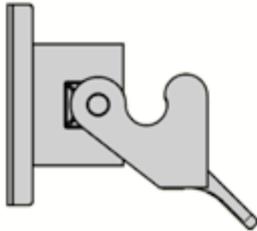
- Suitable with housings, size Han® 3 A including versions Han® M, Han® EMV and Han® HPR
- Degree of protection up to IP 68
- For fibre optic SC contacts; up to 4 SC contacts per connector
- For 1 mm POF
- For Multimode fibre 50 - 62.5 / 125 µm and Single-mode fibre 9 / 125 µm
- Full ceramic sleeves for a minimal insertion loss

Overview (Sample: Han-Brid® Cu)

Thermoplastic
 09 20 003 0320 (light grey)
 09 20 003 0327 (black)

Metal
 09 20 003 0301

EMC
 09 62 003 0301

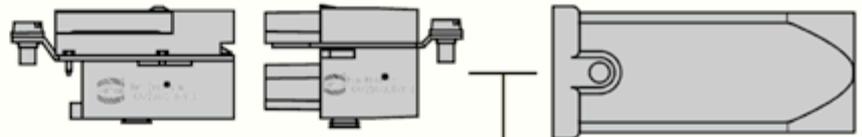


Device side	Cable side
09 12 006 2611	09 12 006 3111
09 12 006 2695	
09 12 006 2694	

Thermoplastic
 19 20 003 0423 (light grey)
 19 20 003 0426 (black)

Metal
 19 20 003 1443

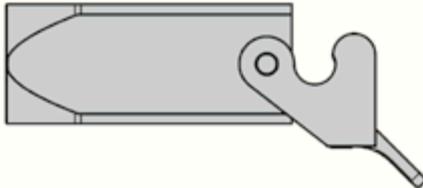
EMC
 19 62 003 1443



Thermoplastic
 19 20 003 0720 (light grey)
 19 20 003 0727 (black)

Metal
 19 20 003 1750

EMC
 19 62 003 1750

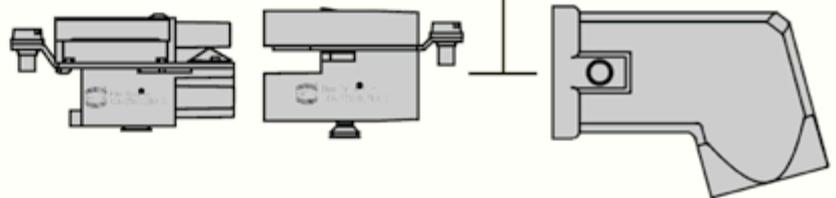


Device side	Cable side
09 12 006 2701	09 12 006 3001
09 12 006 2795	
09 12 006 2794	

Thermoplastic
 19 20 003 0623 (light grey)
 19 20 003 0627 (black)

Metal
 19 20 003 1643

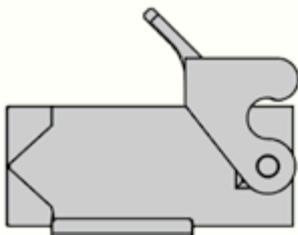
EMC
 19 62 003 1643



Thermoplastic
 19 20 003 0220 (light grey)
 19 20 003 0227 (black)

Metal
 19 20 003 1250

EMC
 19 62 003 1250



Overview (Sample: Han-Brid® RJ45 C)

Han-Brid

Thermoplastic
09 20 003 0320 (light grey)
09 20 003 0327 (black)

Metal
09 20 003 0301

EMC
09 62 003 0301

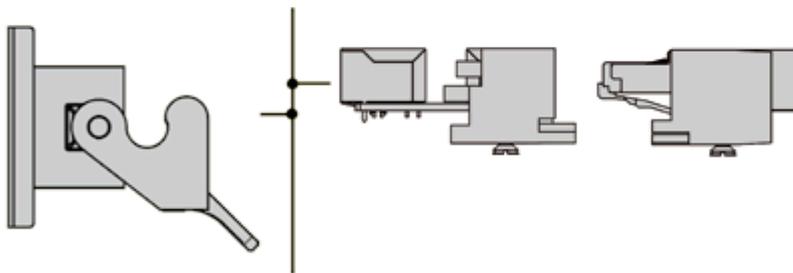
Device side
09 12 003 2770
09 12 003 2774
09 12 003 2776

Cable side
09 12 003 3011
09 12 003 3021
09 12 003 3031

Thermoplastic
19 20 003 0423 (light grey)
19 20 003 0427 (black)

Metal
09 20 003 1443

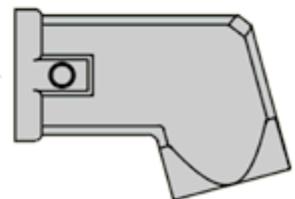
EMC
19 62 003 1443



Thermoplastic
19 20 003 0623 (light grey)
19 20 003 0627 (black)

Metal
19 20 003 1643

EMC
19 62 003 1643



Features

General Description

The Han-Brid® series allows the connection of a data interface and a power supply in a single space saving connector. This means that it is now possible to provide data transmission and power to devices in a single bus structure. This hybrid connector family includes provision for connection of a max. 50 V, 10 A power supply together with a range of inserts for connection of a variety of data protocols and transmission medias:

- Han-Brid® F.O. for plastic (POF) or for HCS®* optical fibre
- Han-Brid® Cu for shielded twisted pair
- Han-Brid® Quintax 3 A for Coax cable with large diameter
- Han-Brid® Quintax 3 A for shielded 4 or 8 wire bus systems
- Han-Brid® RJ45 C for Ethernet application
- Han-Brid® USB / Firewire for fast data transmission

Han-Brid® inserts fit into the standard plastic as well as metal hoods and housings with seal of the Han® 3 A series offering a degree of protection IP 65 according to DIN EN 60 529. For harsher environments Han® 3 HPR hoods and housings with a degree of protection of IP 68 can be used.

Power supply

- Han D® male and female with standard crimp contacts (Order crimp contacts separately)
- Rated current 10 A
- Rated voltage 50 V
- termination side 0.14 - 2.5 mm²
- Approval 

Features

- for termination of a shielded twisted pair
- Insert for Han D® male or female contacts
- Connection of the shield by means of shielding plate and fixing clamps
- Connection of the device side can be realised either by a printed circuit board as a modular version or as part of the appliance PCB
- Insert for bulkhead mounted or cable to cable housings are always equipped with a screening spring
- Active bus terminator in standard Han® 3 A hoods and housings
- Power supply to the termination network via electrical contacts of Han-Brid®
- Integrated, galvanically separated DC/DC converter 24 V / 5 V

Technical characteristics

Number of contacts	2
Additional contacts	+ 4 electrical contacts 10 A + option for PE
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (hood/housing)	Polycarbonate, Zinc die-cast
Colour (hood/housing)	RAL 9005 (jet black), RAL 7037 (dust grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

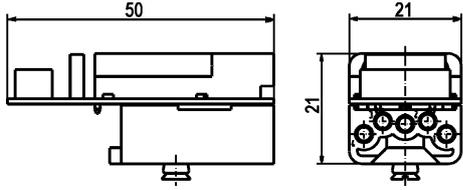
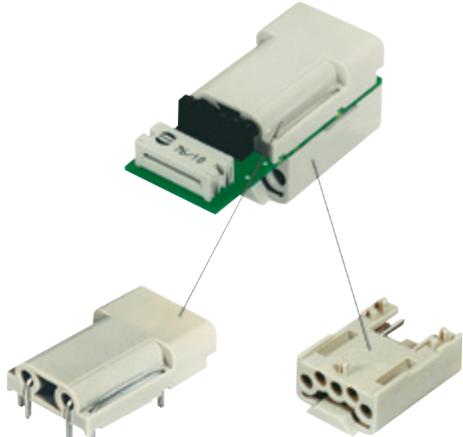
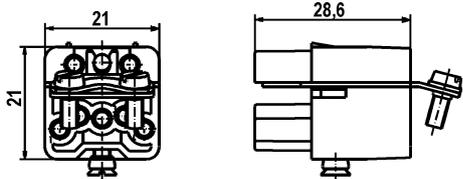
Number of contacts

2

10 A 50 V 0.8 kV 3
+ 4 electrical contacts 10 A + option for PE



Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han-Brid®, Han-Brid® Cu, Hybrid field bus connector</p> <p>Device side</p> 	09 12 006 2611		  <p>Also available as single parts: 09 12 002 2611 Upper part, loaded 09 12 002 3011 Upper part, unloaded 09 12 004 3011 Lower part, unloaded</p>
<p>Han-Brid®, Han-Brid® Cu, Hybrid field bus connector</p> <p>Cable side</p> 		09 12 006 3111	 <p>Contact arrangement (view from termination side)</p>

Number of contacts

2

10 A 50 V 0.8 kV 3
+ 4 electrical contacts 10 A + option for PE



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Han-Brid® Cu, Hybrid field bus connector Device side		09 12 006 2701	 Also available as single parts: 09 12 002 2701 Upper part, loaded 09 12 002 3101 Upper part, unloaded 09 12 004 3101 Lower part, unloaded
Han-Brid®, Han-Brid® Cu, Hybrid field bus connector Cable side	09 12 006 3001		


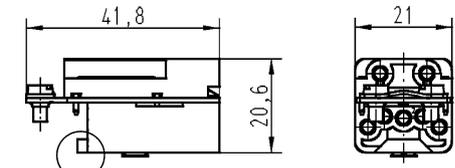
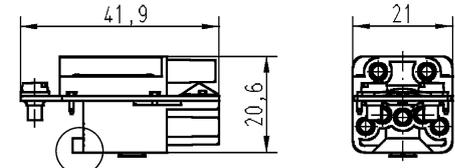
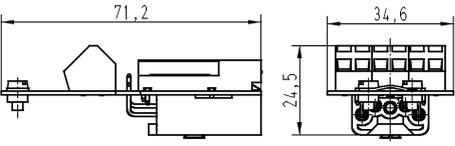
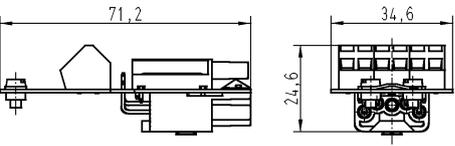
Number of contacts

2

10 A 50 V 0.8 kV 3
+ 4 electrical contacts 10 A + option for PE



Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Han-Brid® Cu, Bus terminator, Plastic hoods/housings 	09 12 006 2691	09 12 006 2791	
Han-Brid®, Han-Brid® Cu, Bus terminator, Metal hoods / housings 	09 12 006 2692	09 12 006 2792	
Han-Brid®, Han-Brid® Cu, Panel feed through 	09 12 006 2694	09 12 006 2794	 <p>X</p>  <p>X</p> <p>X= Cutting off the fin allows the use in cable to cable housings.</p>
Han-Brid®, Han-Brid® Cu, Panel feed through With cage clamp 	09 12 006 2695	09 12 006 2795	 

Features

- Is suitable for all HP Versatile Link (Horizontal Package) transmitters and receivers
- Data rates: Standard 12 Mbit/s, suitable for all common field-bus systems
- Insert allows integration of HP standard contacts for POF and HCS® fibres

Technical characteristics

Number of contacts	2
Additional contacts	+ 4 electrical contacts 10 A + option for PE
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +70 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

Number of contacts

2

10 A 50 V 0.8 kV 3
+ 4 electrical contacts 10 A + option for PE



Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Device side FO (f) + Han D® (m) With PCB	09 12 004 2611		<p>Contact arrangement (view from termination side) Also available as single parts: 09 12 004 3011 Lower part, unloaded</p>
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Cable side FO (m) + Han D® (f) for POF		09 12 004 2711	<p>09 12 004 3111 Unloaded</p>
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Cable side FO (m) + Han D® (f) for POF crimpless		09 12 004 2713	<p>09 12 004 3113 Unloaded</p>
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Cable side FO (m) + Han D® (f) for HCS® fibre		09 12 004 2716	<p>09 12 004 3116 Unloaded</p>

Number of contacts

2

10 A 50 V 0.8 kV 3
+ 4 electrical contacts 10 A + option for PE



Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Device side FO (f) + Han D® (f) With PCB		09 12 004 2701	<p>Also available as single parts: 09 12 004 3101 Lower part, unloaded</p>
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Cable side FO (m) + Han D® (m) for POF	09 12 004 2601		<p>09 12 004 3001 Unloaded</p>
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Cable side With FO contacts FO (m) + Han D® (m) for POF crimpless	09 12 004 2603		<p>09 12 004 3003 Unloaded</p>
Han-Brid®, Han-Brid® FO, Hybrid field bus connector Cable side FO (m) + Han D® (m) for HCS® fibre	09 12 004 2606		<p>09 12 004 3006 Unloaded</p>

Features

- Possibility to terminate shielded four/eight wires conductors (2 pair STP)
- Possibility to terminate Coax cable with large diameter
- Suitable for all 4-wire bus systems
- Suitable for shielded cable conductor diameter 3 ... 9.5 mm
- Transmission of shielding separately from the hood's ground
- Connections are carried out acc. to EN 50173, Cat. 5

Technical characteristics

Number of contacts	1, 4, 8
Additional contacts	+ shielding + 2 power contacts
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +70 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Details

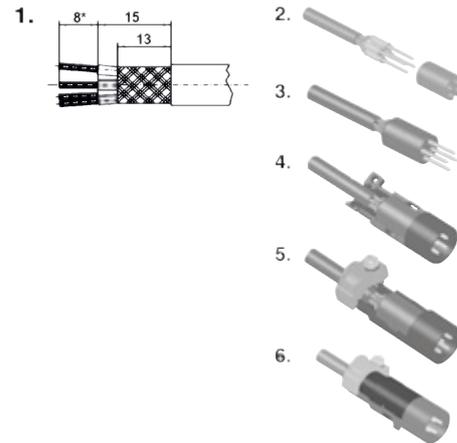
ATTENTION! Han-Brid® Quintax in Han® HPR housings only to be used with the long version!

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Assembly instructions



1. Strip cable acc. to drawing 1 and fold the shielding over the cable.
2. Crimp Han D® contacts onto the wires.
3. Insert Han D® contacts into corresponding cavities of insulator until they are snapped in.
4. Fit the insert including the cable into the opened shielded bushing. The coding pin of the shielded bushing has to meet the groove of the insulator.
5. Clamp the tilt over the shielding onto the cable by means of the special clamp (small opening for cable diameter of 3 ... 6 mm, large opening for cable diameter of 6 ... 9.5 mm).
6. Check the wiring. Close the shielded bushing with the cover and insert it into the corresponding cavity of the Quintax Module as usual.

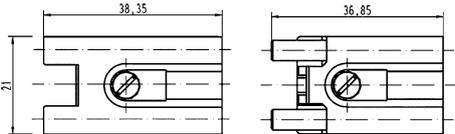
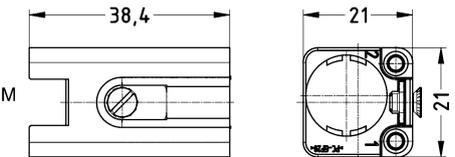

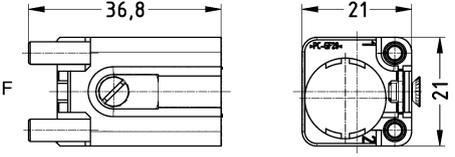
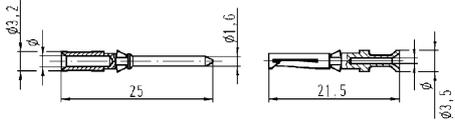
Number of contacts

1.4.8

+ shielding + 2 power contacts



Han-Brid

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Brid®, Han-Brid® Quintax 3 A, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 15 003 3001	09 15 003 3101	 																					
Han-Brid®, Han-Brid® Quintax 3 A, Snap-in latches, snap-fit, Crimp termination  <p>Please order crimp contacts separately.</p>	0.14 ... 2.5	09 15 003 3002	09 15 003 3102	 																					
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table border="1" data-bbox="965 1512 1420 1668"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	∅	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Number of contacts

1

10 A 50 V 0.8 kV 3
+ shielding

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Contact resistance, shielding	≤10 mΩ
Impedance	75 Ω
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Technical characteristics

RoHS exemptions **6c:** Copper alloy containing up to 4 % lead by weight

Specifications and approvals



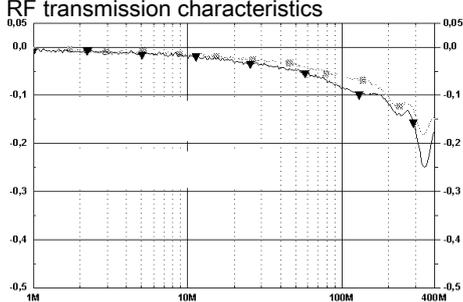
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® D Coax, Crimp termination, for Han D® crimp contacts  Please order crimp contacts separately.	0.14 ... 2.5	09 15 001 3013	09 15 001 3113	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> M  </div> <div style="text-align: center;"> F  </div> </div> RF transmission characteristics  <p> ■ 75 Ohm Cable ▼ 75 Ohm Cable with Han D® Coax </p>

Han-Brid

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 15 000 6124	09 15 000 6224																						
	0.5	09 15 000 6123	09 15 000 6223																						
	0.75	09 15 000 6125	09 15 000 6225																						
	1	09 15 000 6122	09 15 000 6222																						
	1.5	09 15 000 6121	09 15 000 6221																						
	2.5	09 15 000 6126	09 15 000 6226																						
		<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>		Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm	
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Number of contacts

1

16 A 50 V 0.8 kV 3
+ shielding

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Rated current	16 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance	≤1 mΩ
Contact resistance, shielding	≤10 mΩ
Impedance	50 Ω
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption

Technical characteristics

RoHS exemptions **6c:** Copper alloy containing up to 4 % lead by weight

Specifications and approvals

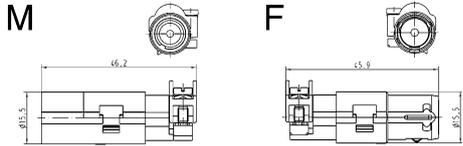
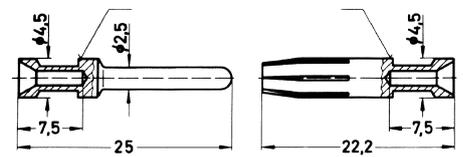
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han® E Coax, Crimp termination, for Han E® crimp contacts  Please order crimp contacts separately.	0.14 ... 4	09 15 001 3023	09 15 001 3123	 <table border="1"> <thead> <tr> <th>Han E® Coax with RG 213 cable (2.5 mm²)</th> <th>200 MHz</th> <th>500 MHz</th> <th>1.0 GHz</th> <th>1.2 GHz</th> <th>1.5 GHz</th> <th>2.0 GHz</th> <th>2.5 GHz</th> </tr> </thead> <tbody> <tr> <td>Return loss [dB]</td> <td>23.8</td> <td>21.1</td> <td>>18.7</td> <td>>17.7</td> <td>>16.4</td> <td>>14.1</td> <td>>12.0</td> </tr> <tr> <td>Attenuation [dB]</td> <td>0.07</td> <td>0.11</td> <td>0.17</td> <td>0.2</td> <td><0.23</td> <td><0.53</td> <td><2.0</td> </tr> </tbody> </table>	Han E® Coax with RG 213 cable (2.5 mm ²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz	Return loss [dB]	23.8	21.1	>18.7	>17.7	>16.4	>14.1	>12.0	Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0
Han E® Coax with RG 213 cable (2.5 mm ²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz																					
Return loss [dB]	23.8	21.1	>18.7	>17.7	>16.4	>14.1	>12.0																					
Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0																					
Han E®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 4	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> </tr> </tbody> </table> <p>* on the back crimp collar Stripping length 7.5 mm</p>	Conductor cross-section	Identification	0.14-0.37 mm ²	AWG 26-22	0.5 mm ²	AWG 20	0.75 mm ²	AWG 18	1 mm ²	AWG 18	1.5 mm ²	AWG 16	2.5 mm ²	AWG 14	3 mm ²	AWG 12	4 mm ²	AWG 12						
Conductor cross-section	Identification																											
0.14-0.37 mm ²	AWG 26-22																											
0.5 mm ²	AWG 20																											
0.75 mm ²	AWG 18																											
1 mm ²	AWG 18																											
1.5 mm ²	AWG 16																											
2.5 mm ²	AWG 14																											
3 mm ²	AWG 12																											
4 mm ²	AWG 12																											

Number of contacts

4

10 A 50 V 0.8 kV 3
+ shielding

Han-Brid

Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)
- The four pole Han® Quintax contact is suitable for Ethernet cat. 5e and PROFIBUS when diagonally wiring of the data pairs.

Technical characteristics

Number of contacts	4
Additional contacts	+ shielding
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Contact resistance, shielding	≤10 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

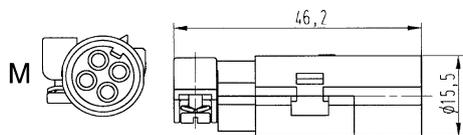
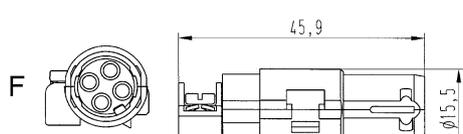
EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Quintax®, for Han D® crimp contacts  Please order crimp contacts separately.	0.14 ... 2.5	09 15 004 3013	09 15 004 3113	  Cable diameter 3 ... 9.5 mm

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D®, Crimp contact, Contact surface: Gold plated	0.14 ... 0.37	09 15 000 6124	09 15 000 6224																						
	0.5	09 15 000 6123	09 15 000 6223																						
	0.75	09 15 000 6125	09 15 000 6225																						
	1	09 15 000 6122	09 15 000 6222																						
	1.5	09 15 000 6121	09 15 000 6221																						
	2.5	09 15 000 6126	09 15 000 6226																						
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							

Number of contacts

8

5 A 50 V 0.8 kV 3
+ shielding

Han-Brid

Technical characteristics

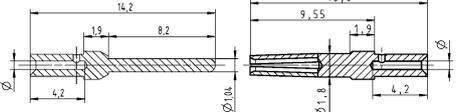
Number of contacts	8
Additional contacts	+ shielding
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance	≤10 mΩ
Contact resistance, shielding	≤10 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Material (shielding)	Zinc die-cast, nickel-plated
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Technical characteristics

Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Quintax [®] High Density, for Han [®] D-Sub crimp contacts  Please order crimp contacts separately.	0.09 ... 0.52	09 15 008 3013	09 15 008 3113	M  F  Cable diameter 3 ... 9.5 mm 															
D-Sub, Standard, Crimp contact, Turned 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm²</td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> for stranded wire according IEC 60228 Class 5	Wire gauge	∅	Stripping length	0.09-0.25 mm ²	0.64 mm	4 mm	0.13-0.33 mm ²	0.88 mm	4 mm	0.25-0.52 mm ²	1.13 mm	4 mm	0.33-0.82 mm ²	1.34 mm	4 mm
Wire gauge	∅	Stripping length																	
0.09-0.25 mm ²	0.64 mm	4 mm																	
0.13-0.33 mm ²	0.88 mm	4 mm																	
0.25-0.52 mm ²	1.13 mm	4 mm																	
0.33-0.82 mm ²	1.34 mm	4 mm																	

Features

- Suitable for standard RJ 45 Plug and Jack, shielded version
- Connections are carried out acc. to EN 50173, Cat. 5
- Connection of the device side can be realised either by a printed circuit board as a modular version or as part of the appliance PCB
- Assembly with standard tools
- Insert for 2 Han-D® male or female contacts offers the combination with electrical bus connector

Technical characteristics

Number of contacts	2
Additional contacts	+ RJ45
Rated current	10 A
Rated voltage	24 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

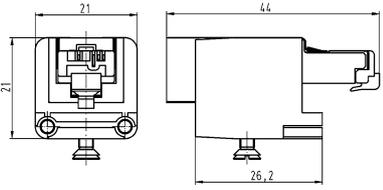
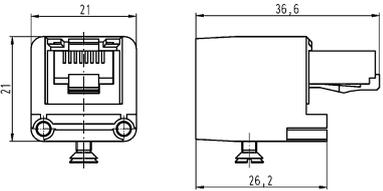
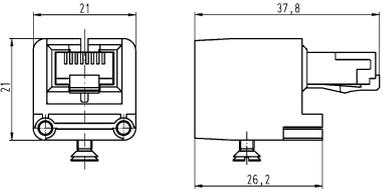
IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

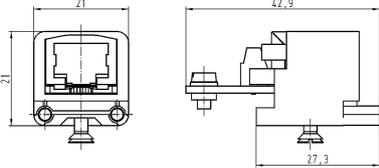
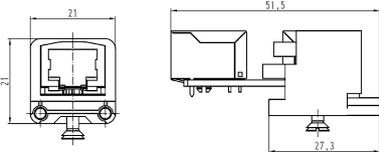
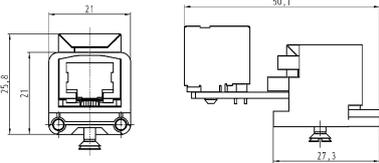
Number of contacts

2

10 A 24 V 0.8 kV 3
+ RJ45

Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Han-Brid® RJ45 C, hybrid network connector 	09 12 003 3011		
With RJ Industrial Han-Brid®, Han-Brid® RJ45 C, hybrid network connector, 10 Gbit/s 	09 12 003 3015		
With RJ Industrial Han-Brid®, Han-Brid® RJ45 C, hybrid network connector, Cat. 6A 	09 12 003 3016		
With RJ Industrial Han-Brid®, Han-Brid® RJ45 C, hybrid network connector 	09 12 003 3021		
With Stewart RJ45 Han-Brid®, Han-Brid® RJ45 C, hybrid network connector 	09 12 003 3031		
With HIROSE RJ45			

Identification	Part number		Drawing (dimensions in mm)	
	Male	Female		
<p>Han-Brid®, Han-Brid® RJ45 C, hybrid network connector</p>  <p>Panel feed through With 4-pin terminal block</p>		09 12 003 2770		
<p>Han-Brid®, Han-Brid® RJ45 C, hybrid network connector</p>  <p>Panel feed through Straight</p>		09 12 003 2774		
<p>Han-Brid®, Han-Brid® RJ45 C, hybrid network connector</p>  <p>Panel feed through Angled</p>		09 12 003 2776		

Han-Brid

Number of contacts

2

1 A 50 V 0.8 kV 3
+ USB

Han-Brid

Features

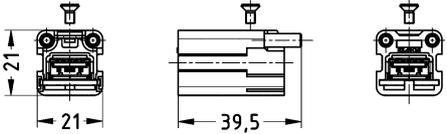
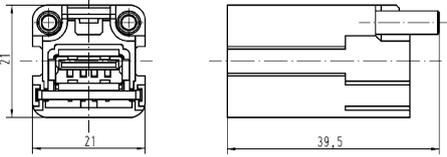
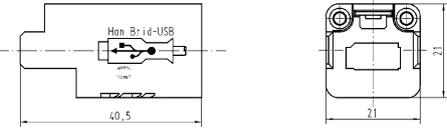
- Insert for all Han® 3 A hoods with glued seal
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief

Technical characteristics

Number of contacts	2
Additional contacts	+ USB
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≥4 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Han-Brid® USB, USB 3.0  Device side	09 12 001 2793		
Han-Brid®, Han-Brid® USB, USB 2.0  Device side	09 12 001 2794		
Han-Brid®, Han-Brid® USB  Cable side		09 12 001 3091	

Number of contacts

2

1 A 50 V 0.8 kV 3
+ FireWire

Han-Brid

Features





- Insert for all Han® 3 A hoods with glued seal
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief
- Compatibel to IEEE 1394

Technical characteristics

Number of contacts	2
Additional contacts	+ FireWire
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≥4 mΩ
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Identification	Part number		Drawing (dimensions in mm)	
	Male	Female		
Han-Brid®, Han-Brid® FireWire  Device side	09 12 001 2774			
Han-Brid®, Han-Brid® FireWire  Cable side		09 12 001 3071		

Features

- Suitable for housings, size Han® 3 A including versions Han® M, Han® EMC and Han® HPR
- Degree of protection up to IP68
- Suitable for HARTING SC contacts
- for Multimode fibre 50 - 62.5 / 125 µm and Singlemode fibre 9 / 125 µm
- 4 full ceramic sleeves for a minimal insertion loss
- 1 mm POF

Technical characteristics

Number of contacts	4
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight


Specifications and approvals

UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Assembly instructions

Male module



Assemble the SC contact

- ① Push the SC contact from the side into the relevant insert
- ② Push the spring clip over the contact body.

Assembly instructions

Female module

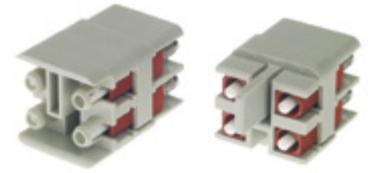


Assemble the SC contact

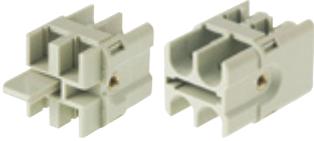
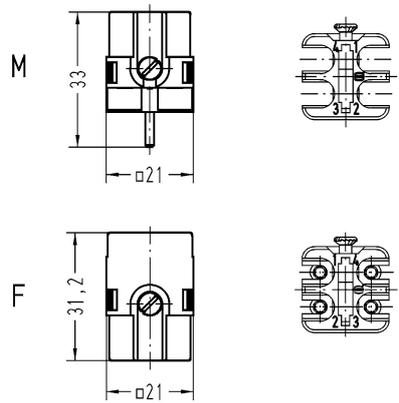

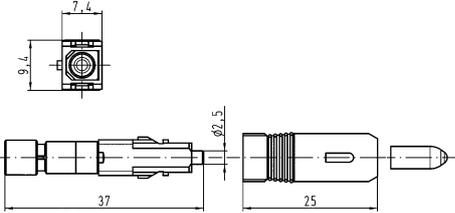
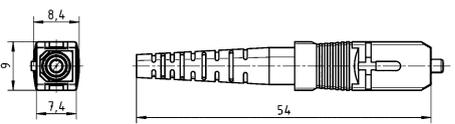
- ① Push the centering ferrule (included in delivery) on the SC contact
- ② Push the SC contact from the side into the relevant insert
- ③ Push the spring clip over the contact body.

Number of contacts

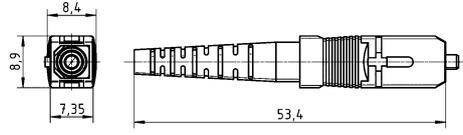
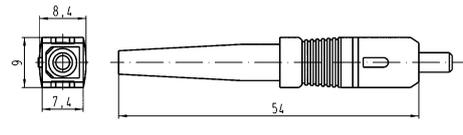
4



Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han-Brid®, Han® 4 A SC, for FO</p>  <p>Please order contacts separately.</p>	09 20 004 4701	09 20 004 4711	 <p>Contact arrangement (view from termination side) The female inserts are equipped with centering ferrules. 4 ferrules are included within the delivery.</p>
<p>SC contact, for 1 mm plastic fibre Crimp termination</p> 	20 10 001 5211		
<p>SC contact, for 1 mm plastic fibre Fast termination</p> 	20 10 001 5217		
<p>SC contact, for singlemode fibre 9/125 µm</p> 	20 10 125 5220		

Han-Brid

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
SC contact, for GI fibre 50/125 µm for ceramic ferrule 62.5/125 µm	20 10 125 5211		
SC contact, for SI fibre (HCS®) 200/230 µm	20 10 230 5211		



Standard Hoods/housings for industrial applications
Single locking lever

Features

- Hoods/housings for industrial applications
- With glued seal

Technical characteristics

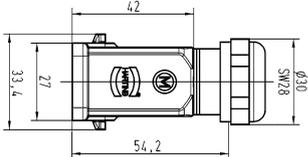
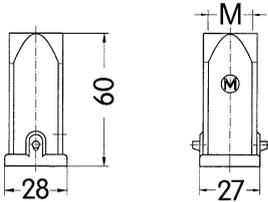
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

DNV GL



Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Hoods, for Han-Brid®, With glued seal, With integrated cable gland, Top entry 	1x Integrated 1x Integrated	5 ... 13 6 ... 12	19 20 003 1423 19 20 003 1425	
Han A®, Hoods, for Han-Brid®, With glued seal, Top entry 	1x M20 1x M25		19 20 003 1443 19 20 003 1447	



Han-Brid

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)	
<p>Han A®, Hoods, for Han-Brid®, With glued seal, Side entry</p> 	1x M20		19 20 003 1643		

Standard Hoods/housings for industrial applications
Single locking lever

Han-Brid

Features

- Hoods/housings for industrial applications
- With glued seal

Technical characteristics

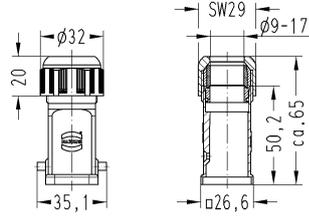
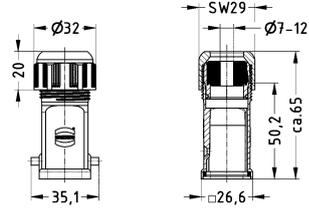
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey), RAL 9005 (jet black)
Material (seal)	NBR
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Hoods, for Han-Brid®, With glued seal, With integrated cable gland, Top entry 	1x Integrated	9 ... 17	19 20 003 0413	
Han A®, Hoods, for Han-Brid®, With glued seal, With integrated cable gland, Top entry, Black 	1x Integrated 1x Integrated	7 ... 12 9 ... 17	19 20 003 0421 19 20 003 0418	

Han-Brid

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A [®] , Hoods, for Han-Brid [®] , With glued seal, Top entry	1x M20 1x M25		19 20 003 0423 19 20 003 0433	
Han A [®] , Hoods, for Han-Brid [®] , With glued seal, Top entry, Black	1x M20 1x M25		19 20 003 0426 19 20 003 0436	
Han A [®] , Hoods, for Han-Brid [®] , With glued seal, Side entry	1x M20		19 20 003 0623	
Han A [®] , Hoods, for Han-Brid [®] , With glued seal, Side entry, Black	1x M20		19 20 003 0626	

Hoods/housings for rough environments
Single locking lever

Han-
Brid

Features

- Hoods/housings for rough environments
- Corrosion resistance ASTM B117-09 (500 h)
- With glued seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
RoHS	compliant

Specifications and approvals

DNV GL

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® M, Hoods, for Han-Brid®, With glued seal, Top entry, Pack contents: With seal screw	1x M20	19 37 003 1443	
Han® M, Hoods, for Han-Brid®, With glued seal, Side entry, Pack contents: With seal screw	1x M20	19 37 003 1643	

Hoods/Housings for higher EMC requirements
Single locking lever

Han-Brid

Features

- Hoods/Housings for higher EMC requirements
- With glued seal

Technical characteristics


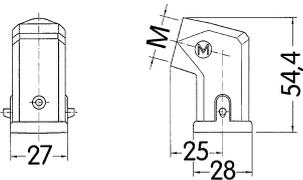
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	NBR
RoHS	compliant

Specifications and approvals

DNV GL

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Hoods, for Han-Brid®, With glued seal, Top entry 	1x M20	19 62 003 1443	
Han® EMC, Hoods, for Han-Brid®, With glued seal, Side entry 	1x M20	19 62 003 1643	

Hoods/housings for harsh environments
Single locking lever

Han-Brid

Features

- Hoods/housings for harsh environments
- Extremely resistant to chemicals and other aggressive influences
- Made completely from high-quality stainless steel
- Extremely resistant to corrosion
- With glued seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP67
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Stainless steel
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	NBR
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han-INOX®, Hoods, for Han-Brid®, With glued seal, Top entry, Pack contents: With seal screw	1x M20	19 44 003 1443		
Han-INOX®, Hoods, for Han-Brid®, With glued seal, Side entry, Pack contents: With seal screw	1x M20	19 44 003 1643		

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M4
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

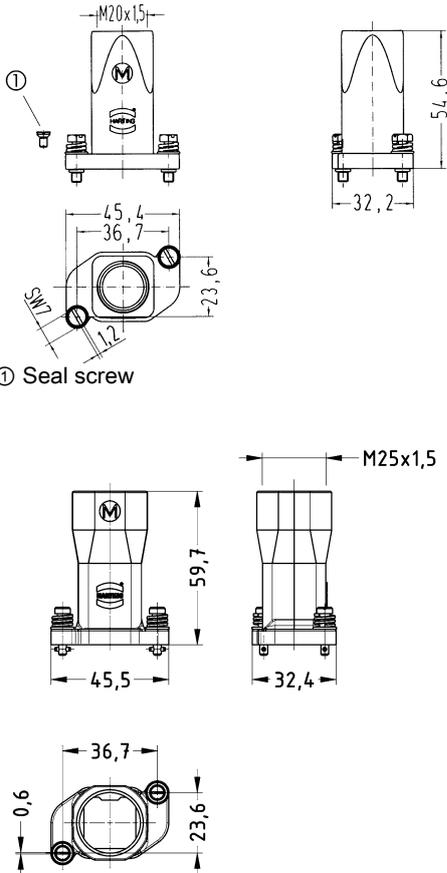
Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	2 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Chromated
Colour (hood/housing)	RAL 9005 (jet black)
Material (locking)	Stainless steel
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

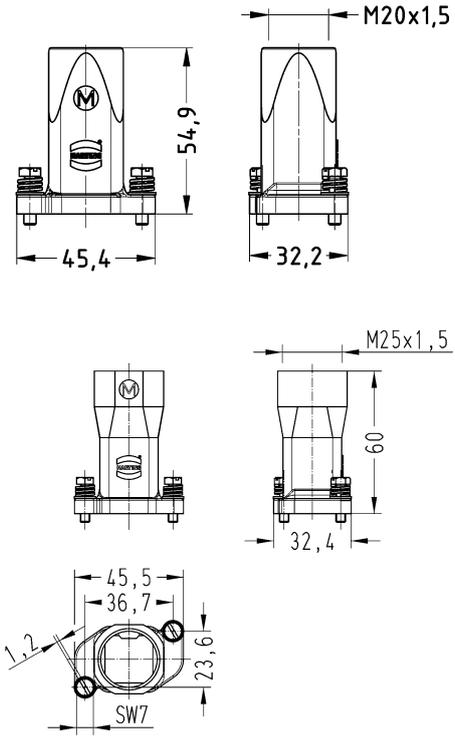
Hoods/housings for harsh outdoor environments
Toggle locking

Han-
Brid

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 703 0400 19 40 703 0401</p>	 <p>① Seal screw</p>

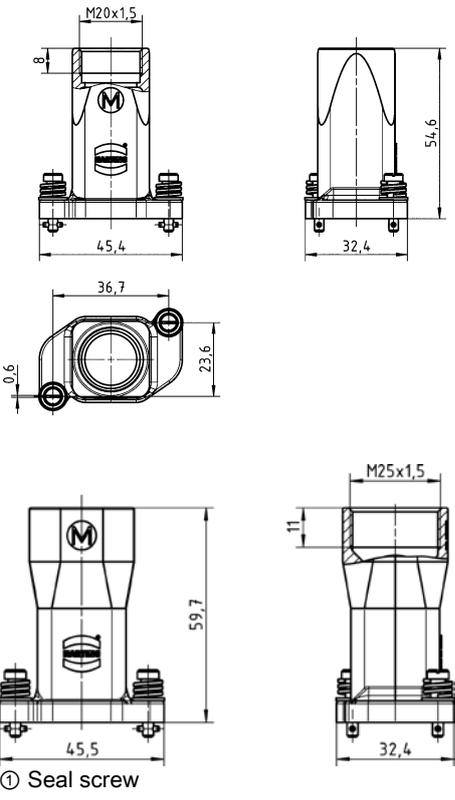
Hoods/housings for harsh outdoor environments
Screw locking

Han-
Brid

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 703 0410 19 40 703 0411</p>	 <p>M20x1,5</p> <p>M25x1,5</p>

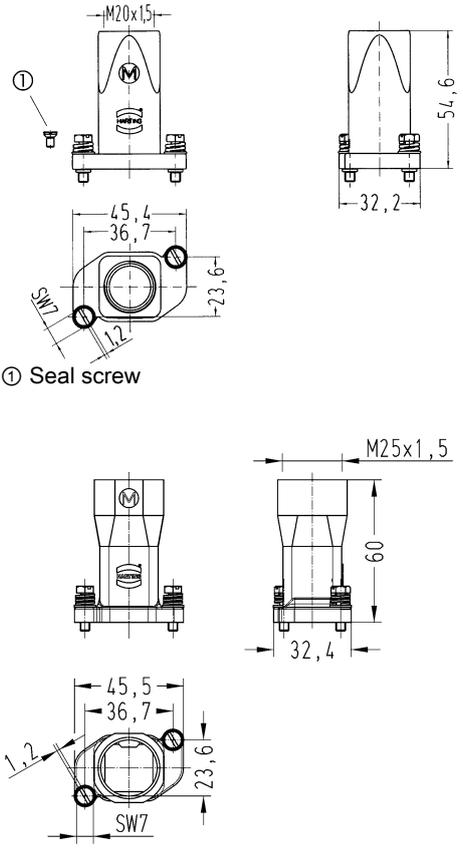
Hoods/housings for harsh outdoor environments
Toggle locking

Han-
Brid

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 003 0400 19 40 003 0401</p>	 <p>① Seal screw</p>

Hoods/housings for harsh outdoor environments
Screw locking

Han-
Brid


Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 003 0410 19 40 003 0411</p>	 <p>① Seal screw</p>

Contents	Page
Han-Fast® Lock	Han 20.11
PCB adapter for Han DD®	Han 20.13
PCB adapter for Han® DDD module.....	Han 20.16
PCB adapter for Han® 40 A Axial module.....	Han 20.18
PCB adapter for Han E®	Han 20.19
PCB adapter for Han® 40 EEE	Han 20.20
PCB adapter for Han® Q 4/2	Han 20.21
PCB adapter for Han® Q 5/0	Han 20.24
PCB adapter for Han® Q 7/0	Han 20.27
PCB adapter for Han® Q 8/0	Han 20.30
PCB adapter for Han® Q 12/0	Han 20.33


Layout of PCB

PCB

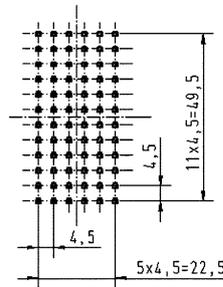
Han[®] 24 DD



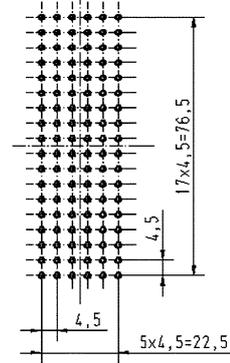
Han[®] 42 DD



Han[®] 72 DD

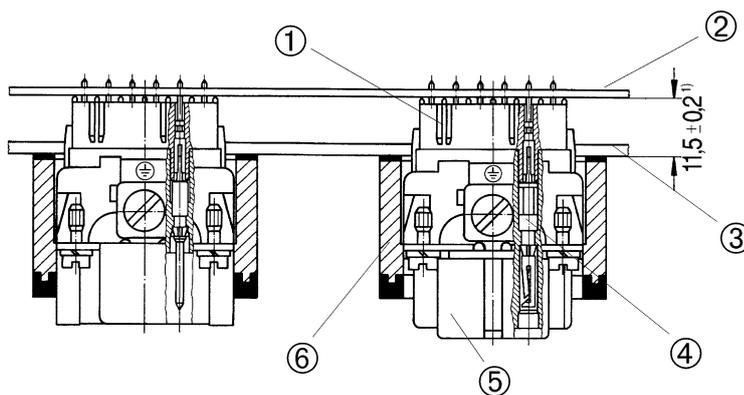


Han[®] 108 DD



Recommended hole diameter: 0.8 mm

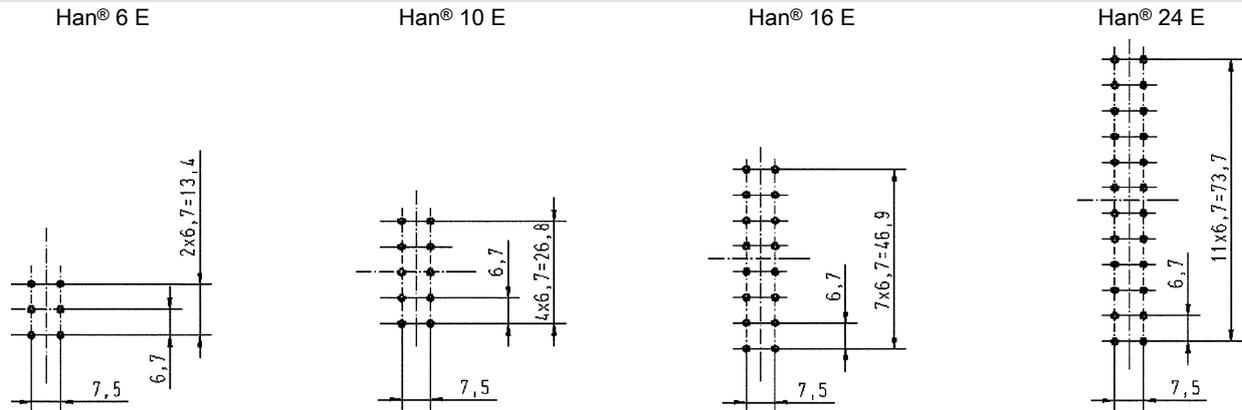
Assembly situation



- ① PCB adapter
- ② Printed circuit board (PCB)
- ③ Switch board panel
- ④ Han DD[®] double contact
- ⑤ Han DD[®] insert
- ⑥ Han[®] B bulkhead mounted housing

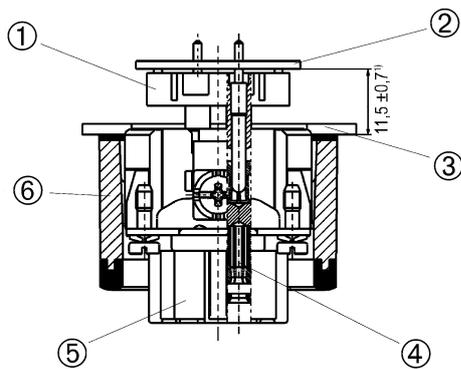
1) for Han[®] B EMC housings spacing of 12.5 ± 0.2 mm is necessary as no flange seal is used

Layout of PCB



PCB

Assembly situation



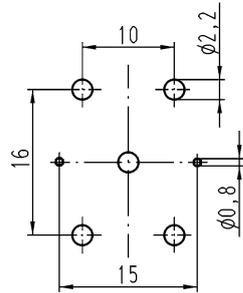
- ① PCB adapter
- ② Printed circuit board (PCB)
- ③ Switch board panel
- ④ Han E® double contact
- ⑤ Han E® insert
- ⑥ Han® B bulkhead mounted housing

1) for Han® B EMC housings spacing of 12.5 ± 0.7 mm is necessary as no flange seal is used

Layout of PCB

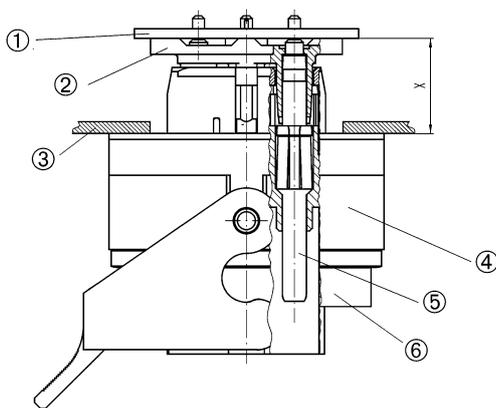
PCB

Dimensions in mm



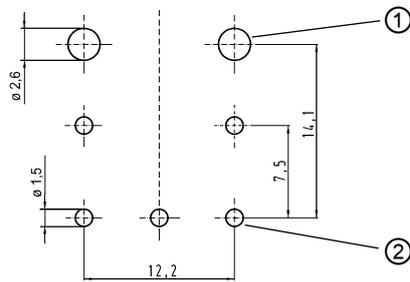
Assembly situation

X = 16⁺¹ with signal contact or 16⁺² without signal contact



- ① Printed circuit board (PCB)
- ② PCB adapter
- ③ Switch board panel
- ④ Han-Compact® bulkhead mounted housing
- ⑤ Han® C double contact
- ⑥ Han® Q 4/2 insert

Layout of PCB

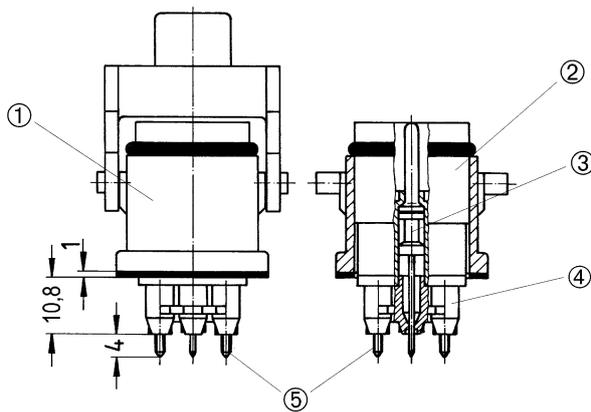


Dimensions in mm

- ① Recommended hole diameter:
2.6 mm
- ② Recommended hole diameter:
1.5 mm

PCB

Assembly situation

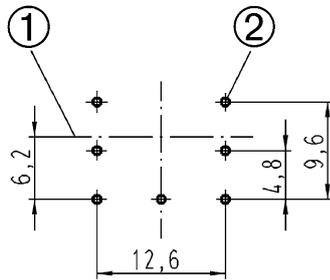


- ① Han® 3 A bulkhead mounting housing
- ② Han® Q 5/0
- ③ Solder contacts
- ④ PCB adapter
- ⑤ Connection to printed circuit board

Layout of PCB

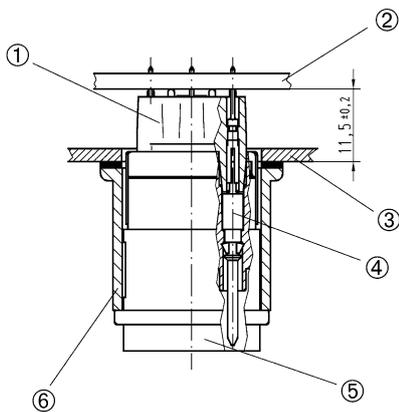
PCB

Dimensions in mm



- ① Median plane of the housing
- ② Recommended hole diameter: 0.8 mm

Assembly situation

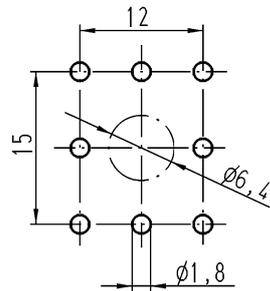


- ① PCB adapter
- ② Printed circuit board (PCB)
- ③ Switch board panel
- ④ Han D® double contact
- ⑤ Han® Q 7/0 Insert
- ⑥ Han® 3 A bulkhead mounting housing

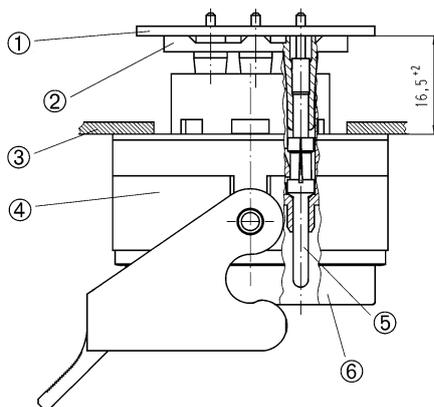
Layout of PCB

Dimensions in mm

PCB



Assembly situation

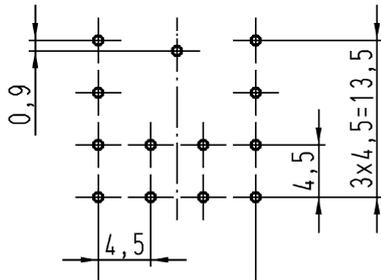


- ① Printed circuit board (PCB)
- ② PCB adapter
- ③ Switch board panel
- ④ Han-Compact[®] bulkhead mounted housing
- ⑤ Han E[®] double contact
- ⑥ Han[®] Q 8/0 Insert

Layout of PCB

PCB

Dimensions in mm
Recommended hole diameter: 0.8 mm

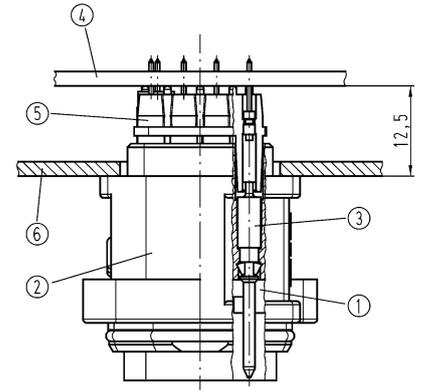
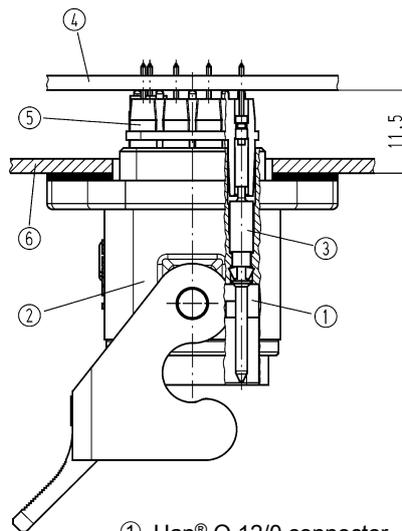
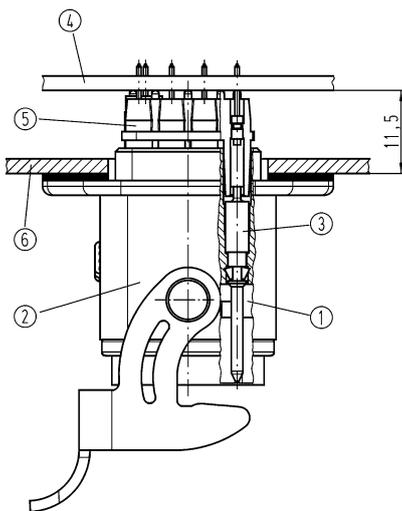


Assembly situation

Han® 3 A Standard / EMC

Han® 3 A plastic

Han® 3 A HPR



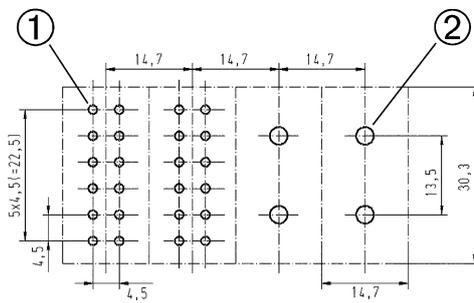
- ① Han® Q 12/0 connector
- ② Han® 3 A housing bulkhead mounting
- ③ R15-double contact

- ④ Printed circuit board (PCB)
- ⑤ PCB adapter
- ⑥ Switch board panel

Layout of PCB

Dimensions in mm

PCB

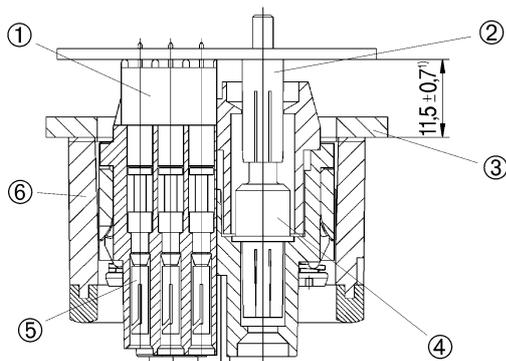


Han DD® module

Han® 40 A module

- ① Recommended hole diameter: 0.8 mm
- ② Recommended hole diameter: 3.2 mm

Assembly situation

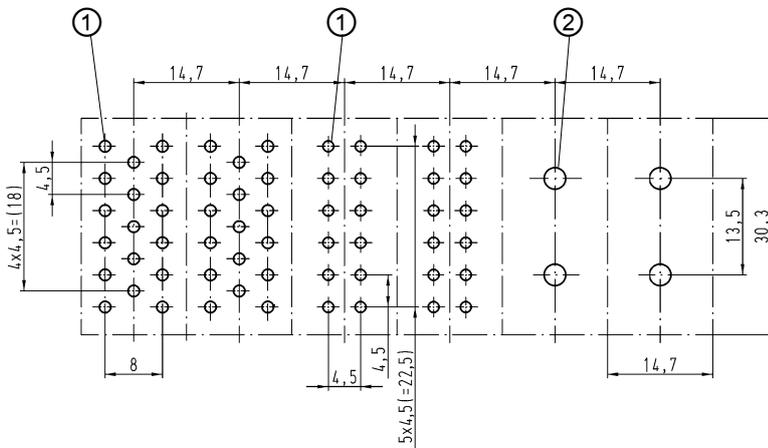


- ① Han DD® PCB-adapter
- ② Han® C solder contact
- ③ Switch board panel
- ④ Module for connection to printed circuit board
- ⑤ Han D® double contact
- ⑥ Han® B bulkhead mounted housing

¹⁾ for Han® B EMC housings spacing of 12.5 ± 0.7 mm is necessary as no flange seal is used

Layout of PCB

Dimensions in mm

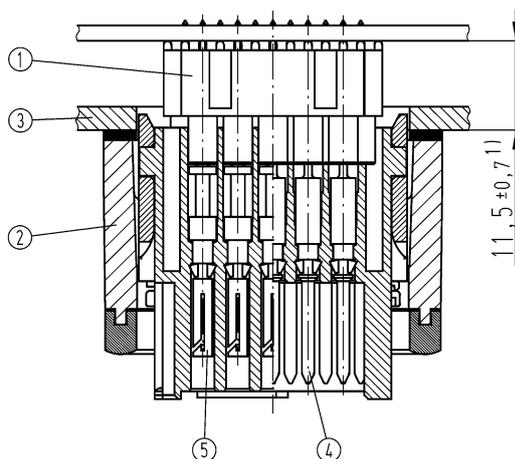


Han® DDD module Han® DD module Han® 70 A module

- ① Recommended hole diameter: 0.8 mm
- ② Recommended hole diameter: 3.2 mm

Assembly situation

Dimensions in mm



- ① Han DDD® PCB adapter 5 pins
- ② Han® B bulkhead mounted housing
- ③ Switch board panel
- ④ Han D® double male contact, 09 15 000 6197
- ⑤ Han D® double female contact, 09 15 000 6291

1) for Han® B EMV hood and housing spacing of 12.5 ± 0.7 mm is necessary as no flange seal is used.

For further information and Han-Modular® frames please refer to chapter 06 (Han-Modular®)

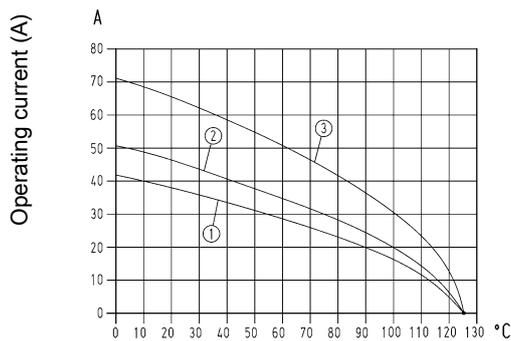
Features

- Solder free PCB termination
- PCB contact with locking element
- Machine processing
- Flexible in terms of applications
- Practical and easy handling
- Fast assembly to PCB
- Locking directly on the PCB

Technical characteristics

Contact resistance	≤2 mΩ
Material (locking)	Copper alloy
Surface (locking)	Passivated
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating



Ambient temperature (°C)

- ① Conductor cross-section 4 mm²
- ② Conductor cross-section 6 mm²
- ③ Conductor cross-section 10 mm²

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

PCB

Details

PCB thickness 1.6 ... 3.2 mm

Clearance and creepage distances have to be considered for the printed circuit board

Finished hole d= 4.4 mm +0.05/-0.04

The new connection of wires to the PCB offers optimized PCB design, combined with outstanding contact qualities.

The Han-Fast® Lock is flexible and allows a fast and simple PCB connection. The PCB has one drilled hole and a pad.

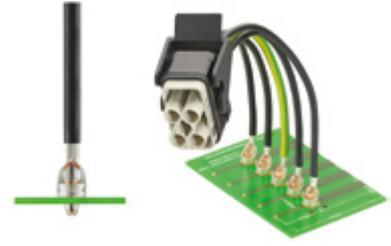
The inner surface of the plated drilled hole serves as the interface. The Han-Fast® Lock is simply inserted into the through-plated PCB hole. The locking pin is pushed in and hence locks the contact into position.

The solder free connection technique is easy to handle and to operate. Maintenance has been made simple with the facility to detach the contact.

Han-Fast® Lock also supports SMD assembly of the PCB.

- Current up to 60 Amps
- Standard drilled hole with pad
- Position independent of connector
- Solder free PCB termination
- Easy locking solution

PCB



Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Fast® Lock, PCB contact, With pin, Pack contents: Single contact Contact surface: Silver plated	1.5 ... 2.5 4 ... 6 10	09 08 000 7122 09 08 000 7123 09 08 000 7124	<p>Stripping length 7.5 mm</p>
Han-Fast® Lock, PCB contact, With pin Angled, Pack contents: Single contact Contact surface: Silver plated	1.5 ... 2.5 4 ... 6 10	09 08 000 7222 09 08 000 7223 09 08 000 7224	<p>Stripping length 7.5 mm</p>
Han-Fast® Lock, PCB contact, With pin, Pack contents: On a reel Contact surface: Silver plated	1.5 ... 2.5 4 ... 6 10	09 08 000 6122 09 08 000 6123 09 08 000 6124	<p>Stripping length 7.5 mm</p>

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs
- High density of contacts

Technical characteristics

Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polyamide
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

Details


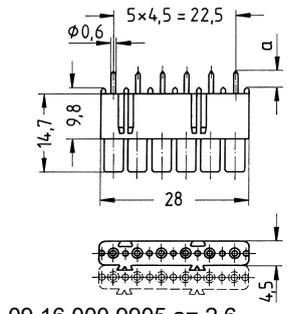
Han DD® crimp inserts see chapter 02

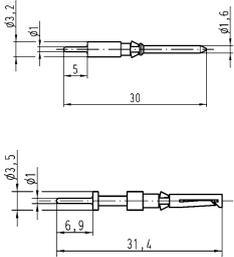
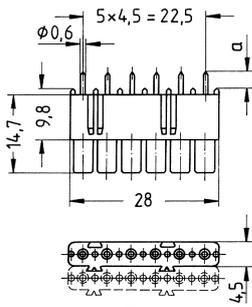
Modules see chapter 06

Han® B bulkhead mounted housings see chapter 31

Crimping tools see chapter 90

PCB

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han D[®], PCB contact, Contact surface: Silver plated</p> 	09 15 000 6191	09 15 000 6291	
<p>PCB adapter, In the Han DD[®] crimp insert, In the Han DD[®] module, In the Han[®] DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)</p>  <p>for PCB's up to 1.6 mm</p>	09 16 000 9905	09 16 000 9905	 <p>09 16 000 9905 a= 2.6 09 16 000 9908 a= 3.4</p>
<p>PCB adapter, In the Han DD[®] crimp insert, In the Han DD[®] module, In the Han[®] DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)</p>  <p>for PCB's up to 2.4 mm</p>	09 16 000 9908	09 16 000 9908	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han D[®], PCB contact, Contact surface: Silver plated</p> 	09 15 000 6191	09 15 000 6294	
<p>PCB adapter, In the Han DD[®] crimp insert, In the Han DD[®] module, In the Han[®] DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)</p>  <p>for PCB's up to 1.6 mm</p>	09 16 000 9905	09 16 000 9905	 <p>09 16 000 9905 a= 2.6 09 16 000 9908 a= 3.4</p>
<p>PCB adapter, In the Han DD[®] crimp insert, In the Han DD[®] module, In the Han[®] DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)</p>  <p>for PCB's up to 2.4 mm</p>	09 16 000 9908	09 16 000 9908	

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs
- High density of contacts

Technical characteristics

Rated current	7.5 A
Rated voltage	160 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polyamide
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

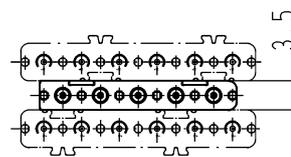
EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Details

Modules see chapter 06





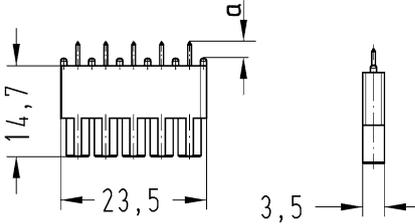
Han® B bulkhead mounted housings see chapter 31

Crimping tools see chapter 90



For a 17-pin PCB termination with the Han® DDD module two 6-pin and one 5-pin PCB adapters are necessary.

PCB

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han D®, PCB contact, Contact surface: Silver plated</p> 	09 15 000 6197	09 15 000 6291	 
<p>PCB adapter, In the Han DD® crimp insert, In the Han DD® module, In the Han® DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)</p>  <p>for PCB's up to 1.6 mm</p>	09 16 000 9905	09 16 000 9905	  <p>09 16 000 9905 a= 2.6 09 16 000 9908 a= 3.4</p>
<p>PCB adapter, In the Han DD® crimp insert, In the Han DD® module, In the Han® DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)</p>  <p>for PCB's up to 2.4 mm</p>	09 16 000 9908	09 16 000 9908	
<p>PCB adapter, 5-pin, In the Han® DDD module</p>  <p>for PCB's up to 1.6 mm</p>	09 16 000 9915	09 16 000 9915	 <p>09 16 000 9915 a= 2.6 09 16 000 9918 a= 3.4</p>
<p>PCB adapter, 5-pin, In the Han® DDD module</p>  <p>for PCB's up to 2.4 mm</p>	09 16 000 9918	09 16 000 9918	

PCB

Features

- Modular assembly
- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs

Technical characteristics

Rated current	40 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polycarbonate
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Details

Hinged frames see chapter 06

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® C, PCB contact, Contact surface: Silver plated	09 32 000 6295		
PCB adapter, In the Han® 40 A Axial module	09 14 002 2603	09 14 002 2703	

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs
- Counter connector available with screw, crimp or cage clamp termination

Technical characteristics

Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polycarbonate
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c : Copper alloy containing up to 4 % lead by weight

Specifications and approvals


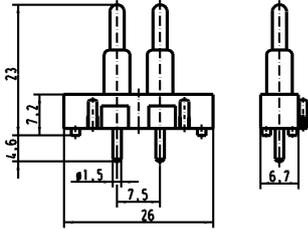
EN 60664-1
IEC 61984

Details

Han E® crimp inserts see chapter 03

Hoods/Housings see chapter 31

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han E®, PCB contact, Contact surface: Silver plated 	09 33 000 6180	09 33 000 6280	
PCB adapter, In the Han E® crimp insert 	09 33 000 9996	09 33 000 9996	

Number of contacts

40

16 A 500 V 6 kV 3

PCB

Technical characteristics

Number of contacts	40
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV

Technical characteristics

Pollution degree	3
Limiting temperature	-40 ... +125 °C
Material (insert)	Polycarbonate
Material (contacts)	Copper alloy

Identification	Size	Part number		Drawing (dimensions in mm)
		Male	Female	
PCB adapter, In the Han® 40 EEE crimp insert, Contact surface: Silver plated	16 B	09 33 000 9880	09 33 000 9880	



Features

- Robust design
- Low wiring costs
- High density of contacts
- Suitable for Han-Compact[®] hoods and housings

Technical characteristics

Rated current	30 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	2
Rated current (signal)	7.5 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	2
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 12
Material (insert)	LCP
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 9005 (jet black)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Han[®] Q inserts see chapter 13

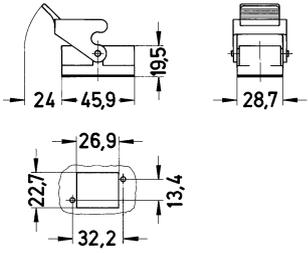
Crimping tools see chapter 90

PCB

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® C, PCB contact, Contact surface: Silver plated	09 32 000 6180	09 32 000 6280	
Han D®, PCB contact, Contact surface: Silver plated	09 15 000 6191	09 15 000 6293	
PCB adapter, In the Han® Q 4/2 for PCB's up to 2.4 mm	09 12 006 9901	09 12 006 9901	

Hoods/housings for industrial applications
Single locking lever

PCB

Identification	Part number	Drawing (dimensions in mm)
<p>Han-Compact[®], Bulkhead mounted housings, Straight</p> 	<p>09 12 008 0327</p>	

PCB

Features

- Robust design
- Suitable only for EMC housings size Han® 3 A
- Additional robust and secure PE-connection between housing and PCB

Technical characteristics

Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12
Material (insert)	Polycarbonate
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	PTFE
Material (locking)	Steel
Surface (locking)	Zinc plated
Material (contacts)	Copper alloy
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Han® Q inserts see chapter 13

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han E®, PCB contact, Contact surface: Silver plated	09 33 000 6195	09 33 000 6295	
PCB adapter, 5-pin, In the Han® Q 5/0 for PCB's up to 2.4 mm	09 12 000 9905	09 12 000 9905	<p>Adapter PE contact panel</p>

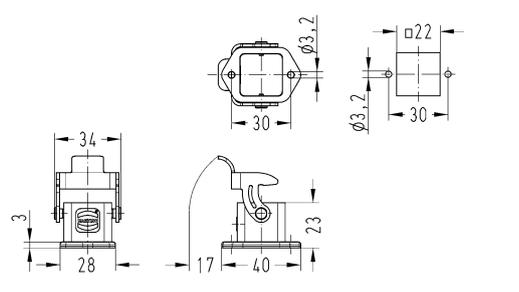
Hoods/Housings for higher EMC requirements
Single locking lever

PCB

Identification	Part number	Drawing (dimensions in mm)
----------------	-------------	----------------------------

Han® EMC,
Bulkhead mounted housings,
Straight,
for PCB termination with Han® Q 5/0

09 62 003 0304



Features

- Robust design
- Suitable for standard and EMC hoods and housings
- High density of contacts

Technical characteristics

Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12
Material (insert)	Polycarbonate
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Steel
Surface (locking)	Zinc plated
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

PCB

Details

Han® Q inserts see chapter 13

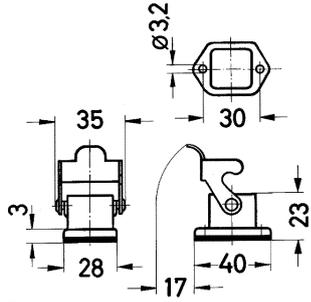
Crimping tools see chapter 90

PCB

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han D®, PCB contact, Contact surface: Silver plated	09 15 000 6190	09 15 000 6290	
PCB adapter, In the Han® Q 7/0 for PCB's up to 2.4 mm		09 12 000 9908	

Standard Hoods/housings for industrial applications
Single locking lever

PCB

Identification	Part number	Drawing (dimensions in mm)
<p>Han A®, Bulkhead mounted housings, Straight</p> 	<p>09 20 003 0301</p>	 <p>Panel cut out 22 x 22 mm</p>

Features

- Robust design
- Suitable for Han-Compact® hoods and housings
- Low wiring costs
- High density of contacts

Technical characteristics

Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	2
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 12
Material (insert)	LCP
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 9005 (jet black)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight


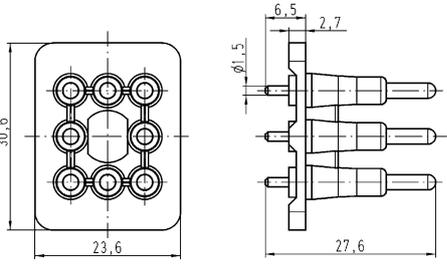
Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

Han® Q inserts see chapter 13

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han E®, PCB contact, Contact surface: Silver plated 	09 33 000 6180	09 33 000 6280	
PCB adapter, In the Han® Q 8/0 for PCB's up to 1.6 mm 	09 12 008 9901		



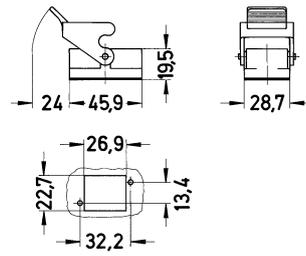
Hoods/housings for industrial applications
Single locking lever

PCB

Identification	Part number	Drawing (dimensions in mm)
----------------	-------------	----------------------------

Han-Compact®,
Bulkhead mounted housings,
Straight

09 12 008 0327



Features

- Robust design
- Suitable for standard and EMC hoods and housings
- High density of contacts

Technical characteristics

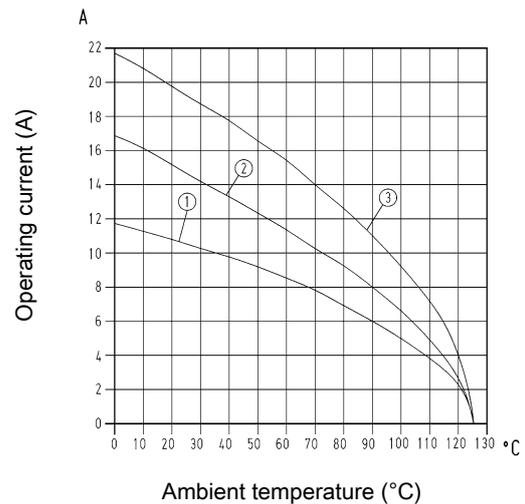
Number of contacts	12
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.75 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076
DNV GL

Details

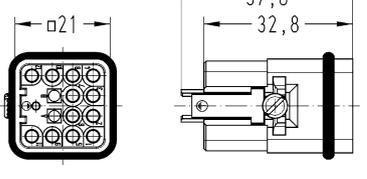
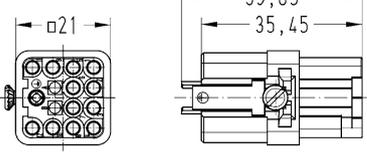
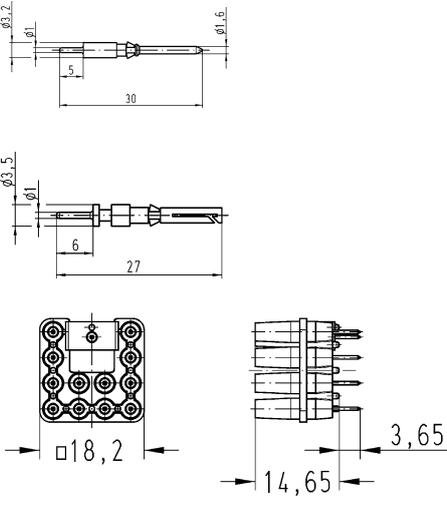
Crimping tools see chapter 90

Number of contacts

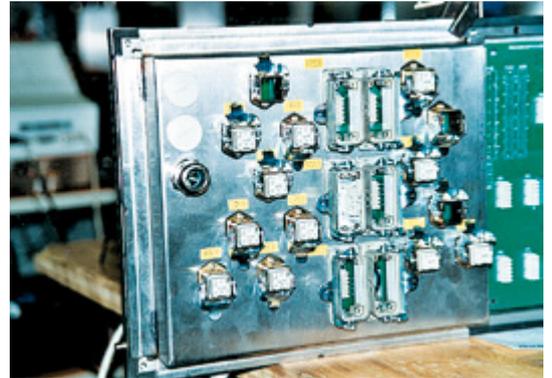
12+

7.5 A 250 V 4 kV 3

PCB

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Han® Q, for PCB adapter, Solder termination</p>  <p>Please order contacts separately.</p>	09 12 012 3002	09 12 012 3102	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; margin-bottom: 10px;"> M  </div> <div style="display: flex; align-items: center;"> F  </div> </div>
<p>Han D®, PCB contact, Contact surface: Silver plated</p>  <p>PCB adapter, In the Han® Q 12/0</p>  <p>for PCB's up to 2.4 mm</p>	09 15 000 6191	09 15 000 6297	

- Secondary mating between industrial connector and printed circuit board.
- No higher force is applied on the soldering joint when mating the industrial connector due to an additional mating point.
- No wiring between printed circuit board and industrial connector necessary.
- This means no wiring faults ⇔ no testing, no costs
- Connecting times are minimized.
- Easy handling is time and cost saving.
- The production of mechanical and electrical / electronical components can be completely separated.
- Possibility to reach a higher degree of automation in the production (e.g. wave soldering of the PCBs).

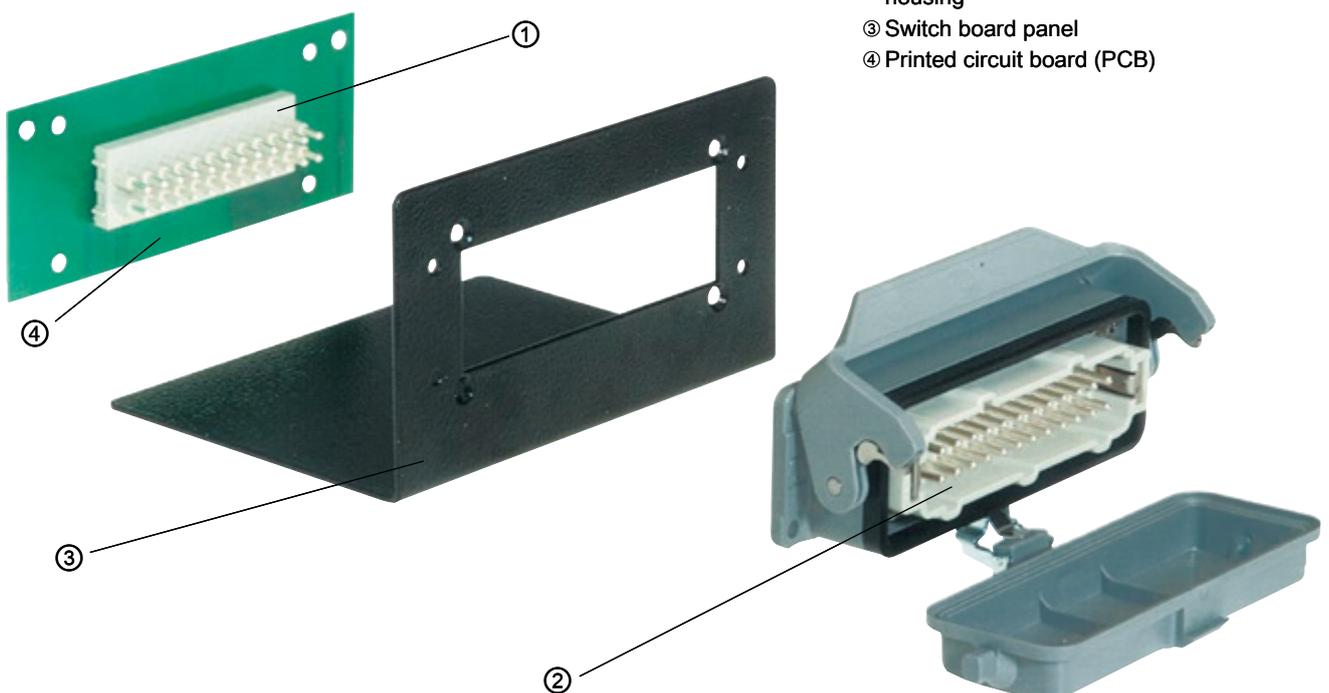


Han DD® and Han® Q 5/0 PCB adapter
Wilhelm Fette GmbH, Germany

PCB



Han E® PCB adapter



- ① PCB adapter for Han E®
- ② Han E® connector in a bulkhead mounted housing
- ③ Switch board panel
- ④ Printed circuit board (PCB)

Contents	Page
Inserts for Han- <i>Yellock</i> ® 10	Han 25.7
Inserts for adapter frames	Han 25.9
Quick Lock module	Han 25.11
Crimp module	Han 25.13
Multiplier block.....	Han 25.15
Multiplier	Han 25.17
Adapter frames.....	Han 25.20
Monoblocks	Han 25.23
Han- <i>Yellock</i> ® 10 hoods/housings	Han 25.26
Han- <i>Yellock</i> ® 30 hoods/housings	Han 25.29
Han- <i>Yellock</i> ® 60 hoods/housings	Han 25.36
Accessories	Han 25.43

Yellock

Description of the Han-Yellock® system

The Han-Yellock® - a special Han® connector

Han-Yellock® is a new product series which retains the core functionality but differs significantly from current size and shape formats. The approach of this series makes many new functions possible, for example:

- An internal, latched locking mechanism on the hood
- Multiplies the potentials in the connector with Han-Yellock® modules
- Usage of Han-Modular® modules with adapter frames
- Insulators can snap into the front or back walls of the housing
- Protected Earth contact (PE) in crimp or Quick Lock termination

These new technical features encourage sustained and effective improvements:

when purchasing products –

- Less article numbers and less inventory,

when planning for the electrical and mechanical layout –

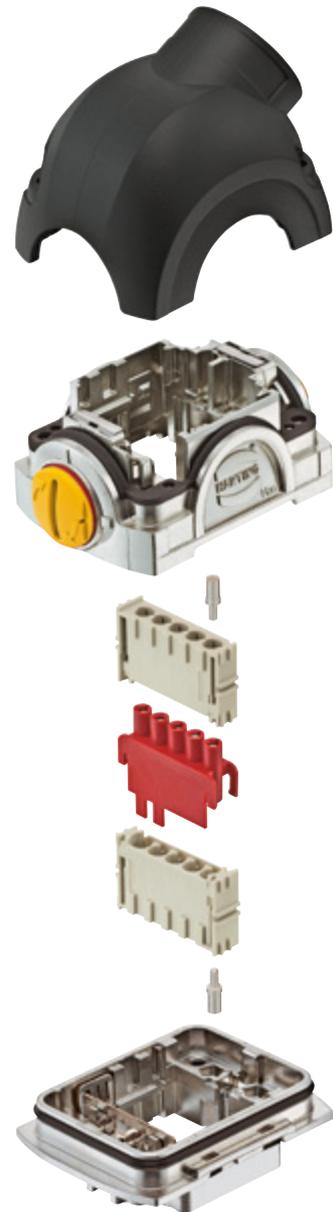
- Less wiring work within a machine,

during the work flow –

- Less steps in the work flow and quicker assembly,

and during the after-sales stage –

- Reduced down times because of the latched locking mechanism and maintenance-friendly design



Assembly details

Design overview

The Han-Yellock® interface consists of a housing, bulkhead mounting, on the housing side and a carrier hood with cover on the cable side.

Han-Yellock® offers the following features when assembling components:

- Han-Yellock® modules require only male crimp contacts.
- The PE is contacted on the housing; it can be connected with crimp and/or Quick Lock contacts.
- The Han-Yellock® hoods/housing are not plug-compatible with all other Han® hood/housing series.

The Han-Yellock® system can be used with a variety of insulators and contact inserts in order to establish an interface.

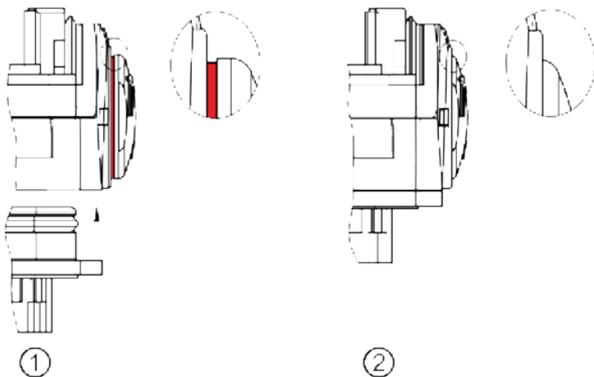
The Locking

The locking ability is a key function of the Han-Yellock®. The function makes connections and disconnections safe, simple and quick – even under harsh industrial conditions.

Main advantages include:

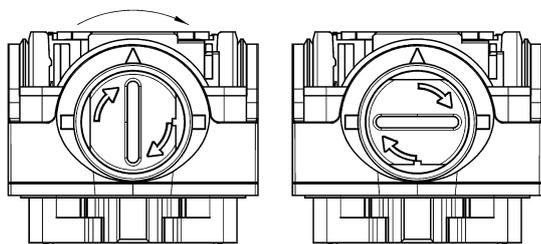
- Easy handling
- Resistance to vibrations and shock
- Protected against accidental opening
- Compact, space-saving design

Han-Yellock® features a patented internal locking mechanism. The locking takes place as the cable and device sides are simply joined together. A red ring around the perimeter of the push button will be visible if the housing halves do not snap together properly. This ring disappears as soon as the internally protected stainless steel springs snap into place.



① unlocked
② locked

This press-button locking also features an integrated blocking function. The locking mechanism can be locked by rotating the button 90°. It is then no longer possible to open the connector.



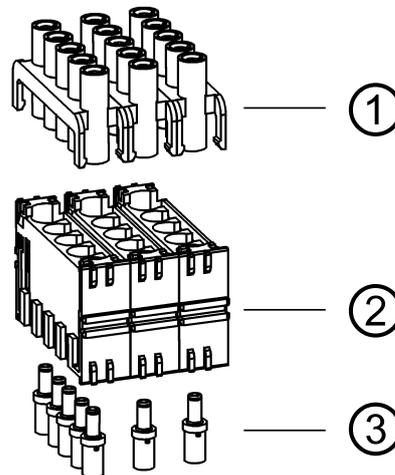
„open“ „blocked“

The press button can be set back to its visually open position only after the button is turned back 90°. It is then possible to release the two housing halves by pressing the snap-in button.

This feature provides an elegant mechanism for preventing an accidental opening of the connector – and no additional components are needed for it.

Han-Yellock® modules

This new product series enables an improved approach and strategy for electrical planning and procurement. For assembling the Han-Yellock® connector only male crimp contacts are needed. The conduct between the two male contacts is made by multipliers.



① multiplier
② Han-Yellock® module
③ Han-Yellock® crimp contacts

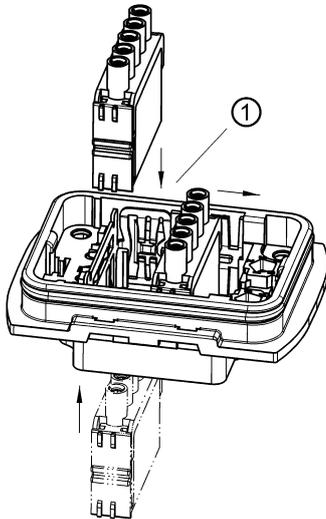
This concept allows a 1:1 wire to wire arrangement and in addition the use of bridges. Two to five contacts can be arranged.

It does not matter if the bridge attachment is inserted on the cable side or the housing side of the connector.

In the past, terminals blocks have been responsible for the function of multiplying potentials. But now this function has been integrated into the connector for a quick, compact and easy-to-service solution.

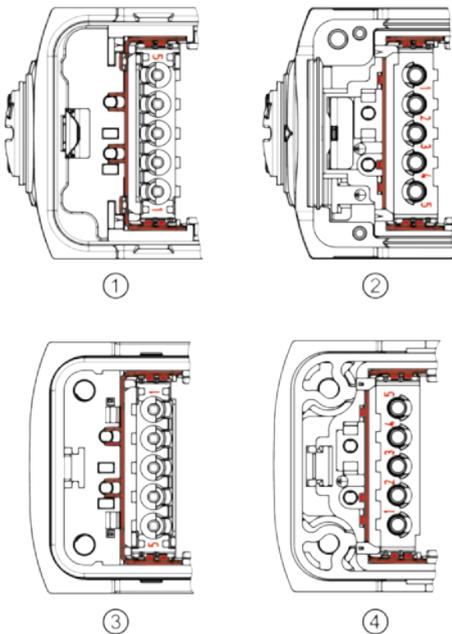
Inserting the module into the hoods/housing

- The Han-Yellock® module should only be inserted into the „A“ plug-in position in the metal clamp.




① plug-in position „A“

- The illustration shows the orientation of the module (see arrangement of contacts 1 ... 5).

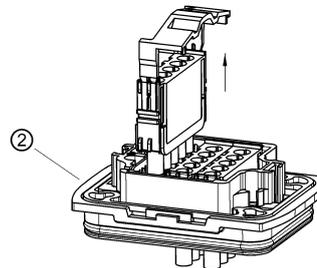
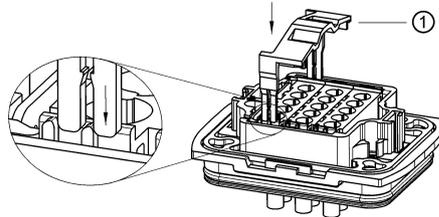


- ① Carrier hood, mating side
- ② Carrier hood, connection side
- ③ Housing, bulkhead mounting, mating side
- ④ Housing, bulkhead mounting, connection side
- A distinct click can be heard when the module snaps into position. It is then pushed along the rail to its final position. The plug-in slots must always be completely filled.



Disassembling the Han-Yellock® module

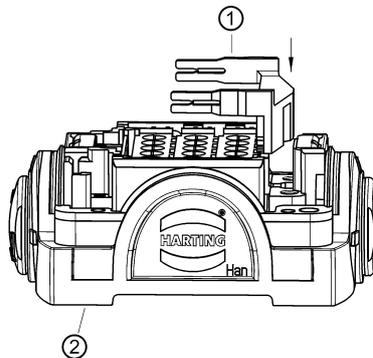
- The removal tool (part no. 11 99 000 0001) is required to take out the module.
- The following illustration shows how to insert the removal tool into the metal clamp. The tool should then be pressed down until it reaches the end stop.
- The tool is then pulled back and the module comes out of the housing.
- The removal can be made from the connection side as well as from the mating side.



- ① removal tool
- ② housing, bulkhead mounting

The process is identical for both housings, bulkhead mounting, and carrier hoods.

The removal tool can be stored on the carrier hood:



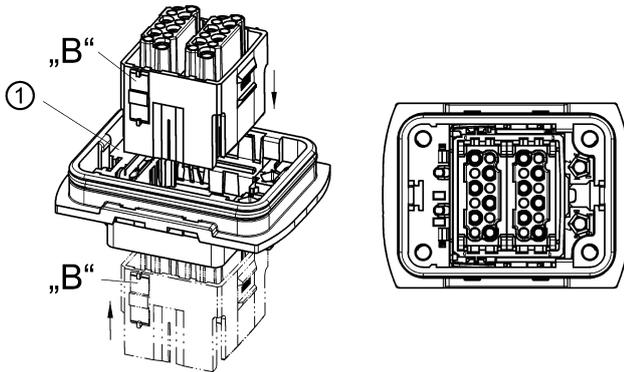
- ① removal tool
- ② carrier hood

Han-Yellock® adapter frame

Han-Modular® series interfaces can be established using the Han-Yellock® adapter frame. The connection is based on a male/female contact arrangement.

Inserting the adapter frame in the housing:

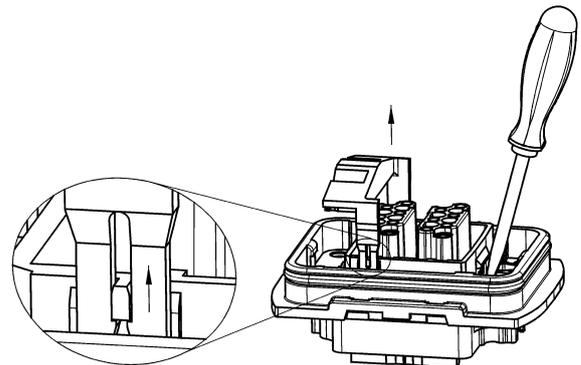
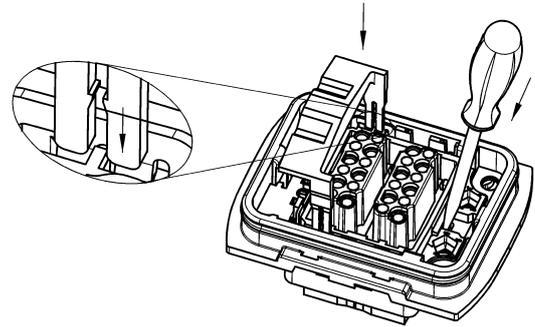
- The adapter frame can be snapped into the housing, bulkhead mounting, on the termination side and the mating side (refer to the illustration).
- The lateral plastic tabs („B“) are pressed into the metal clamps on the housing.
- The adapter frame then snaps in with a distinctly audible click.



① metal clamp

Removal the adapter frame:

- The removal tool part no. 11 99 000 0001 is required for disassembly.
- The removal tool is inserted into the metal clamp and pressed down as shown in the following illustration. A screwdriver need also be placed into the notch in the housing.
- The removal tool should then be pulled outwards to remove the adapter frame from the housing.
- The removal can be made from the termination side as well as from the mating side.
- The process is identical for both housings, bulkhead mounting, and carrier hoods.



Han-Yellock® Protection covers

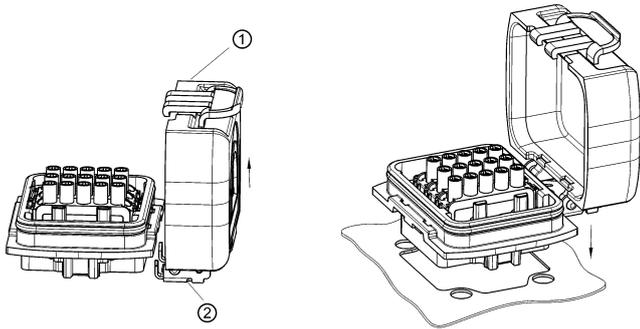
Protection cover function

To protect the insert against dust and water it is possible to use a Han-Yellock® protection cover.

The protection cover comes with a metal bearing pedestal and can be installed during initial or retrofit installation.

The Han-Yellock® design offer the possibility to snap in the pedestal either on the left or on the right side of the housing.

The direction of the cover movement can flip without turning the housing and inserts.



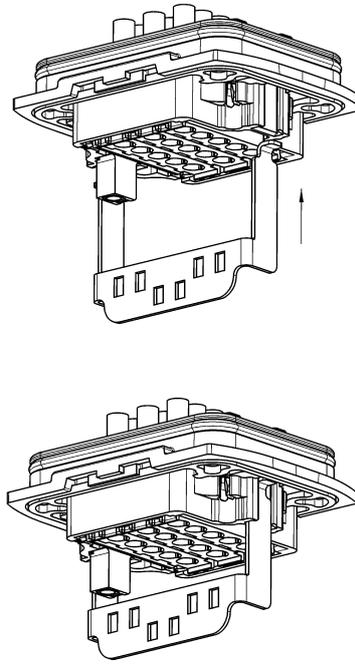
- ① cover
- ② bearing pedestal

Han-Yellock® Ground terminal

Ground terminal assembly

On the housing side ground terminals can be used.

After placing the frame deeply inside the housing slots the housing will be fixed to the panel leading to solid mounting of the complete set.



Series	Han® 3 A	Han® 3 A Quick Lock	Han® 3 A Quick Lock	Han® 4 A
Number of contacts	3 + ⊕	3 + ⊕	3 + ⊕	4 + ⊕
Termination	Screw terminal 	Quick Lock termination 	Quick Lock termination 	Screw terminal 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	230 / 400 V	230 / 400 V	230 / 400 V	230 / 400 V
Wire gauge	0.75 ... 1.5 mm ²	0.5 ... 2.5 mm ²	0.25 ... 1.5 mm ²	0.75 ... 1.5 mm ²
Male insert (M)	09 20 003 2611	09 20 003 2633	09 20 003 2634	09 20 004 2611
Female insert (F)	09 20 003 2711	09 20 003 2733	09 20 003 2734	09 20 004 2711
Series	Han® 4 A Quick Lock	Han® 4 A Quick Lock	Han® 8 D	Han® 8 D Quick Lock
Number of contacts	4 + ⊕	4 + ⊕	8	8
Termination	Quick Lock termination 	Quick Lock termination 	Crimp terminal 	Quick Lock termination 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	230 / 400 V	230 / 400 V	~ 50 V / - 120 V	~ 50 V / - 120 V
Wire gauge	0.5 ... 2.5 mm ²	0.25 ... 1.5 mm ²	0.14 ... 2.5 mm ²	0.25 ... 1.5 mm ²
Male insert (M)	09 20 004 2633	09 20 004 2634	09 36 008 3001	09 36 008 2632
Female insert (F)	09 20 004 2733	09 20 004 2734	09 36 008 3101	09 36 008 2732
Series	Han® Q 2/0	Han® Q 2/0	Han® Q 2/0	Han® Q 2/0
Number of contacts	2 + ⊕	2 + ⊕	2 + ⊕	2 + ⊕
Termination	Axial screw terminal 	Axial screw terminal 	Crimp terminal 	Axial screw terminal 
Rated current	40 A	40 A	40 A	40 A
Rated voltage	400 V	400 V	400 V	830 V
Wire gauge	2.5 ... 6 mm ²	4 ... 10 mm ²	1.5 ... 10 mm ²	2.5 ... 6 mm ²
Male insert (M)	09 12 002 2653	09 12 002 2651	09 12 002 3051	09 12 002 2654
Female insert (F)	09 12 002 2753	09 12 002 2751	09 12 002 3151	09 12 002 2754

Inserts for Han-Yellock® 10




Series	Han® Q 2/0	Han® Q 2/0	Han® Q 3/0	Han® Q 5/0
Number of contacts	2 + ⊕	2 + ⊕	3 + ⊕	5 + ⊕
Termination	Axial screw terminal 	Crimp terminal 	Crimp terminal	Crimp terminal 
Rated current	40 A	40 A	40 A	16 A
Rated voltage	830 V	830 V	400 V	230 / 400 V
Wire gauge	4 ... 10 mm ²	1.5 ... 10 mm ²	1.5 ... 10 mm ²	0.14 ... 2.5 mm ²
Male insert (M)	09 12 002 2652	09 12 002 3052	09 12 003 3051	09 12 005 3001
Female insert (F)	09 12 002 2752	09 12 002 3152	09 12 003 3151	09 12 005 3101
Series	Han® Q 5/0 Quick Lock	Han® Q 7/0	Han® Q 12/0	
Number of contacts	5 + ⊕	7 + ⊕	12 + ⊕	
Termination	Quick Lock termination 	Crimp terminal 	Crimp termination/ Quick Lock termination 	
Rated current	16 A	10 A	10 A	
Rated voltage	230 / 400 V	400 V	400 V	
Wire gauge	0.5 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	
Male insert (M)	09 12 005 2633	09 12 007 3001	09 12 012 3001	
Female insert (F)	09 12 005 2733	09 12 007 3101	09 12 012 3101	
Series	Han-Brid® RJ45 C	Han-Brid® RJ45 C	Han-Brid® RJ45 C	Han-Brid® RJ45 C
Number of contacts	2 / 8	2 / 8	2 / 8	2 / 8
Termination	Crimp terminal / RJ45 	Crimp terminal / RJ45 	Crimp terminal / RJ45 	Crimp terminal / RJ45 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	24 V	24 V	24 V	24 V
Wire gauge	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²
Male insert (M)	09 12 003 3021	09 12 003 3031		
Female insert (F)			09 12 003 2774	09 12 003 2776

Han
25
·
8

By using in Han-Yellock® 10 hoods/housings the seal on the insert has to be removed.

Inserts for adapter frames



Series	Han® CC Protected module	Han® CD module	Han E® module	Han® E Quick Lock module
Number of contacts	4	3	6	6
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Quick Lock termination 
Rated current	40 A	40 A	16 A	16 A
Rated voltage	830 V	830 V	500 V	500 V
Wire gauge	1.5 ... 6 mm ²	1.5 ... 6 mm ²	0.14 ... 4 mm ²	0.5 ... 2.5 mm ²
Series	Han® EE module	Han® EE Quick Lock module	Han E® Protected module	Han® EEE module
Number of contacts	8	8	6	20
Modules	Crimp terminal 	Quick Lock termination 	Crimp terminal 	Crimp terminal 
Rated current	16 A	16 A	16 A	16 A
Rated voltage	400 V	400 V	830 V	500 V
Wire gauge	0.14 ... 4 mm ²	0.5 ... 2.5 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²
Series	Han® ES module	Han DD® module	Han DD® Quick Lock module	Han® DDD module
Number of contacts	5	12	12	17
Modules	Cage-clamp terminal 	Crimp terminal 	Quick Lock termination 	Crimp terminal 
Rated current	16 A	10 A	10 A	10 A
Rated voltage	400 V	250 V	250 V	160 V
Wire gauge	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.25 ... 1.5 mm ²	0.14 ... 2.5 mm ²
Series	Han® High Density module	Han® D-Sub module		
Number of contacts	25	9		
Modules	Crimp terminal 	Crimp terminal 		
Rated current	4 A	5 A		
Rated voltage	50 V	50 V		
Wire gauge	0.08 ... 0.52 mm ²	0.08 ... 0.52 mm ²		

Yellow

Inserts for adapter frames



Series	Han® USB module	Han® GigaBit module		
Number of contacts	4	8		
Modules	USB 2.0	Ethernet Cat. 6		
				

Series	Han-Quintax® module				Han® Multi module
Number of contacts	2				
Modules					
Contacts	Han-Quintax® contact 4 + shielding 	High Density Quintax contact 8 + shielding 	Han D® Coax contact 75 Ω 1 + shielding  75 Ω	Han E® Coax contact 50 Ω 1 + shielding  50 Ω	Coaxial contact  50 Ω RG 174 75 Ω RG 179 50 Ω RG 58

Features

- Snap-in assembly from mating side and from termination side
- Bus bar within bridge attachments
- Finger safe design
- Fast and tool-less assembly
- Mating compatible to the crimp version

Technical characteristics

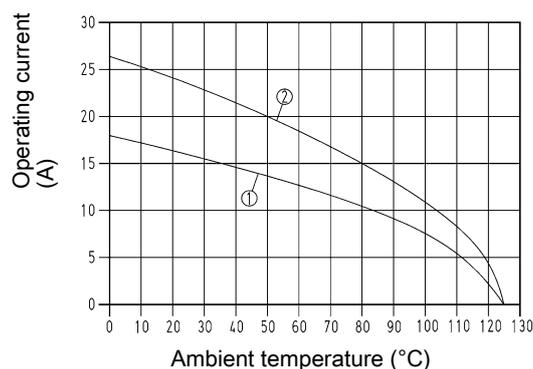
Number of contacts	5
Rated current	20 A, 10 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



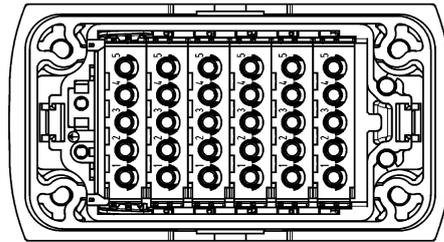
- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
for connector with 3 Han-Yellock® modules, fully loaded (multiplier 1:1)

Specifications and approvals

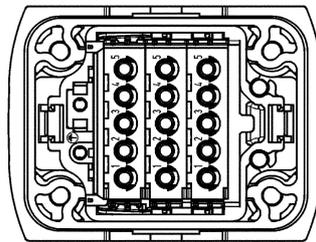
EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Yellock

Details



Placement for Han-Yellock® 60 with 6 Han-Yellock® modules



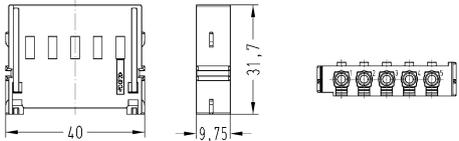
Placement for Han-Yellock® 30 with 3 Han-Yellock® modules

Number of contacts

5

20 A 500 V 6 kV 3

Yellowlock

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
<p>Han-<i>Yellowlock</i>[®], Module, Han-Quick Lock[®] termination, 20 A Contact surface: Silver plated</p>  <p>Blue slide</p>	0.5 ... 2.5	11 05 105 2633	 <p>Stripping length 10 mm</p>
<p>Han-<i>Yellowlock</i>[®], Module, Han-Quick Lock[®] termination, 10 A Contact surface: Silver plated</p>  <p>Black slide</p>	0.25 ... 1.5	11 05 105 2634	

Features

- Snap-in assembly from mating side and from termination side
- Wiring with male contacts only
- Bus bar within bridge attachments
- Finger safe design
- Fast and tool-less assembly

Technical characteristics

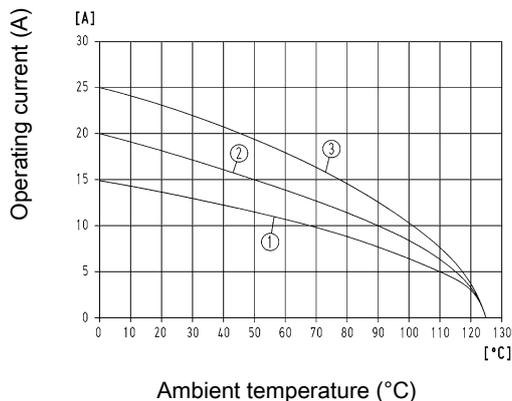
Number of contacts	5
Rated current	20 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey), RAL 5015 (sky blue), RAL 3000 (flame red)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²
for connector with 3 Han-Yellock® modules, fully loaded (multiplier 1:1)

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

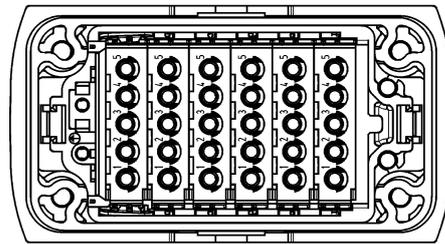
Yellock

Details

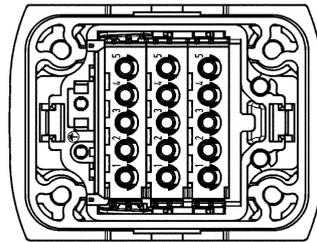
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Placement for Han-Yellock® 60 with 6 Han-Yellock® modules



Placement for Han-Yellock® 30 with 3 Han-Yellock® modules

Number of contacts

5

20 A 500 V 6 kV 3

Yellowlock

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)																											
Han- <i>Yellowlock</i> [®] , Module, Crimp termination, Contact surface: Silver plated	0.14 ... 4 0.14 ... 4 0.14 ... 4	11 05 105 3001 11 05 105 3011 11 05 105 3012	 11 05 105 3001 Grey 11 05 105 3011 Blue 11 05 105 3012 Red																											
Han- <i>Yellowlock</i> [®] , Crimp contact, Contact surface: Silver plated	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108																												
Han- <i>Yellowlock</i> [®] , Crimp contact, Contact surface: Gold plated	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	<table border="1"> <thead> <tr> <th colspan="2">Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>6.5 mm</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>6.5 mm</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>6.5 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>6.5 mm</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> </tbody> </table> Removal tool 09 99 000 0319 See chapter 90	Wire gauge		Stripping length	0.14-0.37 mm ²	AWG 26-22	6.5 mm	0.5 mm ²	AWG 20	6.5 mm	0.75 mm ²	AWG 18	6.5 mm	1 mm ²	AWG 18	6.5 mm	1.5 mm ²	AWG 16	6.5 mm	2.5 mm ²	AWG 14	6.5 mm	3 mm ²	AWG 12	6.5 mm	4 mm ²	AWG 12	6.5 mm
Wire gauge		Stripping length																												
0.14-0.37 mm ²	AWG 26-22	6.5 mm																												
0.5 mm ²	AWG 20	6.5 mm																												
0.75 mm ²	AWG 18	6.5 mm																												
1 mm ²	AWG 18	6.5 mm																												
1.5 mm ²	AWG 16	6.5 mm																												
2.5 mm ²	AWG 14	6.5 mm																												
3 mm ²	AWG 12	6.5 mm																												
4 mm ²	AWG 12	6.5 mm																												

Features

- Up to 3 Han-Yellock® multipliers can be used in one multiplier bloc
- By using the multipliers, the potential of one up to five contacts can be multiplied
- Needs 3 places in the Han-Modular® Docking frame and Hinged frame
- Wiring with male contacts only

Technical characteristics

Number of contacts	15
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Yellock

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Multiplier block

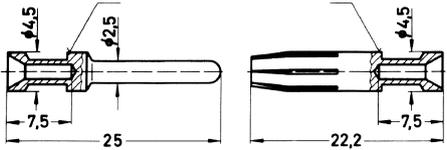


Number of contacts

15

16 A 500 V 6 kV 3



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han- <i>Yellock</i> [®] , Multiplier block, Crimp termination  Please order crimp contacts separately.	0.14 ... 4	09 14 015 3001	09 14 015 3101	
Han E [®] , Crimp contact, Contact surface: Silver plated 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107		

Features

- Snap-in assembly from mating side and from termination side
- Bus bar within bridge attachments
- Visible bridge position from mating side and from termination side
- Fast and easy exchange

Technical characteristics

Number of contacts	5
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey), RAL 3000 (flame red), RAL 5015 (sky blue)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Yellow


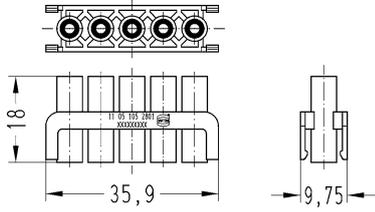

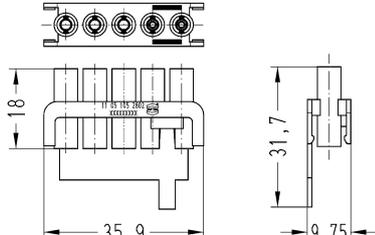

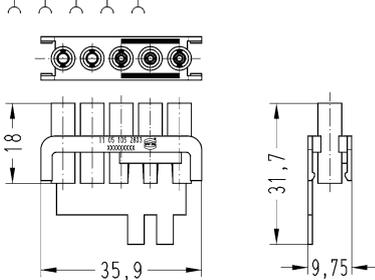
Specifications and approvals



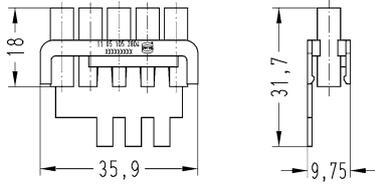


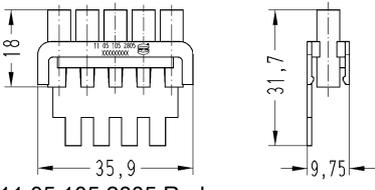

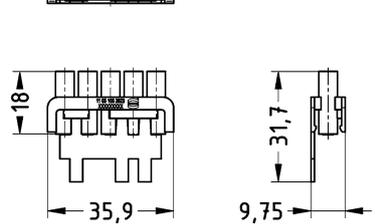
EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Number of contacts

5

Yellowlock

Identification	Part number Female	Drawing (dimensions in mm)
<p>Han-<i>Yellowlock</i>[®], Multiplier, 0 Bridged contacts, 5 Unbridged contacts</p> 	<p>11 05 105 2801</p>	<p>Circuit diagram</p>  
<p>Han-<i>Yellowlock</i>[®], Multiplier, 2 Bridged contacts, 3 Unbridged contacts</p> 	<p>11 05 105 2802</p>	<p>Circuit diagram</p>  
<p>Han-<i>Yellowlock</i>[®], Multiplier, 3 Bridged contacts, 2 Unbridged contacts</p> 	<p>11 05 105 2803</p>	<p>Circuit diagram</p>  

Identification	Part number Female	Drawing (dimensions in mm)
<p>Han-<i>Yellock</i>[®], Multiplier, 4 Bridged contacts, 1 Unbridged contacts</p> 	<p>11 05 105 2804</p>	<p>Circuit diagram</p>   
<p>Han-<i>Yellock</i>[®], Multiplier, 5 Bridged contacts, 0 Unbridged contacts</p>  	<p>11 05 105 2805 11 05 105 2815</p>	<p>Circuit diagram</p>    <p>11 05 105 2805 Red 11 05 105 2815 Blue</p>
<p>Han-<i>Yellock</i>[®], Multiplier, 2 Bridged contacts, 3 Bridged contacts</p> 	<p>11 05 105 2823</p>	<p>Circuit diagram</p>   

Yellock

Features

- Suitable for Han-Modular® modules
- Fast and tool-less assembly
- Snap-in assembly from mating side and from termination side
- Removal from mating side and from termination side possible

Technical characteristics

Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

Details

Han-Yellock® adapter frame

Han-Modular® series interfaces can be established using the Han-Yellock® adapter frame. The connection is based on a male/female contact arrangement.

Inserting the adapter frame in the housing:

The adapter frame can be snapped into the housing, bulkhead mounting, on the termination side and the mating side (refer to the illustration).

The lateral plastic tabs („B“) are pressed into the metal clamps on the housing.

The adapter frame then snaps in with a distinctly audible click.

① metal clamp

Removal of the adapter frame

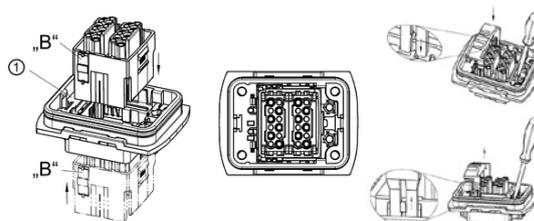
The removal tool part no. 11 99 000 0001 is required for disassembly. (see chapter 90)

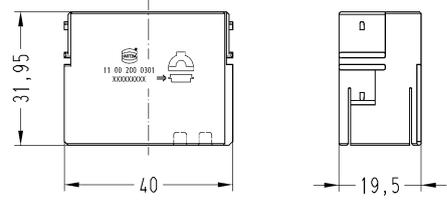
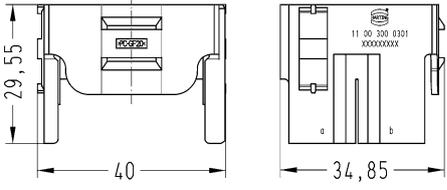
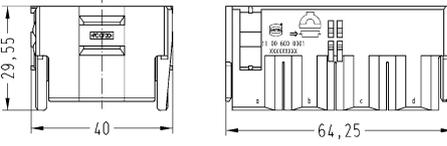
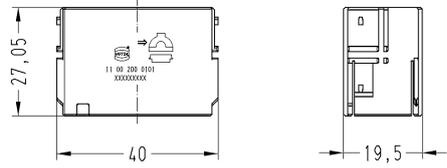
The removal tool is inserted into the metal clamp and pressed down as shown in the following illustration. A screwdriver need also be placed into the notch in the housing.

The removal tool should then be pulled outwards to remove the adapter frame from the housing.

The removal can be made from the termination side as well as from the mating side.

The process is identical for both housings, bulkhead mounting, and carrier hoods.



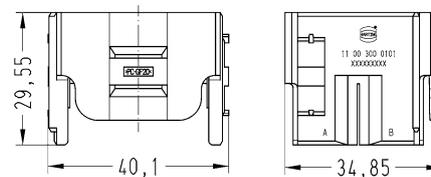
Identification	Part number	Drawing (dimensions in mm)
<p>Han-<i>Yellowlock</i>[®], Adapter frames, for bulkhead mounted housings, for Han-<i>Yellowlock</i>[®] 30, for Han-<i>Yellowlock</i>[®] 60</p> 	11 00 200 0301	
<p>Mounting/removal from termination side only!</p>		
<p>Han-<i>Yellowlock</i>[®], Adapter frames, for bulkhead mounted housings, for Han-<i>Yellowlock</i>[®] 30</p> 	11 00 300 0301	
<p>Han-<i>Yellowlock</i>[®], Adapter frames, for bulkhead mounted housings, for Han-<i>Yellowlock</i>[®] 60</p> 	11 00 600 0301	
<p>Han-<i>Yellowlock</i>[®], Adapter frames, for carrier hoods, for Han-<i>Yellowlock</i>[®] 30, for Han-<i>Yellowlock</i>[®] 60</p> 	11 00 200 0101	
<p>Mounting/removal from termination side only!</p>		

Identification Part number Drawing (dimensions in mm)

Han-Yellock®,
Adapter frames,
for carrier hoods,
for Han-Yellock® 30



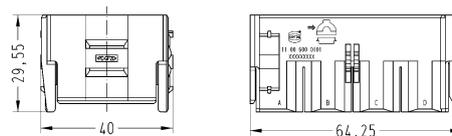
11 00 300 0101



Han-Yellock®,
Adapter frames,
for carrier hoods,
for Han-Yellock® 60



11 00 600 0101



Combinations	Han-Yellock® Hood/Housing				
	30	30	60	60	60
Han-Yellock® 20 Adapter frame (for Han-Yellock® 30 und 60)	1		2	1	
Han-Yellock® 30 Adapter frame		1			
Han-Yellock® 60 Adapter frame					1
Han-Yellock® Module	1		2	4	

Yellock

Features

- Snap-in assembly from mating side and from termination side
- Finger safe design
- Fast and tool-less assembly

Technical characteristics

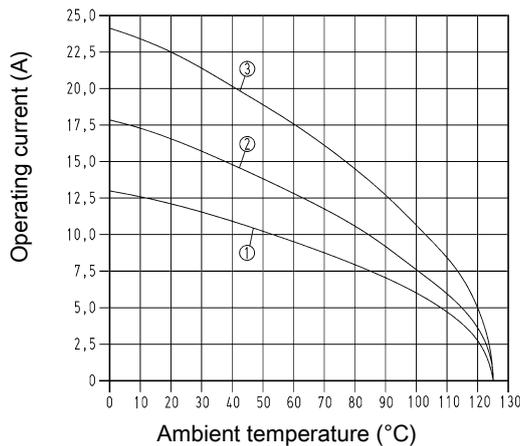
Number of contacts	25, 48
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Derating

Current carrying capacity

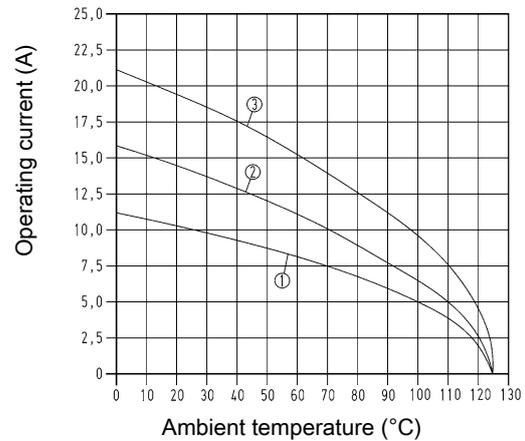
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²

Derating



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
DNV GL

Details

Crimping tools see chapter 90

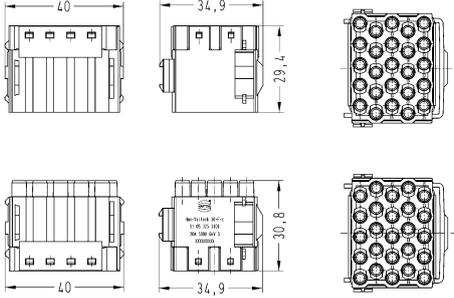
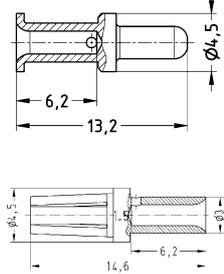
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

25

16 A 500 V 6 kV 3

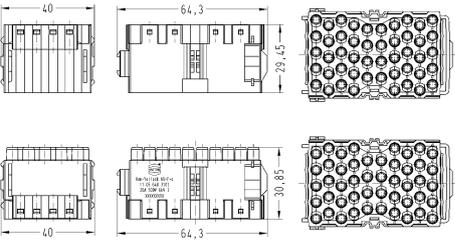
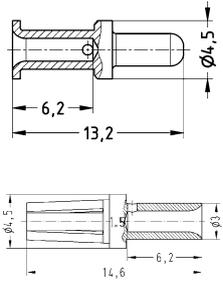
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
<p>Han-Yellock®, Monoblock, Crimp termination</p>  <p>Please order crimp contacts separately. ATTENTION! It is not possible to use 2 monoblocks 30 in the Han-Yellock® 60 series!</p>	0.14 ... 4	11 05 325 3001	11 05 325 3101																												
<p>Han-Yellock®, Crimp contact, Contact surface: Silver plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208																												
<p>Han-Yellock®, Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228	<table border="1"> <thead> <tr> <th colspan="2">Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>6.5 mm</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>6.5 mm</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>6.5 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>6.5 mm</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> </tbody> </table> <p>Removal tool 09 99 000 0319 See chapter 90</p>	Wire gauge		Stripping length	0.14-0.37 mm ²	AWG 26-22	6.5 mm	0.5 mm ²	AWG 20	6.5 mm	0.75 mm ²	AWG 18	6.5 mm	1 mm ²	AWG 18	6.5 mm	1.5 mm ²	AWG 16	6.5 mm	2.5 mm ²	AWG 14	6.5 mm	3 mm ²	AWG 12	6.5 mm	4 mm ²	AWG 12	6.5 mm
Wire gauge		Stripping length																													
0.14-0.37 mm ²	AWG 26-22	6.5 mm																													
0.5 mm ²	AWG 20	6.5 mm																													
0.75 mm ²	AWG 18	6.5 mm																													
1 mm ²	AWG 18	6.5 mm																													
1.5 mm ²	AWG 16	6.5 mm																													
2.5 mm ²	AWG 14	6.5 mm																													
3 mm ²	AWG 12	6.5 mm																													
4 mm ²	AWG 12	6.5 mm																													

Number of contacts

48

16 A 500 V 6 kV 3

Yellock

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
<p>Han-Yellock®, Monoblock, Crimp termination</p>  <p>Please order crimp contacts separately.</p>	0.14 ... 4	11 05 648 3001	11 05 648 3101																												
<p>Han-Yellock®, Crimp contact, Contact surface: Silver plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208																												
<p>Han-Yellock®, Crimp contact, Contact surface: Gold plated</p> 	0.14 ... 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228	<table border="1"> <thead> <tr> <th colspan="2">Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>6.5 mm</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>6.5 mm</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>6.5 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>6.5 mm</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> </tbody> </table> <p>Removal tool 09 99 000 0319 See chapter 90</p>	Wire gauge		Stripping length	0.14-0.37 mm ²	AWG 26-22	6.5 mm	0.5 mm ²	AWG 20	6.5 mm	0.75 mm ²	AWG 18	6.5 mm	1 mm ²	AWG 18	6.5 mm	1.5 mm ²	AWG 16	6.5 mm	2.5 mm ²	AWG 14	6.5 mm	3 mm ²	AWG 12	6.5 mm	4 mm ²	AWG 12	6.5 mm
Wire gauge		Stripping length																													
0.14-0.37 mm ²	AWG 26-22	6.5 mm																													
0.5 mm ²	AWG 20	6.5 mm																													
0.75 mm ²	AWG 18	6.5 mm																													
1 mm ²	AWG 18	6.5 mm																													
1.5 mm ²	AWG 16	6.5 mm																													
2.5 mm ²	AWG 14	6.5 mm																													
3 mm ²	AWG 12	6.5 mm																													
4 mm ²	AWG 12	6.5 mm																													

Features

- Hoods/housings for industrial applications
- Highly EMC resistant
- High robustness due to internal locking mechanism
- Compatible with inserts size Han® 3 A

Technical characteristics

Un-/locking temperature	-10 ... +85 °C
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Zinc passivation
Colour (hood/housing)	RAL 7021 (black grey), Metallic
Material (seal)	NBR
Material (locking)	Polyamide, Stainless steel
Colour (locking)	Melon yellow
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

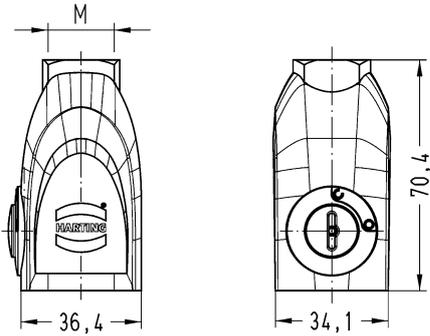
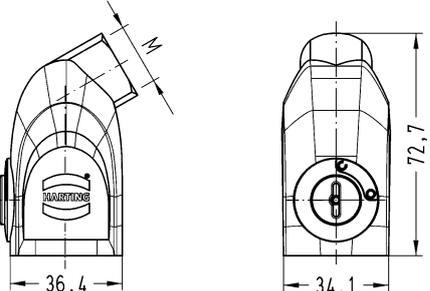
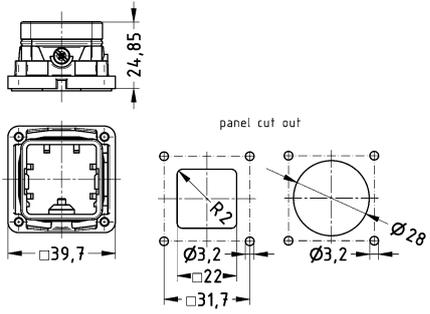
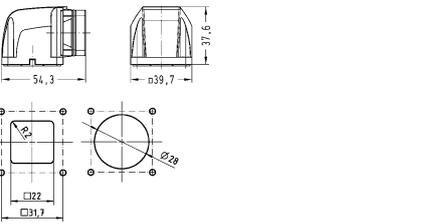
EN 60664-1
IEC 61984
DNV GL

Details

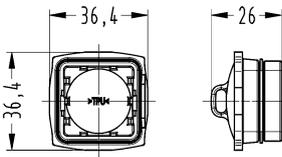
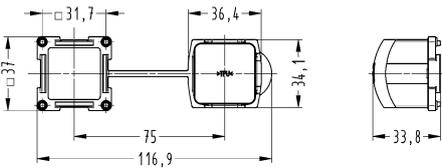

For use with inserts Han® Q, the seal on the insert has to be removed.

Hoods/housings for industrial applications
Push button

Yellock

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Yellock®, Hoods, Top entry</p> 	<p>1x M20 1x M25</p>	<p>11 20 003 1400 11 20 003 1401</p>	
<p>Han-Yellock®, Hoods, Side entry</p> 	<p>1x M20 1x M25</p>	<p>11 20 003 1600 11 20 003 1601</p>	
<p>Han-Yellock®, Bulkhead mounted housings, Straight</p> 		<p>11 20 003 0300</p>	
<p>Han-Yellock®, Bulkhead mounted housings, Angled</p> 		<p>11 20 003 0800</p>	

Yellock

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-<i>Yellock</i>®, Protection cover, for hoods, Thermoplastic</p> 		11 20 003 5456	
<p>Han-<i>Yellock</i>®, Protection cover, for bulkhead mounted housings, Thermoplastic, With seal</p> 		11 20 003 5406	
<p>Han-<i>Yellock</i>®, Protection cover, for bulkhead mounted housings, Thermoplastic</p> 		11 20 003 5407	

Features

- for three Han-Yellock® modules
- High robustness due to internal locking mechanism
- Two-part hood
- Earthed contacts PE in crimped or Han-Quick Lock® termination
- Protection cover retrofit on housing side

Technical characteristics



Un-/locking temperature	-10 ... +85 °C
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast, Aluminium die-cast
Surface (hood/housing)	Zinc passivation, Powder-coated, Passivated
Colour (hood/housing)	Metallic, RAL 7021 (black grey), RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide, Stainless steel
Colour (locking)	Melon yellow
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals


EN 60664-1
IEC 61984
DNV GL

Yellock

Details



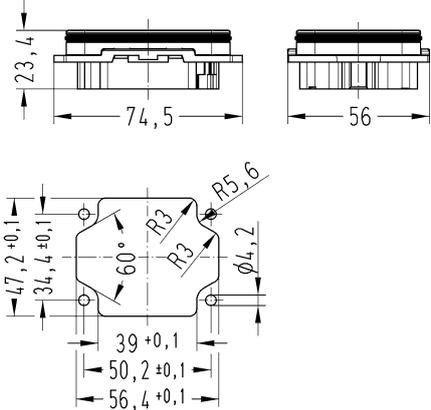
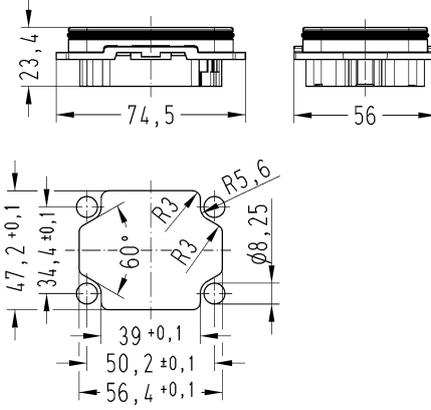
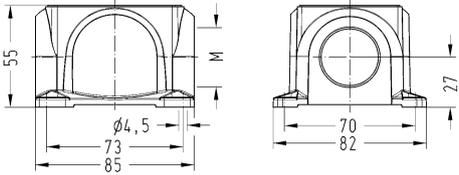
- ① M4 fixing screw (screw length > 20 mm, tightening torque: 1Nm)
- ② Panel fastener (tightening torque: 2.3 Nm)

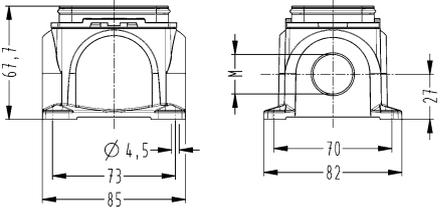
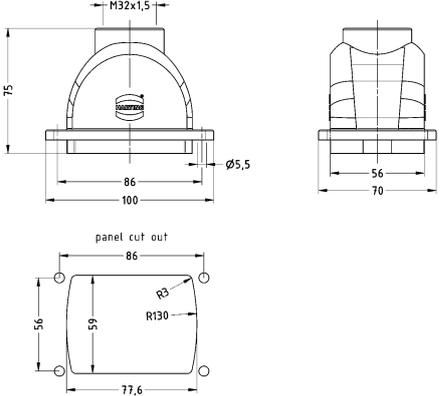
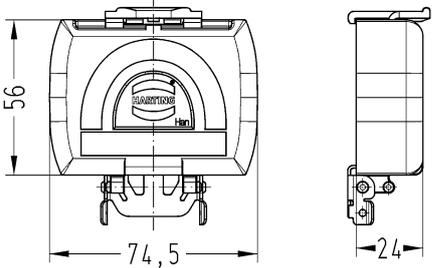


- ① Shell with top entry
- ② Cable entry M20 ... M40
- ③ Carrier hood with push button release
- ④ Bulkhead mounted housings

Hoods/housings for industrial applications

Yellock

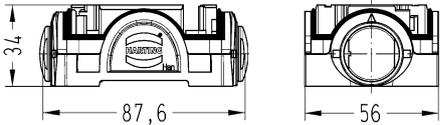
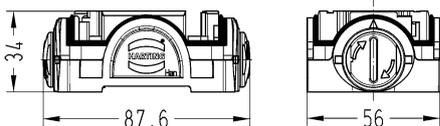
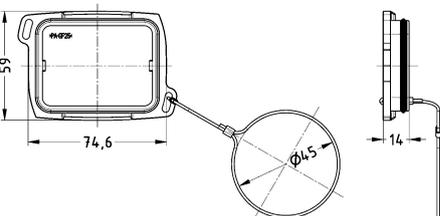
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Yellock®, Bulkhead mounted housings</p> 		11 12 300 0301	
<p>Han-Yellock®, Bulkhead mounted housings, Pack contents: incl. 4 panel fastener</p> 		11 12 300 0302	
<p>Han-Yellock®, Surface mounted housing, Side entry</p> 	<p>1x M20 1x M25 1x M32 2x M20 2x M25 2x M32</p>	<p>11 12 300 1200 11 12 300 1201 11 12 300 1202 11 12 300 1204 11 12 300 1205 11 12 300 1206</p>	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Yellock®, Surface mounted housing, incl. bulkhead mounted housings, Side entry</p> 	<p>1x M20 1x M25 1x M32 2x M20 2x M25 2x M32</p>	<p>11 12 300 1210 11 12 300 1211 11 12 300 1212 11 12 300 1214 11 12 300 1215 11 12 300 1216</p>	
<p>Han-Yellock®, Panel feed through housing, Top entry</p> 	<p>1x M32</p>	<p>11 12 300 1702</p>	
<p>Han-Yellock®, Protection cover, for bulkhead mounted housings, Thermoplastic</p> 		<p>11 12 300 5401</p>	

Hoods/housings for industrial applications
Push button

Yellock

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han-Yellock®, Shell, Top entry	1x M20 1x M25 1x M32	11 12 300 1400 11 12 300 1401 11 12 300 1402		
Han-Yellock®, Shell, Side entry	1x M20 1x M25 1x M32	11 12 300 1500 11 12 300 1501 11 12 300 1502		
Han-Yellock®, Shell, White, Side entry	1x M20	11 12 300 1510		
Han-Yellock®, Shell, EMC version, Side entry	1x M25	11 12 300 1581		
Han-Yellock®, Shell, Angled entry	1x M20 1x M25 1x M32	11 12 300 1600 11 12 300 1601 11 12 300 1602		

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-<i>Yellock</i>®, Carrier hood, Plain push button</p> 		11 12 300 0100	
<p>Han-<i>Yellock</i>®, Carrier hood, Push button, slot</p> 		11 12 300 0110	
<p>Han-<i>Yellock</i>®, Protection cover, for carrier hoods, With fixing cord, Thermoplastic</p> 		11 12 300 5451	

Yellock

Hoods/housings for outdoor applications

Yellock

Identification	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Bulkhead mounted housings 	11 13 300 0301	
Han- <i>Yellock</i> ®, Bulkhead mounted housings, Pack contents: incl. 4 panel fastener 	11 13 300 0302	

Hoods/housings for outdoor applications
Push button

Yellock

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Shell, Top entry	1x M25	11 13 300 1401	
Han- <i>Yellock</i> ®, Shell, Side entry	1x M25	11 13 300 1501	
Han- <i>Yellock</i> ®, Shell, Angled entry	1x M25	11 13 300 1601	
Han- <i>Yellock</i> ®, Carrier hood, Plain push button		11 13 300 0100	
Han- <i>Yellock</i> ®, Carrier hood, Push button, slot		11 13 300 0110	

Features

- for six Han-Yellock® modules
- High robustness due to internal locking mechanism
- Two-part hood
- Earthed contacts PE in crimped or Han-Quick Lock® termination
- Protection cover retrofit on housing side



Technical characteristics

Un-/locking temperature	-10 ... +85 °C
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast, Aluminium die-cast
Surface (hood/housing)	Passivated, Powder-coated
Colour (hood/housing)	Metallic, RAL 7021 (black grey), RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide, Stainless steel
Colour (locking)	Melon yellow
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

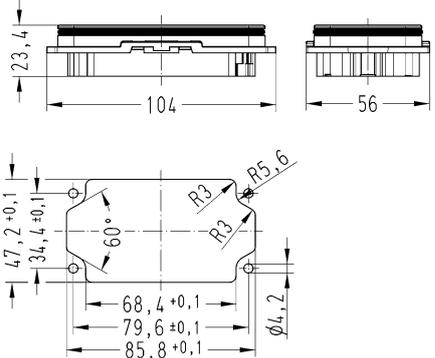
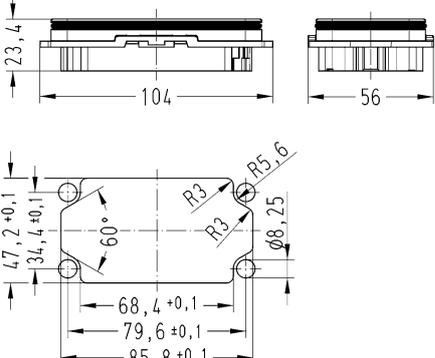
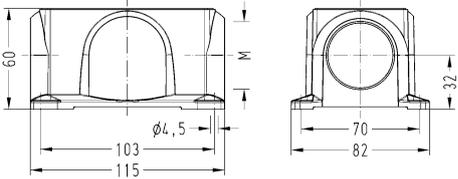
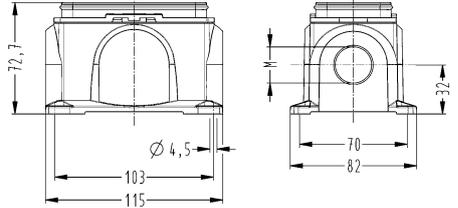
EN 60664-1
IEC 61984
DNV GL

Details

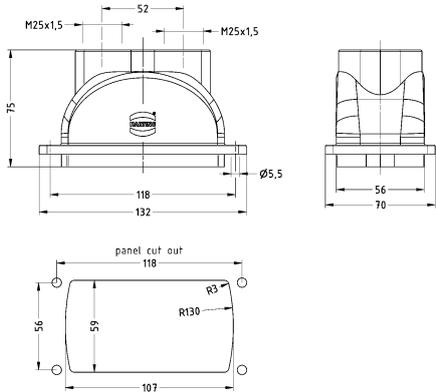
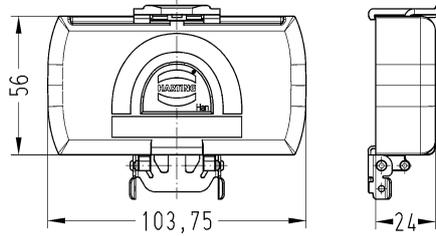


- ① M4 fixing screw (screw length > 20 mm, tightening torque: 1Nm)
- ② Panel fastener (tightening torque: 2.3 Nm)

Hoods/housings for industrial applications

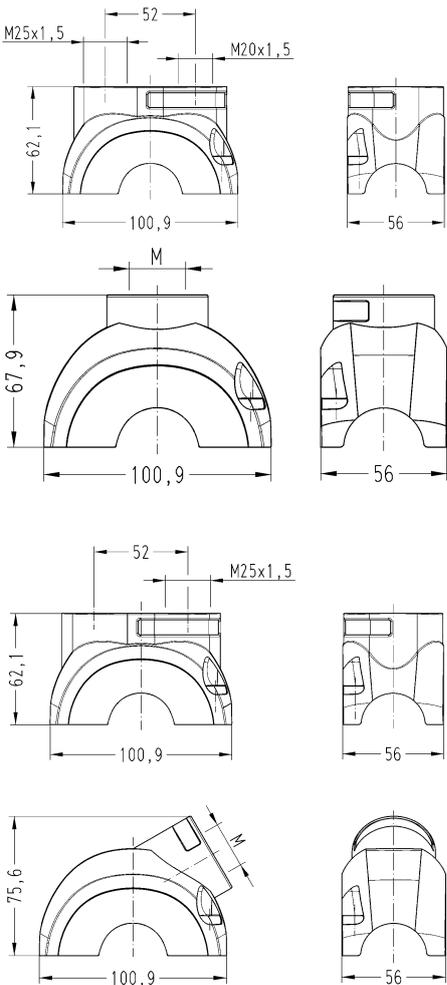
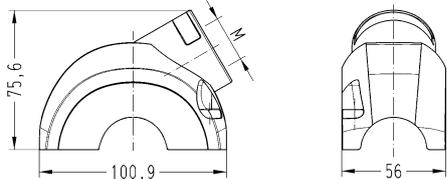
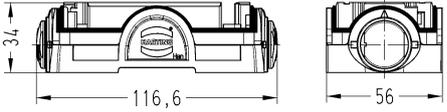
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Yellock®, Bulkhead mounted housings</p> 		11 12 600 0301	
<p>Han-Yellock®, Bulkhead mounted housings, Pack contents: incl. 4 panel fastener</p> 		11 12 600 0302	
<p>Han-Yellock®, Surface mounted housing, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>11 12 600 1201 11 12 600 1202 11 12 600 1203 11 12 600 1205 11 12 600 1206 11 12 600 1207</p>	
<p>Han-Yellock®, Surface mounted housing, incl. bulkhead mounted housings, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>11 12 600 1211 11 12 600 1212 11 12 600 1213 11 12 600 1215 11 12 600 1216 11 12 600 1217</p>	

Yellock

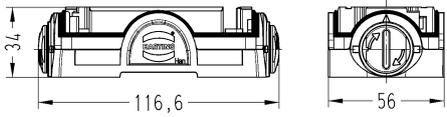
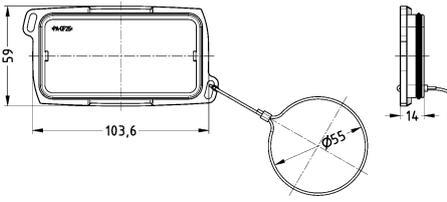
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-<i>Yellock</i>[®], Panel feed through housing, Top entry</p> 	<p>2x M25</p>	<p>11 12 600 1711</p>	
<p>Han-<i>Yellock</i>[®], Protection cover, for bulkhead mounted housings, Thermoplastic</p> 		<p>11 12 600 5401</p>	

Hoods/housings for industrial applications
Push button

Yellock

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-Yellock®, Shell, Top entry</p> 	<p>1x M20, 1x M25 1x M25 1x M32 1x M40 2x M25</p>	<p>11 12 600 1415 11 12 600 1401 11 12 600 1402 11 12 600 1403 11 12 600 1411</p>	
<p>Han-Yellock®, Shell, Side entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>11 12 600 1501 11 12 600 1502 11 12 600 1503</p>	
<p>Han-Yellock®, Carrier hood, Plain push button</p> 		<p>11 12 600 0100</p>	

Yellock

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-<i>Yellock</i>®, Carrier hood, Push button, slot</p> 		11 12 600 0110	
<p>Han-<i>Yellock</i>®, Protection cover, for carrier hoods, With fixing cord, Thermoplastic</p> 		11 12 600 5451	

Hoods/housings for outdoor applications

Yellock

Identification	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Bulkhead mounted housings	11 13 600 0301	
Han- <i>Yellock</i> ®, Bulkhead mounted housings, Pack contents: incl. 4 panel fastener	11 13 600 0302	
 		

Hoods/housings for outdoor applications
Push button

Yellock

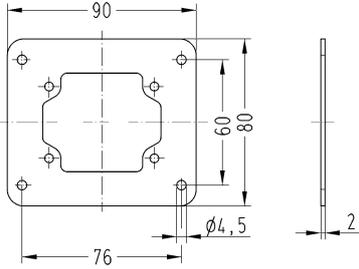
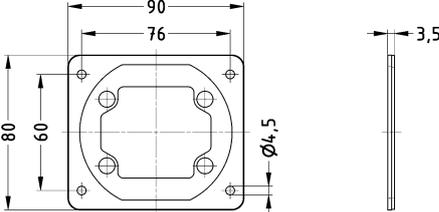
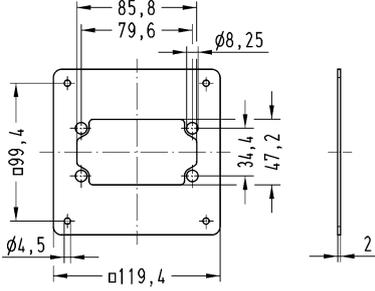
Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han- <i>Yellock</i> ®, Shell, Top entry	1x M32 1x M40	11 13 600 1402 11 13 600 1403		
Han- <i>Yellock</i> ®, Shell, Side entry	1x M32	11 13 600 1502		
Han- <i>Yellock</i> ®, Carrier hood, Plain push button		11 13 600 0100		
Han- <i>Yellock</i> ®, Carrier hood, Push button, slot		11 13 600 0110		

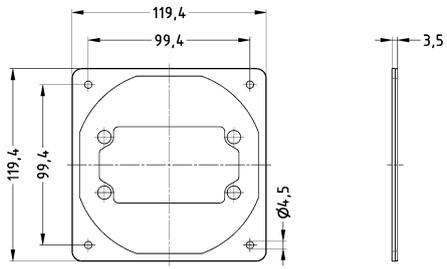
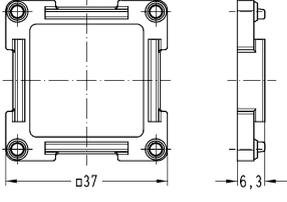
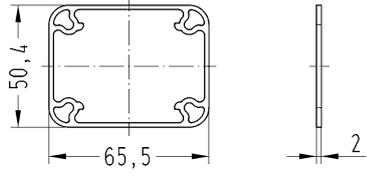
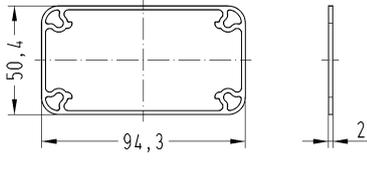
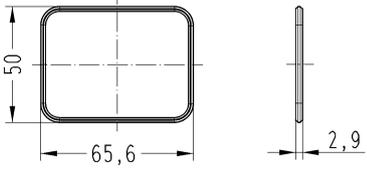
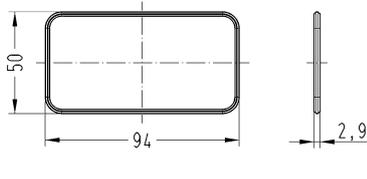
Technical characteristics

Material (seal) NBR
 Colour (seal) Black

Technical characteristics

Material (accessories) Steel, zinc plated, Thermoplastic compliant
 RoHS

Identification	Part number	Drawing (dimensions in mm)
Adapter plate, for Han- <i>Yellowlock</i> ® 30  Circular 68 mm punch for Han- <i>Yellowlock</i> ® panel cut out	11 00 300 9601	
Adapter plate, for Han- <i>Yellowlock</i> ® 30, With seal 	11 00 300 9603	
Adapter plate, for Han- <i>Yellowlock</i> ® 60 	11 00 600 9601	

Identification		Part number	Drawing (dimensions in mm)
<p><i>Yellowlock</i></p> <p>Adapter plate, for Han-<i>Yellowlock</i>® 60, With seal</p>		11 00 600 9603	
<p>Flange gasket, for Han-<i>Yellowlock</i>® 10</p>		11 20 003 9904	
<p>Flange gasket, for Han-<i>Yellowlock</i>® 30</p>		11 00 300 9503	
<p>Flange gasket, for Han-<i>Yellowlock</i>® 60</p>		11 00 600 9503	
<p>Profile gasket, for Han-<i>Yellowlock</i>® 10</p>		11 20 003 9905	
<p>Profile gasket, for Han-<i>Yellowlock</i>® 30</p>		11 00 300 9501	
<p>Profile gasket, for Han-<i>Yellowlock</i>® 60</p>		11 00 600 9501	

Identification	Part number	Drawing (dimensions in mm)
Shaped gasket, for Han- <i>Yellowlock</i> ® 30	11 00 300 9502	
Shaped gasket, for Han- <i>Yellowlock</i> ® 60	11 00 600 9502	
Shielding frame, for Han- <i>Yellowlock</i> ® 30, for fastening with cable ties	11 12 300 5201	
Shielding frame, for Han- <i>Yellowlock</i> ® 30, Earthing with saddle terminals	11 12 300 5202	
Shielding frame, for Han- <i>Yellowlock</i> ® 60, for fastening with cable ties	11 12 600 5201	
Han- <i>Yellowlock</i> ®, Coding element, Pack contents: 8 pieces per frame	11 00 000 9501	

Yellowlock

Identification	Part number	Drawing (dimensions in mm)
<p>Fixing screws, M3, for Han- <i>Yellowlock</i>® 10</p> 	11 20 003 9903	
<p>Han- <i>Yellowlock</i>®, Identification strip, Pack contents: 500 pieces on a reel</p> 	11 00 000 9601	
<p>PE / N rail, Suitable for Han- <i>Yellowlock</i>® 30 surface mounted housing, Pack contents: 1 bar with fixing screws</p> 	11 00 000 9512	
<p>PE / N rail, Suitable Han- <i>Yellowlock</i>® 60 surface mounted housing, Pack contents: 1 bar with fixing screws</p> 	11 00 000 9511	

Technical characteristics

Contact resistance	≤2 mΩ
Material (contacts)	Copper alloy
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

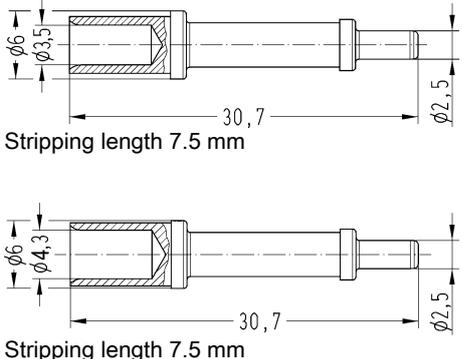
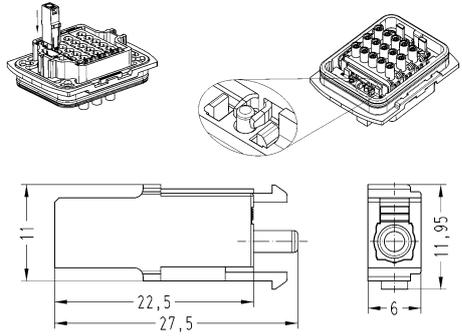
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
<p>Han-<i>Yellowlock</i>[®], Crimp termination, PE contact, Contact surface: Silver plated</p> 	<p>6 10</p>	<p>11 00 000 9509 11 00 000 9510</p>	 <p>Stripping length 7.5 mm</p> <p>Stripping length 7.5 mm</p>
<p>Han-<i>Yellowlock</i>[®], Han-Quick Lock[®] termination, PE contact chamber, Contact surface: Silver plated</p> 	<p>0.5 ... 2.5</p>	<p>11 05 001 2601</p>	 <p>Stripping length 10 mm</p>

Yellow



The KR 6 R900 sixx (KR AGILUS) with Han-Yello[®] combines functional design and high technical requirements.

Photo courtesy: KUKA Roboter GmbH

Contents	Page
Modules and monoblocks for Han-Eco® Modular	Han 29.3
Han-Eco® Modular for industrial applications	Han 29.7
Han-Eco® Modular for outdoor applications	Han 29.20
Han-Eco® A for industrial applications	Han 29.33
Han-Eco® A for outdoor applications	Han 29.40
Han-Eco® B for industrial applications.....	Han 29.47
Han-Eco® B for outdoor applications.....	Han 29.76
Accessories	Han 29.100

Han-Eco® Modular
19 41 xxx xxxx



Han-Eco® A
19 46 xxx xxxx



Han-Eco® B
19 43 xxx xxxx



The Han-Eco® B series is a new series of hoods and housings in the Han-Eco® portfolio that comes in sizes 6B – 24B. This series is completely compatible with the Han® B industrial standard. Standard inserts and modules in conjunction with the hinged frames from the Han-Modular® portfolio may be used.

Highlights Han-Eco® B



Backwards compatibility with the Han® B metal hoods and housings



Rear mounting for the inserts enables faster installation



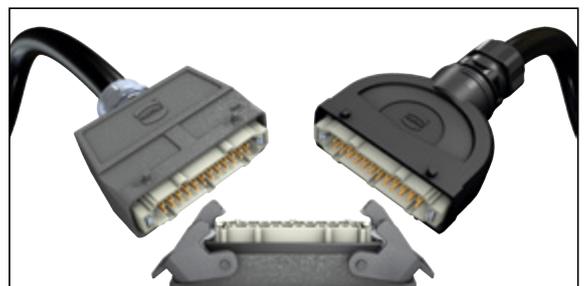
Minimal weight with excellent mechanical robustness




Outdoor variant is available for more extreme environmental conditions



"Click and mate" installation ensures secure assembly



70 - 100 A		Han® 100 A Axial module	Han® 100 A Crimp module	Han® 100 A Single module	Han® 70 A Crimp module
					
	Number of contacts	2*	2*	1	2
	Electrical data	100 A / 1000 V	100 A / 1000 V	100 A / 830 V	70 A / 1000 V
	Termination type	Axial screw termination	Crimp termination	Crimp termination	Crimp termination
	Cross-section	16 ... 35 mm ²	10 ... 35 mm ²	10 ... 35 mm ²	6 ... 25 mm ²
	Male module (M)	09 14 002 2651	09 14 002 3051	09 14 001 3031	09 14 002 3041
	Female module (F)	09 14 002 2751	09 14 002 3151	09 14 001 3131	09 14 002 3141
40 - 70 A		Han® 70 A Axial module	Han® 70 A Hybrid module	Han® 40 A Axial module	Han® C Axial module
					
	Number of contacts	2	1 + (4 x Han E®)	2	3
	Electrical data	70 A / 1000 V	70 A / 1000 V	40 A / 1000 V	40 A / 690 V
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	14 ... 22 mm ²	14 ... 22 mm ²	6 ... 10 mm ²	6 ... 10 mm ²
	Male module (M)	09 14 002 2647	09 14 005 2647	09 14 002 2602	09 14 003 2602
	Female module (F)	09 14 002 2742	09 14 005 2742	09 14 002 2702	09 14 003 2702
16 A		Han E® Quick Lock module	Han® EE Quick Lock module	Han® ES module	Han E® screw module
					
	Number of contacts	6	8	5	5
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 400 V	16 A / 230/400 V
	Termination type	Quick Lock termination	Quick Lock termination	Cage clamp termination	Screw termination
	Cross-section	0.5 ... 2.5 mm ²	0.5 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.5 ... 2.5 mm ²
	Male module (M)	09 14 006 2633	09 14 008 2633	09 14 005 2616	09 14 005 2601
	Female module (F)	09 14 006 2733	09 14 008 2733	09 14 005 2716	09 14 005 2701
≤ 10 A		Han DD® Quick Lock module	Han DD® Quick Lock module		
					
	Number of contacts	12, silver plated	12, gold plated		
	Electrical data	10 A / 250 V	10 A / 250 V		
	Termination type	Quick Lock termination	Quick Lock termination		
	Cross-section	0.25 ... 1.5 mm ²	0.25 ... 1.5 mm ²		
Male module (M)	09 14 012 2632	09 14 012 2634			
Female module (F)	09 14 012 2732	09 14 012 2734			

* Double module, requires two places in the frame

Han Eco

40 A		Han® A Crimp module	Han® C module	Han® CC module	Han® CD module
	Number of contacts	2	3	4	3 + 4
	Electrical data	40 A / 1000 V	40 A / 690 V	40 A / 830 V	40 A + 10 A / 830 V
	Cross-section	1.5 ... 10 mm ²	1.5 ... 6 mm ²	1.5 ... 6 mm ²	0.14 ... 6 mm ²
Termination type	Crimp termination, Han® C				
Male module (M)	09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001	
Female module (F)	09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101	
16 A		Han E® module	Han® EE module	Han® EEE module	Han E® Protected module
	Number of contacts	6	8	20*	6
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 500 V	16 A / 830 V
	Cross-section	0.14 ... 4 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²
Termination type	Crimp termination, Han E®				
Male module (M)	09 14 006 3001	09 14 008 3001	09 14 020 3001	09 14 006 3041	
Female module (F)	09 14 006 3101	09 14 008 3101	09 14 020 3101	09 14 006 3141	
≤ 10 A		Han DD® module	Han® DDD module	Han DD® Quad module	
	Number of contacts	12	17	25	
	Electrical data	10 A / 250 V	10 A / 150 V	4 A / 50 V	
	Cross-section	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.08 ... 0.52 mm ²	
Termination type	Crimp termination, Han D®				
Male module (M)	09 14 012 3002	09 14 017 3001	09 14 025 3001		
Female module (F)	09 14 012 3102	09 14 017 3101	09 14 025 3101		
High voltage		Han® HV module 40 A	Han® HV module 16 A	Han® HV Single module	
	Number of contacts	2*	2*	2	
	Electrical data	40 A / 2900/5000 V	16 A / 2900/5000 V	16 A / 2500 V	
	Cross-section	1.5 ... 10 mm ²	0.14 ... 4 mm ²	0.14 ... 4 mm ²	
Termination type	Crimp termination, Han E®				
Male module (M)	09 14 002 3023	09 14 002 3021	09 14 002 3025		
Female module (F)	09 14 002 3123	09 14 002 3121	09 14 002 3125		

* Double module, requires two places in the frame

Modules and monoblocks for Han-Eco® Modular



Han Eco

Han® RJ45 modules	Han® RJ45 module	for patch cable	for IDC	for patch cable	for IDC and preLink
	- 8 contacts - Cat. 6 _A - 10 Gbit/s				
	Part numbers	Male module (M) 09 14 001 4623	Male module (M) 09 14 001 4623	Female module (F) 09 14 001 4721	Female module (F) 09 14 001 4722
		Adapter for patch cables: 09 14 000 9966	RJ Industrial IDC: 09 45 400 1560	-	RJ45 female IDC: 09 14 545 1561
	Patch cable cat. 6: 09 47 474 71xx	-	-	RJ45 female preLink: 09 14 008 4720	
Han-Quintax® modules	Quintax module	Han-Quintax®	Han® High Density Quintax	Han D® Coax	Han E® Coax
	Number of contacts	2 x 4*	2 x 8*	2 x Coax*	2 x Coax*
	Male module (M)	09 14 002 3001	09 14 002 3001	09 14 002 3001	09 14 002 3001
	Female module (F)	09 14 002 3101	09 14 002 3101	09 14 002 3101	09 14 002 3101
	Insert (Cable Ø ≤ 9.5 mm)				
	Data rate	100 Mbit/s (Cat. 5e)	100 Mbit/s (Cat. 5e)	≤ 500 Mhz / 75 Ω	≤ 500 Mhz / 50 Ω
	Electrical data	10 A / 50 V	5 A / 50 V	10 A / 50 V	16 A / 50 V
	Cross-section	0.14 ... 2.5 mm ²	0.09 ... 0.52 mm ²	0.14 ... 2.5 mm ²	0.14 ... 4 mm ²
	Termination type	Crimp termination, Han D®		Crimp termination, Han D®	Crimp termination, Han E®
	Male insert (M)	09 15 004 3013	09 15 008 3013	09 15 001 3013	09 15 001 3023
Female insert (F)	09 15 004 3113	09 15 008 3113	09 15 001 3113	09 15 001 3123	
PE shielding termination	Optional shielding termination to the hinged frame with the aid of Han-Quintax® metal adapter 09 14 000 9915				
Han® GigaBit – Han® MegaBit modules	Adapter Modul	Han® GigaBit module	Han® MegaBit module	Han® MegaBit module with 1 cable entry	Han® Shielded module
	Male module (M)	09 14 001 3011	09 14 001 3011	09 14 001 3011	09 14 001 3011
	Female module (F)	09 14 001 3111	09 14 001 3111	09 14 001 3111	09 14 001 3111
	Insert (Cable Ø ≤ 14 mm)				
	Number of contacts	8	2 x 4	8	20
	Data rate	10 Gbit/s (Cat. 6 _A)	2 x 100 Mbit/s (Cat. 5e)	1 Gbit/s (Cat. 5e)	
	Electrical data	5 A / 50 V	10 A / 50 V	10 A / 50 V	4 A / 32 V
	Cross-section	0.09 ... 0.52 mm ²	0.14 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.09 ... 0.52 mm ²
	Termination type	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub
	Shielding termination	Crimp flange	2 x crimp flange	Crimp flange	Crimp flange
Male insert (M)	09 14 008 3011	09 14 008 3016	09 14 008 3021	09 14 020 3013	
Female insert (F)	09 14 008 3111	09 14 008 3116	09 14 008 3121	09 14 020 3113	
	with PE shielding termination	with PE shielding termination	with PE shielding termination	-	
Male insert (M)	09 14 008 3012	09 14 008 3017	09 14 008 3022		
Female insert (F)	09 14 008 3112	09 14 008 3117	09 14 008 3122		
Serial Bus modules		Han D-Sub module	Han® USB module	Han® FireWire module	
	Number of contacts	9 + shielding	8	6	
	Datenrate	12 Mbit/s (Profibus)	5 Gbit/s (USB 3.0)	400 Mbit/s (IEEE 1394a)	
	Electrical data	5 A / 50 V	1 A / 50 V	1 A / 50 V	
	Cross-section	0.09 ... 0.52 mm ²			
Termination type	Crimp termination, D-Sub	USB patch cable	FireWire patch cable		
Male module (M)	09 14 009 3001	09 14 001 4601	09 14 001 4611		
Female module (F)	09 14 009 3101	09 14 001 4703	09 14 001 4711		

* Double module, requires two places in the frame

For more technical details see chapter 06

Removal tools 09 99 000 0331, 09 99 000 0828 and 09 99 000 0842 see chapter 90

* Take care of the wiring space! Choose inner positions.

Han Eco

	Han® SC module	Han® Multi module	Han® Multi module
Number of contacts	4	4	12*
Male module (M)	09 14 004 4701	09 14 004 4501	09 14 012 4501
Female module (F)	09 14 004 4713	09 14 004 4512	09 14 012 4512
Contacts			
1 mm POF	20 10 001 5211	Male: 20 10 001 4211 Female: 20 10 001 4221	Male: 20 10 001 4211 Female: 20 10 001 4221
1 mm POF Fast assembly termination	20 10 001 5217		
SI-Fibre 200 / 230 µm Multi-Mode	20 10 230 5211	Male: 20 10 230 4211 Female: 20 10 230 4221	Male: 20 10 230 4211 Female: 20 10 230 4221
GI-Fibre 50-62.5 / 125 µm Multi-Mode	20 10 125 5211	Male: 20 10 125 4212 Female: 20 10 125 4222	Male: 20 10 125 4212 Female: 20 10 125 4222

	Han-Eco® PE module	Han® Dummy module
Field of application	for Han-Eco® hoods/housings only	to fill-up empty module places
Number of contacts	1 x PE	
Electrical data		
Cross-section	1.5 ... 16 mm ²	
Termination type	Screw termination	
Male module (M)	19 41 001 2600	09 14 000 9950
Female module (F)	19 41 001 2700	

* Double module, requires two places in the frame

	6 B	10 B	16 B	24 B
Number of contacts	10	14	20	28
Electrical data	16 A / 500 V			
Cross section	0.75 ... 2.5 mm ²			
Termination type	Screw termination	Screw termination	Screw termination	Screw termination
Male	19 41 010 2601	19 41 014 2601	19 41 020 2601	19 41 028 2601
Female	19 41 010 2701	19 41 014 2701	19 41 020 2701	19 41 028 2701

Features

- With integrated cable gland
- Optional PE contact module to hold the protective ground conductor
- Suitable for applications according to protection class II

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Colour (seal)	RAL 9005 (jet black)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

Specifications and approvals

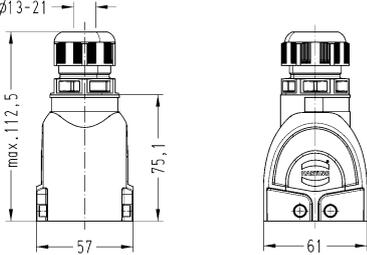
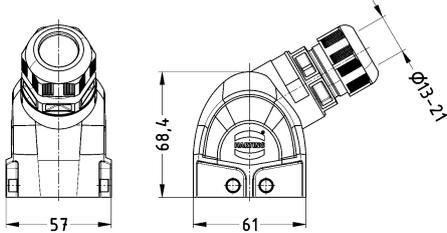
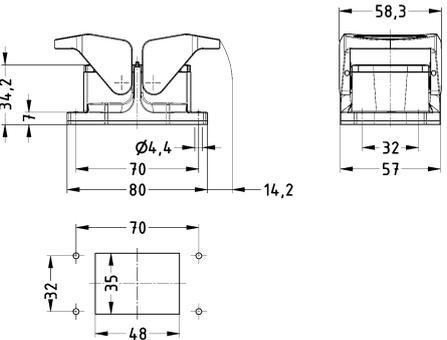
IEC 61984
 EN 45545-2 R22: HL1, HL2, HL3
 EN 45545-2 R23: HL1, HL2, HL3
 EN 45545-2 R24: HL1, HL2, HL3
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

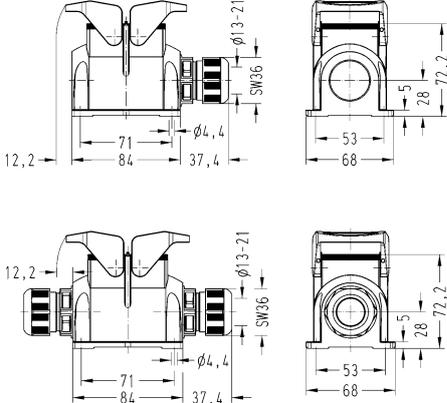
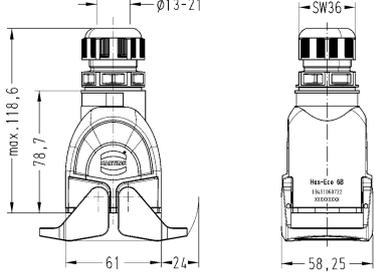
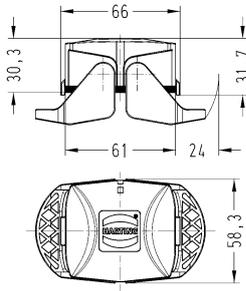
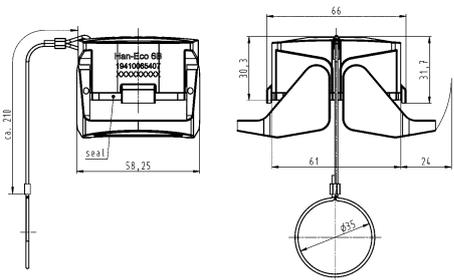
Details

Assembly dimensions are identical for the Han® B bulkhead mounted housings - not mating compatible with the hoods and housings of the series Han® B.

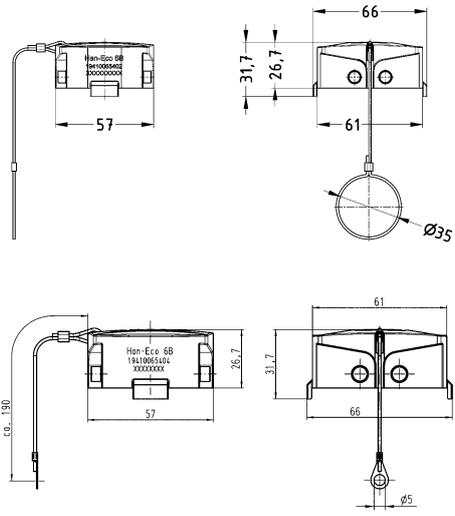
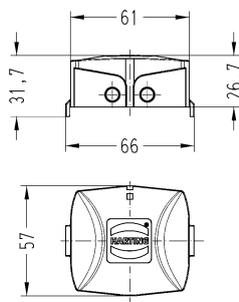
Double locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M32	13 ... 21	19 41 106 0422	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M32	13 ... 21	19 41 106 0522	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 006 0301	 <p data-bbox="962 1603 1098 1630">Panel cut out</p>

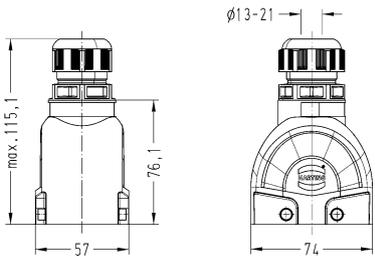
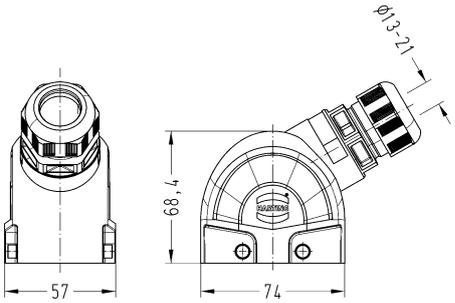
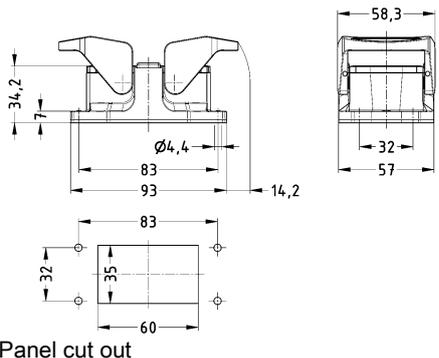
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M32 2x M32</p>	<p>13 ... 21 13 ... 21</p>	<p>19 41 106 0232 19 41 106 0272</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 41 106 0722 19 41 106 0723</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p> 			<p>19 41 006 5406</p>	
<p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 006 5407</p>	

Han
Eco

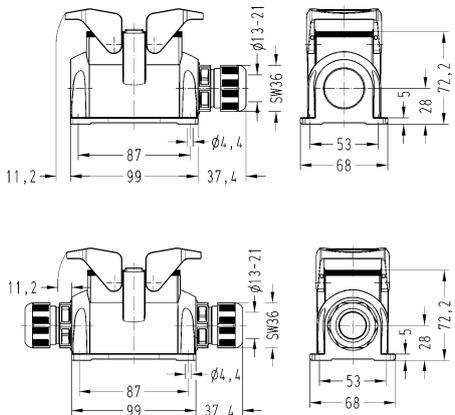
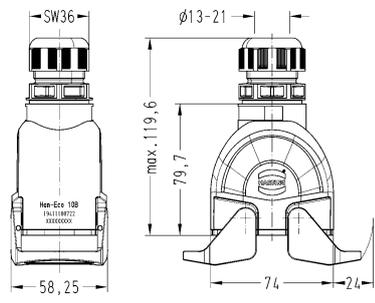
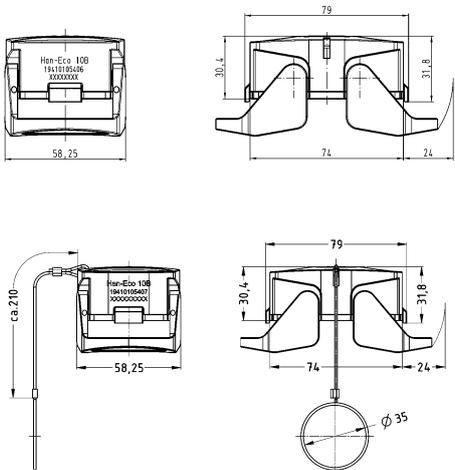
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 006 5402 19 41 006 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 006 5405</p>	

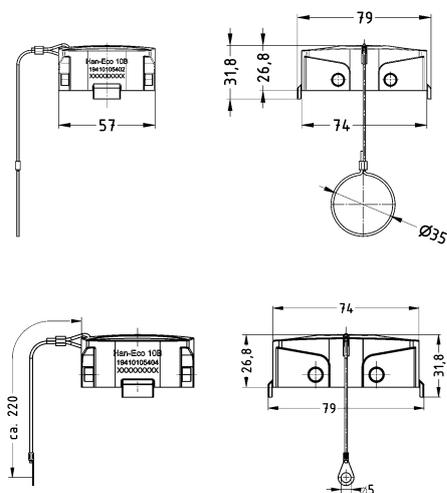
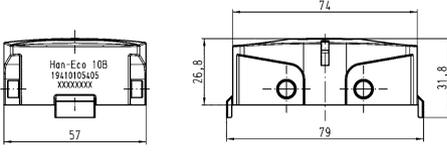
Double locking lever

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M32	13 ... 21	19 41 110 0422	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M32	13 ... 21	19 41 110 0522	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 010 0301	

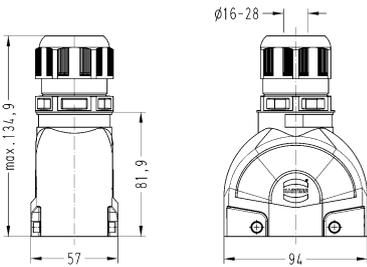
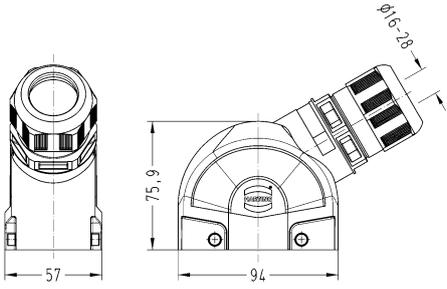
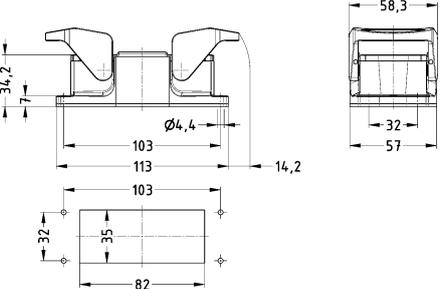
Han Eco

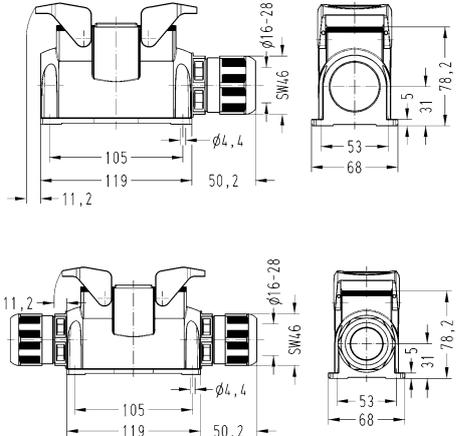
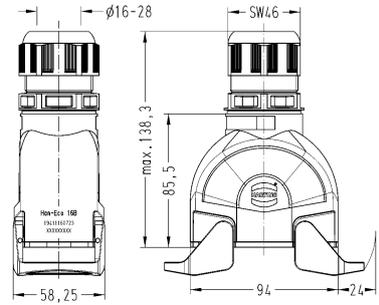
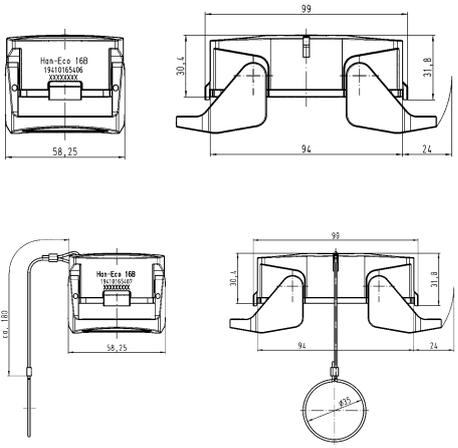
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M32 2x M32</p>	<p>13 ... 21 13 ... 21</p>	<p>19 41 110 0232 19 41 110 0272</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32</p>	<p>13 ... 21</p>	<p>19 41 110 0722</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p>  <p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 010 5406</p> <p>19 41 010 5407</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 010 5402 19 41 010 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 010 5405</p>	

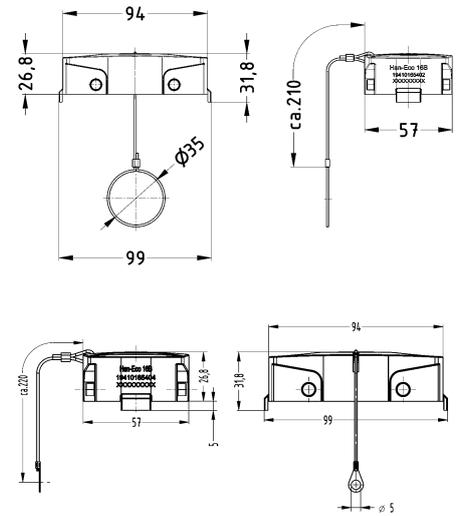
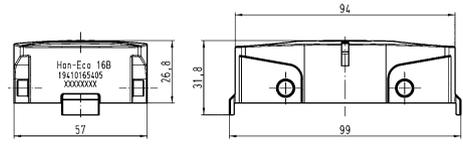
Double locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M40	16 ... 28	19 41 116 0423	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M40	16 ... 28	19 41 116 0523	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 016 0301	 <p>Panel cut out</p>

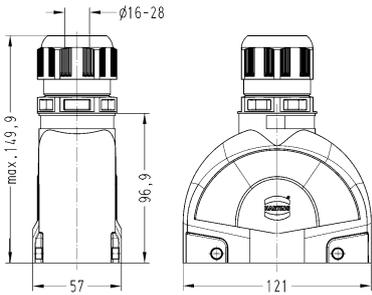
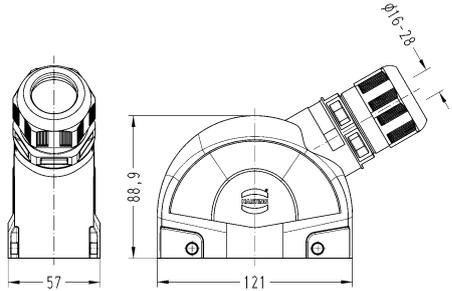
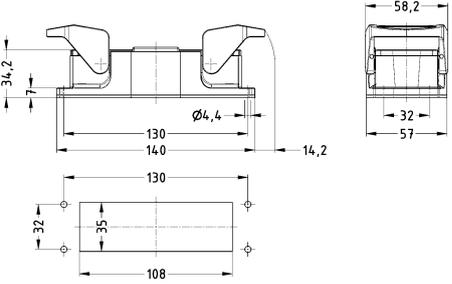
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M40 2x M40</p>	<p>16 ... 28 16 ... 28</p>	<p>19 41 116 0233 19 41 116 0273</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M40</p>	<p>16 ... 28</p>	<p>19 41 116 0723</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p>  <p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 016 5406 19 41 016 5407</p>	

Han
Eco

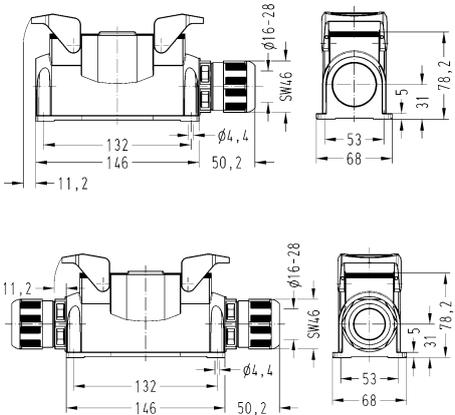
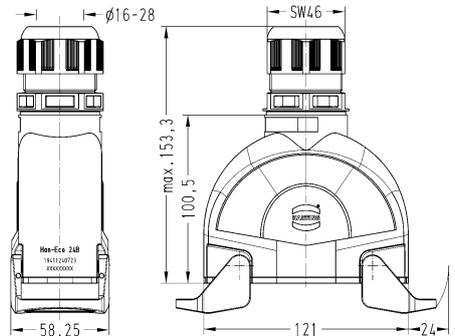
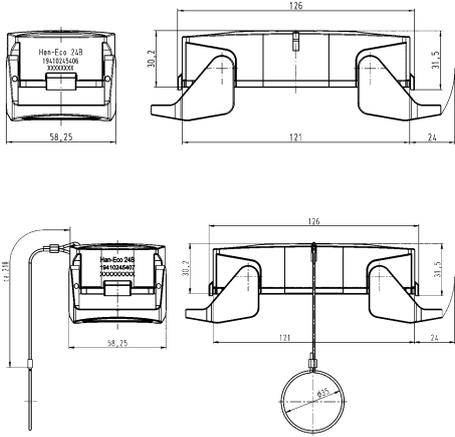
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 016 5402 19 41 016 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 016 5405</p>	

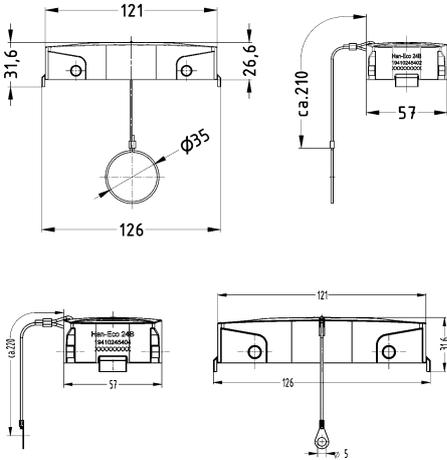
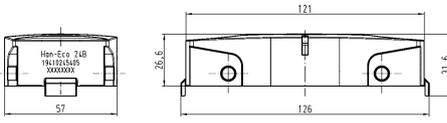
Double locking lever

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M40	16 ... 28	19 41 124 0423	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M40	16 ... 28	19 41 124 0523	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 024 0301	 <p>Panel cut out</p>

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M40 2x M40</p>	<p>16 ... 28 16 ... 28</p>	<p>19 41 124 0233 19 41 124 0273</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M40</p>	<p>16 ... 28</p>	<p>19 41 124 0723</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p>  <p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 024 5406 19 41 024 5407</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 024 5402 19 41 024 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 024 5405</p>	

Features

- With integrated cable gland
- Optional PE contact module to hold the protective ground conductor
- Suitable for applications according to protection class II

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Colour (seal)	RAL 7001 (silver-grey)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

Specifications and approvals

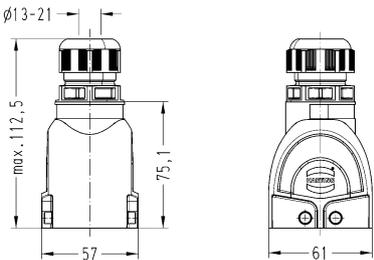
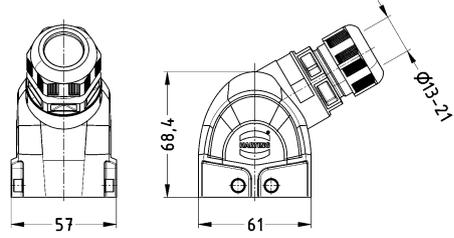
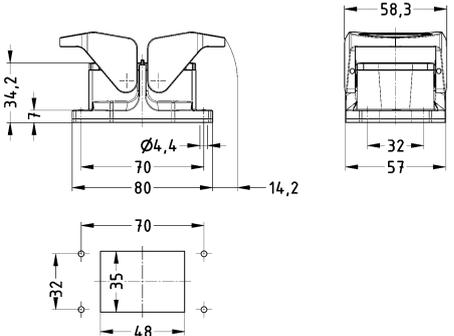
IEC 61984
 EN 45545-2 R22: HL1, HL2, HL3
 EN 45545-2 R23: HL1, HL2, HL3
 EN 45545-2 R24: HL1, HL2, HL3
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076

Details

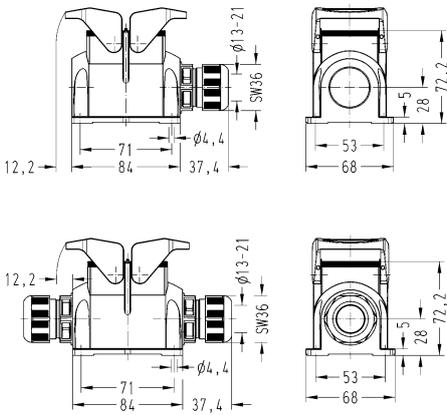
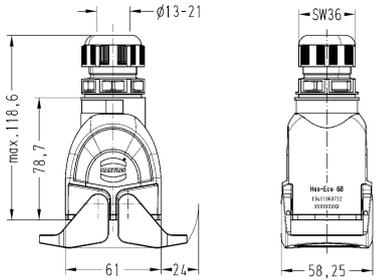
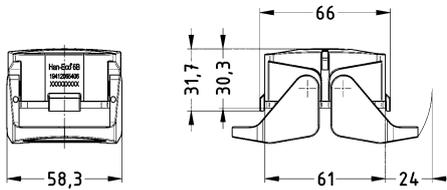
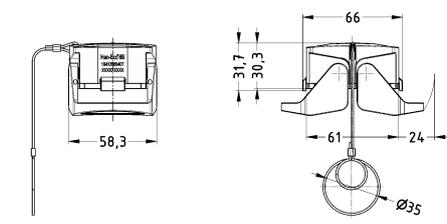
Assembly dimensions are identical for the Han® B bulkhead mounted housings - not mating compatible with the hoods and housings of the series Han® B.

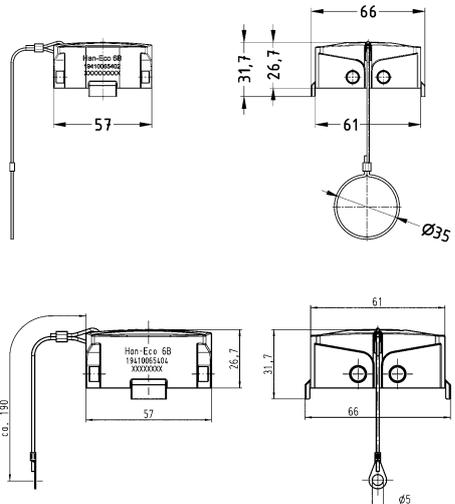
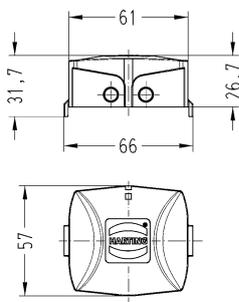
Double locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M32	13 ... 21	19 41 106 0422	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M32	13 ... 21	19 41 106 0522	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 206 0301	 <p>Panel cut out</p>

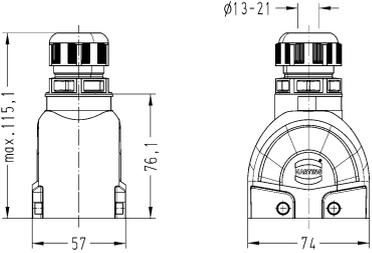
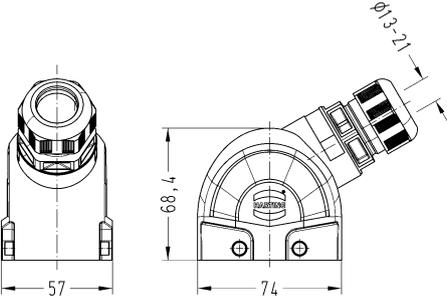
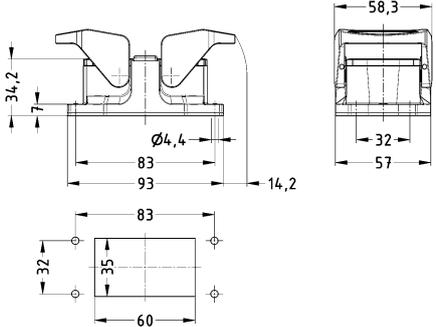
Han
Eco

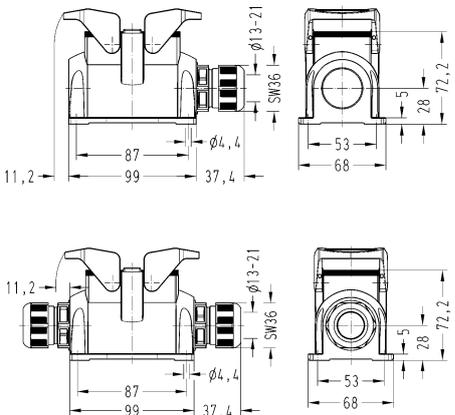
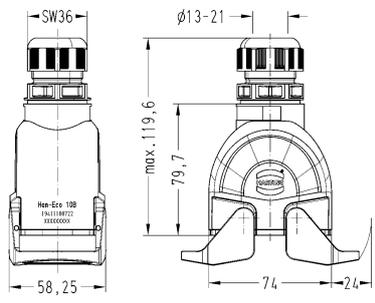
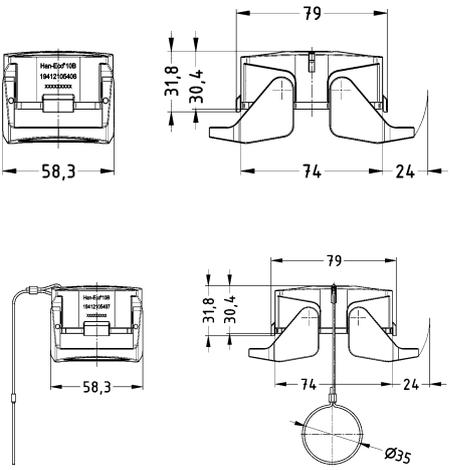
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M32 2x M32</p>	<p>13 ... 21 13 ... 21</p>	<p>19 41 306 0232 19 41 306 0272</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32</p>	<p>13 ... 21</p>	<p>19 41 306 0722</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p> 			<p>19 41 206 5406</p>	
<p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 206 5407</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 006 5402 19 41 006 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 006 5405</p>	

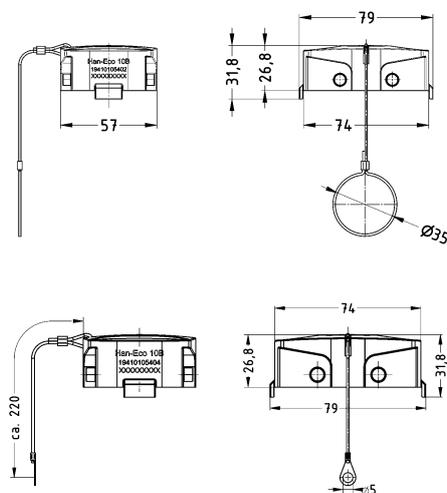
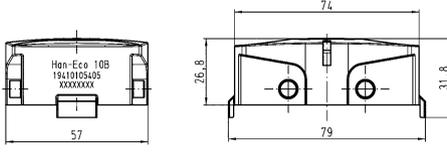
Double locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M32	13 ... 21	19 41 110 0422	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M32	13 ... 21	19 41 110 0522	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 210 0301	 <p>Panel cut out</p>

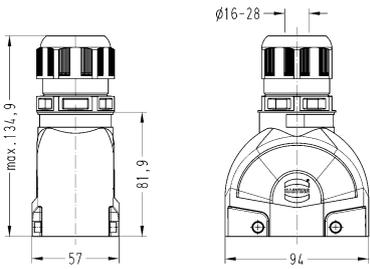
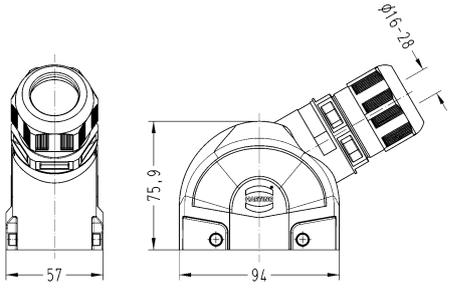
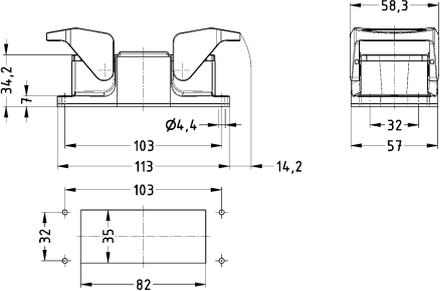
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M32 2x M32</p>	<p>13 ... 21 13 ... 21</p>	<p>19 41 310 0232 19 41 310 0272</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32</p>	<p>13 ... 21</p>	<p>19 41 310 0722</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p>  <p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 210 5406</p> <p>19 41 210 5407</p>	

Han Eco

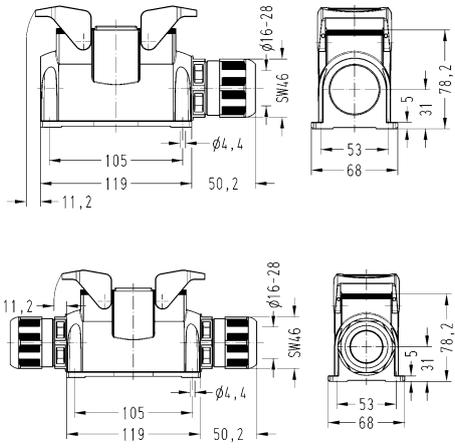
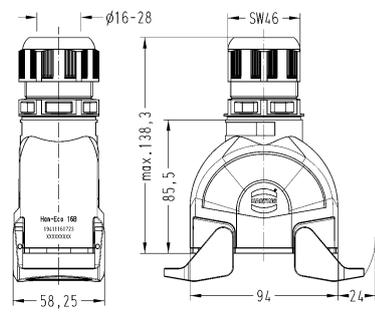
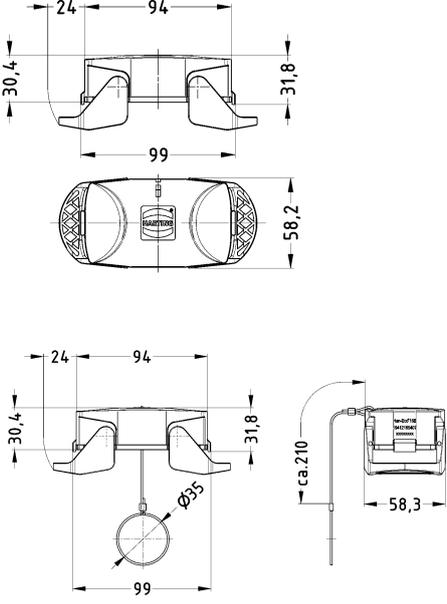
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 010 5402 19 41 010 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 010 5405</p>	

Double locking lever

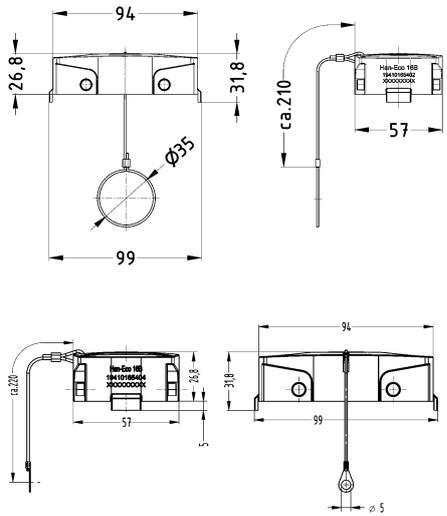
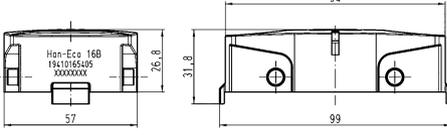
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M40	16 ... 28	19 41 116 0423	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M40	16 ... 28	19 41 116 0523	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 216 0301	 <p>Panel cut out</p>

Han
Eco

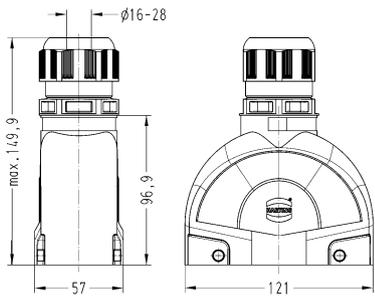
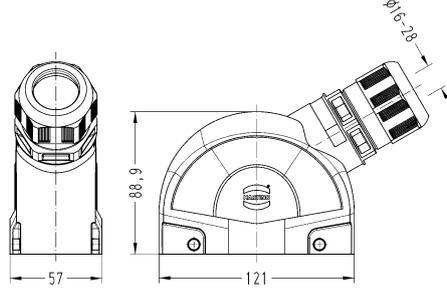
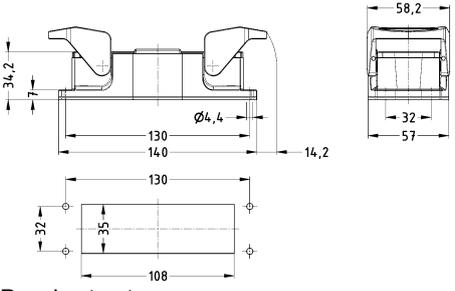
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M40 2x M40</p>	<p>16 ... 28 16 ... 28</p>	<p>19 41 316 0233 19 41 316 0273</p>	
<p>Han-Eco® Modular, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M40</p>	<p>16 ... 28</p>	<p>19 41 316 0723</p>	
<p>Han-Eco® Modular, Protection cover, for hoods</p>  <p>Han-Eco® Modular, Protection cover, for hoods, With fixing cord</p> 			<p>19 41 216 5406 19 41 216 5407</p>	

Han
29
·
28

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 016 5402 19 41 016 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 016 5405</p>	

Double locking lever

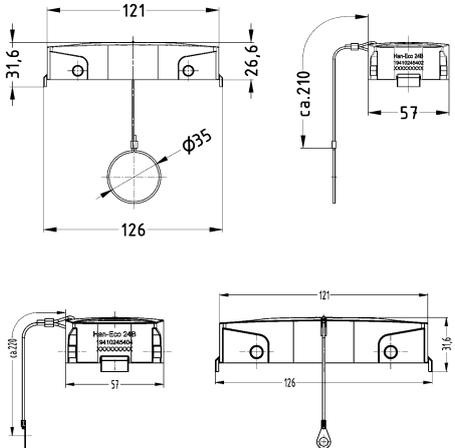
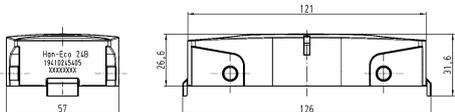
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Hoods, With integrated cable gland, Top entry 	1x M40	16 ... 28	19 41 124 0423	
Han-Eco® Modular, Hoods, With integrated cable gland, Side entry 	1x M40	16 ... 28	19 41 124 0523	
Han-Eco® Modular, Bulkhead mounted housings 			19 41 224 0301	 <p>Panel cut out</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco [®] Modular, Surface mounted housing, With integrated cable gland, Side entry 	1x M40 2x M40	16 ... 28 16 ... 28	19 41 324 0233 19 41 324 0273	
Han-Eco [®] Modular, Cable to cable housing, With integrated cable gland, Top entry 	1x M40	16 ... 28	19 41 324 0723	
Han-Eco [®] Modular, Protection cover, for hoods  Han-Eco [®] Modular, Protection cover, for hoods, With fixing cord 			19 41 224 5406 19 41 224 5407	

Han Eco

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, With fixing cord</p> 			<p>19 41 024 5402 19 41 024 5404</p>	
<p>Han-Eco® Modular, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing</p> 			<p>19 41 024 5405</p>	

Features

- With integrated cable gland
- Suitable for applications according to protection class II

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Colour (seal)	RAL 9005 (jet black)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

IEC 61984
 EN 45545-2 R22: HL1, HL2, HL3
 EN 45545-2 R23: HL1, HL2, HL3
 EN 45545-2 R24: HL1, HL2, HL3

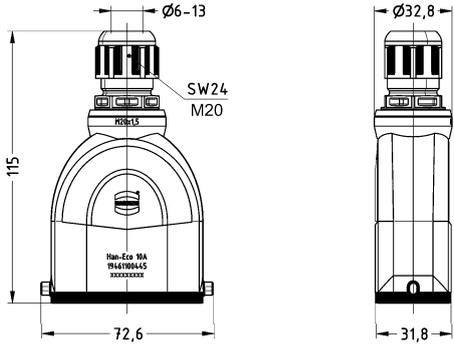
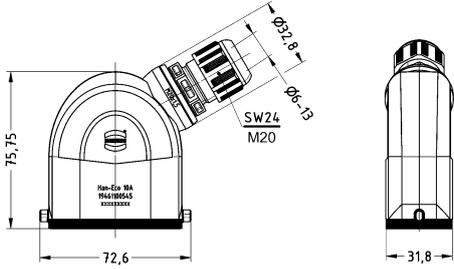
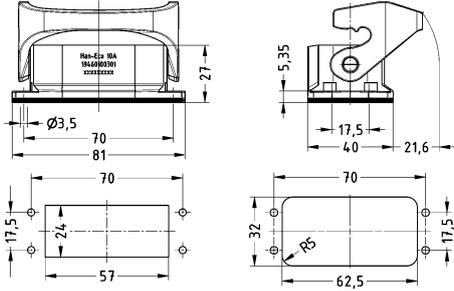
Details

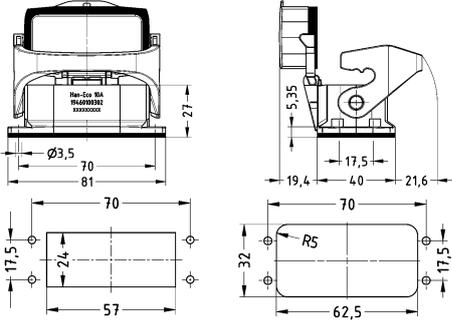
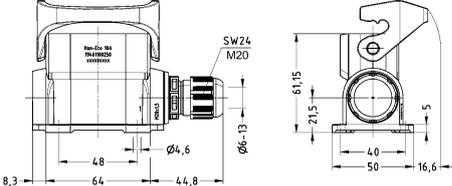
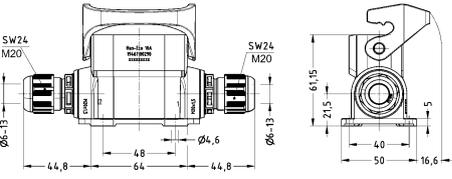
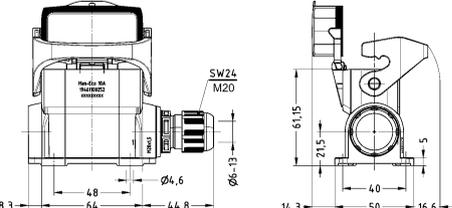
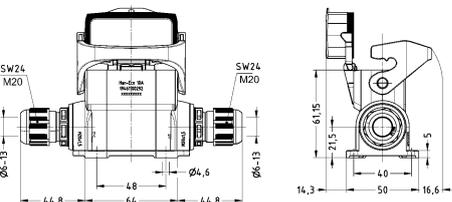
Assembly dimensions are identical for the Han® A bulkhead and surface mounted housings – mating compatible with all metal hoods and housings of the series Han® A.

As an option a larger panel cut out for the rear assembly of the bulkhead mounted housings is possible.

Single locking lever

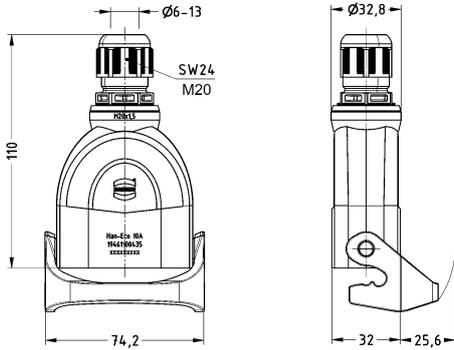
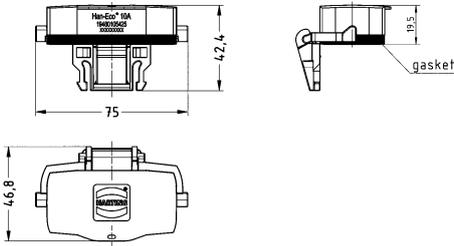
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25</p>	<p>6 ... 13 9 ... 17</p>	<p>19 46 110 0445 19 46 110 0446</p>	
<p>Han-Eco® A, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25</p>	<p>6 ... 13 9 ... 17</p>	<p>19 46 110 0545 19 46 110 0546</p>	
<p>Han-Eco® A, Bulkhead mounted housings</p> 			<p>19 46 010 0301</p>	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 46 010 0302	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® A, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 2x M20 2x M25</p>	<p>6 ... 13 9 ... 17 6 ... 13 9 ... 17</p>	<p>19 46 110 0250 19 46 110 0251 19 46 110 0290 19 46 110 0291</p>	 
<p>Han-Eco® A, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 2x M20 2x M25</p>	<p>6 ... 13 9 ... 17 6 ... 13 9 ... 17</p>	<p>19 46 110 0252 19 46 110 0253 19 46 110 0292 19 46 110 0293</p>	 



Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25</p>	<p>6 ... 13 9 ... 17</p>	<p>19 46 110 0435 19 46 110 0436</p>	
<p>Han-Eco® A, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			<p>19 46 010 5425</p>	

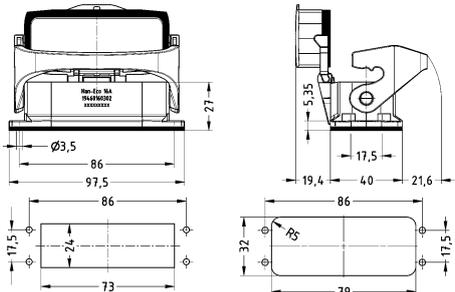
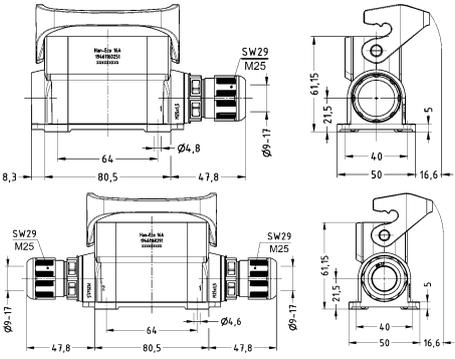
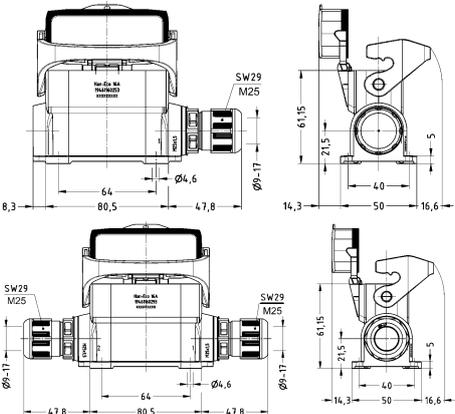
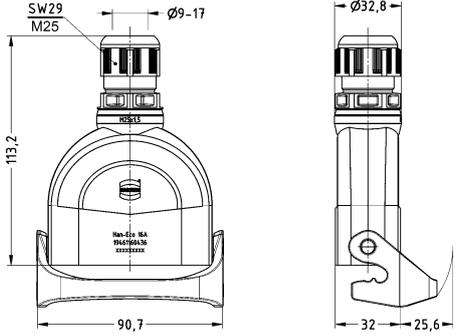
Single locking lever

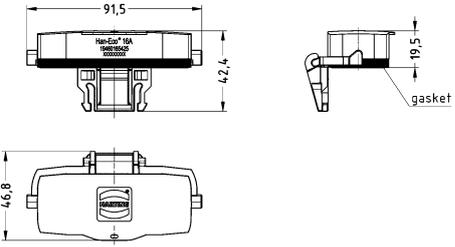


Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® A, Hoods, With integrated cable gland, Top entry	1x M20 1x M25	6 ... 13 9 ... 17	19 46 116 0445 19 46 116 0446	
Han-Eco® A, Hoods, With integrated cable gland, Side entry	1x M20 1x M25	6 ... 13 9 ... 17	19 46 116 0545 19 46 116 0546	
Han-Eco® A, Bulkhead mounted housings			19 46 016 0301	<p>Panel cut out Front mounting / Rear mounting</p>

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 46 016 0302	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® A, Surface mounted housing, With integrated cable gland, Side entry</p> 	1x M20 1x M25 2x M20 2x M25	6 ... 13 9 ... 17 6 ... 13 9 ... 17	19 46 116 0250 19 46 116 0251 19 46 116 0290 19 46 116 0291	
<p>Han-Eco® A, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	1x M20 1x M25 2x M20 2x M25	6 ... 13 9 ... 17 6 ... 13 9 ... 17	19 46 116 0252 19 46 116 0253 19 46 116 0292 19 46 116 0293	
<p>Han-Eco® A, Cable to cable housing, With integrated cable gland, Top entry</p> 	1x M20 1x M25	6 ... 13 9 ... 17	19 46 116 0435 19 46 116 0436	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			<p>19 46 016 5425</p>	

Features

- With integrated cable gland
- Suitable for applications according to protection class II

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Colour (seal)	RAL 7001 (silver-grey)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

IEC 61984
 EN 45545-2 R22: HL1, HL2, HL3
 EN 45545-2 R23: HL1, HL2, HL3
 EN 45545-2 R24: HL1, HL2, HL3

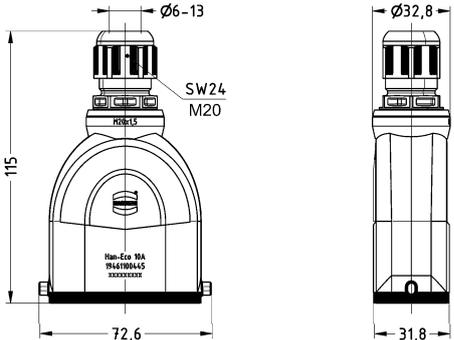
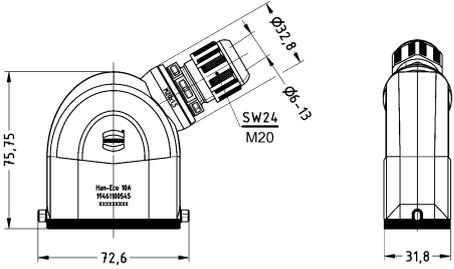
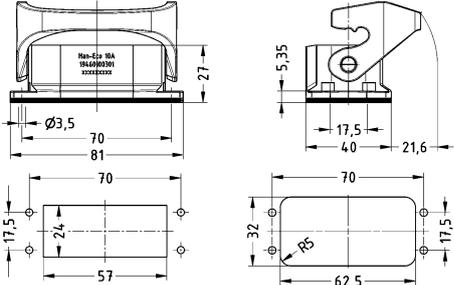
Details

Assembly dimensions are identical for the Han® A bulkhead and surface mounted housings – mating compatible with all metal hoods and housings of the series Han® A.

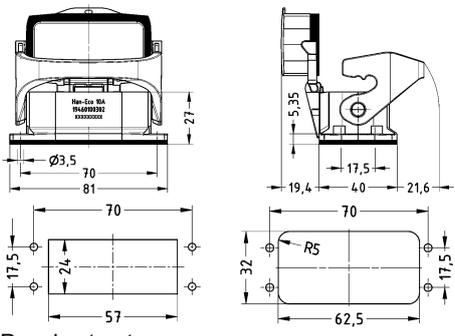
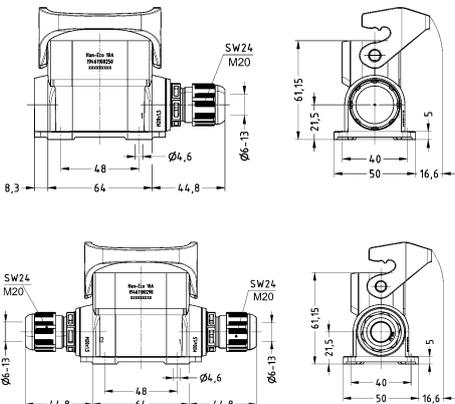
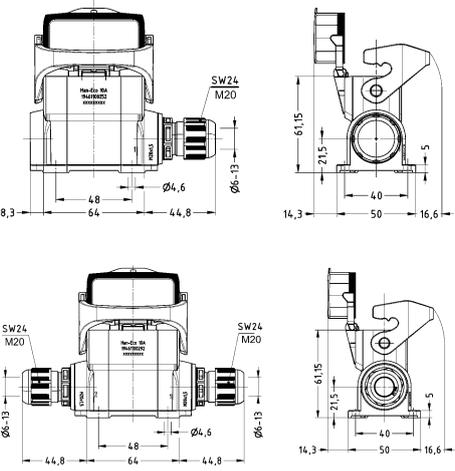
As an option a larger panel cut out for the rear assembly of the bulkhead mounted housings is possible.

Single locking lever

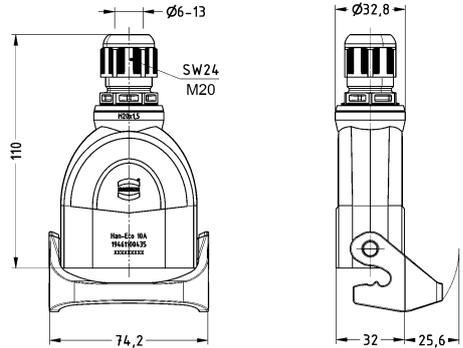
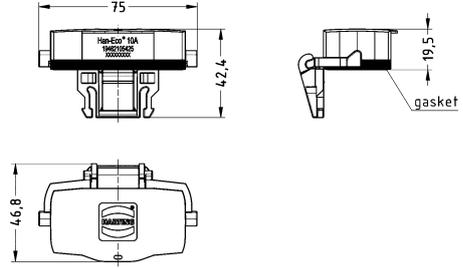
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25</p>	<p>6 ... 13 9 ... 17</p>	<p>19 46 310 0445 19 46 310 0446</p>	
<p>Han-Eco® A, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25</p>	<p>6 ... 13 9 ... 17</p>	<p>19 46 310 0545 19 46 310 0546</p>	
<p>Han-Eco® A, Bulkhead mounted housings</p> 			<p>19 46 210 0301</p>	 <p>Panel cut out Front mounting / Rear mounting</p>

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco[®] A, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 46 210 0302	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco[®] A, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 2x M20 2x M25</p>	<p>6 ... 13 9 ... 17 6 ... 13 9 ... 17</p>	<p>19 46 110 0250 19 46 110 0251 19 46 110 0290 19 46 110 0291</p>	
<p>Han-Eco[®] A, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 2x M20 2x M25</p>	<p>6 ... 13 9 ... 17 6 ... 13 9 ... 17</p>	<p>19 46 310 0252 19 46 310 0253 19 46 310 0292 19 46 310 0293</p>	

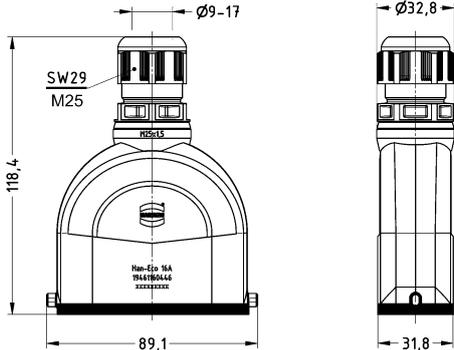
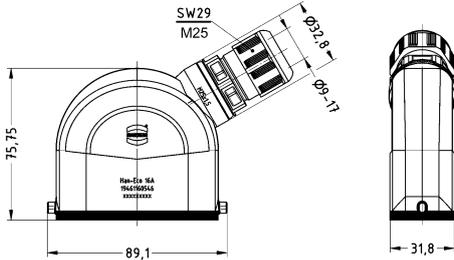
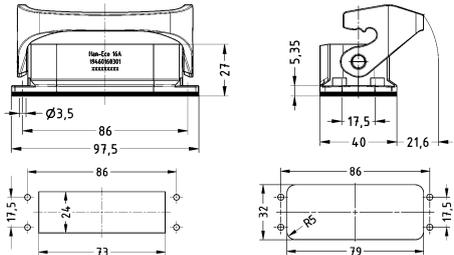


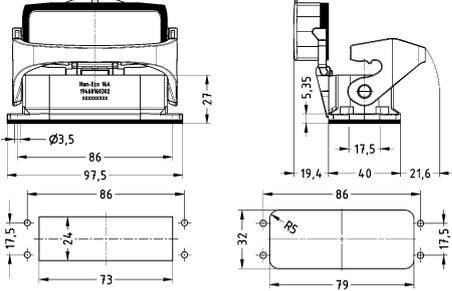
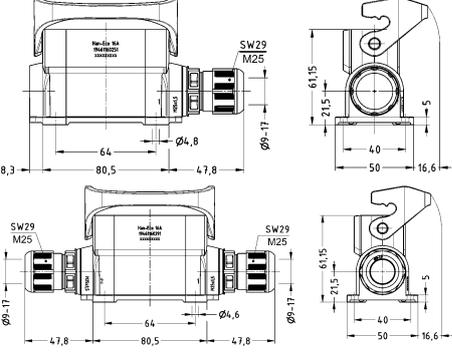
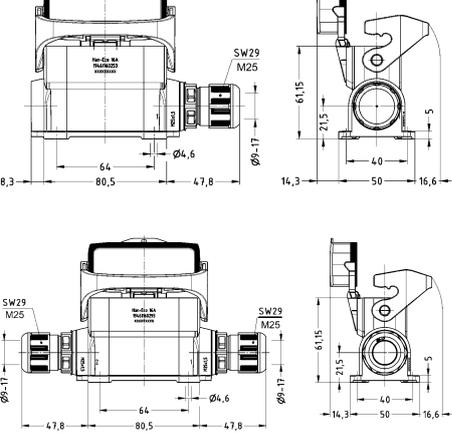
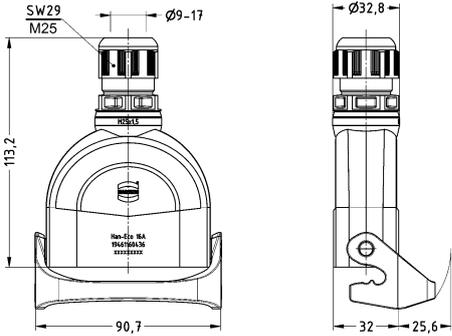
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
<p>Han-Eco® A, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25</p>	<p>6 ... 13 9 ... 17</p>	<p>19 46 110 0435 19 46 110 0436</p>		
<p>Han-Eco® A, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			<p>19 46 210 5425</p>		

Single locking lever



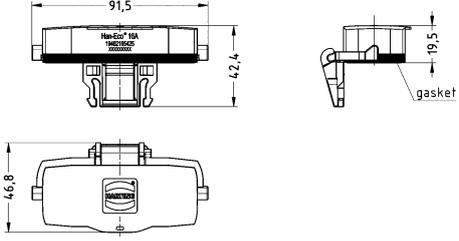
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® A, Hoods, With integrated cable gland, Top entry 	1x M20 1x M25	6 ... 13 9 ... 17	19 46 316 0445 19 46 316 0446	
Han-Eco® A, Hoods, With integrated cable gland, Side entry 	1x M20 1x M25	6 ... 13 9 ... 17	19 46 316 0545 19 46 316 0546	
Han-Eco® A, Bulkhead mounted housings 			19 46 216 0301	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® A, Bulkhead mounted housings, With thermo-plastic cover 			19 46 216 0302	 <p>Panel cut out Front mounting / Rear mounting</p>
Han-Eco® A, Surface mounted housing, With integrated cable gland, Side entry 	1x M20 1x M25 2x M20 2x M25	6 ... 13 9 ... 17 6 ... 13 9 ... 17	19 46 116 0250 19 46 116 0251 19 46 116 0290 19 46 116 0291	
Han-Eco® A, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry 	1x M20 1x M25 2x M20 2x M25	6 ... 13 9 ... 17 6 ... 13 9 ... 17	19 46 316 0252 19 46 316 0253 19 46 316 0292 19 46 316 0293	
Han-Eco® A, Cable to cable housing, With integrated cable gland, Top entry 	1x M20 1x M25	6 ... 13 9 ... 17	19 46 116 0435 19 46 116 0436	



Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® A, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			<p>19 46 216 5425</p>	

Features

- Suitable for standard inserts and modules from the Han-Modular® portfolio
- With integrated cable gland
- Suitable for applications according to protection class II
- Minimal weight with excellent mechanical robustness

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP66
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR, FPM
Colour (seal)	RAL 9005 (jet black), RAL 7001 (silver-grey)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0

Specifications and approvals

IEC 61984
 EN 45545-2 R22: HL1, HL2, HL3
 EN 45545-2 R23: HL1, HL2, HL3
 EN 45545-2 R24: HL1, HL2, HL3

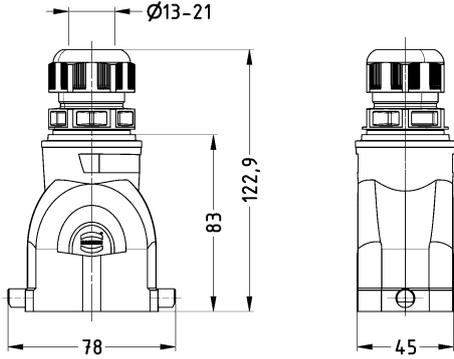
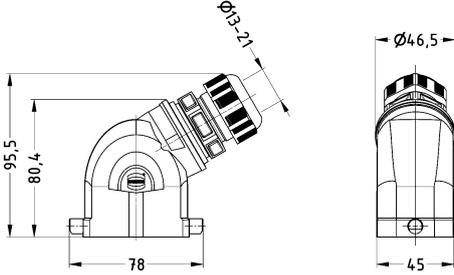
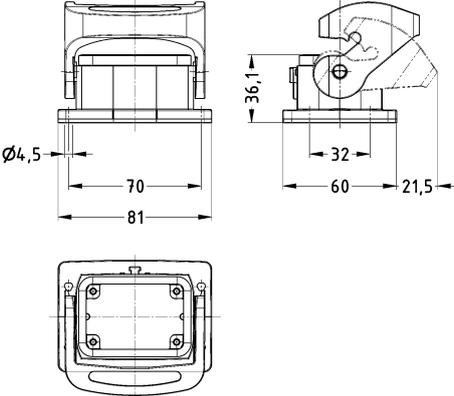
Details

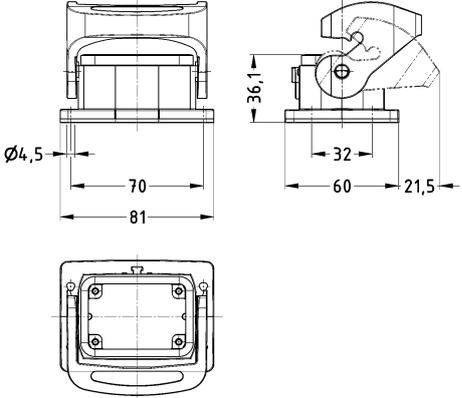
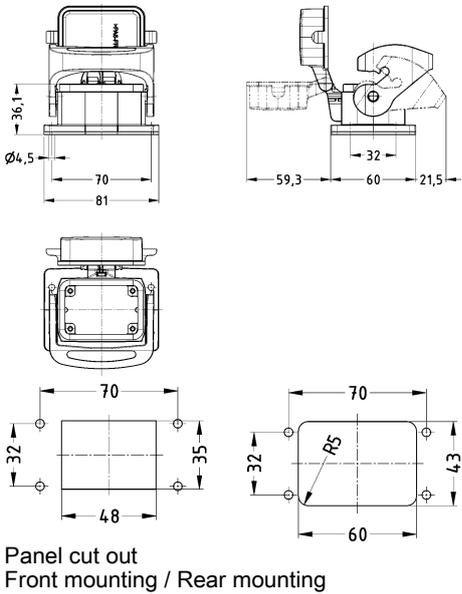
Mating compatible with all metal hoods and housings of the series Han® B.

As an option a larger panel cut out for the rear assembly of the bulkhead mounted housings is possible.

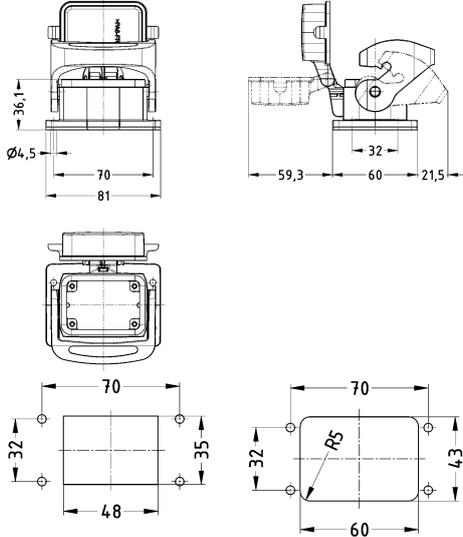
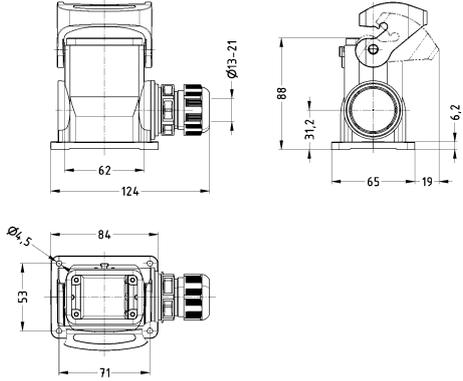
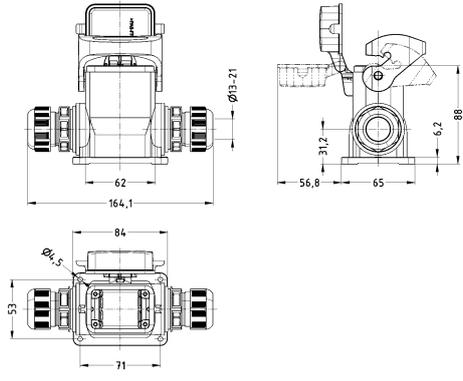
Single locking lever

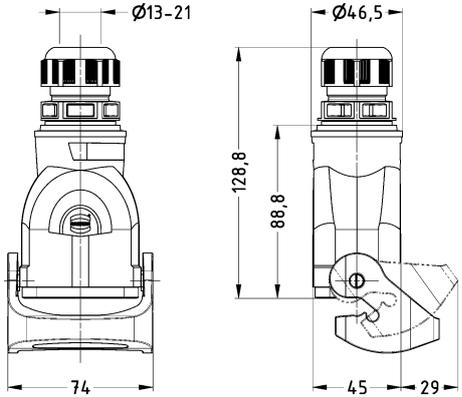
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Top entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 106 0445 19 43 106 0446 19 43 106 0447	
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 106 0545 19 43 106 0546 19 43 106 0547	
Han-Eco® B, Bulkhead mounted housings, Rear mounting 			19 43 006 0330 19 43 206 0330	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings</p> 			19 43 006 0340	
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting</p> 			19 43 006 0331	 <p>Panel cut out Front mounting / Rear mounting</p>

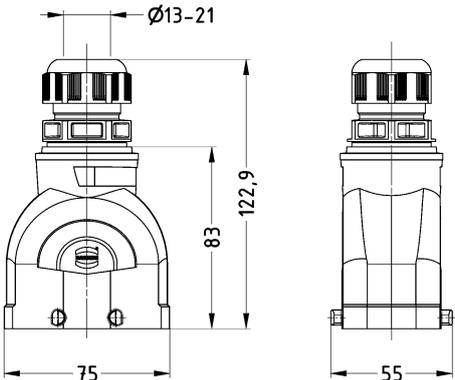
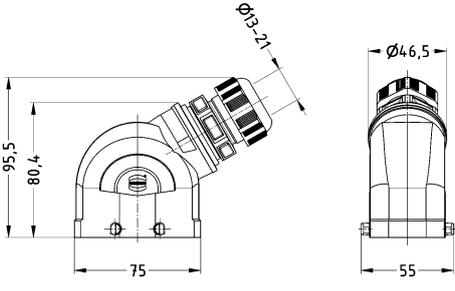
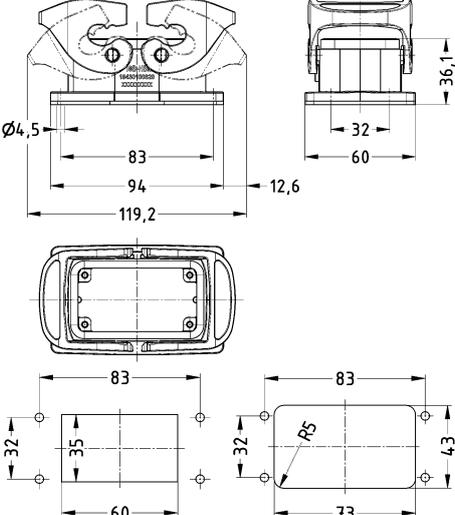
Han Eco

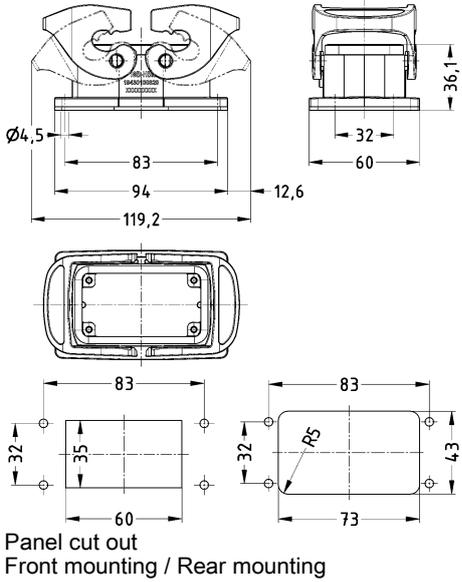
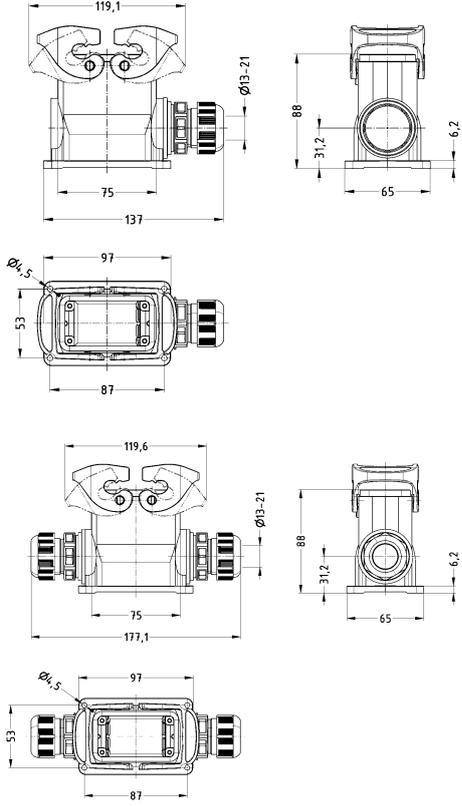
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 43 006 0341	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32 2x M20 2x M25 2x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 106 0250 19 43 106 0251 19 43 106 0252 19 43 106 0290 19 43 106 0291 19 43 106 0292</p>	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32 2x M20 2x M25 2x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 106 0255 19 43 106 0256 19 43 106 0257 19 43 106 0295 19 43 106 0296 19 43 106 0297</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 106 0755 19 43 106 0756 19 43 106 0757</p>	
<p>Han-Eco® B, Protection cover, for hoods</p> <p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p>  <p>Han-Eco® B, Protection cover, for cable to cable housing</p>			<p>19 43 006 5442</p> <p>19 43 006 5410</p> <p>19 43 006 5446</p>	

Double locking lever

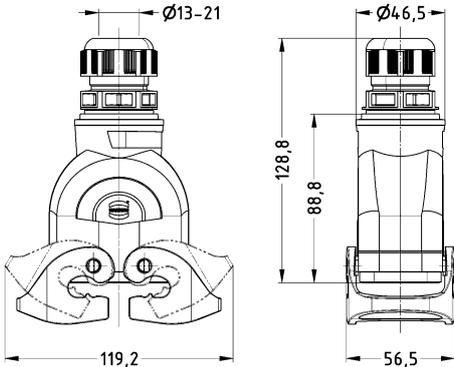
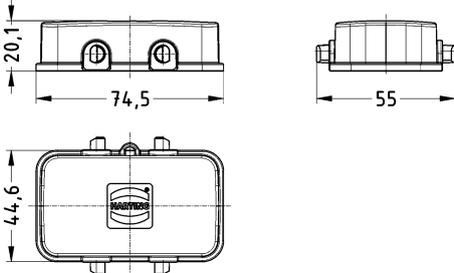
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Top entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 110 0425 19 43 110 0426 19 43 110 0427	
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 110 0525 19 43 110 0526 19 43 110 0527	
Han-Eco® B, Bulkhead mounted housings, Rear mounting 			19 43 010 0310 19 43 210 0310	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings</p> 			19 43 010 0320	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32 1x M40 2x M20 2x M25 2x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21 16 ... 28 6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 110 0230 19 43 110 0231 19 43 110 0232 19 43 110 0233 19 43 110 0270 19 43 110 0271 19 43 110 0272</p>	

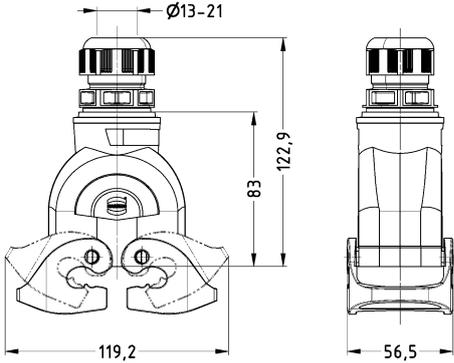
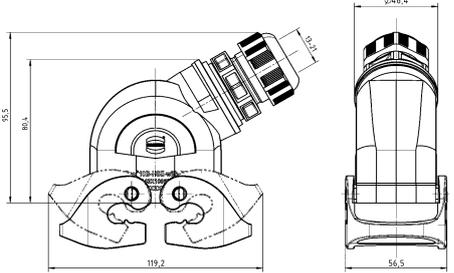
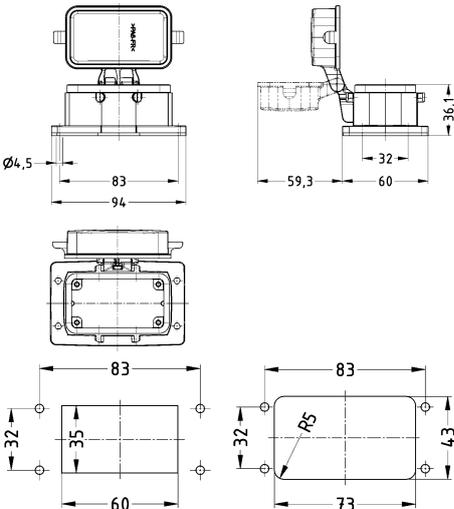


Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 110 0735 19 43 110 0736 19 43 110 0737</p>	
<p>Han-Eco® B, Protection cover, for hoods</p> <p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			<p>19 43 010 5422 19 43 010 5425</p>	
<p>Han-Eco® B, Protection cover, for cable to cable housing</p>			<p>19 43 010 5426</p>	

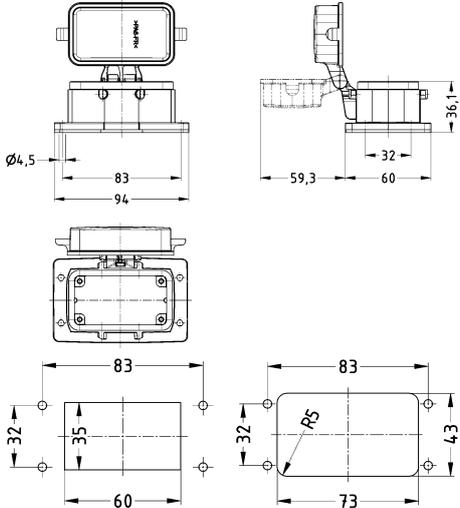
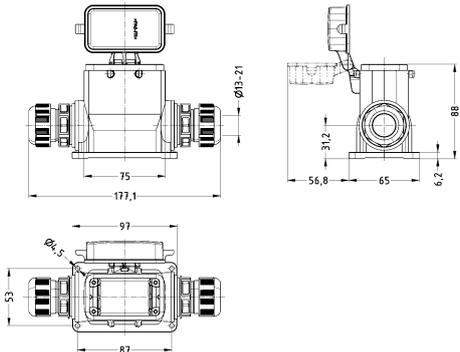
Double locking lever (on the hood)

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	1x M32	13 ... 21	19 43 110 0437	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	1x M32	13 ... 21	19 43 110 0537	
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting</p> 			19 43 010 0312	 <p>Panel cut out Front mounting / Rear mounting</p>

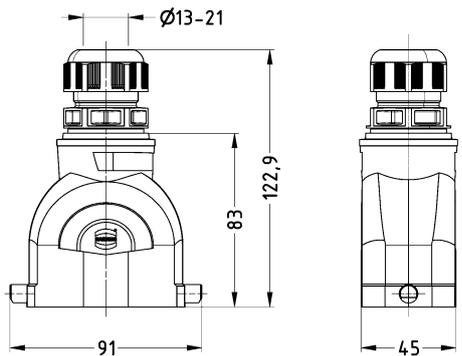
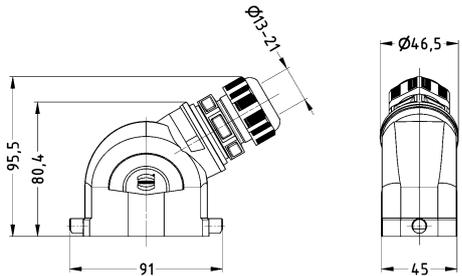
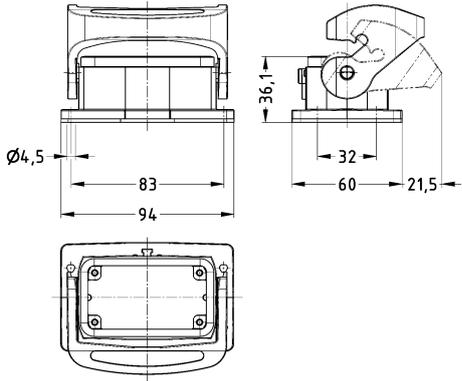


Han
Eco

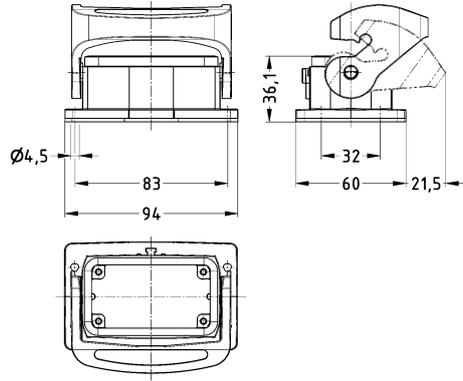
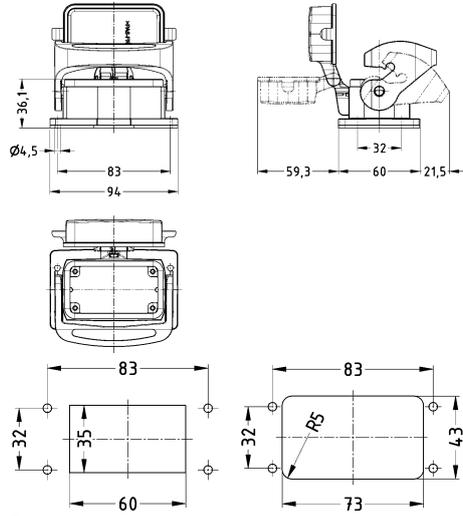
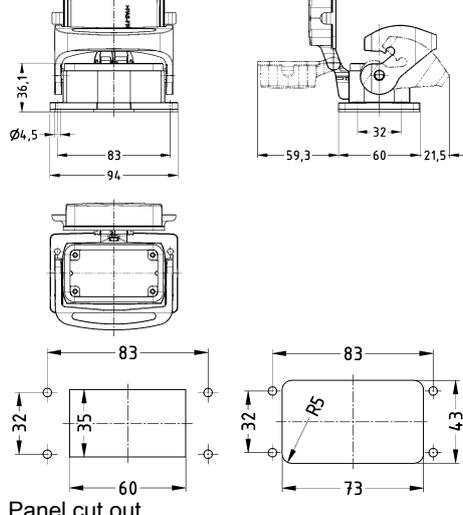
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			<p>19 43 010 0322</p>	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M32 2x M32</p>	<p>13 ... 21 13 ... 21</p>	<p>19 43 110 0227 19 43 110 0267</p>	

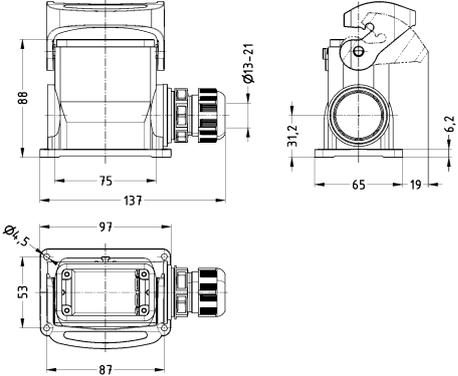
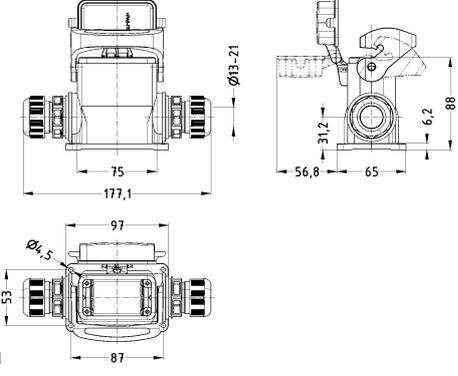
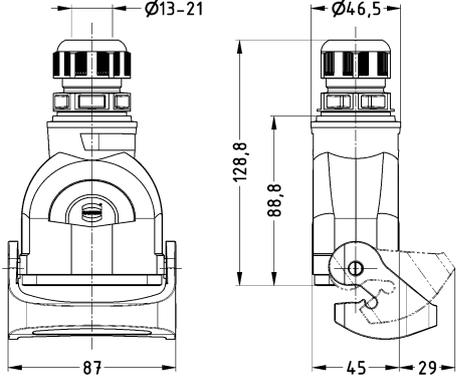
Single locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 110 0445 19 43 110 0446 19 43 110 0447</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 110 0545 19 43 110 0546 19 43 110 0547</p>	
<p>Han-Eco® B, Bulkhead mounted housings, Rear mounting</p> 			<p>19 43 010 0330 19 43 210 0330</p>	

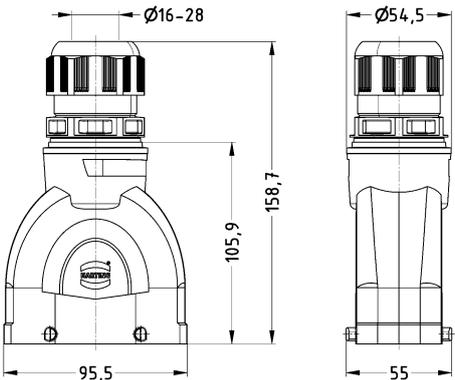
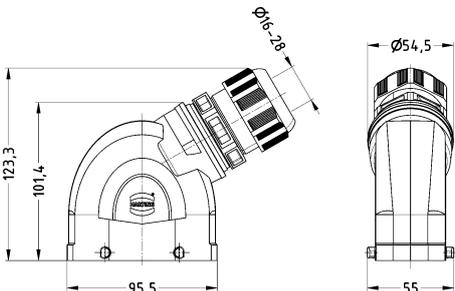
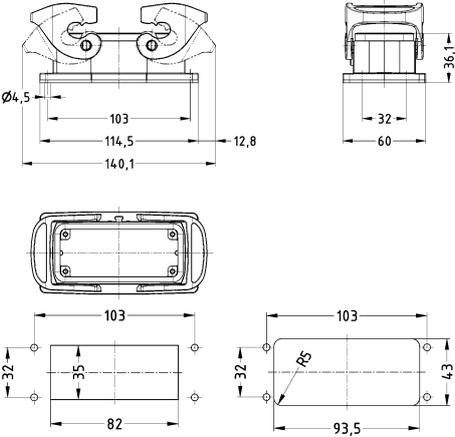
Han Eco

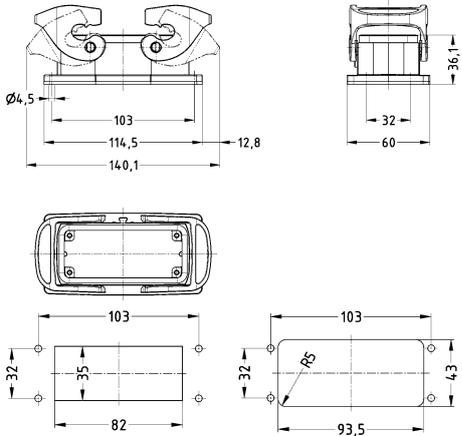
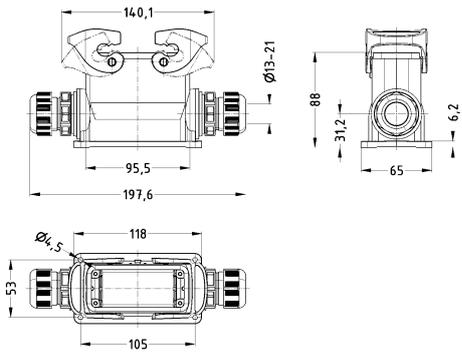
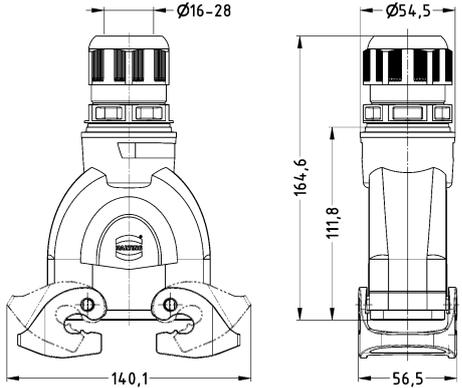
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Bulkhead mounted housings 			19 43 010 0340	
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting 			19 43 010 0331	 <p>Panel cut out Front mounting / Rear mounting</p>
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover 			19 43 010 0341	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	1x M20 1x M25 1x M32 2x M20 2x M25 2x M32	6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21	19 43 110 0250 19 43 110 0251 19 43 110 0252 19 43 110 0290 19 43 110 0291 19 43 110 0292	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	1x M20 1x M25 1x M32 2x M20 2x M25 2x M32	6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21	19 43 110 0255 19 43 110 0256 19 43 110 0257 19 43 110 0295 19 43 110 0296 19 43 110 0297	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 110 0755 19 43 110 0756 19 43 110 0757	
<p>Han-Eco® B, Protection cover, for hoods</p> <p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			19 43 010 5442 19 43 010 5410	
<p>Han-Eco® B, Protection cover, for cable to cable housing</p>			19 43 010 5446	

Double locking lever

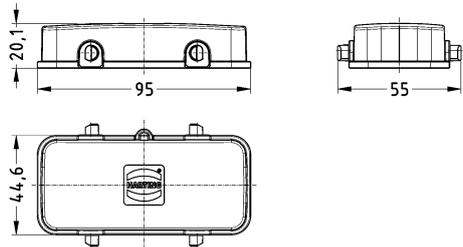
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0426 19 43 116 0427 19 43 116 0428</p>		
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0526 19 43 116 0527 19 43 116 0528</p>		
<p>Han-Eco® B, Bulkhead mounted housings, Rear mounting</p> 			<p>19 43 016 0310 19 43 216 0310</p>	 <p>Panel cut out Front mounting / Rear mounting</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings</p> 			19 43 016 0320	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0231 19 43 116 0232 19 43 116 0233 19 43 116 0271 19 43 116 0272 19 43 116 0273</p>	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0736 19 43 116 0737 19 43 116 0738</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			19 43 016 5422	

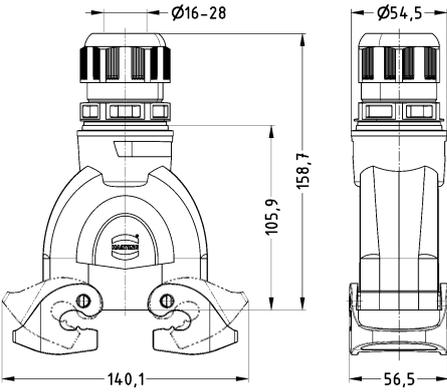
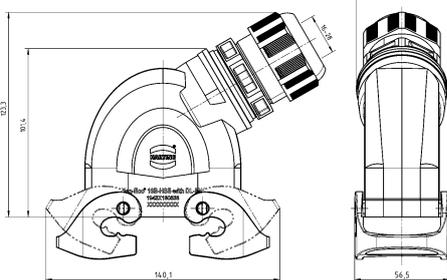
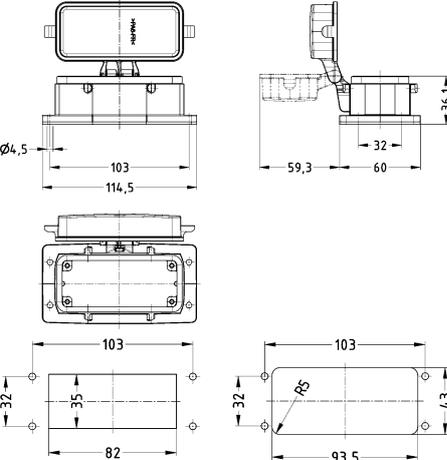


Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			19 43 016 5425	
<p>Han-Eco® B, Protection cover, for cable to cable housing</p>			19 43 016 5426	

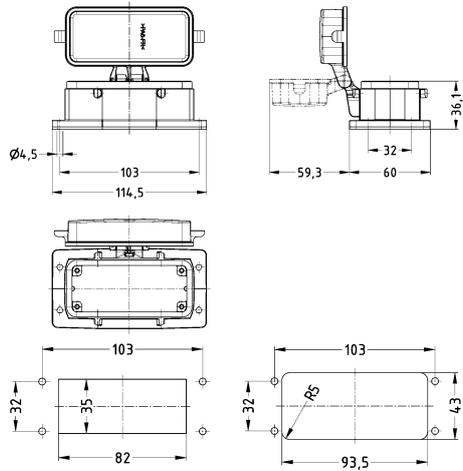
Double locking lever (on the hood)

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	1x M40	16 ... 28	19 43 116 0438	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	1x M40	16 ... 28	19 43 116 0538	
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting</p> 			19 43 016 0312	 <p>Panel cut out Front mounting / Rear mounting</p>

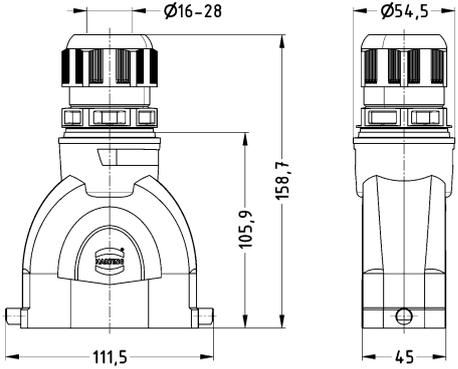
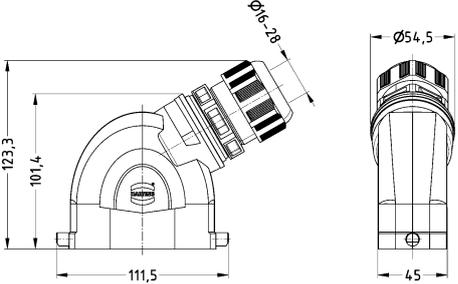
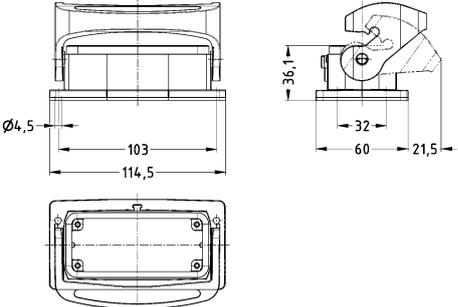


Han
Eco

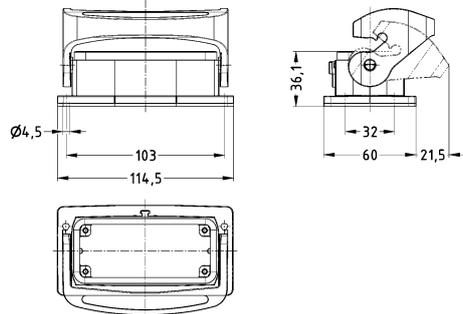
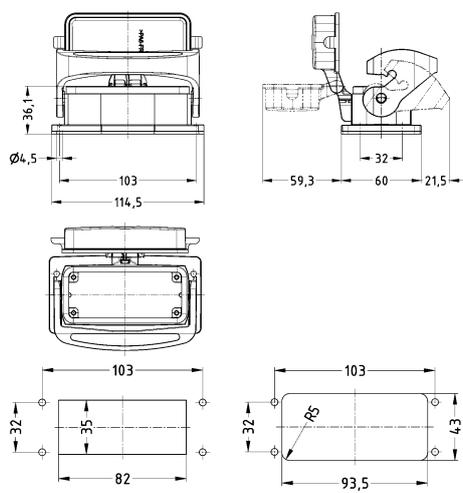
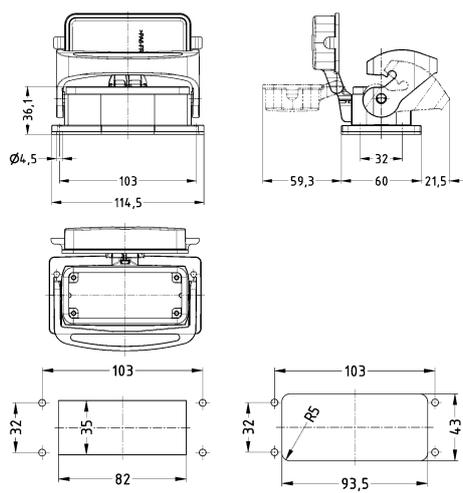
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 43 016 0322	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	1x M40 2x M40	16 ... 28 16 ... 28	19 43 116 0228 19 43 116 0268	

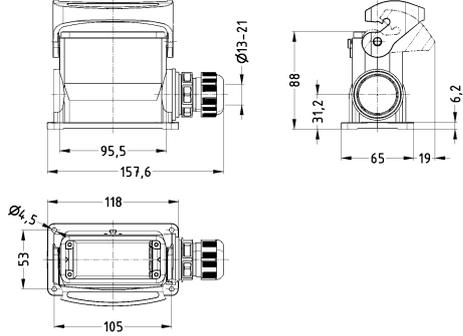
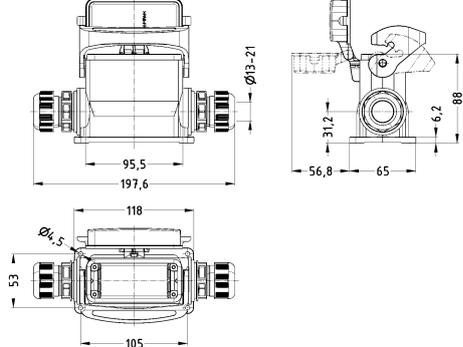
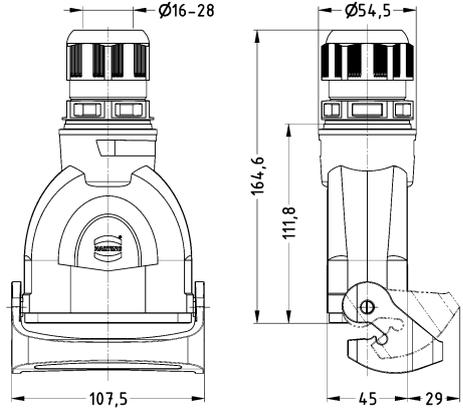
Single locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0446 19 43 116 0447 19 43 116 0448</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0546 19 43 116 0547 19 43 116 0548</p>	
<p>Han-Eco® B, Bulkhead mounted housings, Rear mounting</p> 			<p>19 43 016 0330 19 43 216 0330</p>	

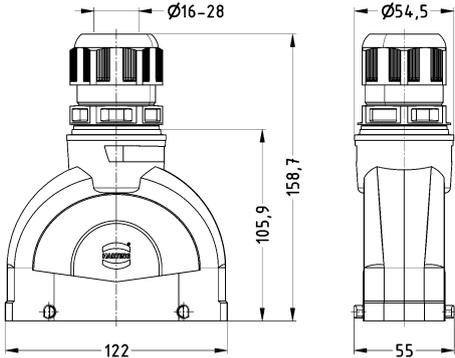
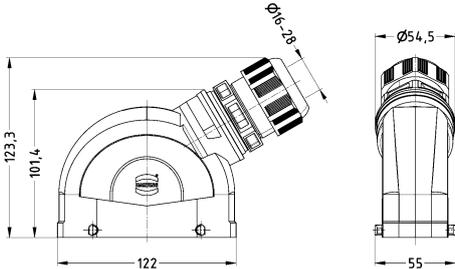
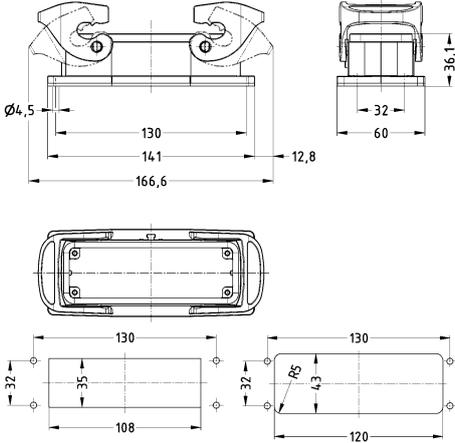
Han
Eco

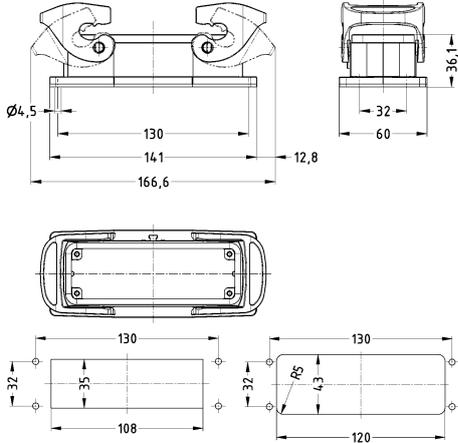
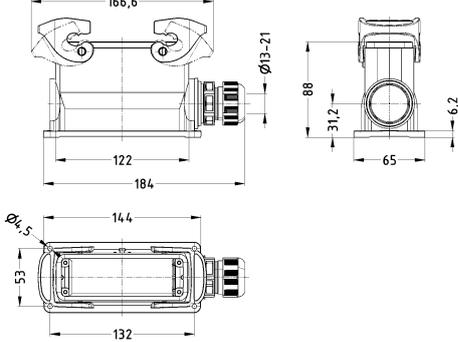
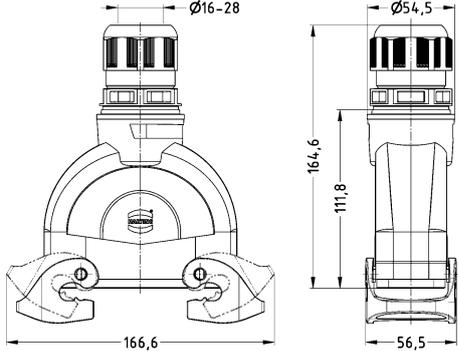
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Bulkhead mounted housings 			19 43 016 0340	
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting 			19 43 016 0331	 <p data-bbox="957 1198 1276 1243">Panel cut out Front mounting / Rear mounting</p>
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover 			19 43 016 0341	 <p data-bbox="957 1803 1276 1848">Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	1x M25 1x M32 1x M40 2x M25 2x M32 2x M40	9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28	19 43 116 0251 19 43 116 0252 19 43 116 0253 19 43 116 0291 19 43 116 0292 19 43 116 0293	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	1x M25 1x M32 1x M40 2x M25 2x M32 2x M40	9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28	19 43 116 0256 19 43 116 0257 19 43 116 0258 19 43 116 0296 19 43 116 0297 19 43 116 0298	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	1x M25 1x M32 1x M40	9 ... 17 13 ... 21 16 ... 28	19 43 116 0756 19 43 116 0757 19 43 116 0758	
<p>Han-Eco® B, Protection cover, for hoods</p> <p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> <p>Han-Eco® B, Protection cover, for cable to cable housing</p>			19 43 016 5442 19 43 016 5410 19 43 016 5446	

Double locking lever

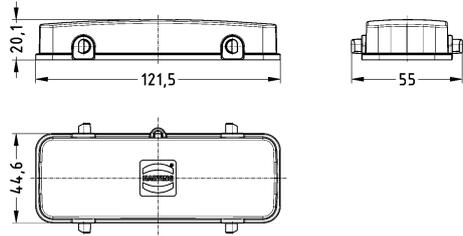
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0427 19 43 124 0428</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0527 19 43 124 0528</p>	
<p>Han-Eco® B, Bulkhead mounted housings, Rear mounting</p> 			<p>19 43 024 0310 19 43 224 0310</p>	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings</p> 			19 43 024 0320	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 124 0231 19 43 124 0232 19 43 124 0233 19 43 124 0271 19 43 124 0272 19 43 124 0273</p>	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0737 19 43 124 0738</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			19 43 024 5422	

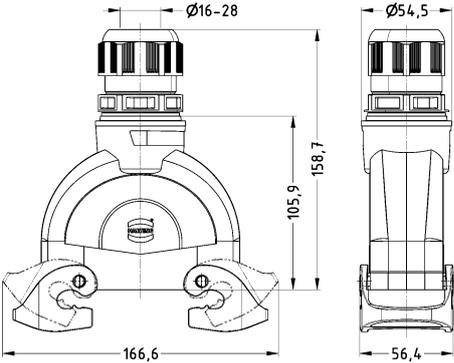
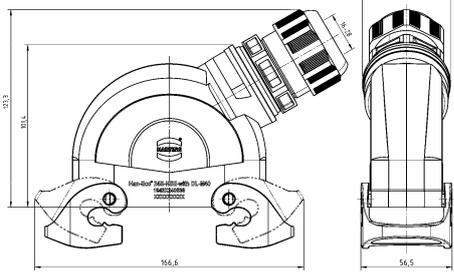
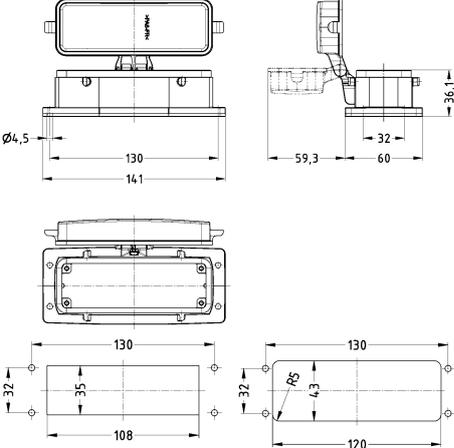


Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			19 43 024 5425	
<p>Han-Eco® B, Protection cover, for cable to cable housing</p>			19 43 024 5426	

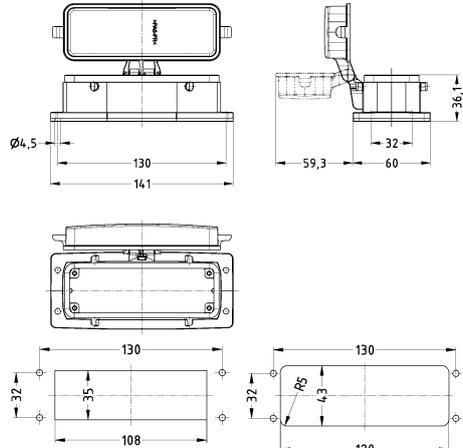
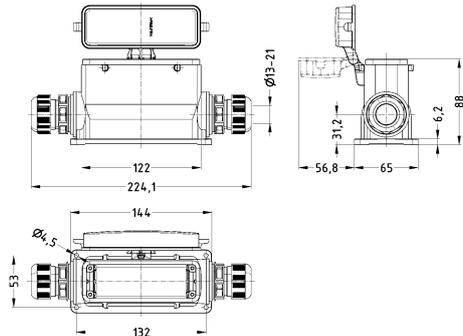
Double locking lever (on the hood)

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	1x M40	16 ... 28	19 43 124 0438	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	1x M40	16 ... 28	19 43 124 0538	
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting</p> 			19 43 024 0312	 <p>Panel cut out Front mounting / Rear mounting</p>

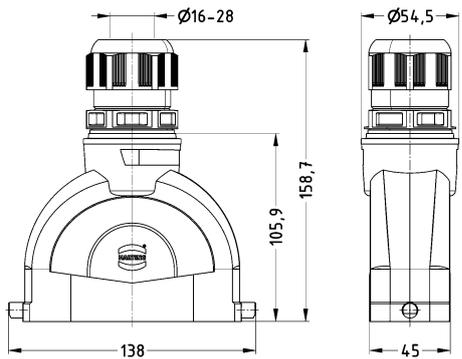
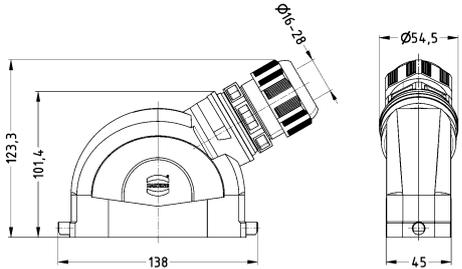
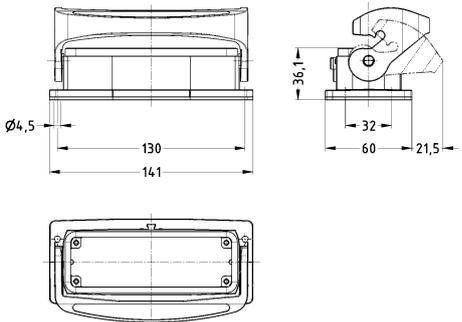


Han Eco

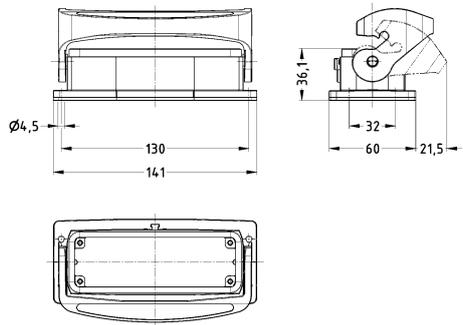
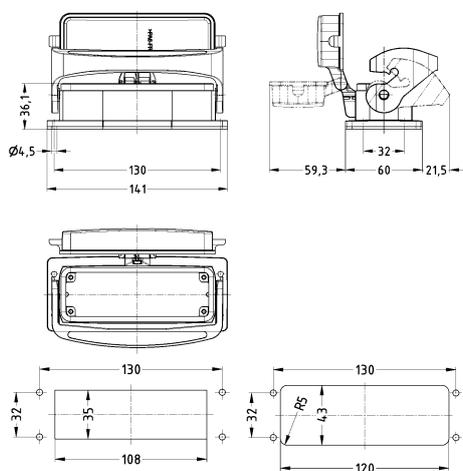
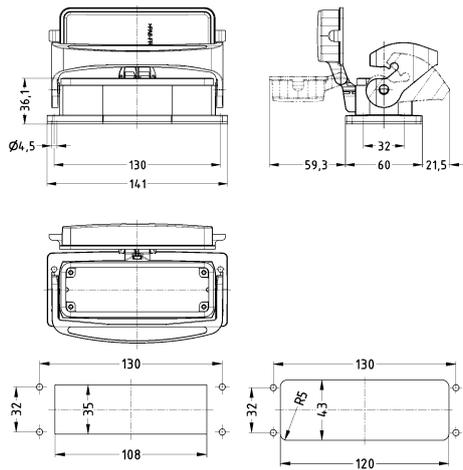
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			<p>19 43 024 0322</p>	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M32 1x M40 2x M32 2x M40</p>	<p>13 ... 21 16 ... 28 13 ... 21 16 ... 28</p>	<p>19 43 124 0227 19 43 124 0228 19 43 124 0267 19 43 124 0268</p>	

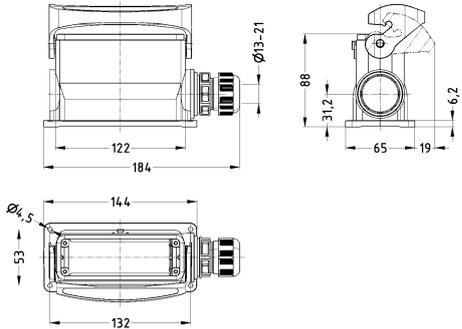
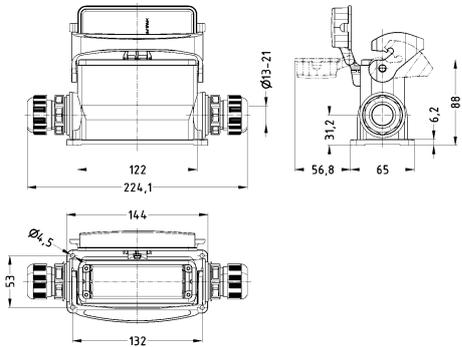
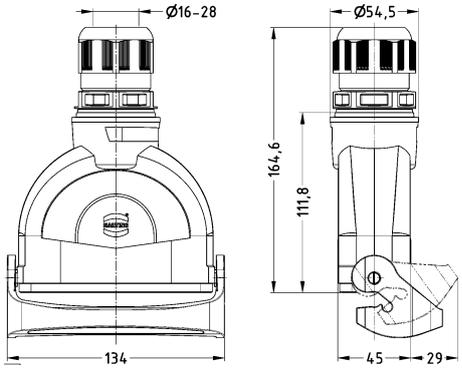
Single locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0447 19 43 124 0448</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0547 19 43 124 0548</p>	
<p>Han-Eco® B, Bulkhead mounted housings, Rear mounting</p> 			<p>19 43 024 0330 19 43 224 0330</p>	

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Bulkhead mounted housings 			19 43 024 0340	
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover, Rear mounting 			19 43 024 0331	 <p>Panel cut out Front mounting / Rear mounting</p>
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover 			19 43 024 0341	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 124 0251 19 43 124 0252 19 43 124 0253 19 43 124 0291 19 43 124 0292 19 43 124 0293</p>	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 124 0256 19 43 124 0257 19 43 124 0258 19 43 124 0296 19 43 124 0297 19 43 124 0298</p>	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0757 19 43 124 0758</p>	
<p>Han-Eco® B, Protection cover, for hoods</p> <p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 			<p>19 43 024 5442</p> <p>19 43 024 5410</p>	
<p>Han-Eco® B, Protection cover, for cable to cable housing</p>			<p>19 43 024 5446</p>	

Features

- Suitable for standard inserts and modules from the Han-Modular® portfolio
- With integrated cable gland
- Suitable for applications according to protection class II
- Minimal weight with excellent mechanical robustness

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP66
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Colour (seal)	RAL 7001 (silver-grey)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0

Specifications and approvals

IEC 61984
 EN 45545-2 R22: HL1, HL2, HL3
 EN 45545-2 R23: HL1, HL2, HL3
 EN 45545-2 R24: HL1, HL2, HL3

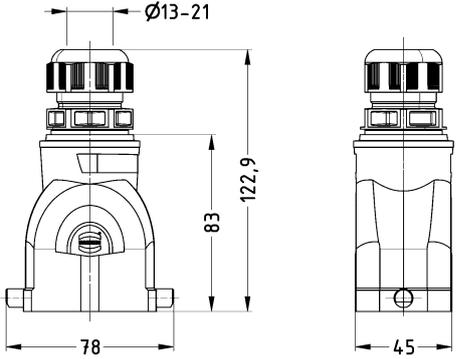
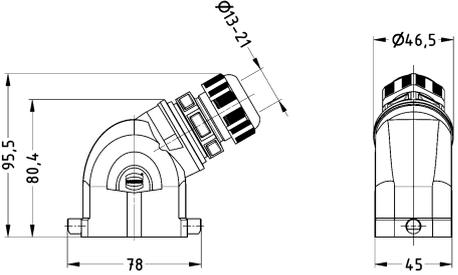
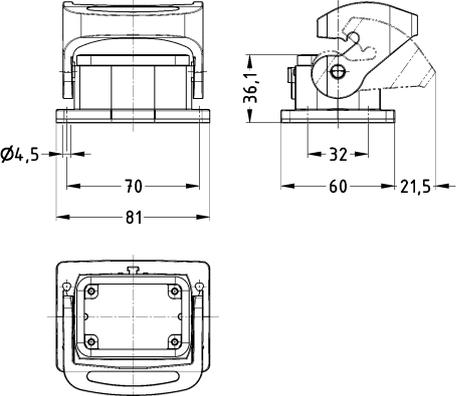
Details

Mating compatible with all metal hoods and housings of the series Han® B.

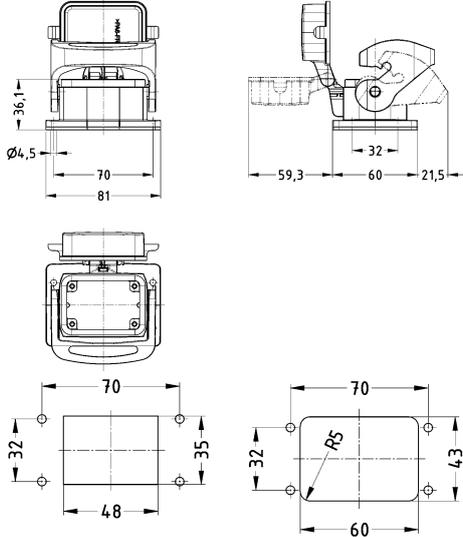
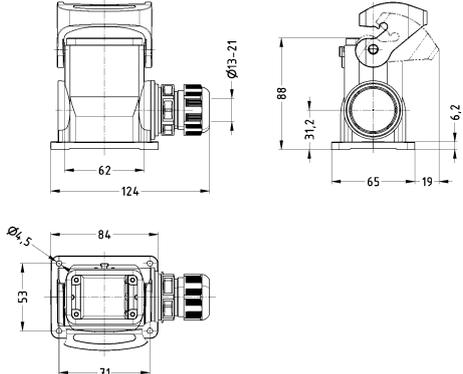
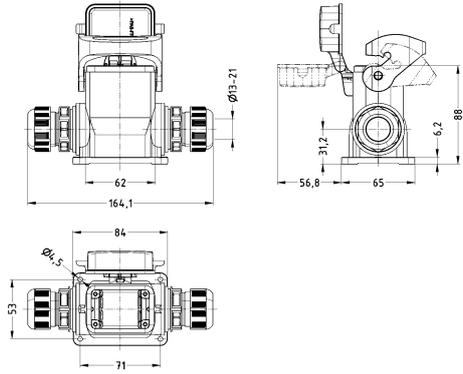
As an option a larger panel cut out for the rear assembly of the bulkhead mounted housings is possible.

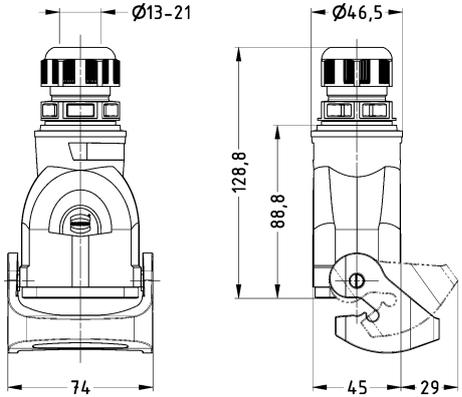
Single locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 106 0445 19 43 106 0446 19 43 106 0447</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 106 0545 19 43 106 0546 19 43 106 0547</p>	
<p>Han-Eco® B, Bulkhead mounted housings</p> 			<p>19 43 206 0340</p>	

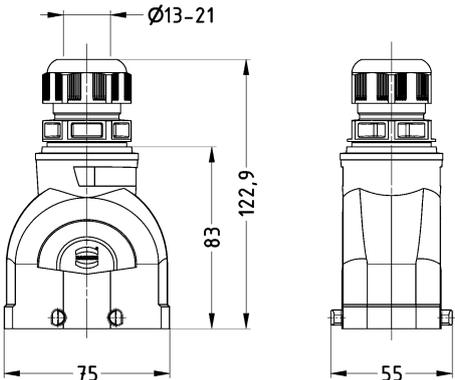
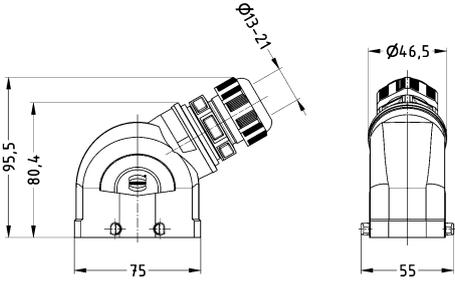
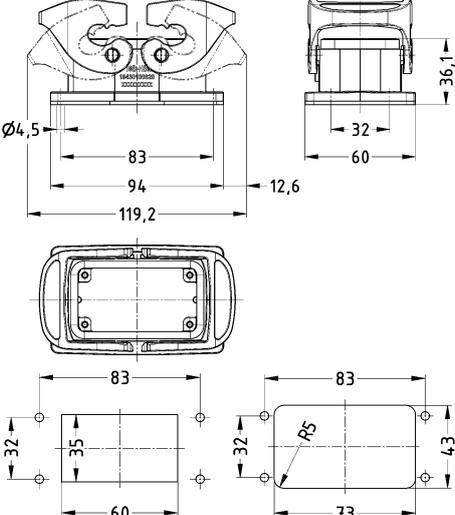
Han Eco

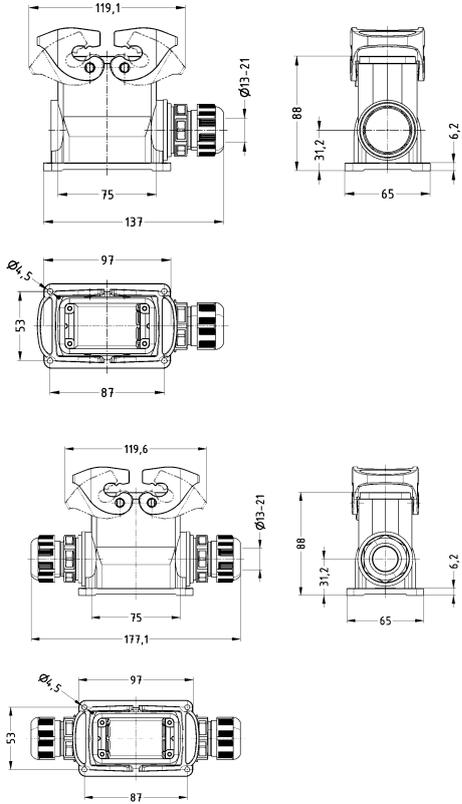
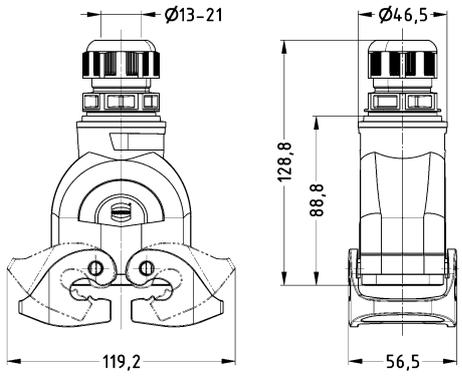
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 43 206 0341	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32 2x M20 2x M25 2x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 306 0250 19 43 306 0251 19 43 306 0252 19 43 306 0290 19 43 306 0291 19 43 306 0292</p>	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32 2x M20 2x M25 2x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 306 0255 19 43 306 0256 19 43 306 0257 19 43 306 0295 19 43 306 0296 19 43 306 0297</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 306 0755 19 43 306 0756 19 43 306 0757</p>	
<p>Han-Eco® B, Protection cover, for hoods</p> <p>Han-Eco® B, Protection cover, for bulkhead mounted housings, for surface mounted housings</p>  <p>Han-Eco® B, Protection cover, for cable to cable housing</p>			<p>19 43 206 5442</p> <p>19 43 006 5410</p> <p>19 43 006 5446</p>	

Double locking lever

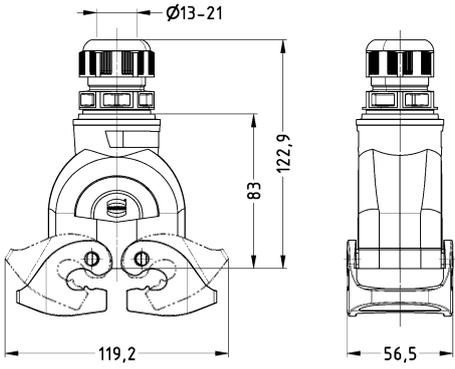
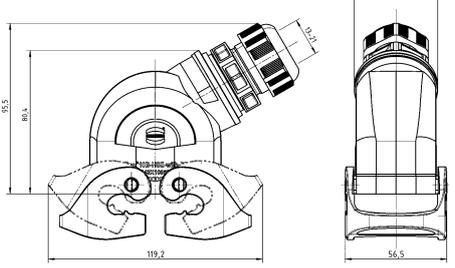
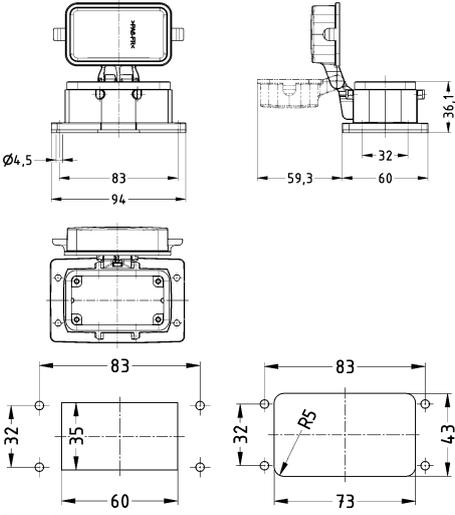
Han
Eco

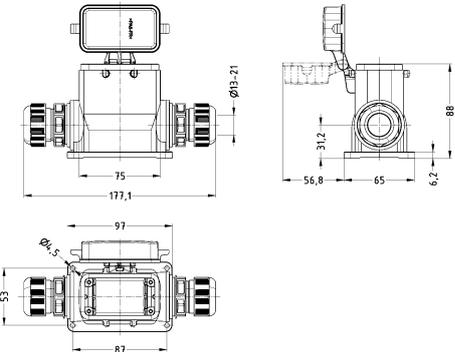
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Top entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 110 0425 19 43 110 0426 19 43 110 0427	
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 110 0525 19 43 110 0526 19 43 110 0527	
Han-Eco® B, Bulkhead mounted housings 			19 43 210 0320	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M20 1x M25 1x M32 1x M40 2x M20 2x M25 2x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21 16 ... 28 6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 310 0230 19 43 310 0231 19 43 310 0232 19 43 310 0233 19 43 310 0270 19 43 310 0271 19 43 310 0272</p>	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M20 1x M25 1x M32</p>	<p>6 ... 13 9 ... 17 13 ... 21</p>	<p>19 43 310 0735 19 43 310 0736 19 43 310 0737</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			<p>19 43 210 5422</p>	

Double locking lever (on the hood)

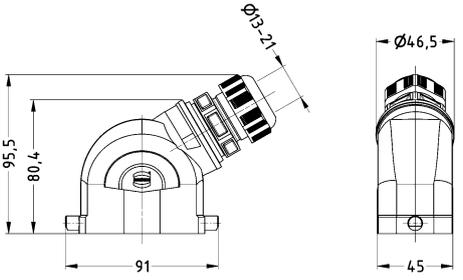
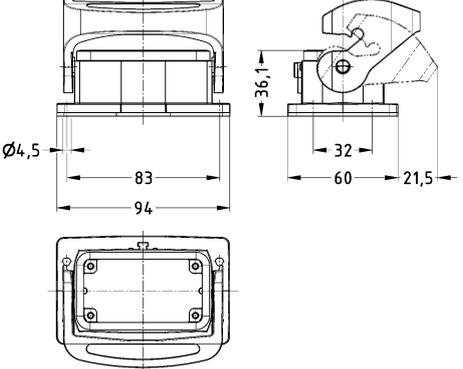
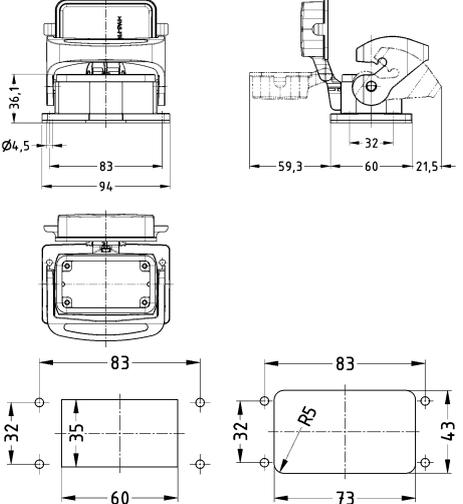
Han
Eco

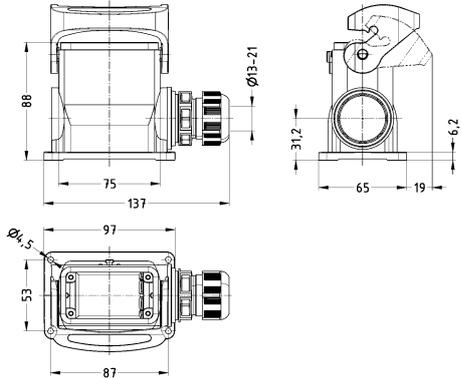
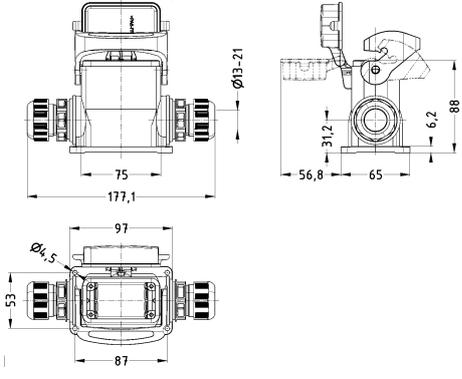
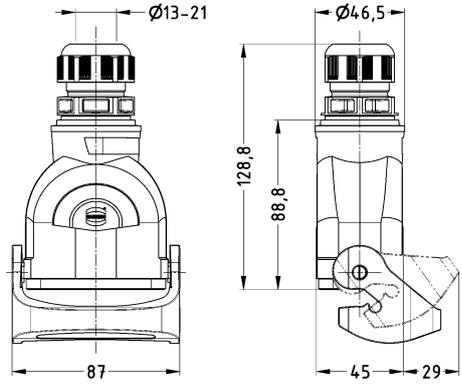
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Top entry 	1x M32	13 ... 21	19 43 110 0437	
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M32	13 ... 21	19 43 110 0537	
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover 			19 43 210 0322	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M32 2x M32</p>	<p>13 ... 21 13 ... 21</p>	<p>19 43 310 0227 19 43 310 0267</p>	

Single locking lever

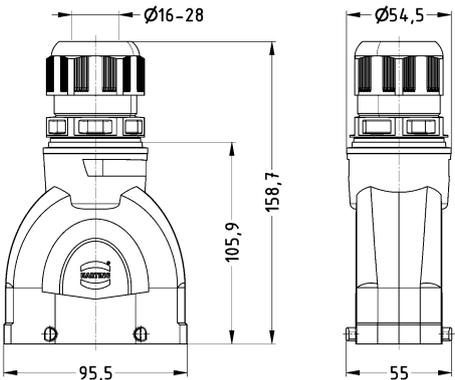
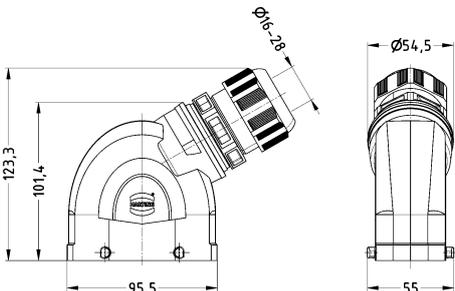
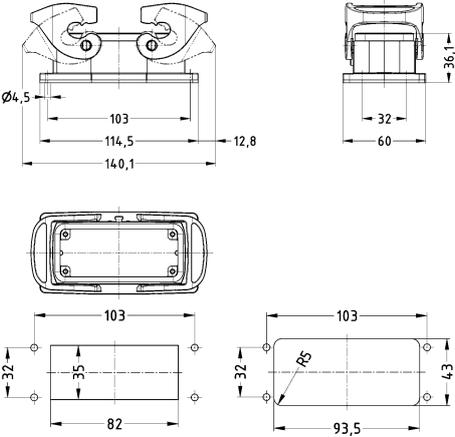
Han
Eco

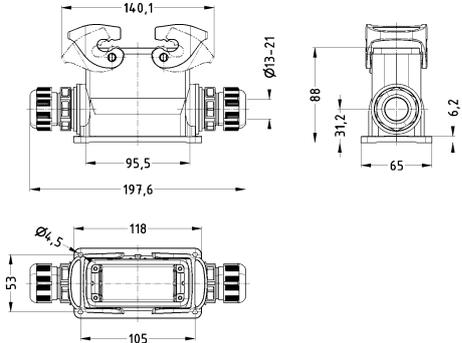
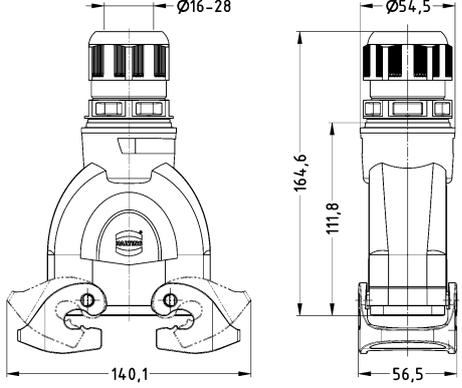
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 110 0545 19 43 110 0546 19 43 110 0547	
Han-Eco® B, Bulkhead mounted housings 			19 43 210 0340	
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover 			19 43 210 0341	 <p>Panel cut out Front mounting / Rear mounting</p>

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry 	1x M20 1x M25 1x M32 2x M20 2x M25 2x M32	6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21	19 43 310 0250 19 43 310 0251 19 43 310 0252 19 43 310 0290 19 43 310 0291 19 43 310 0292	
Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry 	1x M20 1x M25 1x M32 2x M20 2x M25 2x M32	6 ... 13 9 ... 17 13 ... 21 6 ... 13 9 ... 17 13 ... 21	19 43 310 0255 19 43 310 0256 19 43 310 0257 19 43 310 0295 19 43 310 0296 19 43 310 0297	
Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry 	1x M20 1x M25 1x M32	6 ... 13 9 ... 17 13 ... 21	19 43 310 0755 19 43 310 0756 19 43 310 0757	
Han-Eco® B, Protection cover, for hoods			19 43 210 5442	

Double locking lever

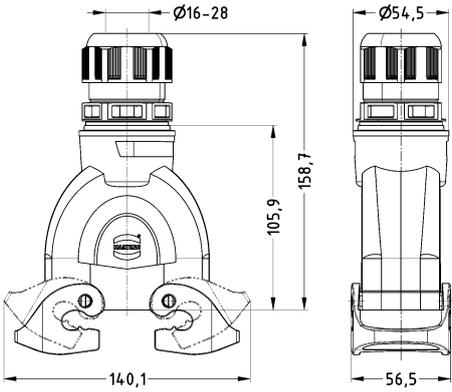
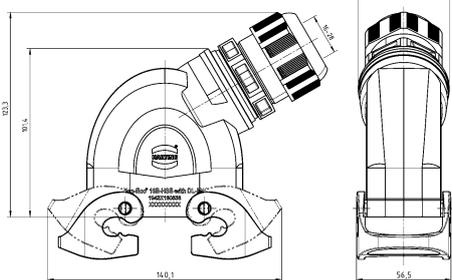
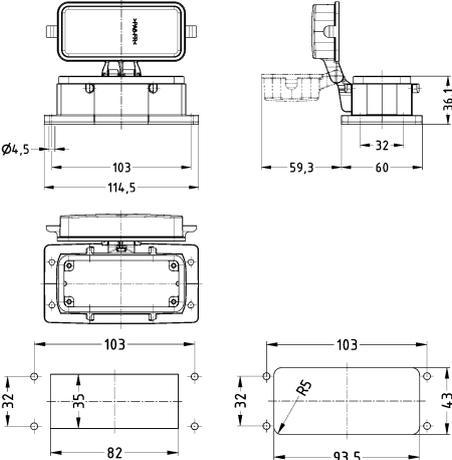
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0426 19 43 116 0427 19 43 116 0428</p>		
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0526 19 43 116 0527 19 43 116 0528</p>		
<p>Han-Eco® B, Bulkhead mounted housings</p> 			<p>19 43 216 0320</p>	 <p>Panel cut out Front mounting / Rear mounting</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 316 0231 19 43 316 0232 19 43 316 0233 19 43 316 0271 19 43 316 0272 19 43 316 0273</p>	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 316 0736 19 43 316 0737 19 43 316 0738</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			<p>19 43 216 5422</p>	

Double locking lever (on the hood)

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Top entry 	1x M40	16 ... 28	19 43 116 0438	
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M40	16 ... 28	19 43 116 0538	
Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover 			19 43 216 0322	 <p>Panel cut out Front mounting / Rear mounting</p>

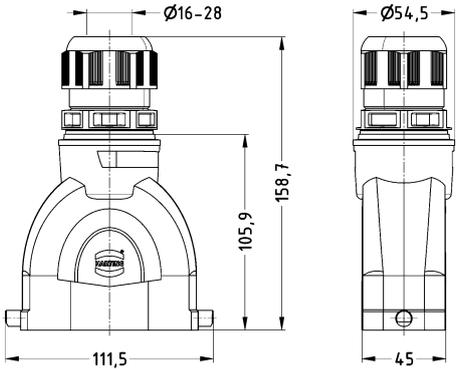
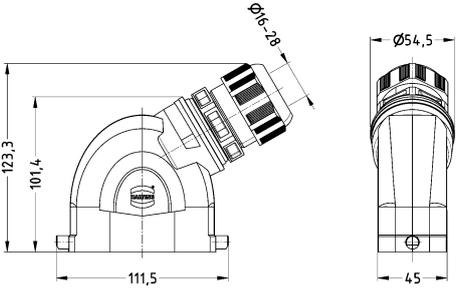
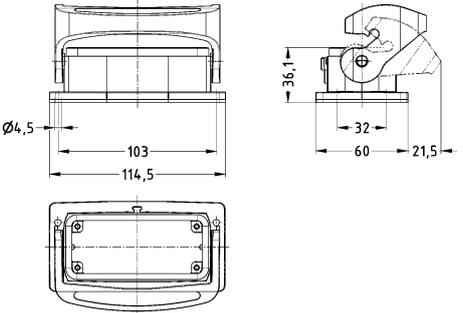


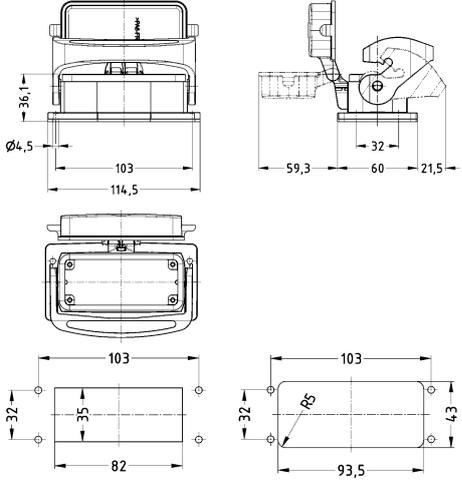
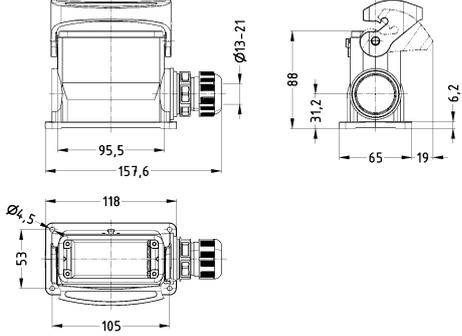
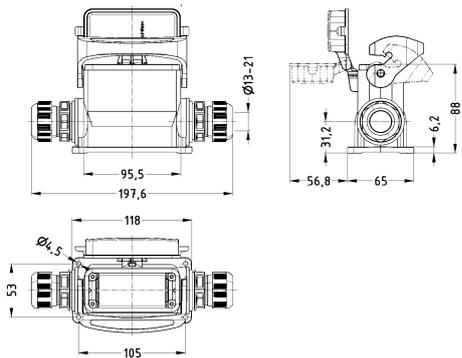
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M40 2x M40</p>	<p>16 ... 28 16 ... 28</p>	<p>19 43 316 0228 19 43 316 0268</p>	

Han
Eco

Single locking lever

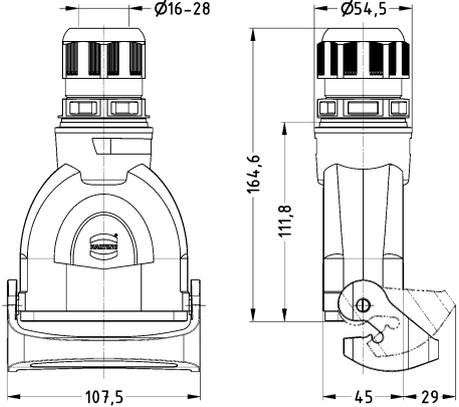
Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0446 19 43 116 0447 19 43 116 0448</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 116 0546 19 43 116 0547 19 43 116 0548</p>	
<p>Han-Eco® B, Bulkhead mounted housings</p> 			<p>19 43 216 0340</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 43 216 0341	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 316 0251 19 43 316 0252 19 43 316 0253 19 43 316 0291 19 43 316 0292 19 43 316 0293</p>	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 316 0256 19 43 316 0257 19 43 316 0258 19 43 316 0296 19 43 316 0297 19 43 316 0298</p>	

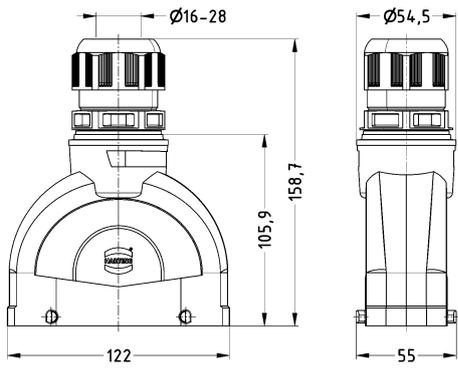
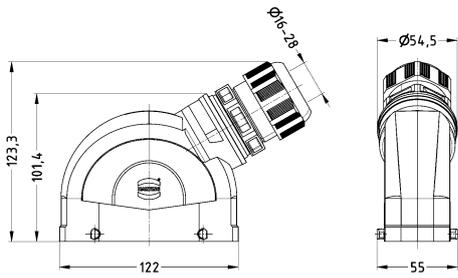
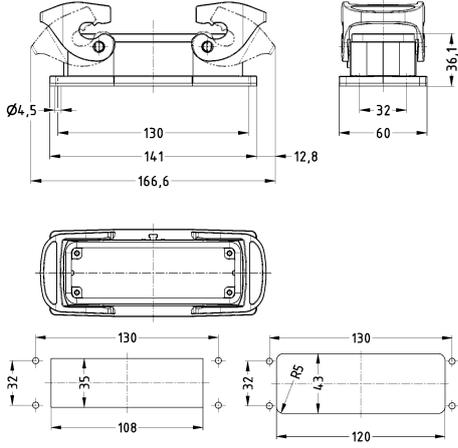


Han
Eco

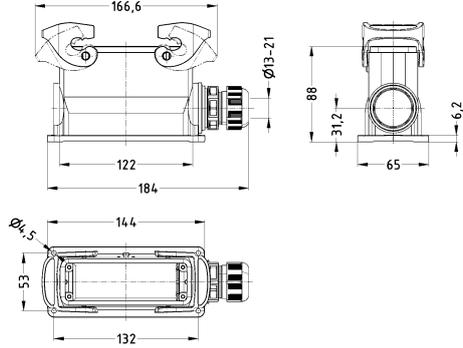
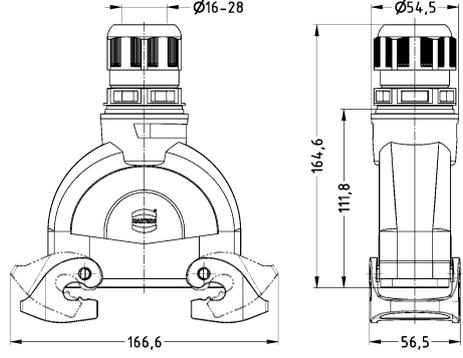
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 316 0756 19 43 316 0757 19 43 316 0758</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			<p>19 43 216 5442</p>	

Double locking lever

Han Eco

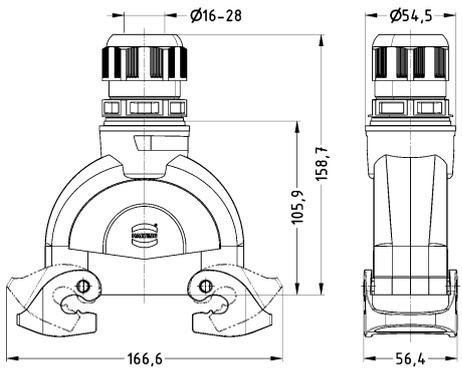
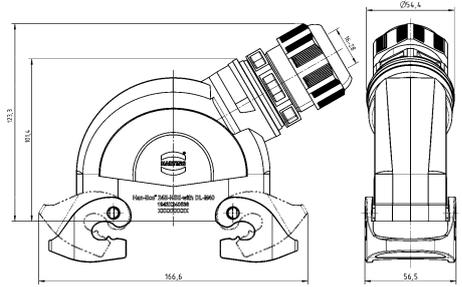
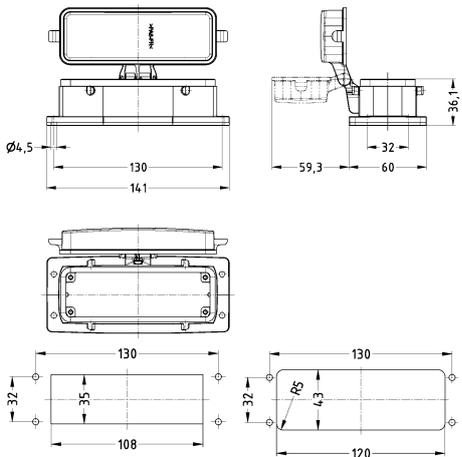
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0427 19 43 124 0428</p>	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 124 0527 19 43 124 0528</p>	
<p>Han-Eco® B, Bulkhead mounted housings</p> 			<p>19 43 224 0320</p>	 <p>Panel cut out Front mounting / Rear mounting</p>

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 324 0231 19 43 324 0232 19 43 324 0233 19 43 324 0271 19 43 324 0272 19 43 324 0273</p>	
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 324 0737 19 43 324 0738</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			<p>19 43 224 5422</p>	

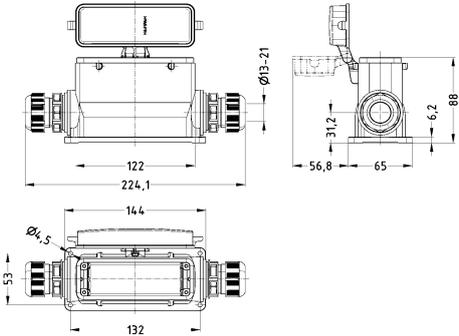
Double locking lever (on the hood)

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Hoods, With integrated cable gland, Top entry</p> 	1x M40	16 ... 28	19 43 124 0438	
<p>Han-Eco® B, Hoods, With integrated cable gland, Side entry</p> 	1x M40	16 ... 28	19 43 124 0538	
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 43 224 0322	 <p>Panel cut out Front mounting / Rear mounting</p>

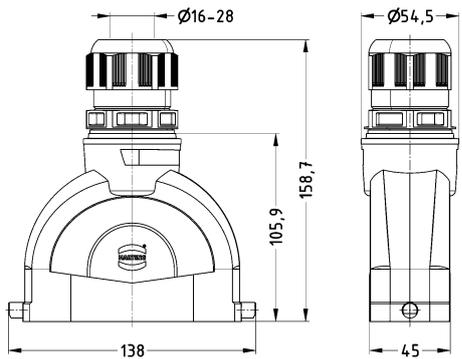
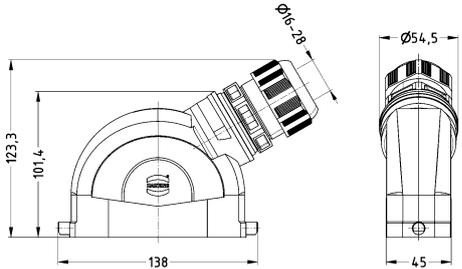
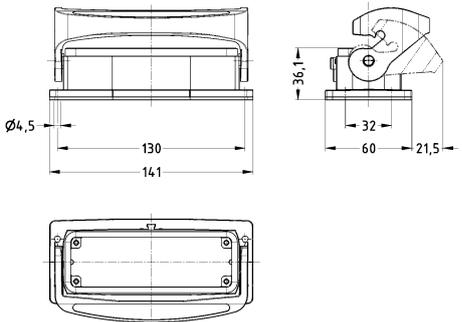


Han
Eco

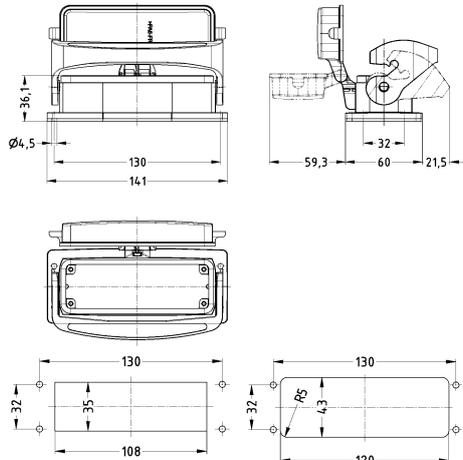
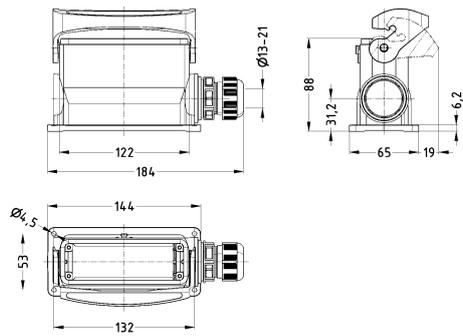
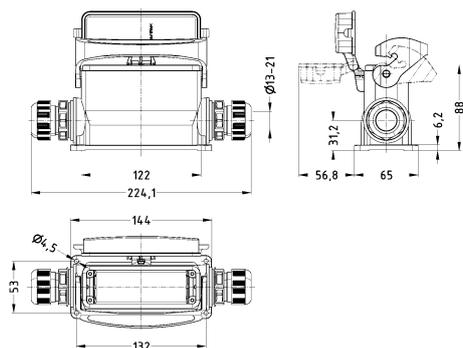
Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M32 1x M40 2x M32 2x M40</p>	<p>13 ... 21 16 ... 28 13 ... 21 16 ... 28</p>	<p>19 43 324 0227 19 43 324 0228 19 43 324 0267 19 43 324 0268</p>	

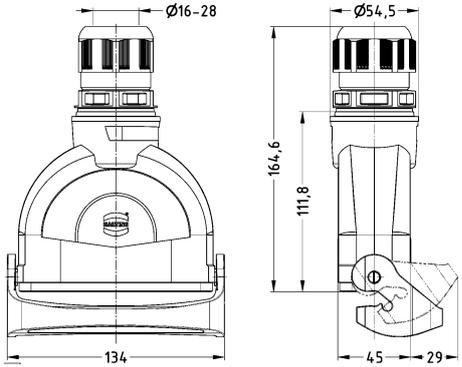
Single locking lever

Han
Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco® B, Hoods, With integrated cable gland, Top entry 	1x M32 1x M40	13 ... 21 16 ... 28	19 43 124 0447 19 43 124 0448	
Han-Eco® B, Hoods, With integrated cable gland, Side entry 	1x M32 1x M40	13 ... 21 16 ... 28	19 43 124 0547 19 43 124 0548	
Han-Eco® B, Bulkhead mounted housings 			19 43 224 0340	

Han Eco

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Bulkhead mounted housings, With thermo-plastic cover</p> 			19 43 224 0341	 <p>Panel cut out Front mounting / Rear mounting</p>
<p>Han-Eco® B, Surface mounted housing, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 324 0251 19 43 324 0252 19 43 324 0253 19 43 324 0291 19 43 324 0292 19 43 324 0293</p>	
<p>Han-Eco® B, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M25 2x M32 2x M40</p>	<p>9 ... 17 13 ... 21 16 ... 28 9 ... 17 13 ... 21 16 ... 28</p>	<p>19 43 324 0256 19 43 324 0257 19 43 324 0258 19 43 324 0296 19 43 324 0297 19 43 324 0298</p>	

Identification	Cable entry	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Han-Eco® B, Cable to cable housing, With integrated cable gland, Top entry</p> 	<p>1x M32 1x M40</p>	<p>13 ... 21 16 ... 28</p>	<p>19 43 324 0757 19 43 324 0758</p>	
<p>Han-Eco® B, Protection cover, for hoods</p>			<p>19 43 224 5442</p>	

Number of contacts

1

Han
Eco

Technical characteristics

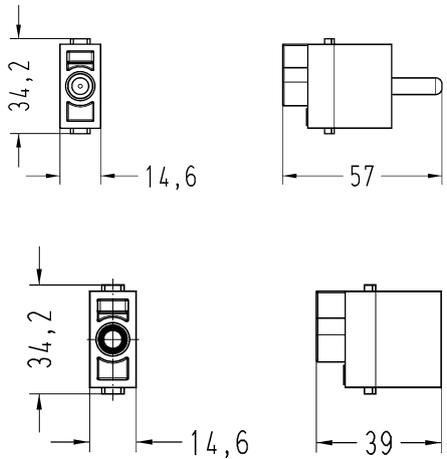
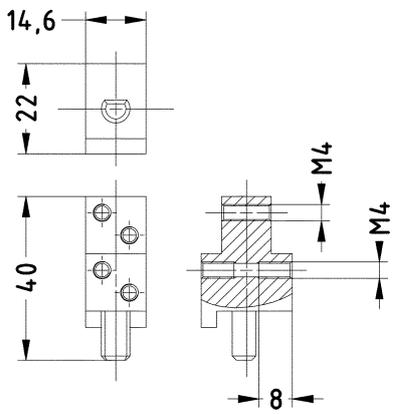
Number of contacts	1
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Copper alloy
RoHS	compliant with exemption

Technical characteristics

RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight
-----------------	--

Specifications and approvals

UL 1977 ECBT2.E235076
IEC 61984

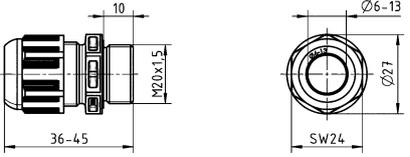
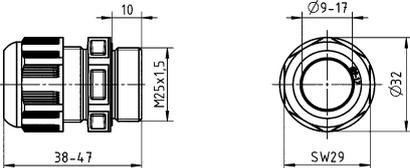
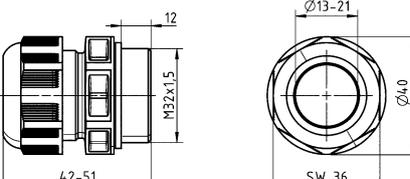
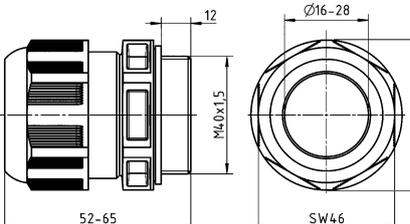
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han-Eco® Modular, Contact module, Screw termination</p>  <p>With 09 99 000 0830 HARTING Crimping tool also cable up to 25 mm² with ferrule adaptable Not for Han-Modular® hinged frames!</p>	1.5 ... 16	19 41 001 2600	19 41 001 2700	
<p>Han-Eco® Modular, PE Multiple ground connection, Up to 8 contacts</p> 	0.5 ... 6 with cable shoe M4 (total max. 25 mm ²)	19 41 000 9999	19 41 000 9999	

Technical characteristics

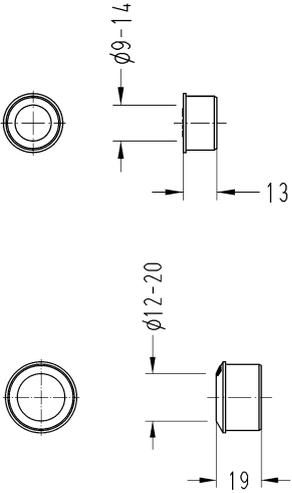
Limiting temperature -20 ... +100 °C
Material (cable glands) Polyamide

Technical characteristics

Colour (accessories) RAL 9005 (jet black)
RoHS compliant

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)															
Han-Eco®, Cable gland 	M20	6 ... 13	19 41 000 5111	Tightening torque <table border="1"> <thead> <tr> <th></th> <th>Fitting</th> <th>Cap nut</th> </tr> </thead> <tbody> <tr> <td>M20</td> <td>4 Nm</td> <td>3 Nm</td> </tr> <tr> <td>M25</td> <td>10 Nm</td> <td>4 Nm</td> </tr> <tr> <td>M32</td> <td>15 Nm</td> <td>4 Nm</td> </tr> <tr> <td>M40</td> <td>20 Nm</td> <td>20 Nm</td> </tr> </tbody> </table>    		Fitting	Cap nut	M20	4 Nm	3 Nm	M25	10 Nm	4 Nm	M32	15 Nm	4 Nm	M40	20 Nm	20 Nm
		Fitting	Cap nut																
	M20	4 Nm	3 Nm																
	M25	10 Nm	4 Nm																
	M32	15 Nm	4 Nm																
M40	20 Nm	20 Nm																	
M25	9 ... 17	19 41 000 5121																	
M32	13 ... 21	19 41 000 5131																	
M40	16 ... 28	19 41 000 5141																	

Han
Eco

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco®, Reduction seal insert 	M32 M40	9 ... 14 12 ... 20	19 41 000 5132 19 41 000 5142	

Technical characteristics

Material (seal) NBR

Technical characteristics

Colour (seal) Black
RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
----------------	------	-------------	-------------------------------

Han-Eco® Modular,
Flange gasket



06 B
10 B
16 B
24 B

19 41 000 9801
19 41 000 9802
19 41 000 9803
19 41 000 9804

Han-Eco® A,
Flange gasket



10 A
16 A

19 46 000 9992
19 46 000 9993

Han-Eco® B,
Flange gasket



06 B
10 B
16 B
24 B

19 43 000 9801
19 43 000 9802
19 43 000 9803
19 43 000 9804

Han-Eco® Modular,
Profile gasket



06 B
10 B
16 B
24 B

19 41 000 9901
19 41 000 9902
19 41 000 9903
19 41 000 9904

Han-Eco® A,
Profile gasket



10 A
16 A

19 46 000 9996
19 46 000 9997

Technical characteristics

Material (seal) FPM

Technical characteristics

Colour (seal) RAL 7001 (silver-grey)

Identification	Size	Part number	Drawing (dimensions in mm)
----------------	------	-------------	-------------------------------

Han-Eco® Modular,
Flange gasket,



06 B
10 B
16 B
24 B

19 41 000 9851
19 41 000 9852
19 41 000 9853
19 41 000 9854

Han-Eco® Modular,
Profile gasket,



06 B
10 B
16 B
24 B

19 41 000 9951
19 41 000 9952
19 41 000 9953
19 41 000 9954

Double locking lever

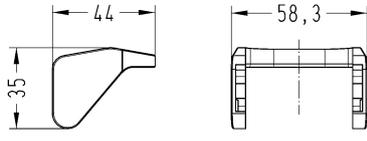
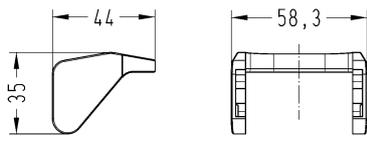
Han
Eco

Technical characteristics

Material (accessories) Polyamide

Technical characteristics

Colour (accessories) Black, Grey compliant
RoHS

Identification	Size	Part number	Drawing (dimensions in mm)
Han-Eco® Modular, Locking levers 	6/10/16/24 B	19 41 000 5201	
Han-Eco® Modular, Locking levers, Grey 	6/10/16/24 B	19 41 000 5202	
Han-Eco® B, Locking levers 	10/16/24 B	19 43 000 5221	

Single locking lever

Han
Eco

Technical characteristics

Material (accessories) Polyamide

Technical characteristics

Colour (accessories) Black

Identification	Size	Part number	Drawing (dimensions in mm)
----------------	------	-------------	-------------------------------

Han-Eco® A,
Locking levers



10 A
16 A

19 46 000 5201
19 46 000 5202

Han-Eco® B,
Locking levers



06 B
10 B
16 B
24 B

19 43 000 5222
19 43 000 5228
19 43 000 5229
19 43 000 5230

Contents	Page
Hoods/Housings, metal Han® 3 A.....	Han 31.4
Hoods/Housings, thermoplastic Han® 3 A.....	Han 31.11
Standard hoods/housings Han® 10 ... 32 A.....	Han 31.17
Standard hoods/housings Han® B.....	Han 31.28
Han® Easy Hood hoods/housings	Han 31.80
Han-Drive® hoods/housings	Han 31.84
Han® 3 M hoods/housings.....	Han 31.87
Han® M hoods/housings.....	Han 31.92
Han® 3 EMC hoods/housings.....	Han 31.107
Han® EMC hoods/housings.....	Han 31.112
Han® EMC/B hoods/housings	Han 31.119
Han® 3 HPR hoods/housings	Han 31.134
Han® HPR hoods/housings	Han 31.149
Han-INOX® hoods/housings.....	Han 31.172

Han® 3 A Standard Hoods/Housings

Metal hoods/housings for industrial applications

Material	zinc die-cast
Colour	RAL 7037 (grey)
Surface	powder-coated
Locking element	steel, zinc-plated
Lever type	lever, metal
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 12
Flammability acc. to UL 94	V 0
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han-Drive® Housings for motor applications

Material	aluminium die-cast
Colour	non coloured / RAL 7037 (grey)
Surface	electrical conductive / powder-coated / unpainted
Locking element	stainless steel
Lever type	Han-Easy Lock®
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® 3 A Hoods/Housings

Plastic hoods/housings for industrial applications

Material	polycarbonate
Colour	RAL 7032 (light grey) / RAL 9005 (black)
Locking element	polyamide
Lever type	lever, plastic
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Flammability acc. to UL 94	V 0
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han® 3 M Hoods/Housings

Hoods/Housings for higher environmental requirements

Material	zinc die-cast
Colour	RAL 9005 (black)
Surface	- Top coat epoxy powder paint
Locking element	stainless steel
Lever type	lever, metal
Hoods/Housings seal	FPM
Limiting temperatures	-40 °C ... +125 °C
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han® Standard Hoods/Housings

Metal hoods/housings for industrial applications

Material	aluminium die-cast
Colour	RAL 7037 (grey)
Surface	powder-coated
Locking element	stainless steel
Lever type	Han-Easy Lock®
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® M Hoods/Housings

Hoods/Housings for higher environmental requirements

Material	aluminium die-cast
Colour	RAL 9005 (black)
Surface	- Top coat epoxy powder paint
Locking element	stainless steel
Lever type	lever, metal
Hoods/Housings seal	FPM
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® 3 EMC Hoods/Housings Hoods/Housings for higher EMC requirements

Material	zinc die-cast
Colour	non coloured
Surface	electrical conductive
Locking element	steel, zinc-plated
Lever type	lever, metal
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han-INOX® Hoods/Housings for higher corrosion requirements

Material	stainless steel
Colour	non coloured
Surface	electrical conductive
Locking element	stainless steel
Lever type	lever, metal
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65 IP44 IP67 is achieved with seal screw 09 20 000 9918
- Size Han® 3 A	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han® EMC Hoods/Housings Hoods/Housings for higher EMC requirements

Material	aluminium die-cast
Colour	non coloured
Surface	electrical conductive
Locking element	
- Screw locking	M5
- Material	stainless steel
- Tightening torque	3 Nm
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® 3 HPR Hoods/Housings Hoods/Housings for harsh environmental requirements

Material	zinc die-cast
Colour	RAL 9005 (black)
Surface	
- Top coat	epoxy powder paint / chromated
Locking element	
- Screw locking	M4
- Material	stainless steel
- Tightening torque	2 Nm
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65 / IP68 / IP69K

Attention
If inserts of the series Han® Q and Han A® are used, the seal on the insert must be removed. The sealed screw of the insulation body must be replaced by the sealed screw of the hood.
For angled bulkhead or surface mounted housings with through holes in the mounting flange the user must make sure, that the fixing screws seal to the inner part of the housing.

Han® EMC/B Hoods/Housings Hoods/Housings for higher EMC requirements

Material	
- Hoods/Housings	aluminium die-cast
- shielded frames	zinc die-cast alloy
Colour	non coloured
Surface	
- Hoods/Housings	electrical conductive
- shielded frames	electrical conductive
Locking element	stainless steel
Lever type	Han-Easy Lock®
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® HPR Hoods/Housings Hoods/Housings for harsh environmental requirements

Material	aluminium die-cast, corrosion resistant
Colour	RAL 9005 (black)
Surface	
- Top coat	epoxy powder paint
Locking element	
- Screw locking	M6
- Material	stainless steel
- Tightening torque	4 Nm
- Toggle locking	
- Material	stainless steel
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65 / IP68 / IP69K

Features

- Standard Hoods/housings for industrial applications
- Slim, space saving construction type

Technical characteristics

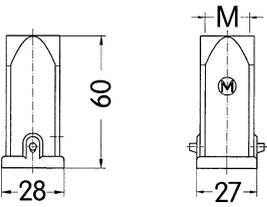
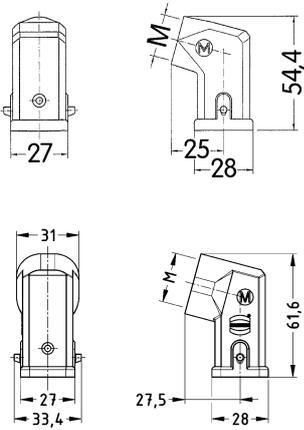
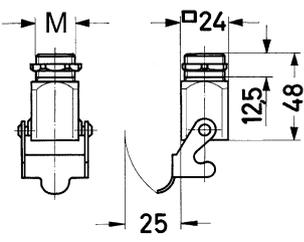
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Steel
Surface (locking)	Zinc plated
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Specifications and approvals

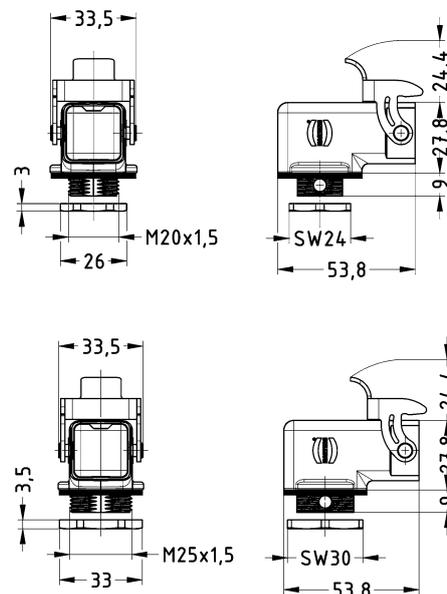
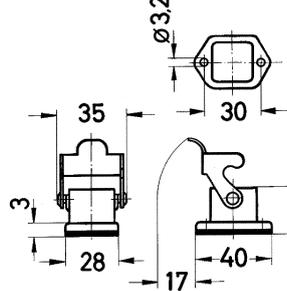
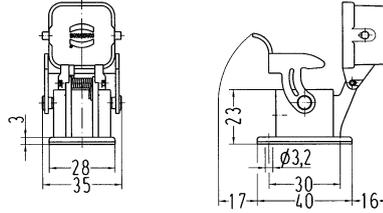
DNV GL

Standard Hoods/housings for industrial applications
Single locking lever

Housings

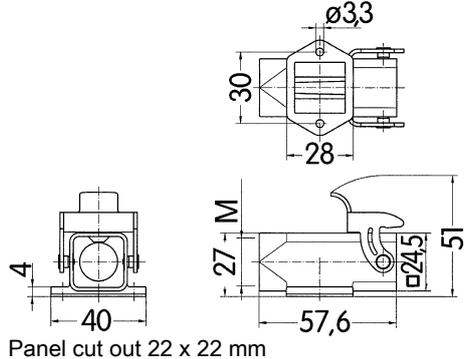
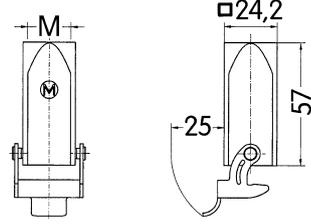
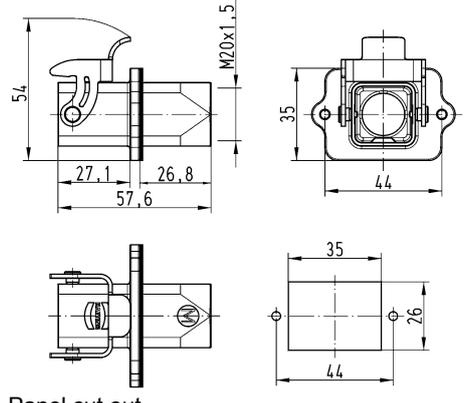
Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Hoods, With integrated cable gland, Top entry 	1x Integrated 1x Integrated	6 ... 12 11 ... 17	19 20 003 1421 19 20 003 1422	
Han A®, Hoods, Top entry 	1x M20 1x M25		19 20 003 1440 19 20 003 1445	
Han A®, Hoods, Side entry 	1x M20 1x M25		19 20 003 1640 19 20 003 1645	
Han A®, Screw mounted housings 	1x M20		19 20 003 1150	

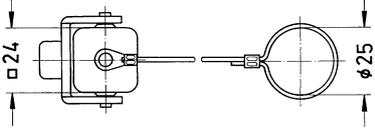
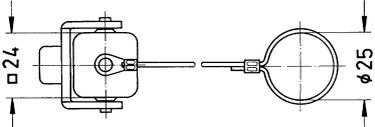
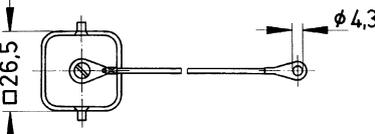
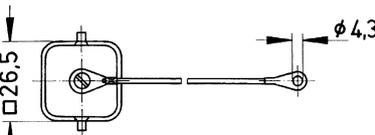

Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Screw mounted housings, Angled</p> 	<p>1x M20 1x M25</p>		<p>19 20 003 1160 19 20 003 1165</p>	
<p>Han A®, Bulkhead mounted housings, Straight</p> 			<p>09 20 003 0301</p>	 <p>Panel cut out 22 x 22 mm</p>
<p>Han A®, Bulkhead mounted housings, Straight, With metal cover</p> 			<p>09 20 003 0305</p>	 <p>Panel cut out 22 x 22 mm</p>

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Bulkhead mounted housings, Straight, With metal cover, With seal			09 20 003 0306	
for female inserts				
Han A®, Bulkhead mounted housings, Angled			09 20 003 0801	<p>Panel cut out 22 x 22 mm</p>
Han A®, Bulkhead mounted housings, Angled, 4 fixing screws			09 20 003 0810	
Han A®, Bulkhead mounted housings, Angled, 4 fixing screws, Square mounting flange			09 20 003 0811	

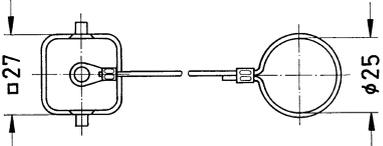
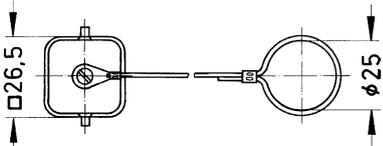
Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Surface mounted housing, Open bottom, Top entry 	1x M20		19 20 003 1250	 <p>Panel cut out 22 x 22 mm</p>
Han A®, Surface mounted housing, Bottom closed, Top entry 	1x M20		19 20 003 1252	
Han A®, Cable to cable housing, Top entry 	1x M20 1x M25		19 20 003 1750 19 20 003 1755	
Han A®, Panel feed through housing, Top entry 	1x M20		19 20 003 1120	 <p>Panel cut out</p>

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Protection cover, for hoods, Metal, With fixing cord, With seal</p>  <p>for mounted female insert</p>			09 20 003 5421	
<p>Han A®, Protection cover, for hoods, Metal, With fixing cord</p>  <p>for mounted male insert</p>			09 20 003 5422	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord, With seal</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>			09 20 003 5425	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord</p>  <p>for mounted male insert</p>			09 20 003 5426	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With seal for mounted female insert or for mounted Han-Brid® insert</p>			09 20 003 5432	



Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Protection cover, for cable to cable housing, Metal, With fixing cord, With seal</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>			09 20 003 5427	
<p>Han A®, Protection cover, for cable to cable housing, Metal, With fixing cord</p> 			09 20 003 5428	

Features

- Hoods/housings for industrial applications
- Slim, space saving construction type

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey), RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 7032 (pebble grey), RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

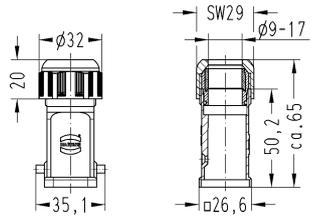
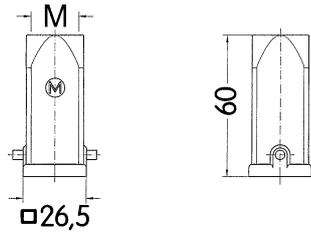
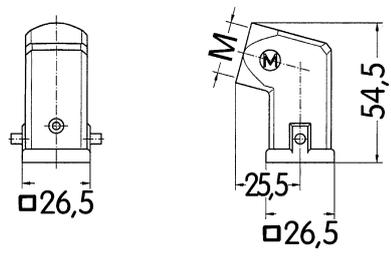
Specifications and approvals

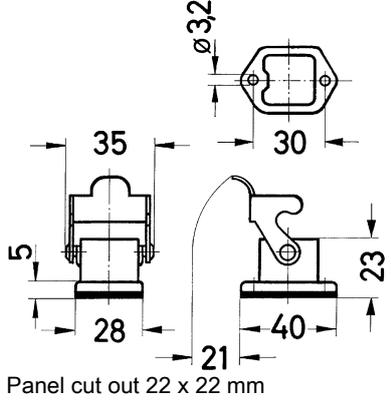
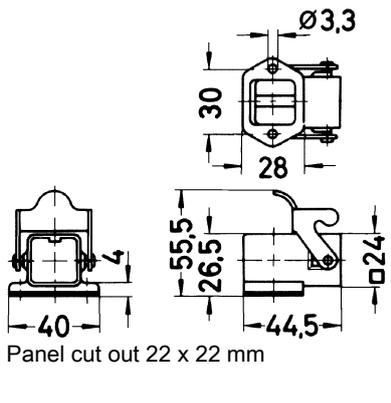
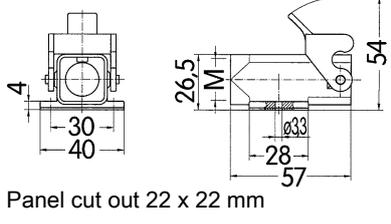
UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Housings

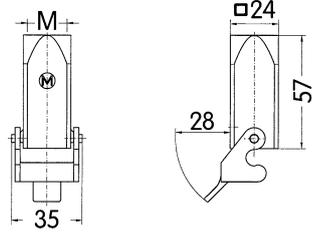
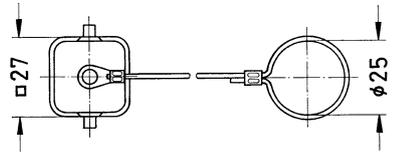
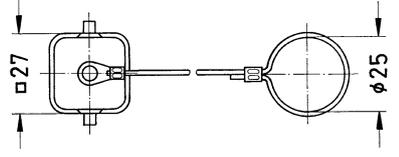
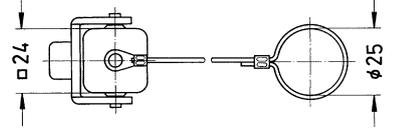
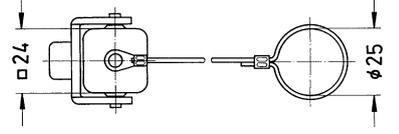
Standard Hoods/housings for industrial applications
Single locking lever



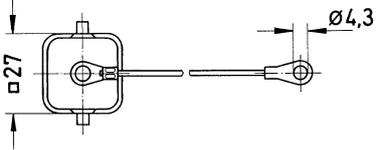
Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Hoods, With integrated cable gland, Top entry, Grey 	1x Integrated 1x Integrated	7 ... 12 9 ... 17	19 20 003 0415 19 20 003 0410	
Han A®, Hoods, Top entry, Grey 	1x M20 1x M25		19 20 003 0420 19 20 003 0430	
Han A®, Hoods, Top entry, Black 	1x M20 1x M25		19 20 003 0427 19 20 003 0437	
Han A®, Hoods, Side entry, Grey 	1x M20		19 20 003 0620	
Han A®, Hoods, Side entry, Black	1x M20		19 20 003 0627	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Bulkhead mounted housings, Straight, Grey</p> 			09 20 003 0320	 <p>Panel cut out 22 x 22 mm</p>
<p>Han A®, Bulkhead mounted housings, Straight, Black</p>			09 20 003 0327	
<p>Han A®, Bulkhead mounted housings, Angled, Grey</p> 			09 20 003 0820	 <p>Panel cut out 22 x 22 mm</p>
<p>Han A®, Bulkhead mounted housings, Angled, Black</p>			09 20 003 0827	
<p>Han A®, Surface mounted housing, Top entry, Grey</p> 	1x M20		19 20 003 0220	 <p>Panel cut out 22 x 22 mm</p>
<p>Han A®, Surface mounted housing, Top entry, Black</p>	1x M20		19 20 003 0227	

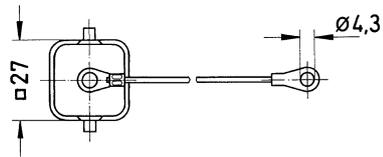
Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Cable to cable housing, Top entry, Grey</p> 	1x M20		19 20 003 0720	
<p>Han A®, Cable to cable housing, Top entry, Black</p>	1x M20		19 20 003 0727	
<p>Han A®, Protection cover, for cable to cable housing, Thermoplastic, With seal, With fixing cord, Grey</p>  <p>for mounted female insert</p>			09 20 003 5447	
<p>Han A®, Protection cover, for cable to cable housing, Thermoplastic, With fixing cord, Grey</p>  <p>for mounted male insert</p>			09 20 003 5448	
<p>Han A®, Protection cover, for hoods, Thermoplastic, With fixing cord, With seal, Grey</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>			09 20 003 5441	
<p>Han A®, Protection cover, for hoods, Thermoplastic, With fixing cord, Grey</p>  <p>for mounted male insert</p>			09 20 003 5442	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, Grey</p>  <p>for mounted male insert</p>			09 20 003 5407	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With seal, Grey</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>			09 20 003 5408	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With seal, Black</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>			09 20 003 5409	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With seal, With fixing cord, Grey</p>  <p>for mounted female insert</p>			09 20 003 5445	



Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With fixing cord, Grey</p>  <p>for mounted male insert</p>			09 20 003 5446	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With seal, With fixing cord, Black</p>  <p>for mounted female insert</p>			09 20 003 5449	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With fixing cord, Black</p>  <p>for mounted male insert</p>			09 20 003 5450	

Features

- Standard Hoods/housings for industrial applications
- Slim, space saving construction type

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6b: Lead as an alloying element in aluminium containing up to 0.4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

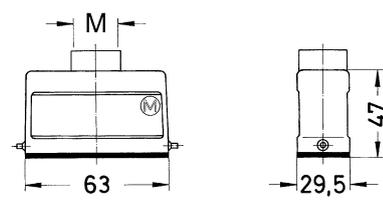
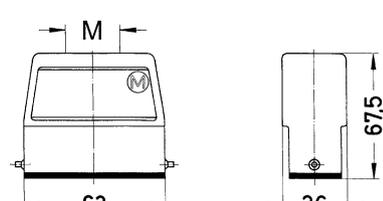
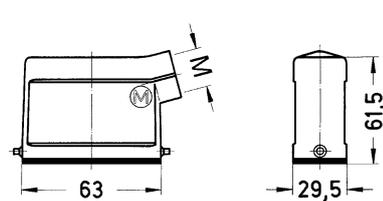
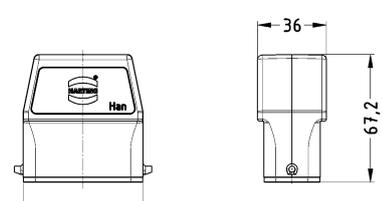
Specifications and approvals

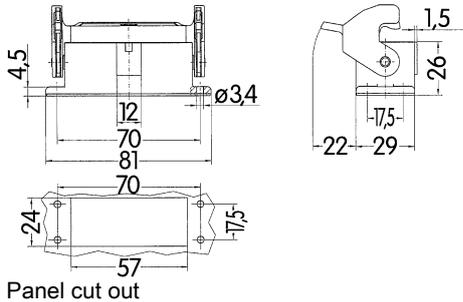
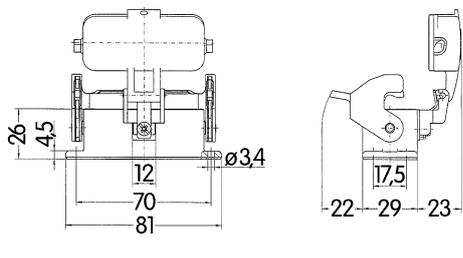
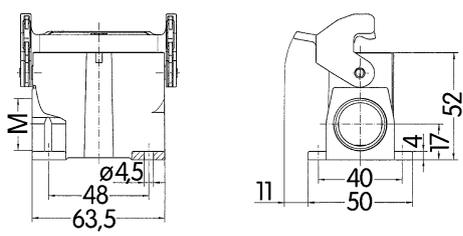
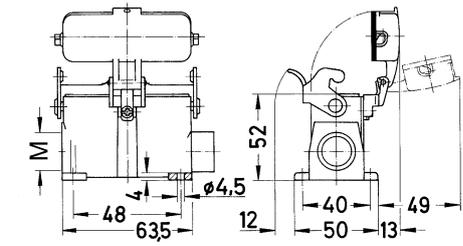
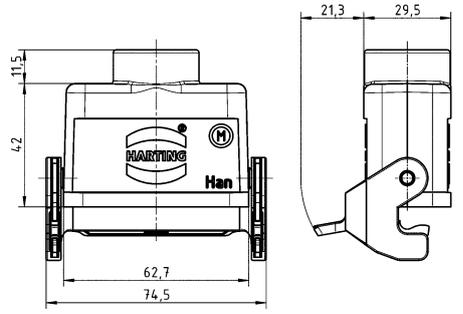
UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Housings

Standard Hoods/housings for industrial applications
Single locking lever

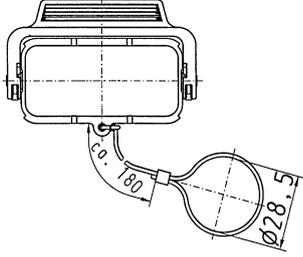
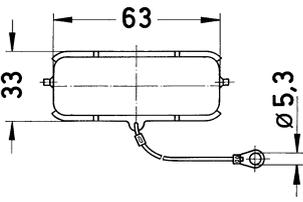
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Hoods, Top entry 	1x M20 1x M25	19 20 010 1440	19 20 010 0446		
		19 20 010 1540		19 20 010 0546	
Han A®, Hoods, Side entry 	1x M20 1x M25		09 20 010 0801		









Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Bulkhead mounted housings, Han-Easy Lock® 		09 20 010 0301			
		09 20 010 0321			
Han A®, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M20	19 20 010 0251 19 20 010 0290			
	2x M20	19 20 010 0295			
Han A®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20	19 20 010 1730			



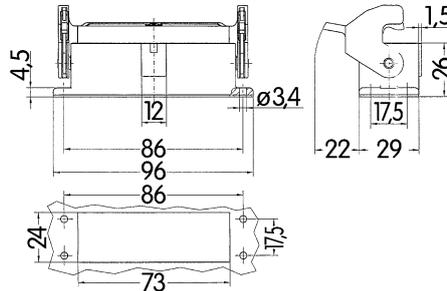
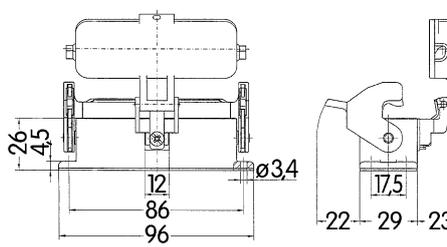
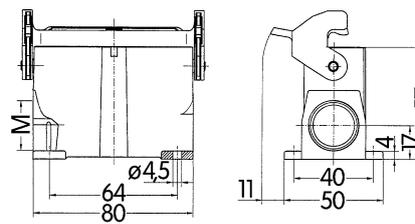
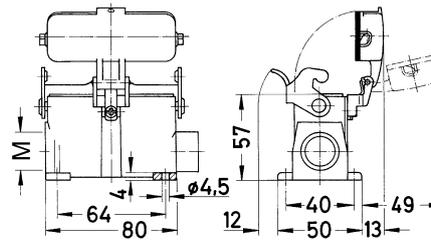
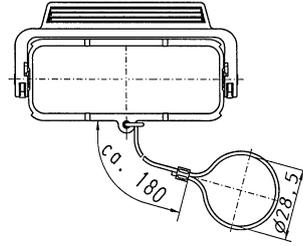
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
<p>Han A®, Protection cover, for hoods, Metal, With fixing cord</p> 		09 20 010 5423	09 20 010 5423	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		09 20 010 5425	09 20 010 5425	

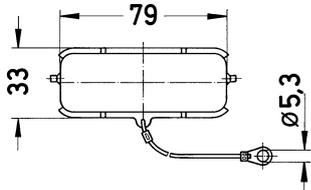
Standard Hoods/housings for industrial applications
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Hoods, Top entry 	1x M20 1x M25	19 20 016 1440	19 20 016 0446		
					
Han A®, Hoods, Side entry 	1x M20 1x M25	19 20 016 1540	19 20 016 0546		
					
Han A®, Hoods, Without cable entry 			09 20 016 0801		

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Bulkhead mounted housings, Han-Easy Lock® 		09 20 016 0301		 <p>Panel cut out</p>
Han A®, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 20 016 0321		
Han A®, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M20 2x M25	19 20 016 0251 19 20 016 0290 19 20 016 0291		
Han A®, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	2x M20	19 20 016 0295		
Han A®, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 20 016 5423	09 20 016 5423	

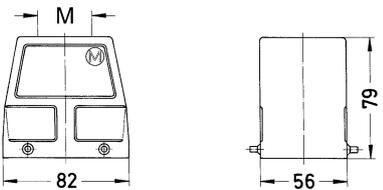
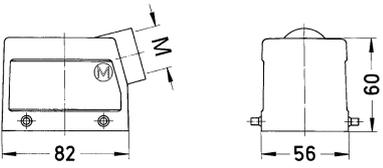
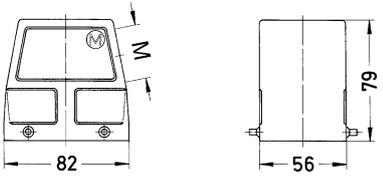
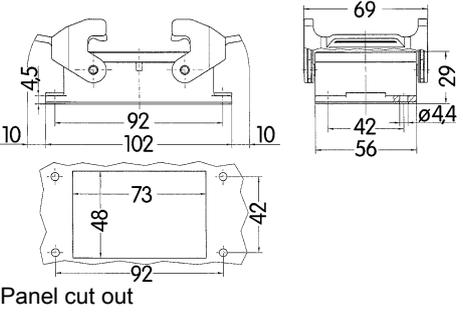
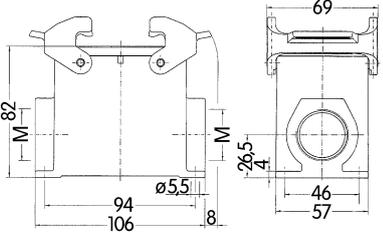


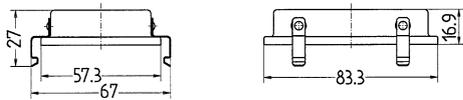
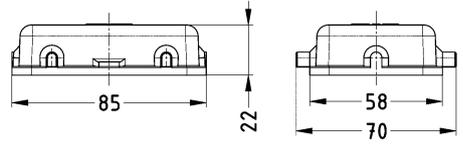
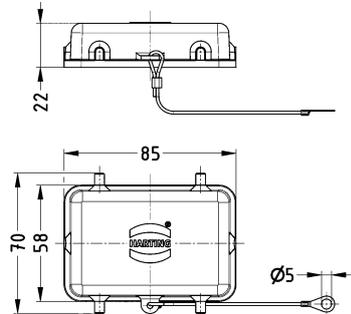
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
<p>Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		09 20 016 5425	09 20 016 5425	



Standard Hoods/housings for industrial applications
Double locking lever

Housings

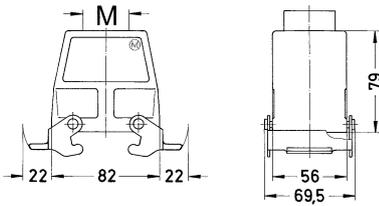
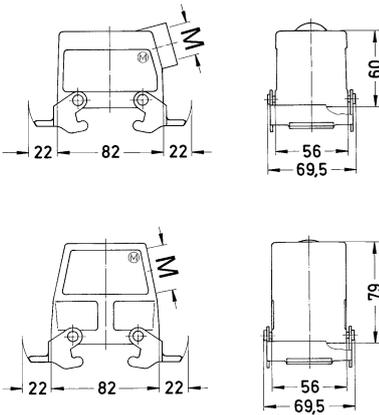
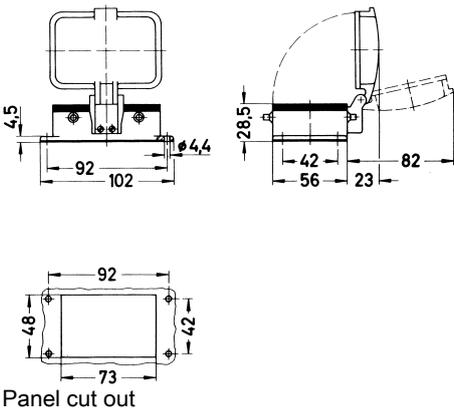
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Hoods, Top entry 	1x M25 1x M32		19 20 032 0426 19 20 032 0427		
Han A®, Hoods, Side entry 	1x M25 1x M32	19 20 032 1521	19 20 032 0527	 	
Han A®, Bulkhead mounted housings, Han-Easy Lock® 		09 20 032 0301		 <p>Panel cut out</p>	
Han A®, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M32		19 20 032 0231 19 20 032 0232 19 20 032 0272		

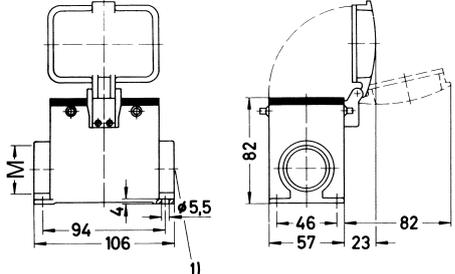
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Protection cover, for hoods, Metal 		09 20 032 5401	09 20 032 5401		
Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal 		09 20 032 5405	09 20 032 5405		
Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic 		09 20 032 5407	09 20 032 5407		
Han A®, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With fixing cord 		09 20 032 5408	09 20 032 5408		



Standard Hoods/housings for industrial applications
Double locking lever (on the hood)

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Hoods, Top entry, Han-Easy Lock® 	1x M32		19 20 032 0437	
Han A®, Hoods, Side entry, Han-Easy Lock® 	1x M25 1x M32	19 20 032 1531	19 20 032 0537	
Han A®, Bulkhead mounted housings, With thermo-plastic cover 		09 20 032 0302		 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Surface mounted housing, With thermo-plastic cover, Side entry 	1x M25		19 20 032 0226	 <p>1) Blind way for one cable entry</p>

Features

- Standard hoods/housings for industrial connectors
- Locking levers: Han-Easy Lock®
- Field of application: for excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
- Distinguishing feature: hoods/housings colour-coded grey (RAL 7037)
- Many variations: for precise industrial applications

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65, IP67, in combination with special bulkhead mounted housings, IP66, IP44, in unlocked position
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material (accessories)	Polyamide, Stainless steel
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6b: Lead as an alloying element in aluminium containing up to 0.4 % lead by weight

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details









Standard degree of protection: IP65

IP67 possible, in combination with special bulkhead mounted housings

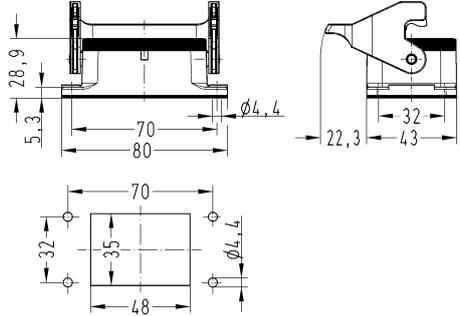
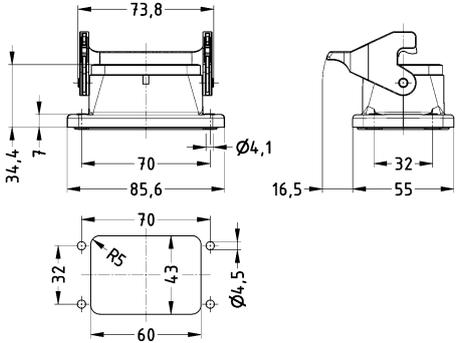
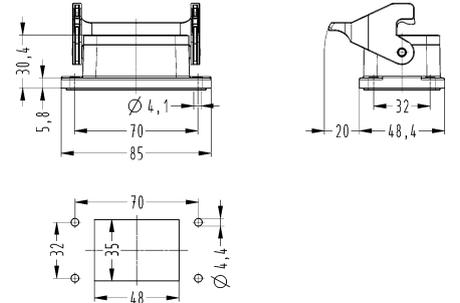
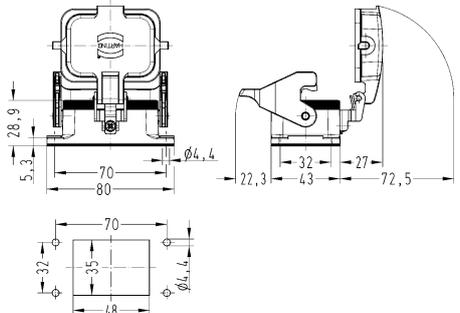
IP44 for self-closing covers in unlocked position

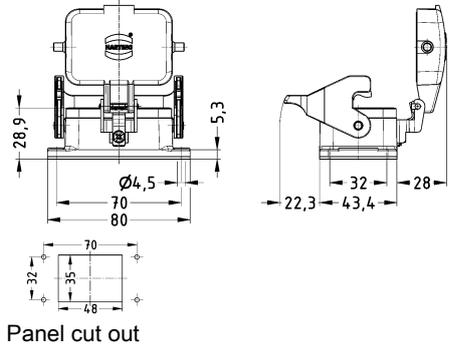
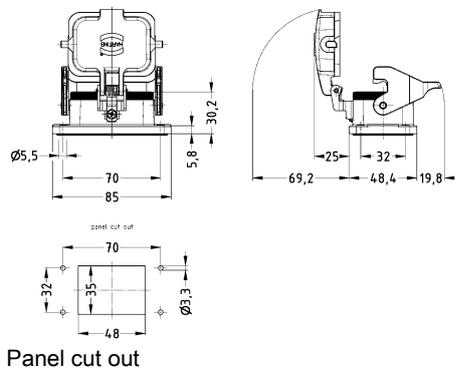
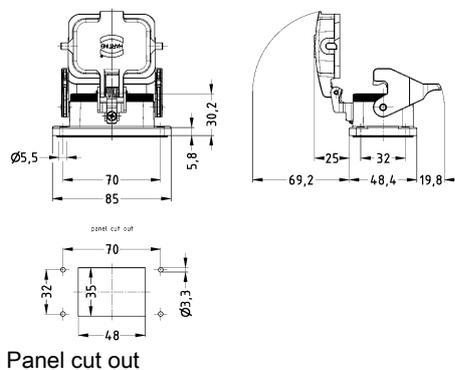
Standard hoods/housings for industrial connectors
Single locking lever

Housings

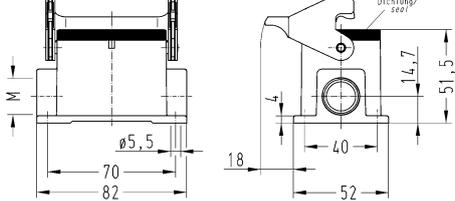
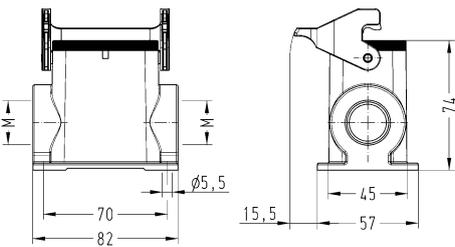
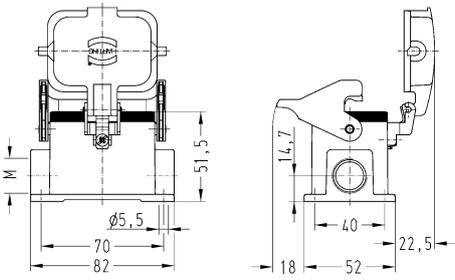
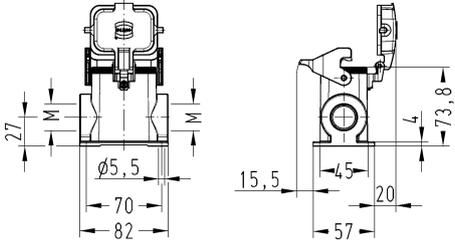
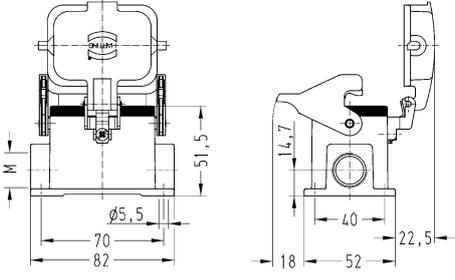
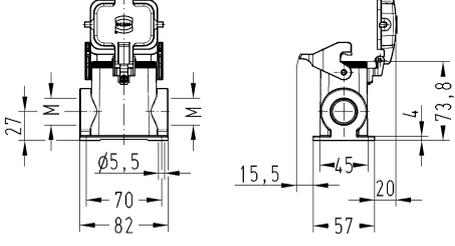
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® B, Hoods, Top entry 	1x M20 1x M25 1x M32	19 30 006 1440	19 30 006 0446 19 30 006 0447		
Han® B, Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 006 1540 19 30 006 1541	19 30 006 0546 19 30 006 0547		
Han® B, Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 006 1540 19 30 006 1541	19 30 006 0546 19 30 006 0547		
Han® B, Hoods, Without cable entry 			09 30 006 0801		

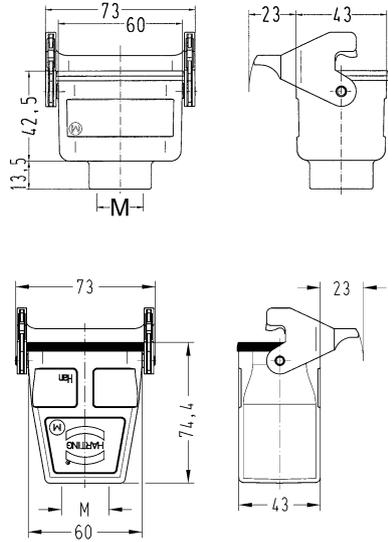
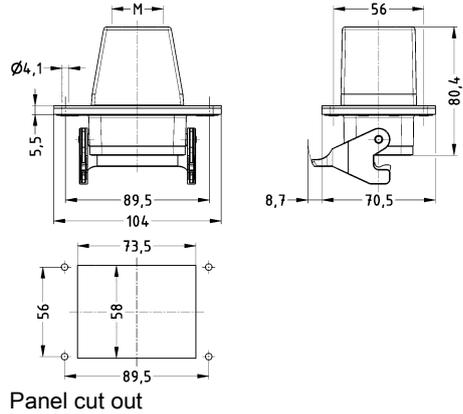
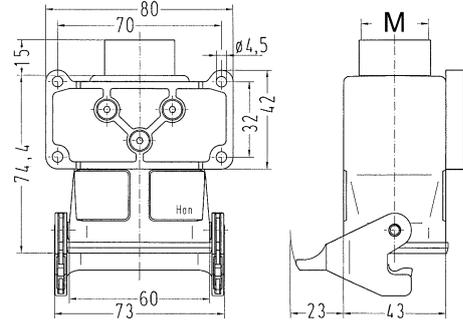
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 006 0301		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 30 006 0391		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 006 1301		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 006 0302		 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 006 0318		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 006 1306		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock®, IP67 		09 30 006 1308		 <p>Panel cut out</p>

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 006 1250 19 30 006 1290	19 30 006 0291 19 30 006 0292		
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 006 1255 19 30 006 1295	19 30 006 0296 19 30 006 0297		
Han® B, Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 006 2255 19 30 006 2295	19 30 006 7296 19 30 006 7297		

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 006 1750	19 30 006 0756 19 30 006 0757	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 30 006 1121 19 30 006 1122	 <p>Panel cut out</p>
Han® B, Flange housings, Top entry, Han-Easy Lock® 	1x M25	19 30 006 0716		

Housings

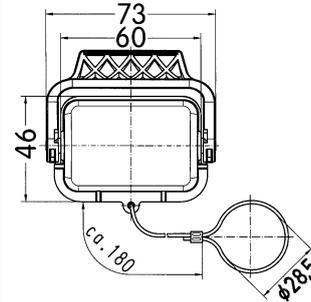
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	

Han® B,
Protection cover,
for hoods,
With fixing cord,
Han-Easy Lock®



09 30 006 5423

09 30 006 5423

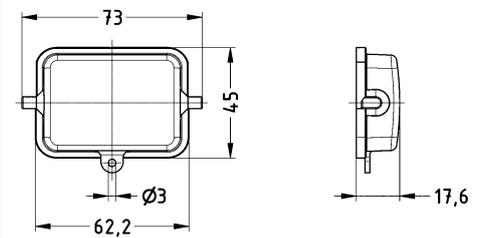


Han® B,
Protection cover,
for bulkhead mounted housings,
for surface mounted housings,
Thermoplastic



09 30 006 5405

09 30 006 5405

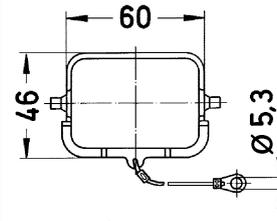


Han® B,
Protection cover,
for bulkhead mounted housings,
for surface mounted housings,
Metal,
With fixing cord



09 30 006 5425

09 30 006 5425

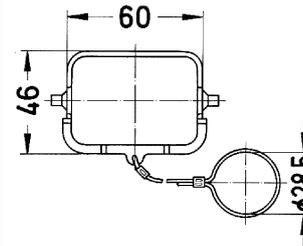


Han® B,
Protection cover,
for cable to cable housing,
Metal,
With fixing cord

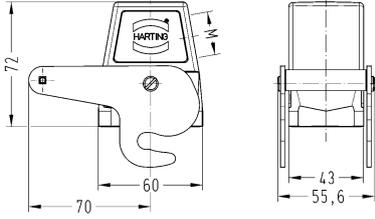
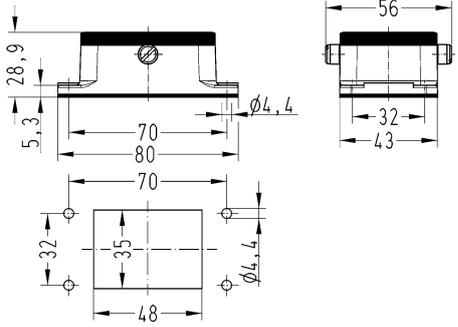
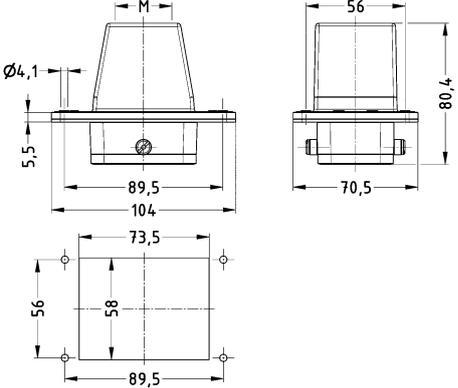


09 30 006 5427

09 30 006 5427

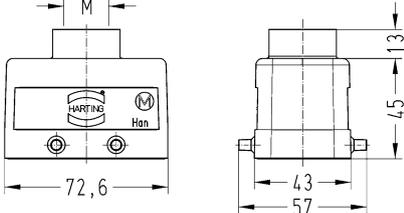
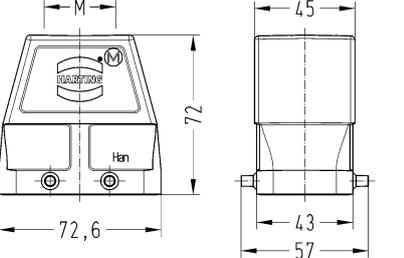
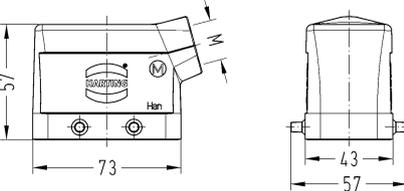
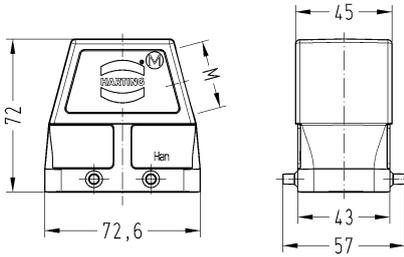
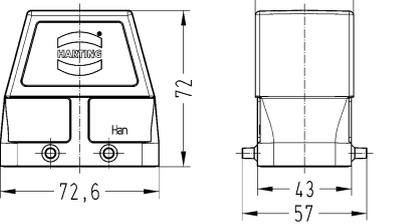


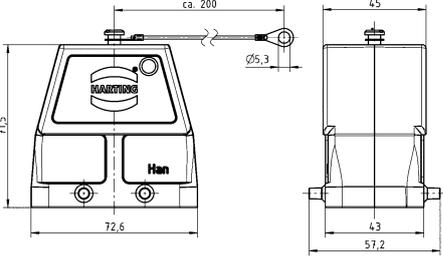
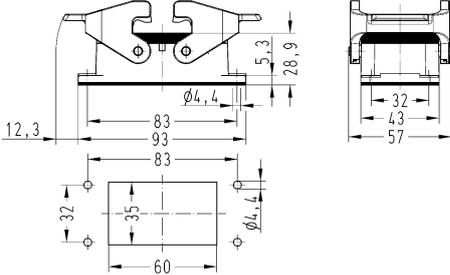
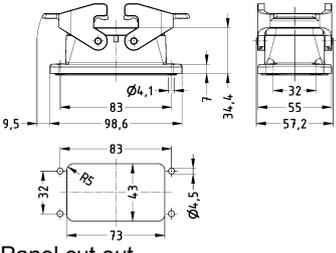
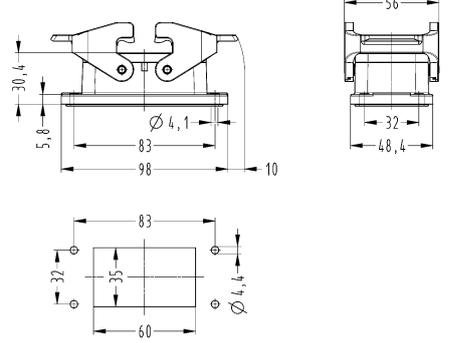
Standard hoods/housings for industrial connectors
Central locking lever (on the hood)

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Side entry 	1x M25 1x M32		19 30 006 0586 19 30 006 0587	
Han® B, Bulkhead mounted housings 		09 30 006 0381		 <p>Panel cut out</p>
Han® B, Panel feed through housing, Top entry 	1x M25 1x M32		19 30 006 1141 19 30 006 1142	 <p>Panel cut out</p>

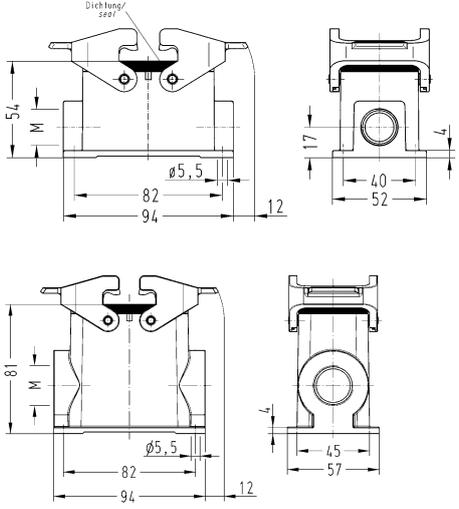
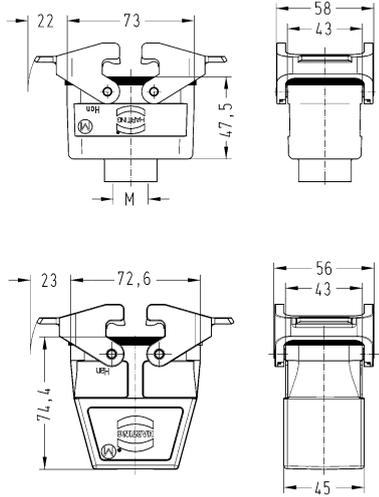
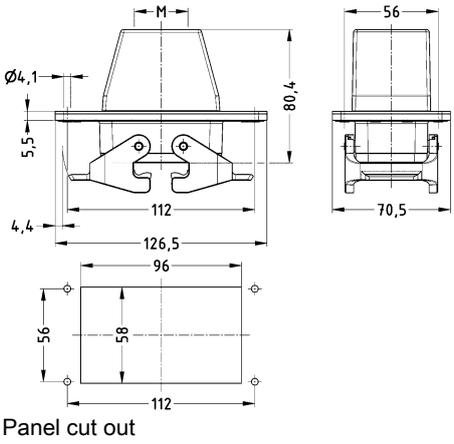
Standard hoods/housings for industrial connectors
Double locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M20 1x M25 1x M32 1x M40 2x M20	19 30 010 1420 19 30 010 1421	19 30 010 0427 19 30 010 0428 19 30 010 0465	 
Han® B, Hoods, Side entry 	1x M20 1x M25 1x M32 1x M40	19 30 010 1520 19 30 010 1521	19 30 010 0526 19 30 010 0527 19 30 010 0528	 
Han® B, Hoods, Without cable entry 			09 30 010 0801	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, With fixing cord, Without cable entry 			09 30 010 0802	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 010 0301		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 30 010 0391		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 010 1301		 <p>Panel cut out</p>

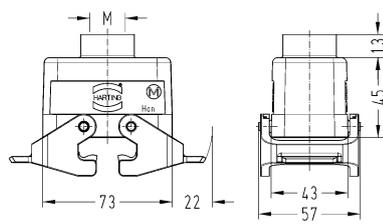
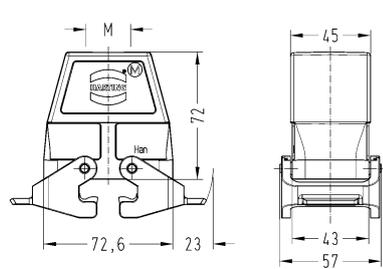
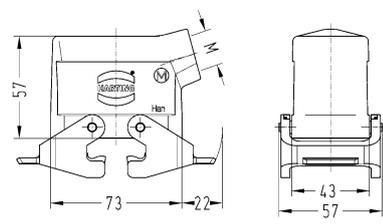
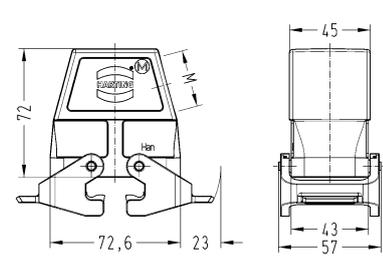
Housings

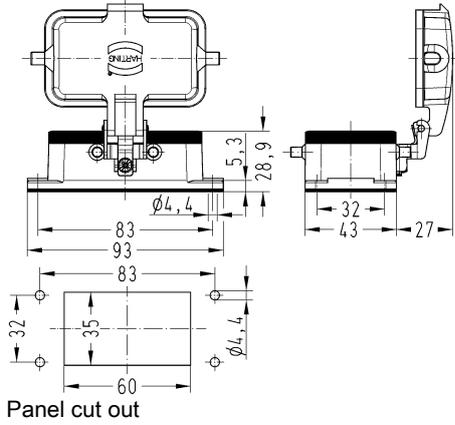
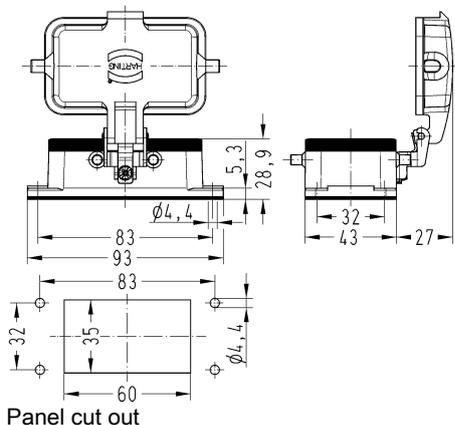
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 1x M25 2x M20 2x M25 2x M32	19 30 010 1230 19 30 010 1231 19 30 010 1270	19 30 010 0231 19 30 010 0271 19 30 010 0272	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 010 1730	19 30 010 0736 19 30 010 0737	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 30 010 1121 19 30 010 1122	 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock®		09 30 010 5423	09 30 010 5423	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic		09 30 010 5407	09 30 010 5407	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord		09 30 010 5425	09 30 010 5425	
Han® B, Protection cover, for cable to cable housing, Metal, With fixing cord		09 30 010 5427	09 30 010 5427	

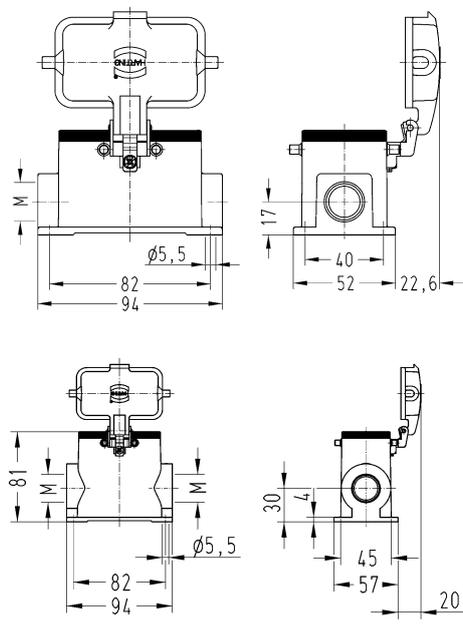
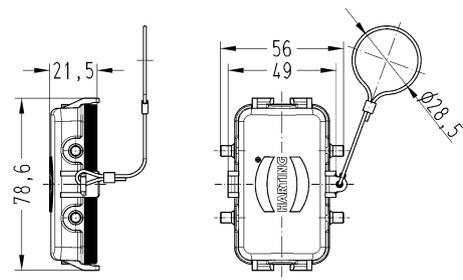
Standard hoods/housings for industrial connectors
 Double locking lever (on the hood)

Housings

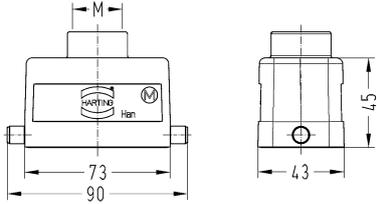
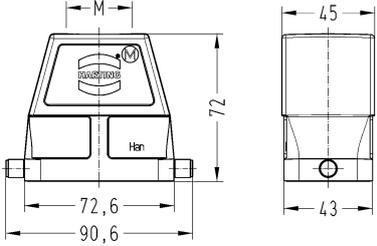
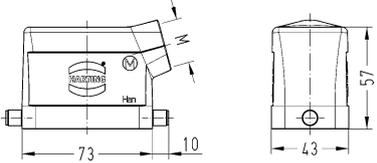
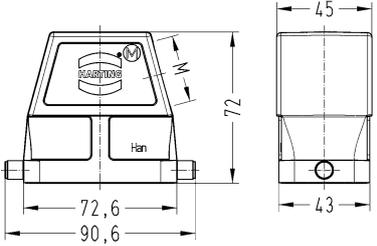
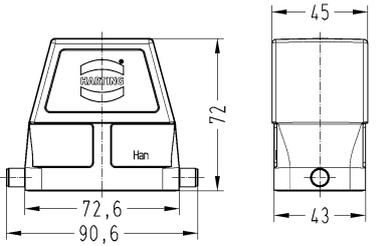
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® B, Hoods, Top entry, Han-Easy Lock® 	1x M20 1x M25	19 30 010 1430	19 30 010 0436		
Han® B, Hoods, Side entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 010 1530 19 30 010 1531	19 30 010 0537		

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With thermo-plastic cover 		09 30 010 0302		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With metal cover 		09 30 010 0317		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With self-closing cover 		09 30 010 1314		

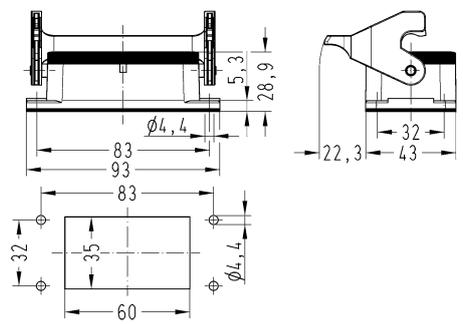
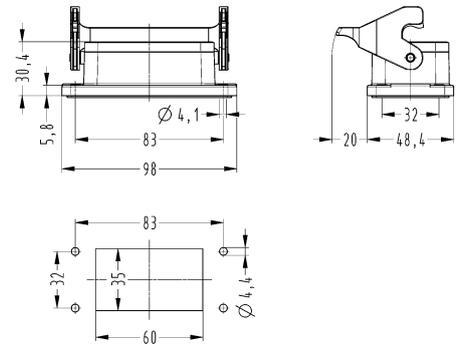
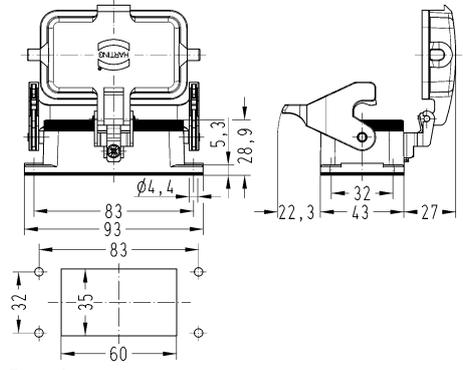
Housings

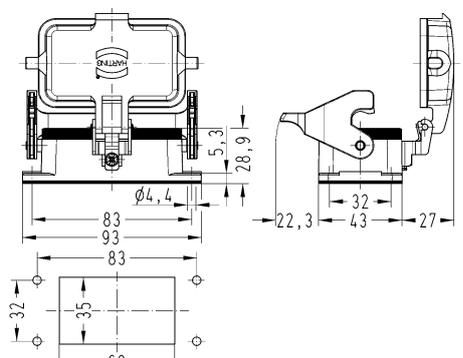
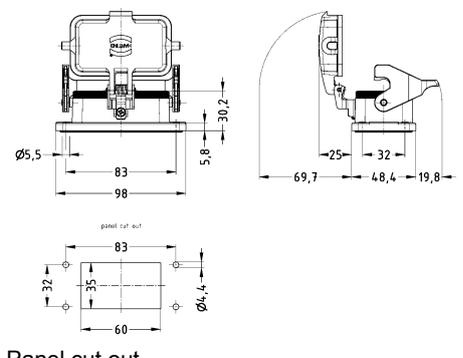
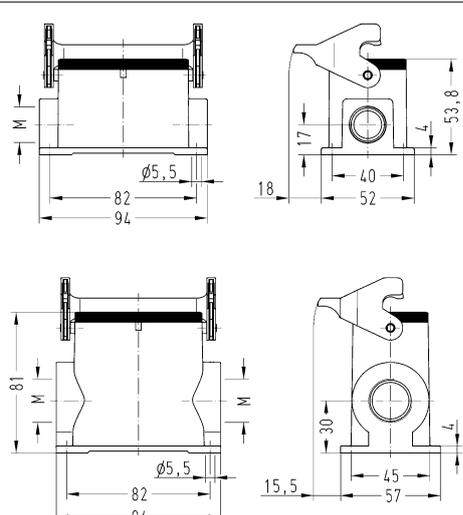
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry 	1x M20 2x M20 2x M25	19 30 010 1225 19 30 010 1265	19 30 010 0266	
Han® B, Protection cover, for hoods, Metal, With fixing cord 		09 30 010 5457	09 30 010 5457	

Standard hoods/housings for industrial connectors
Single locking lever

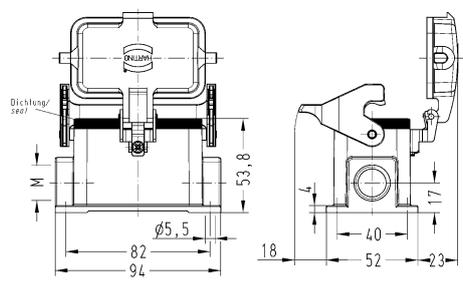
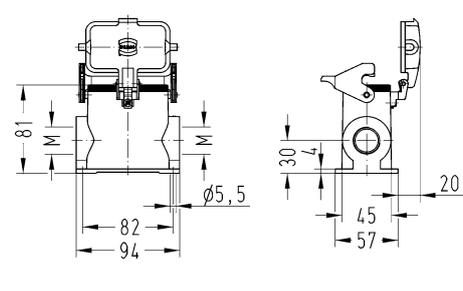
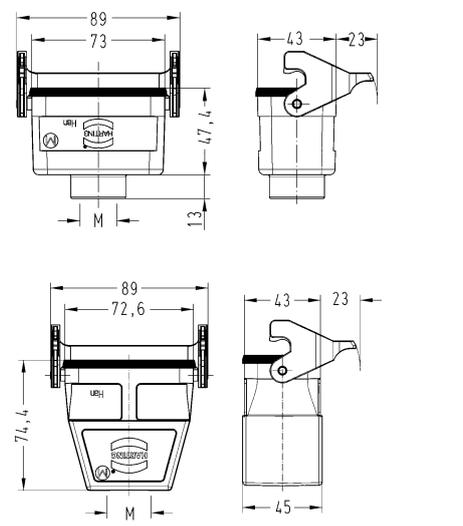
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M20 1x M25 1x M32 1x M40 2x M20	19 30 010 1440 19 30 010 1441	19 30 010 0447 19 30 010 0448 19 30 010 0495	 
Han® B, Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 010 1540 19 30 010 1541	19 30 010 0547	 
Han® B, Hoods, Without cable entry 			09 30 010 0803	

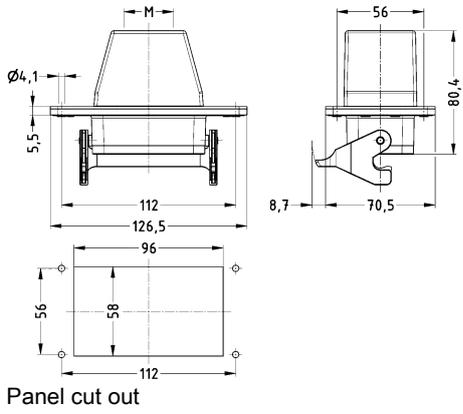
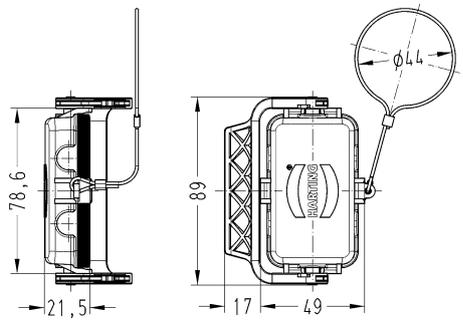
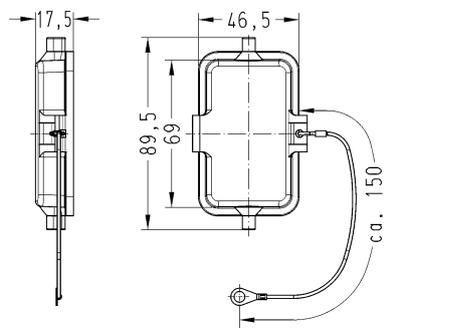
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 010 0305 09 30 010 1308		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 010 1305		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 010 0303		 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 010 0318		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 010 1306		 <p>Panel cut out</p>
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 010 1250 19 30 010 1290	19 30 010 0291 19 30 010 0292	

Housings

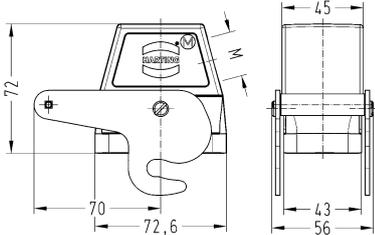
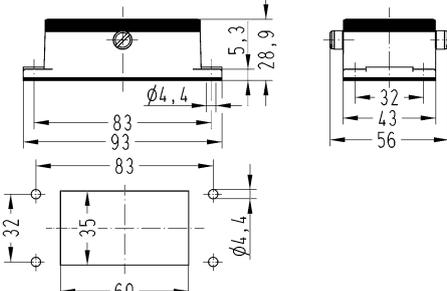
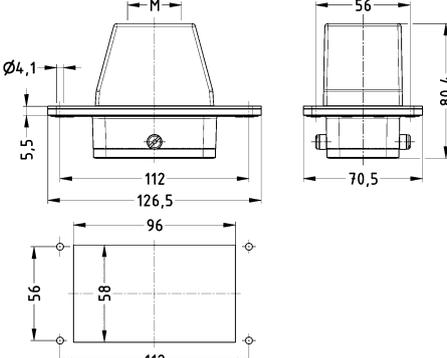
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 010 1255 19 30 010 1295	19 30 010 0296 19 30 010 0297	
Han® B, Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	2x M20 2x M25 2x M32	19 30 010 2295	19 30 010 7296 19 30 010 7297	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 010 1750	19 30 010 0756 19 30 010 0757	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 30 010 1131 19 30 010 1132	 <p>Panel cut out</p>
Han® B, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 010 5432	09 30 010 5432	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Thermoplastic, With fixing cord 		09 30 010 5412	09 30 010 5412	



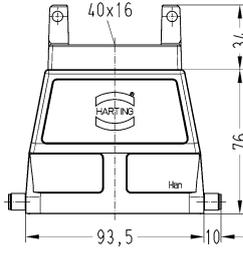







Standard hoods/housings for industrial connectors
Central locking lever (on the hood)

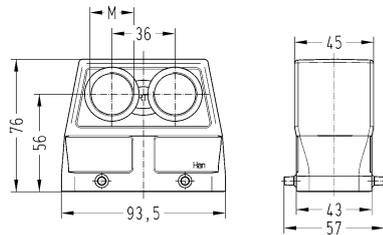
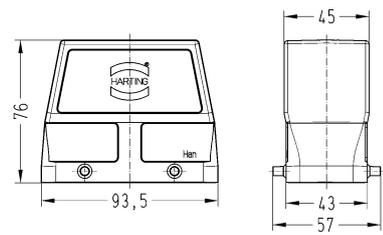
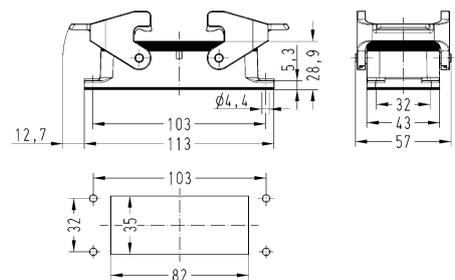
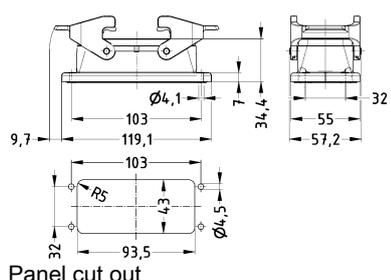
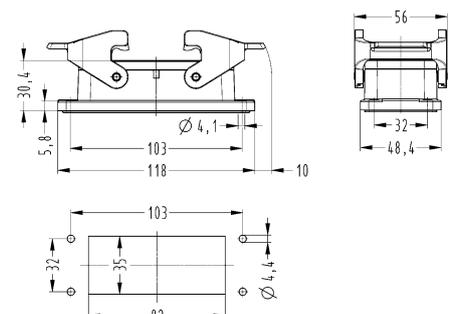
Housings

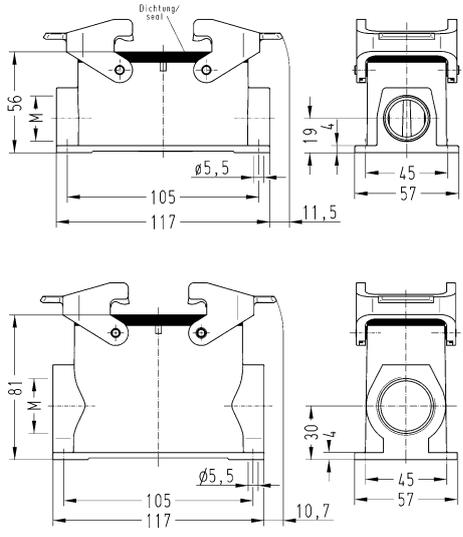
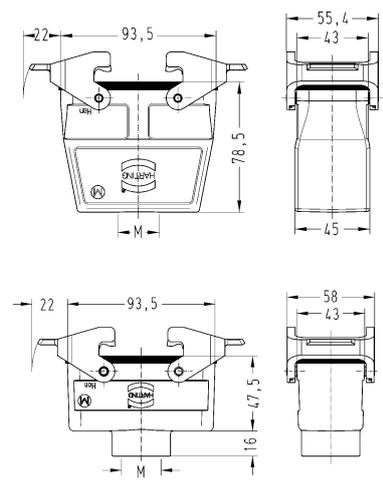
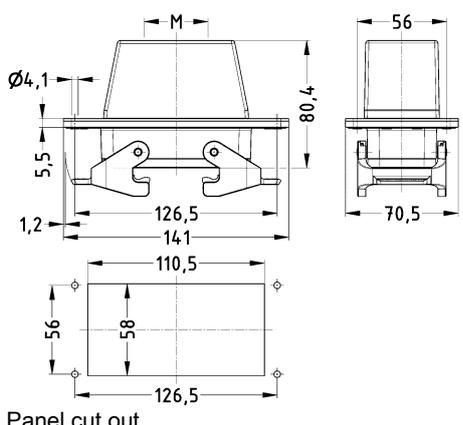
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Side entry 	1x M25		19 30 010 0586	
Han® B, Bulkhead mounted housings 		09 30 010 0381		 Panel cut out
Han® B, Panel feed through housing, Top entry 	1x M25 1x M32		19 30 010 1141 19 30 010 1142	 Panel cut out

Standard hoods/housings for industrial connectors
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® B, Hoods, Top entry 	1x M25 1x M32 1x M40 2x M25	19 30 016 1421 19 30 016 1422	19 30 016 0427 19 30 016 0428 19 30 016 0466		
Han® B, Hoods, Flat cable entry, Top entry 			09 30 016 4441		
Han® B, Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 016 1521 19 30 016 1522	19 30 016 0527 19 30 016 0528		
					

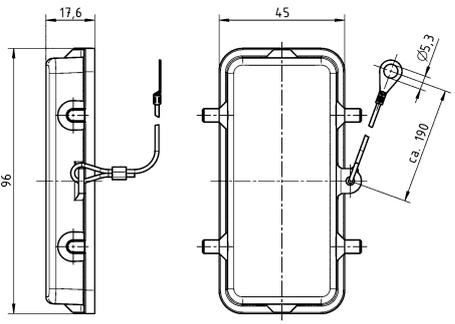
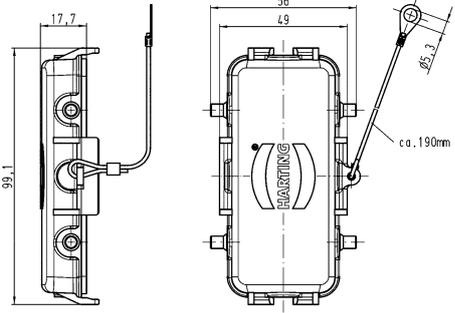
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Angled entry 	2x M25		19 30 016 0666	
Han® B, Hoods, Without cable entry 			09 30 016 0801	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 016 0301		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with in the delivery 		09 30 016 0391		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 016 1301		 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32 2x M40	19 30 016 1231 19 30 016 1271	19 30 016 0232 19 30 016 0271 19 30 016 0272 19 30 016 0273	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 016 1731 19 30 016 1732	19 30 016 0736 19 30 016 0737 19 30 016 0738	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M32 1x M40		19 30 016 1121 19 30 016 1122	 <p>Panel cut out</p>

Housings



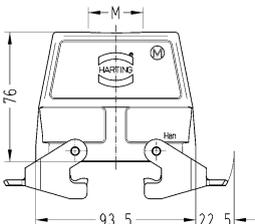

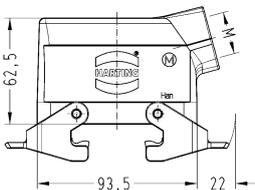

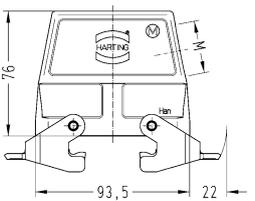

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock®		09 30 016 5422	09 30 016 5422	
Han® B, Protection cover, for hoods, Metal, With fixing cord		09 30 016 5426 09 30 016 5457	09 30 016 5426 09 30 016 5457	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic		09 30 016 5405	09 30 016 5405	

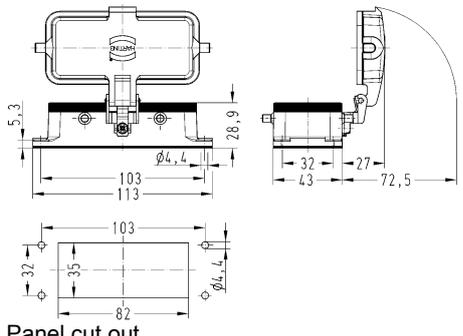
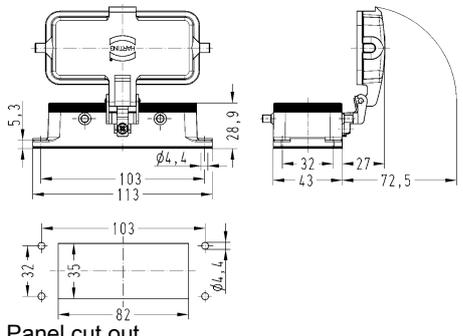
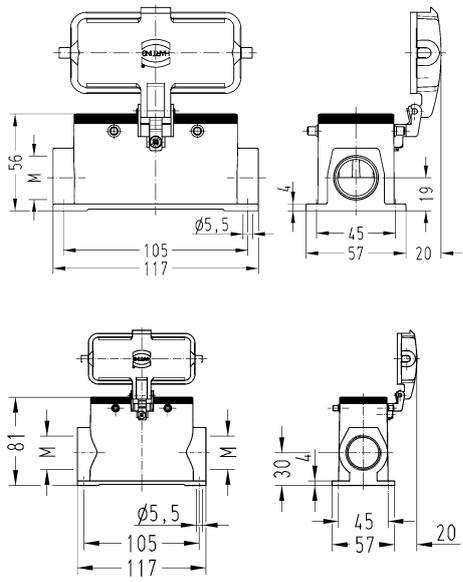
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
<p>Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With fixing cord</p> 		09 30 016 5417	09 30 016 5417	
<p>Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord</p> 		09 30 016 5425	09 30 016 5425	



Standard hoods/housings for industrial connectors
Double locking lever (on the hood)

Housings

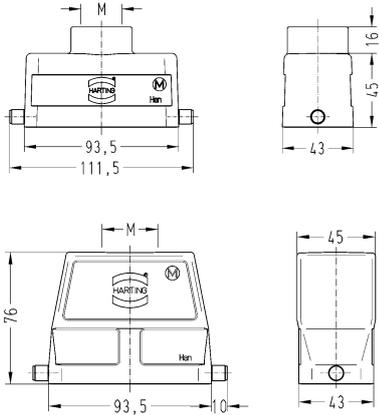
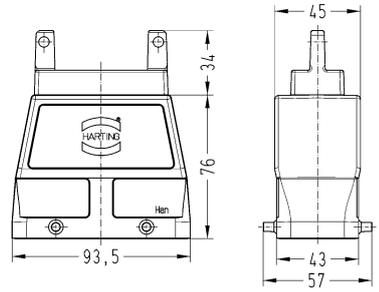
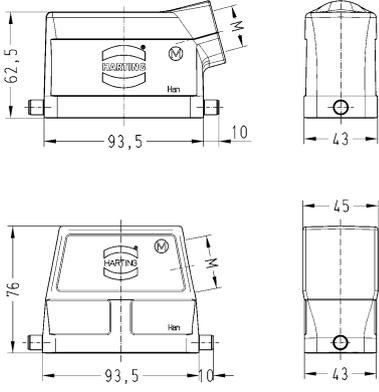
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® B, Hoods, Top entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 016 1431 19 30 016 1432	19 30 016 0437 19 30 016 0438	 	
Han® B, Hoods, Flat cable entry, Top entry, Han-Easy Lock® 			09 30 016 4431	 	
Han® B, Hoods, Side entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 016 1531	19 30 016 0537 19 30 016 0538	 	
				 	

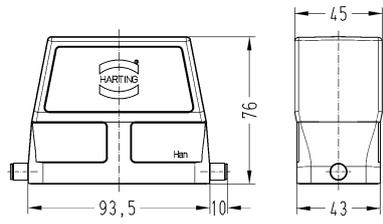
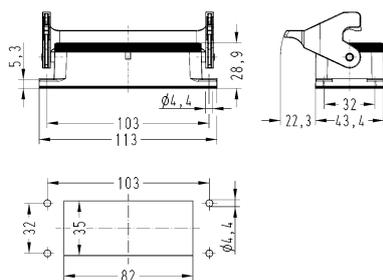
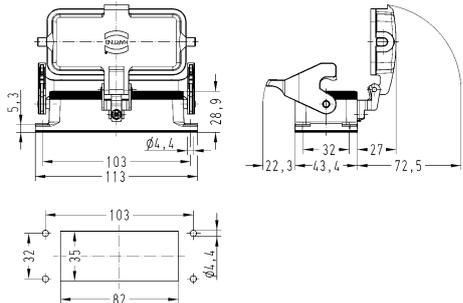
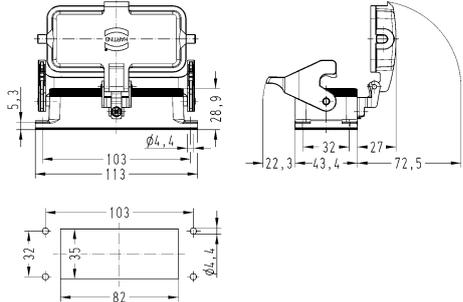
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With thermo-plastic cover 		09 30 016 0302		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With metal cover 		09 30 016 0317		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With self-closing cover 		09 30 016 1314		
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry 	1x M25 2x M25 2x M32	19 30 016 1226 19 30 016 1266	19 30 016 0267	



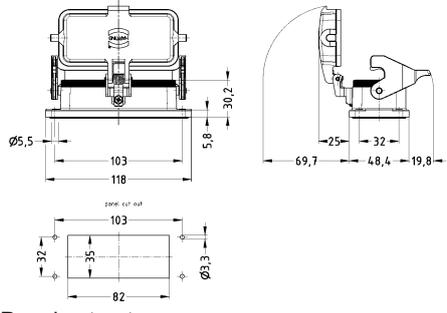
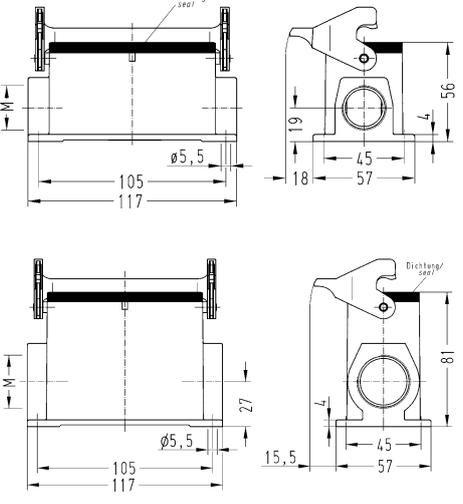
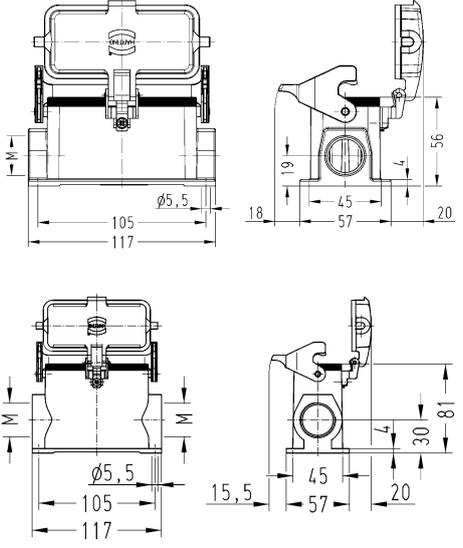
Standard hoods/housings for industrial connectors
Single locking lever

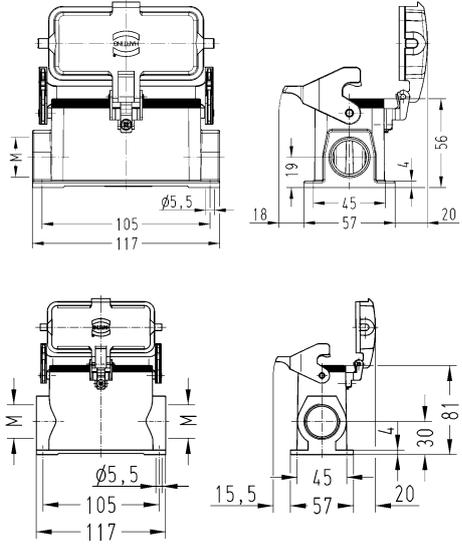
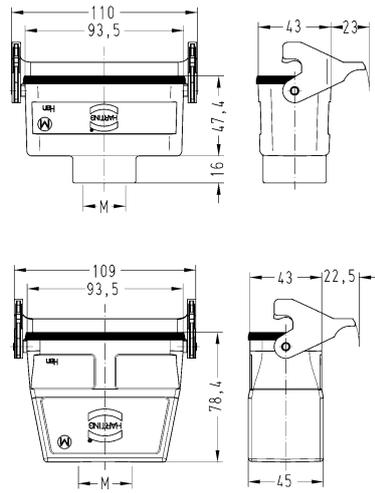
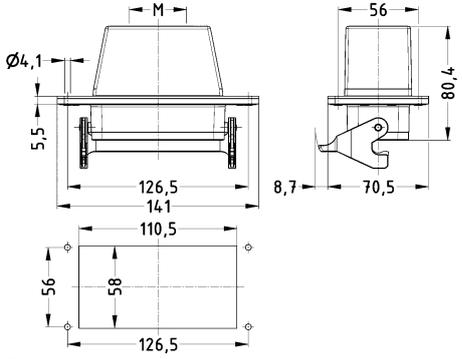
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M25 1x M32 1x M40 2x M25	19 30 016 1441 19 30 016 1442	19 30 016 0446 19 30 016 0447 19 30 016 0448 19 30 016 0456	
Han® B, Hoods, Flat cable entry, Top entry 			09 30 016 4411	
Han® B, Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 016 1541 19 30 016 1542	19 30 016 0547 19 30 016 0548	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Without cable entry 			09 30 016 0803	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 016 0307 09 30 016 1307		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 016 0306		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 016 0318		 <p>Panel cut out</p>

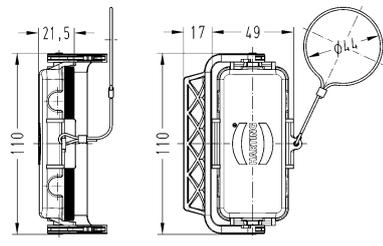
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 016 1306		 <p>Panel cut out</p>
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32	19 30 016 1251 19 30 016 1291	19 30 016 0252 19 30 016 0291 19 30 016 0292	
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 016 1256 19 30 016 1296	19 30 016 0297	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	2x M25 2x M32	19 30 016 2296	19 30 016 7297	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32	19 30 016 1751 19 30 016 1752	19 30 016 0757	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M32 1x M40		19 30 016 1131 19 30 016 1132	 <p>Panel cut out</p>



Housings

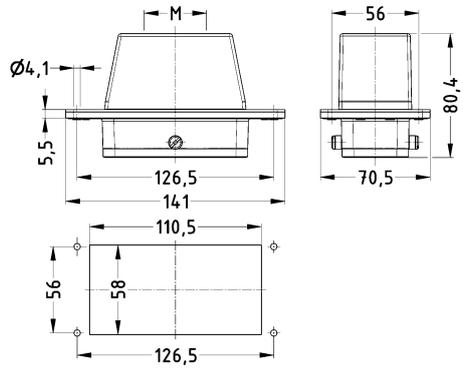
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Protection cover, for hoods, Metal, Han-Easy Lock® 		09 30 016 5432	09 30 016 5432	

Standard hoods/housings for industrial connectors
Central locking lever (on the hood)

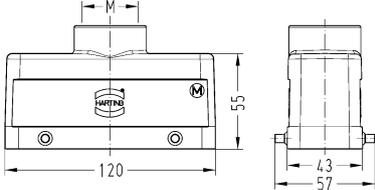
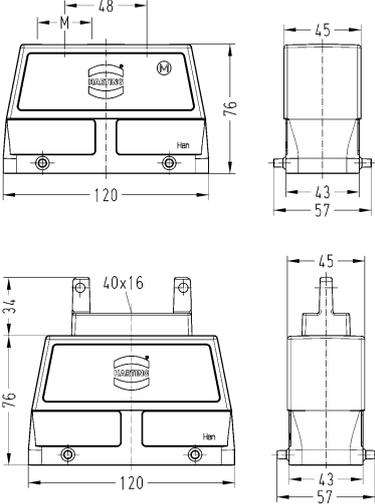
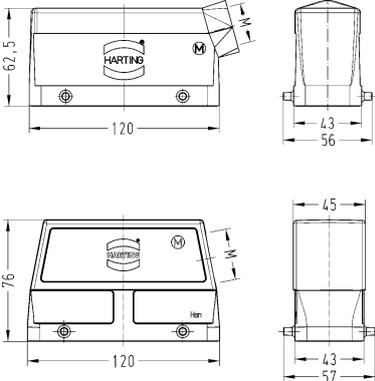
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry	1x M32		19 30 016 0487	
Han® B, Hoods, Side entry	1x M25 1x M32		19 30 016 0586 19 30 016 0587	
Han® B, Bulkhead mounted housings		09 30 016 0381		<p>Panel cut out</p>
Han® B, Surface mounted housing, Side entry	2x M32		19 30 016 0282	



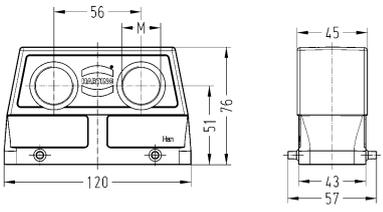
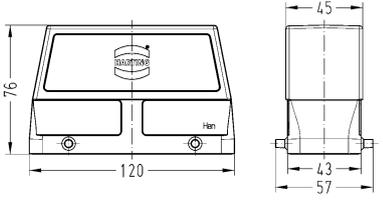
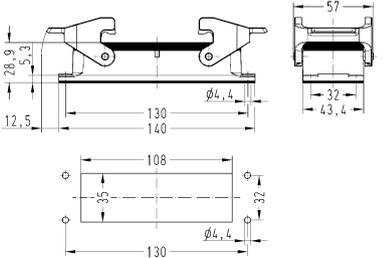
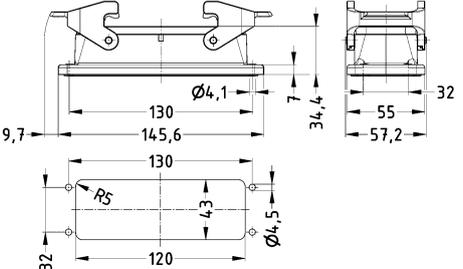
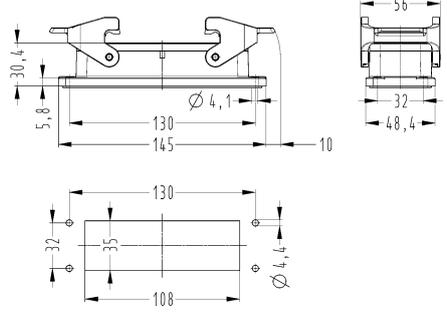
Housings

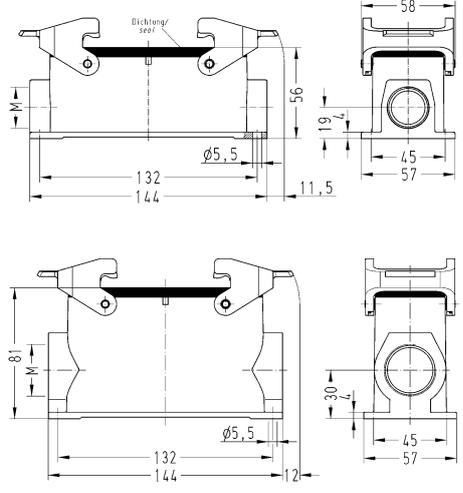
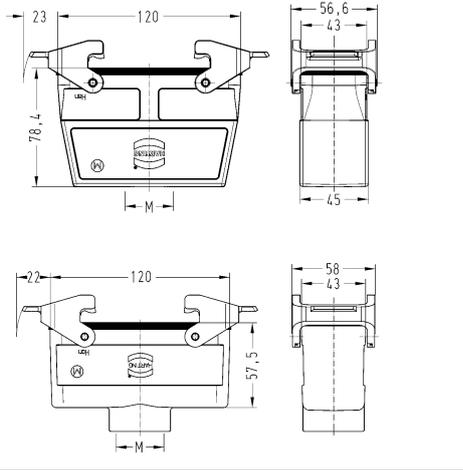
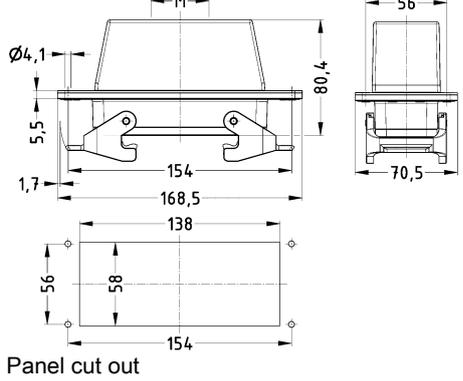
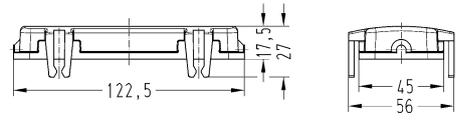
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Panel feed through housing, Top entry 	1x M32 1x M40		19 30 016 1141 19 30 016 1142	 <p>Panel cut out</p>

Standard hoods/housings for industrial connectors
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M32 1x M40 2x M25 2x M32	19 30 024 1422	19 30 024 0427 19 30 024 0428 19 30 024 0466 19 30 024 0467	
Han® B, Hoods, Flat cable entry, Top entry 			09 30 024 4411	
Han® B, Hoods, Side entry 	1x M25 1x M32 1x M40 1x M40	19 30 024 1521 19 30 024 1522	19 30 024 0527 19 30 024 0523 19 30 024 0528	

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Angled entry 	2x M25		19 30 024 0666	
Han® B, Hoods, Without cable entry 			09 30 024 0801	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 024 0301		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 30 024 0391		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 024 1301		 <p>Panel cut out</p>

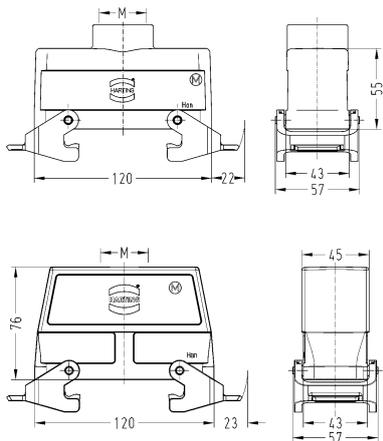
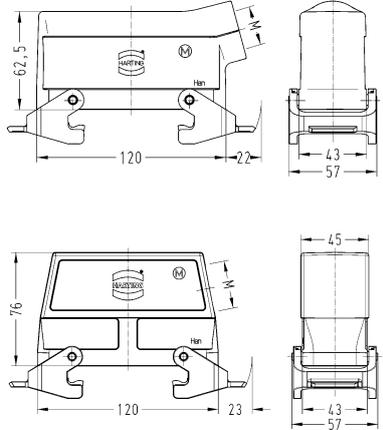
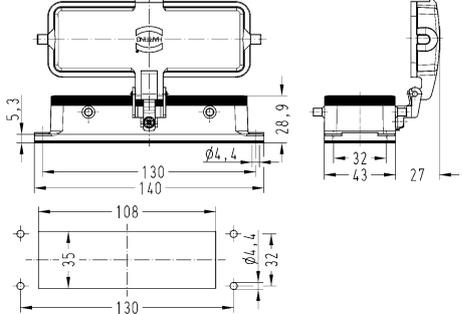
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32 2x M40	19 30 024 1231 19 30 024 1271	19 30 024 0232 19 30 024 0272 19 30 024 0273	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32 1x M40	19 30 024 1732	19 30 024 0737 19 30 024 0738	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M32 1x M40		19 30 024 1121 19 30 024 1122	 <p>Panel cut out</p>
Han® B, Protection cover, for hoods, Thermoplastic, With board locks 		09 30 024 5401	09 30 024 5401	

Housings

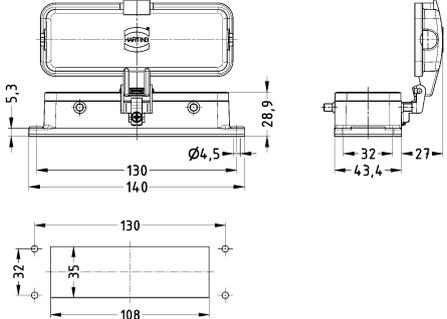
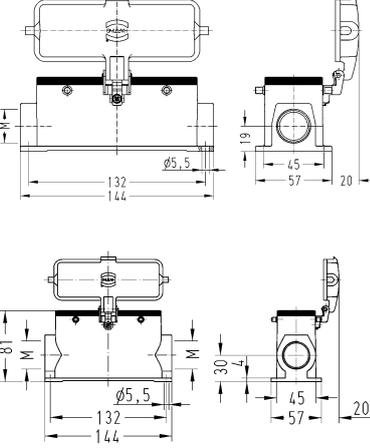
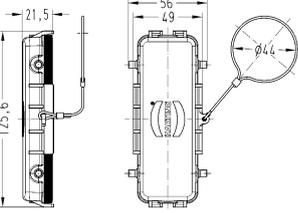
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock®		09 30 024 5422	09 30 024 5422	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic		09 30 024 5405	09 30 024 5405	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord		09 30 024 5425	09 30 024 5425	
Han® B, Protection cover, for cable to cable housing, Metal, With fixing cord		09 30 024 5426	09 30 024 5426	

Standard hoods/housings for industrial connectors
 Double locking lever (on the hood)

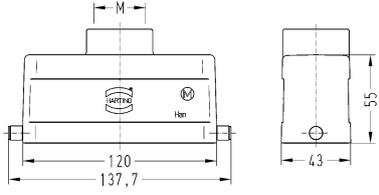
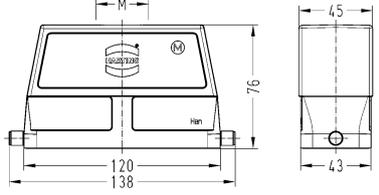
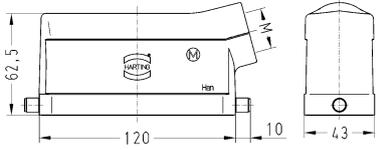
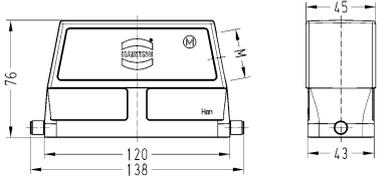
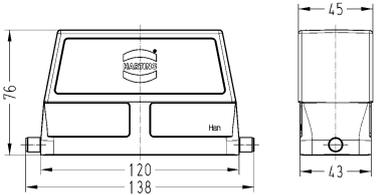
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry, Han-Easy Lock® 	1x M32 1x M40	19 30 024 1432	19 30 024 0437 19 30 024 0438	
Han® B, Hoods, Side entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 024 1531	19 30 024 0537 19 30 024 0538	
Han® B, Bulkhead mounted housings, With thermo-plastic cover 		09 30 024 0302		 <p>Panel cut out</p>

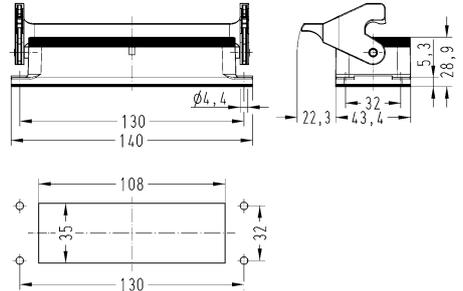
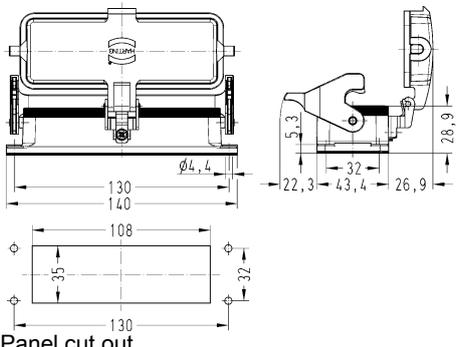
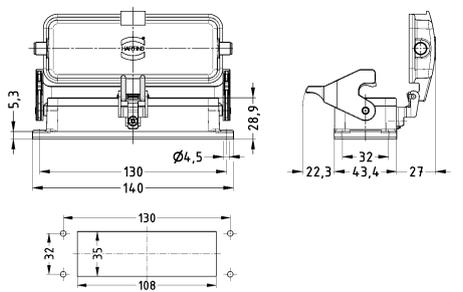
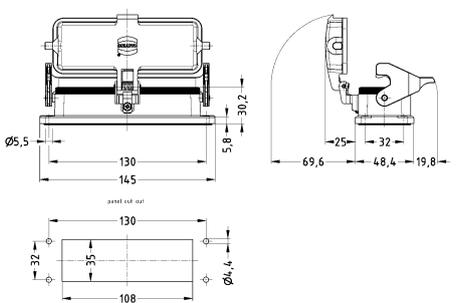
Housings

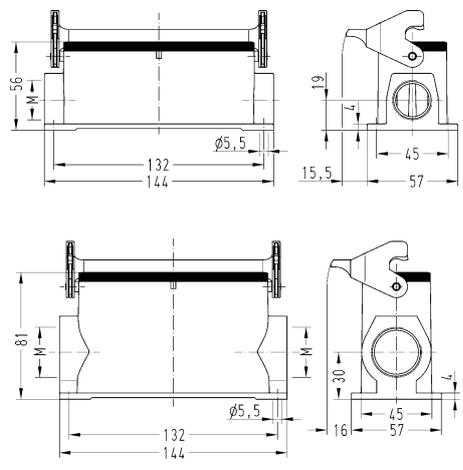
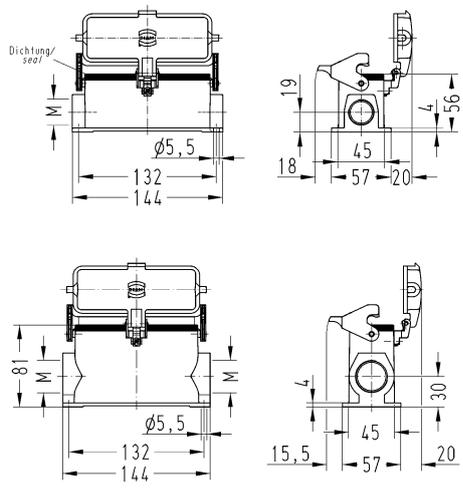
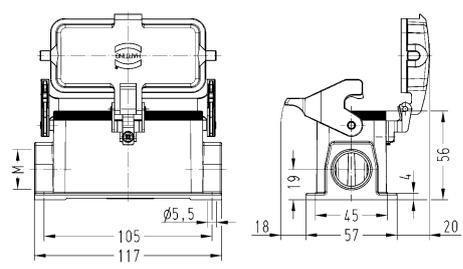
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With metal cover 		09 30 024 0317		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With self-closing cover 		09 30 024 1314		
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry 	1x M25 2x M25 2x M32	19 30 024 1226 19 30 024 1266	19 30 024 0267	
Han® B, Protection cover, for hoods, Metal, With fixing cord 		09 30 024 5442	09 30 024 5442	

Standard hoods/housings for industrial connectors
Single locking lever

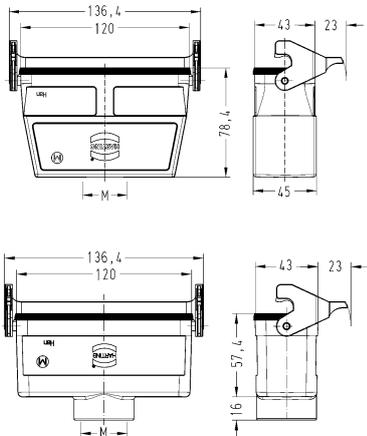
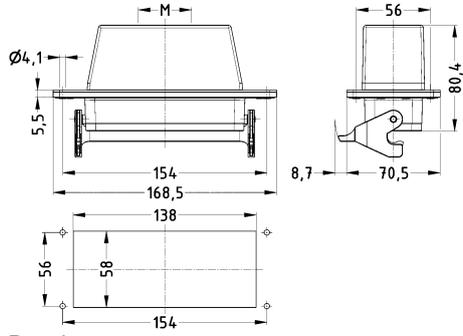
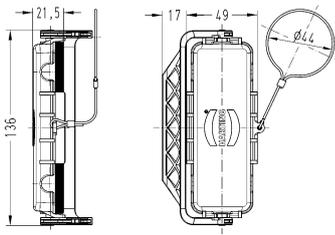
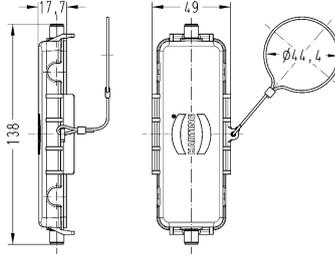
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M32 1x M40 2x M25 2x M32	19 30 024 1442	19 30 024 0447 19 30 024 0448 19 30 024 0456 19 30 024 0457	 
Han® B, Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 024 1541 19 30 024 1542	19 30 024 0547 19 30 024 0548	 
Han® B, Hoods, Without cable entry 			09 30 024 0803	

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 024 0307 09 30 024 1307		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 024 0304		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 024 0318		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 024 1306		 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 024 1251 19 30 024 1291	19 30 024 0292	
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 024 1256 19 30 024 1296	19 30 024 0297	
Han® B, Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	2x M25 2x M32	19 30 024 2296	19 30 024 7297	

Housings

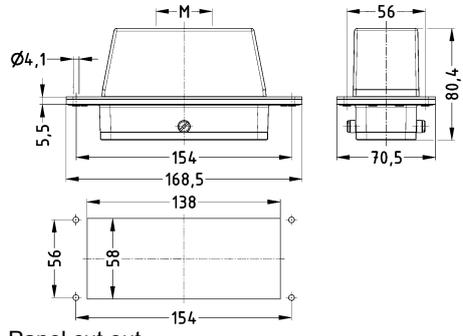
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32	19 30 024 1752	19 30 024 0757	
Han® B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M32 1x M40		19 30 024 1131 19 30 024 1132	 <p>Panel cut out</p>
Han® B, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 024 5432	09 30 024 5432	
Han® B, Protection cover, for cable to cable housing, Metal, With fixing cord 		09 30 024 5436	09 30 024 5436	

Standard hoods/housings for industrial connectors
Central locking lever (on the hood)

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry	1x M32		19 30 024 0487	
Han® B, Hoods, Side entry	1x M25 1x M32 1x M40		19 30 024 0586 19 30 024 0587 19 30 024 0588	
Han® B, Bulkhead mounted housings		09 30 024 0381		<p>Panel cut out</p>
Han® B, Surface mounted housing, Side entry	2x M32		19 30 024 0282	

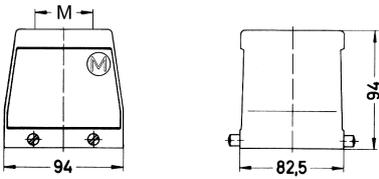
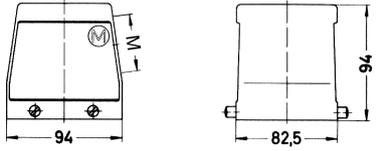
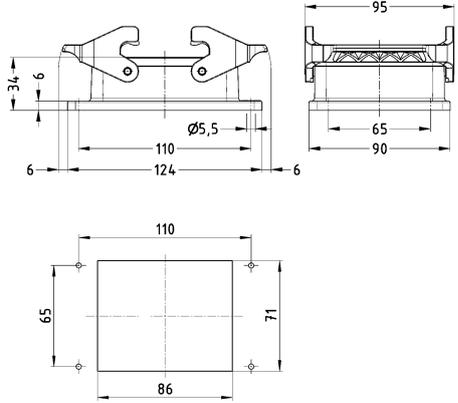
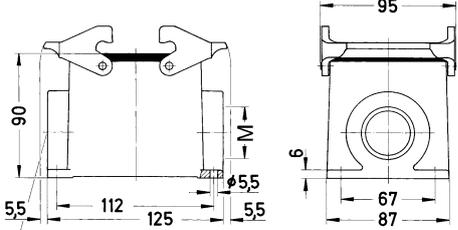


Housings

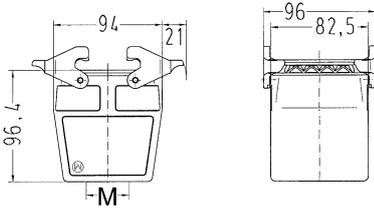
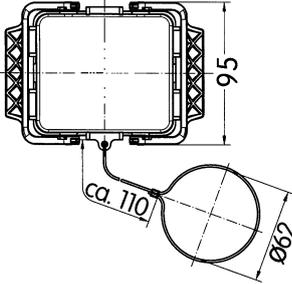
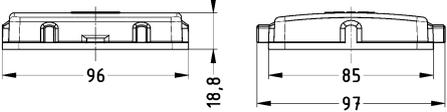
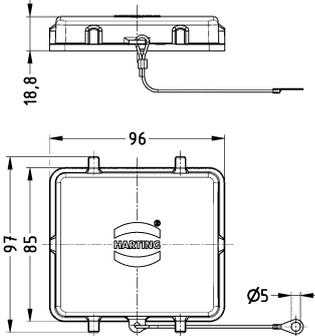
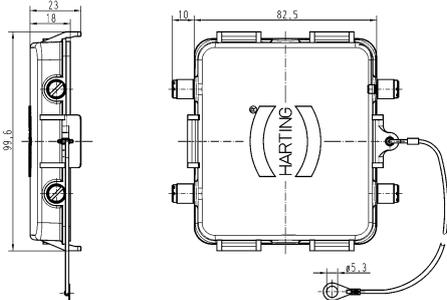
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Panel feed through housing, Top entry 	1x M32 1x M40		19 30 024 1141 19 30 024 1142	 <p>Panel cut out</p>

Standard hoods/housings for industrial connectors
Double locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M32 1x M40 1x M50		19 30 032 0427 19 30 032 0428 19 30 032 0429	
Han® B, Hoods, Side entry 	1x M32 1x M40 1x M50		19 30 032 0527 19 30 032 0528 19 30 032 0529	
Han® B, Bulkhead mounted housings, Han-Easy Lock® 		09 30 032 0301		 <p>Panel cut out</p>
Han® B, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M32 2x M32 2x M40		19 30 032 0232 19 30 032 0272 19 30 032 0273	

Housings

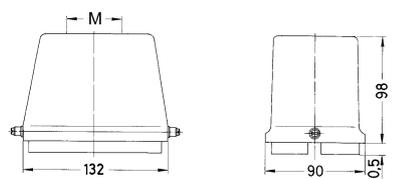
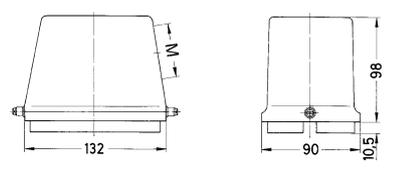
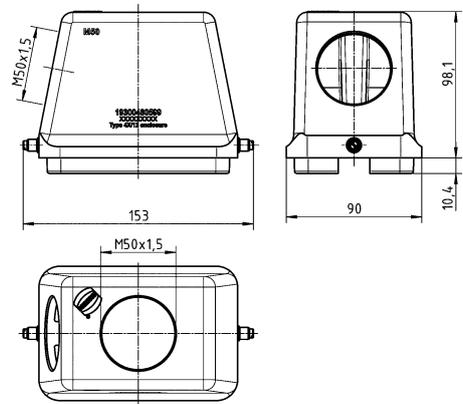
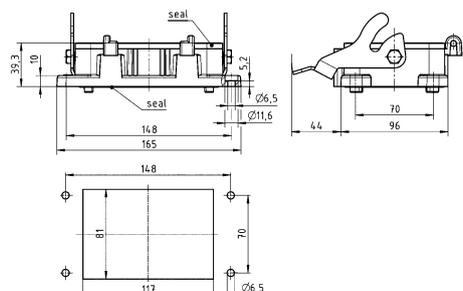
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M40		19 30 032 0738	
Han® B, Protection cover, for hoods, Metal, With fixing cord 		09 30 032 5420	09 30 032 5420	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic 		09 30 032 5405	09 30 032 5405	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Thermoplastic, With fixing cord 		09 30 032 5406	09 30 032 5406	
Han® B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord 		09 30 032 5425	09 30 032 5425	

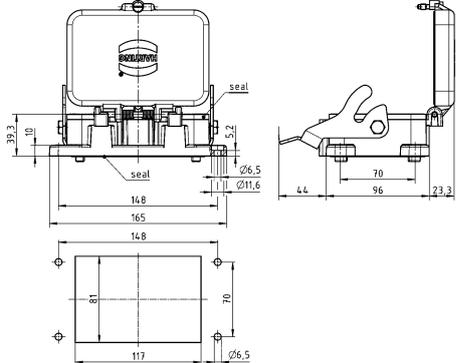
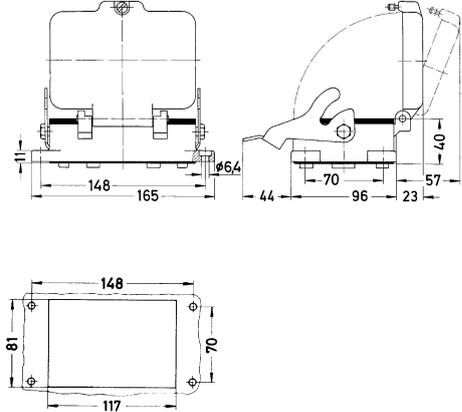
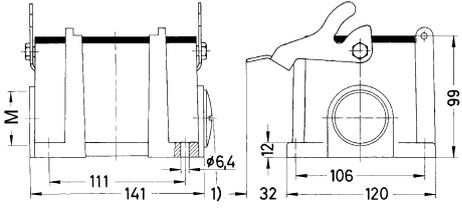
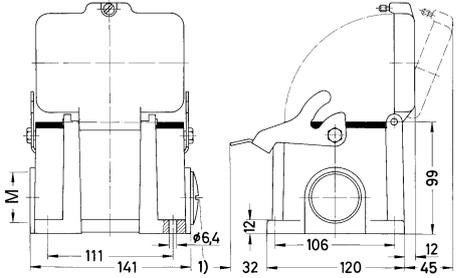
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Protection cover, for cable to cable housing, Metal, With fixing cord		09 30 032 5426 09 30 032 5427	09 30 032 5426 09 30 032 5427	



Standard hoods/housings for industrial connectors
Single locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Hoods, Top entry 	1x M40 1x M50 1x M63		19 30 048 0448 19 30 048 0449 19 30 048 0450	
Han® B, Hoods, Side entry 	1x M40 1x M50		19 30 048 0548 19 30 048 0549	
Han® B, Hoods, Top/side entry 	1x M50, 1x M50		19 30 048 0599	
Han® B, Bulkhead mounted housings 		09 30 048 0302		 <p>Panel cut out</p>

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Bulkhead mounted housings, With thermo-plastic cover 		09 30 048 0301		 <p>Panel cut out</p>
Han® B, Bulkhead mounted housings, With metal cover 		09 30 048 0317		 <p>Panel cut out</p>
Han® B, Surface mounted housing, Side entry 	2x M32 2x M40		19 30 048 0292 19 30 048 0293	
Han® B, Surface mounted housing, With thermo-plastic cover, Side entry 	2x M40		19 30 048 0298	

Features

- Hoods/housings for industrial applications

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
RoHS	compliant

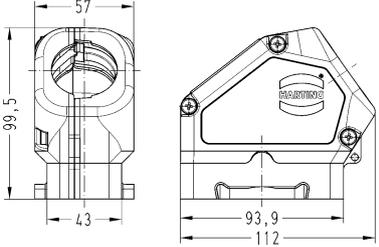
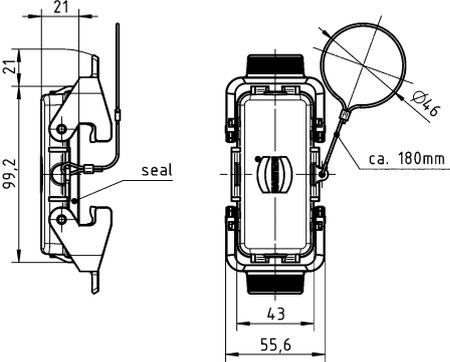
Specifications and approvals

DNV GL

Housings

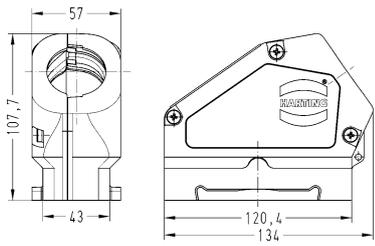
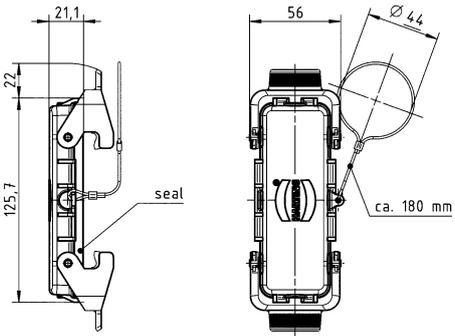
Double locking lever

Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han® Easy Hood, Hoods, Side entry</p> 	<p>1x Integrated</p>	<p>20 ... 34</p>	<p>11 30 016 0520</p>	
<p>Han® Easy Hood, Protection cover, for hoods, Metal, With fixing cord, Han-Easy Lock®</p> 			<p>11 30 016 5422</p>	

Double locking lever

Housings

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
<p>Han® Easy Hood, Hoods, Side entry</p> 	<p>1x Integrated</p>	<p>20 ... 34</p>	<p>11 30 024 0520</p>	
<p>Han® Easy Hood, Protection cover, for hoods, Metal, With fixing cord</p> 			<p>11 30 024 5422</p>	

Technical characteristics

Material (cable glands) Thermoplastic
 Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Black
 RoHS compliant


Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
----------------	------	---------------------	-------------	----------------------------

Cable seal,
Han® Easy Hood



20 ... 22
 23 ... 25
 26 ... 28
 29 ... 31
 32 ... 34

11 30 000 9955
 11 30 000 9956
 11 30 000 9957
 11 30 000 9958
 11 30 000 9959






Han® Easy Hood,
Thread adapter



M25
 M32

11 30 000 9961
 11 30 000 9962



Features

- Angled housing replaces the terminal box
- Compact design saves space
- The position of the terminal housing can be switched by 90°
- Compatible with standard hoods for single lever size 10 B
- Locking levers: Han-Easy Lock®
- Star and delta circuits can be realised in the female connector Han® ESS
- Suitable for standard inserts

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Uncoated, Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

Specifications and approvals

DNV GL

Single locking lever

Housings

Identification	Part number	Drawing (dimensions in mm)																																																																																										
Han-Drive®, Housing for motor applications, Han-Easy Lock®	09 30 410 0901 09 30 410 0909 09 30 410 0921																																																																																											
Han-Drive®, Housing for motor applications, With thermo-plastic cover, Han-Easy Lock®	09 30 410 0951 09 30 410 0960 09 30 410 0970 09 30 410 0971 09 30 410 0974 09 30 410 0983																																																																																											
Han-Drive®, Housing for motor applications, Powder-coated, Han-Easy Lock®	09 30 010 0901 09 30 010 0902																																																																																											
Han-Drive®, Housing for motor applications, Powder-coated, With thermo-plastic cover, Han-Easy Lock®	09 30 010 0961	<table border="1"> <thead> <tr> <th></th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> <th>Ø</th> </tr> </thead> <tbody> <tr> <td>09 30 010 0901</td> <td>82</td> <td>68</td> <td>68</td> <td>82</td> <td>4,5</td> </tr> <tr> <td>09 30 010 0902</td> <td>98</td> <td></td> <td></td> <td>98</td> <td></td> </tr> <tr> <td>09 30 010 0961</td> <td>82</td> <td>70</td> <td>70</td> <td>82</td> <td></td> </tr> <tr> <td>09 30 410 0901</td> <td>82</td> <td>68</td> <td>68</td> <td>82</td> <td>4,5</td> </tr> <tr> <td>09 30 410 0909</td> <td>98</td> <td></td> <td></td> <td>98</td> <td></td> </tr> <tr> <td>09 30 410 0921</td> <td>85</td> <td>73</td> <td>73</td> <td>85</td> <td></td> </tr> <tr> <td>09 30 410 0951</td> <td>82</td> <td>68</td> <td>68</td> <td>82</td> <td>4,5</td> </tr> <tr> <td>09 30 410 0960</td> <td>98</td> <td>70</td> <td>70</td> <td>98</td> <td>4,3</td> </tr> <tr> <td>09 30 410 0970</td> <td>92</td> <td>77</td> <td>77</td> <td>92</td> <td>4,3</td> </tr> <tr> <td>09 30 410 0971</td> <td>85</td> <td>73</td> <td>73</td> <td>85</td> <td>5,5</td> </tr> <tr> <td>09 30 410 0974</td> <td>92</td> <td>70</td> <td>70</td> <td>92</td> <td>4,3</td> </tr> <tr> <td>09 30 410 0983</td> <td>92</td> <td>80</td> <td>80</td> <td>92</td> <td>5,1</td> </tr> <tr> <td>09 62 810 0901</td> <td>82</td> <td>68</td> <td>68</td> <td>82</td> <td>4,5</td> </tr> <tr> <td>09 62 810 0974</td> <td>92</td> <td>70</td> <td>70</td> <td>92</td> <td>4,1</td> </tr> </tbody> </table>		a	b	c	d	Ø	09 30 010 0901	82	68	68	82	4,5	09 30 010 0902	98			98		09 30 010 0961	82	70	70	82		09 30 410 0901	82	68	68	82	4,5	09 30 410 0909	98			98		09 30 410 0921	85	73	73	85		09 30 410 0951	82	68	68	82	4,5	09 30 410 0960	98	70	70	98	4,3	09 30 410 0970	92	77	77	92	4,3	09 30 410 0971	85	73	73	85	5,5	09 30 410 0974	92	70	70	92	4,3	09 30 410 0983	92	80	80	92	5,1	09 62 810 0901	82	68	68	82	4,5	09 62 810 0974	92	70	70	92	4,1
	a	b	c	d	Ø																																																																																							
09 30 010 0901	82	68	68	82	4,5																																																																																							
09 30 010 0902	98			98																																																																																								
09 30 010 0961	82	70	70	82																																																																																								
09 30 410 0901	82	68	68	82	4,5																																																																																							
09 30 410 0909	98			98																																																																																								
09 30 410 0921	85	73	73	85																																																																																								
09 30 410 0951	82	68	68	82	4,5																																																																																							
09 30 410 0960	98	70	70	98	4,3																																																																																							
09 30 410 0970	92	77	77	92	4,3																																																																																							
09 30 410 0971	85	73	73	85	5,5																																																																																							
09 30 410 0974	92	70	70	92	4,3																																																																																							
09 30 410 0983	92	80	80	92	5,1																																																																																							
09 62 810 0901	82	68	68	82	4,5																																																																																							
09 62 810 0974	92	70	70	92	4,1																																																																																							

Single locking lever

Housings

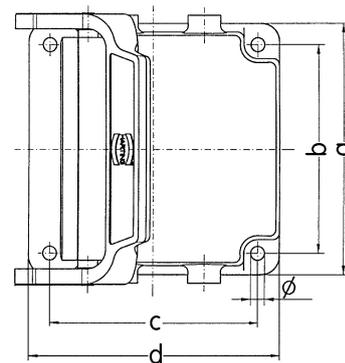
Identification

Part number

Drawing
(dimensions in mm)

Han-Drive®,
Housing for motor applications,
EMC version,
Han-Easy Lock®

09 62 810 0901



Han-Drive®,
Housing for motor applications,
EMC version,
With thermo-plastic cover,
Han-Easy Lock®

09 62 810 0974



	a	b	c	d	∅
09 30 010 0901	82	68	68	82	4,5
09 30 010 0902	98			98	
09 30 010 0961	82	70	70	82	
09 30 410 0901	82	68	68	82	4,5
09 30 410 0909	98			98	
09 30 410 0921	85	73	73	85	
09 30 410 0951	82	68	68	82	4,5
09 30 410 0960	98	70	70	98	4,3
09 30 410 0970	92	77	77	92	4,3
09 30 410 0971	85	73	73	85	5,5
09 30 410 0974	92	70	70	92	4,3
09 30 410 0983	92	80	80	92	5,1
09 62 810 0901	82	68	68	82	4,5
09 62 810 0974	92	70	70	92	4,1

Features

- Hoods/housings for rough environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Locking lever made of high-quality stainless steel

Technical characteristics








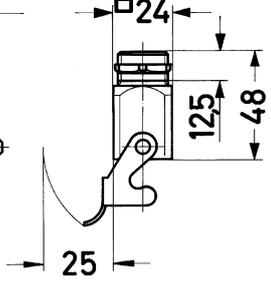
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Material (locking)	Stainless steel
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

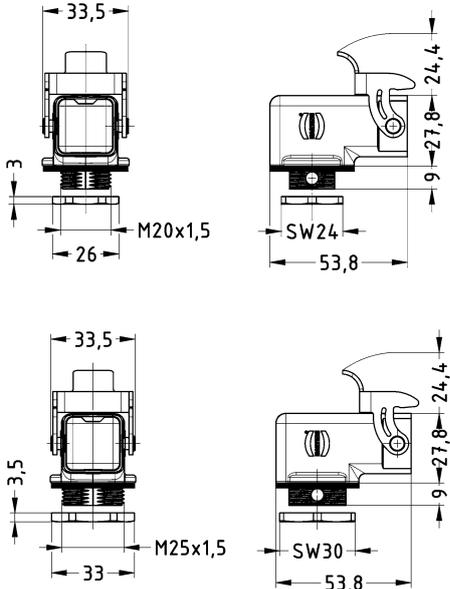
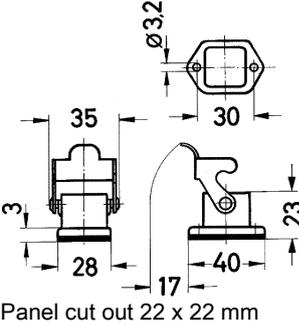
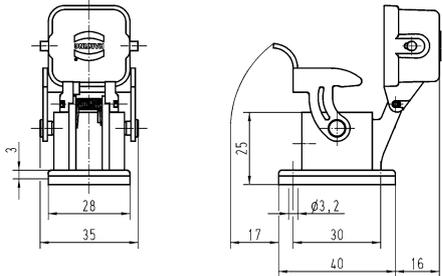
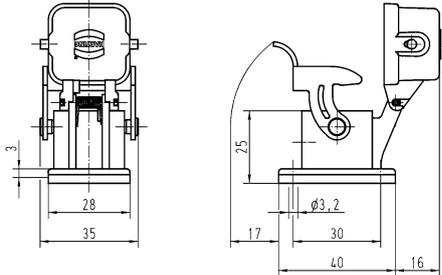
Specifications and approvals

DNV GL

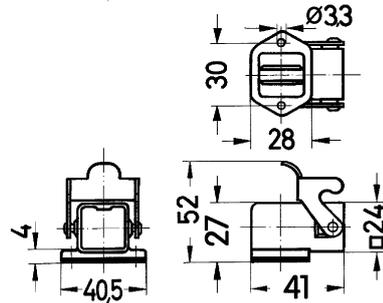
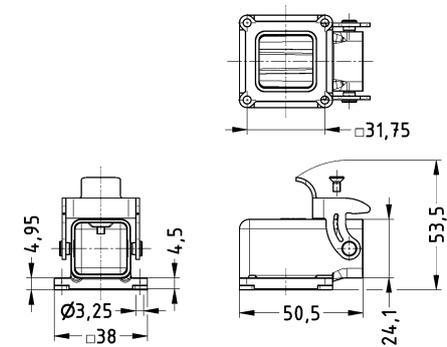
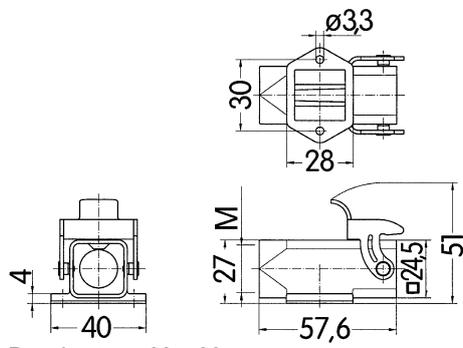
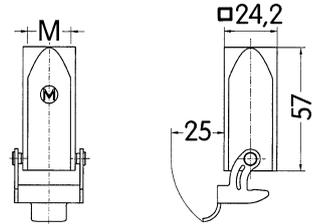
Hoods/housings for rough environments
Single locking lever

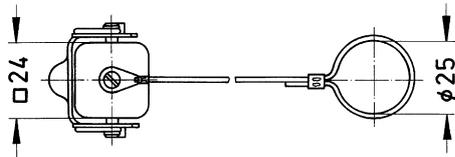
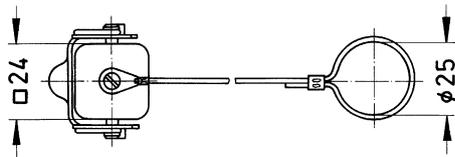
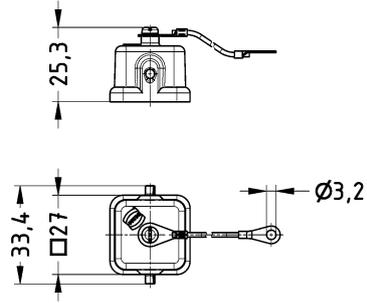
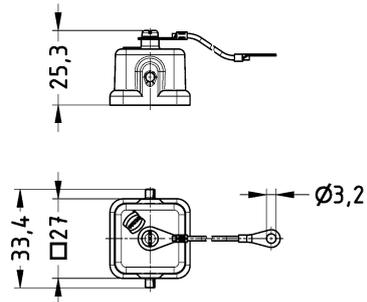
Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han® M, Hoods, Top entry 	1x M20 1x M25	19 37 003 1440 19 37 003 1445		
Han® M, Hoods, Side entry 	1x M20 1x M25	19 37 003 1640 19 37 003 1645	 	 
Han® M, Screw mounted housings 	1x M20	19 37 003 1150		

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® M, Screw mounted housings, Angled</p> 	<p>1x M20 1x M25</p>	<p>19 37 003 1160 19 37 003 1165</p>	
<p>Han® M, Bulkhead mounted housings, Straight</p> 		<p>09 37 003 0301</p>	 <p>Panel cut out 22 x 22 mm</p>
<p>Han® M, Bulkhead mounted housings, Straight, With metal cover, With seal</p>  <p>for male inserts</p>		<p>09 37 003 0305</p>	
<p>Han® M, Bulkhead mounted housings, Straight, With metal cover, With seal</p>  <p>for female inserts</p>		<p>09 37 003 0306</p>	

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® M, Bulkhead mounted housings, Angled</p> 		09 37 003 0801	 <p>Panel cut out 22 x 22 mm</p>
<p>Han® M, Bulkhead mounted housings, Angled, Square mounting flange</p> 		09 37 003 0811	
<p>Han® M, Surface mounted housing, Top entry</p> 	1x M20	19 37 003 1250	 <p>Panel cut out 22 x 22 mm</p>
<p>Han® M, Cable to cable housing, Top entry</p> 	1x M20 1x M25	19 37 003 1750 19 37 003 1755	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® M, Protection cover, for hoods, Metal, With fixing cord</p> 		09 37 003 5401	
<p>for mounted female insert</p> <p>Han® M, Protection cover, for hoods, Metal, With fixing cord</p> 		09 37 003 5402	
<p>for mounted male insert</p> <p>Han® M, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		09 37 003 5405	
<p>for mounted female insert</p> <p>Han® M, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		09 37 003 5406	
<p>for mounted male insert</p>			

Features

- Hoods/housings for rough environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Locking lever made of high-quality stainless steel





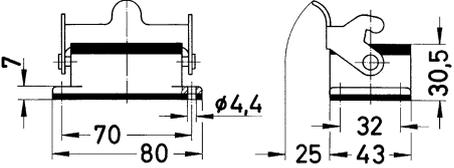

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65, IP66
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Material (locking)	Stainless steel, Polycarbonate
Colour (locking)	RAL 7037 (dust grey)
Material (accessories)	Polyamide, Stainless steel
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

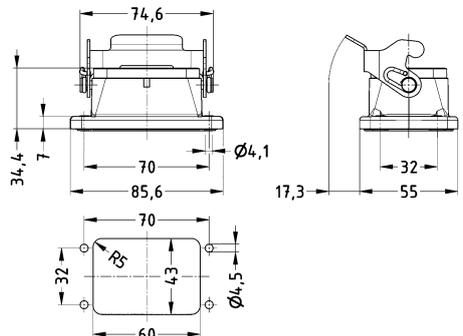
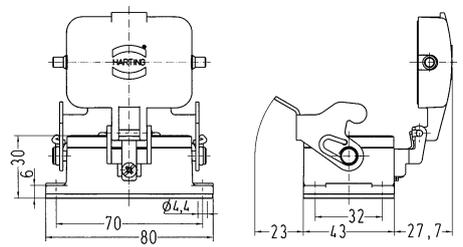
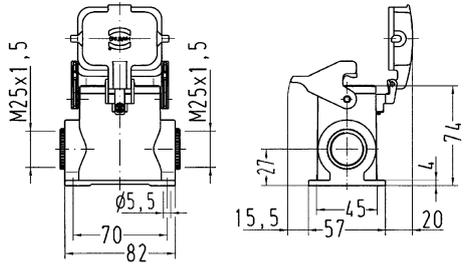
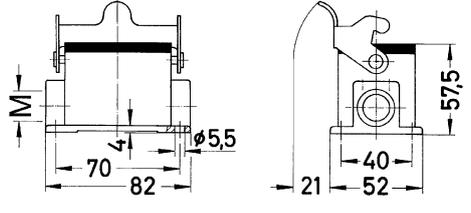
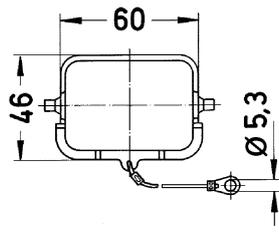
Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Hoods/housings for rough environments
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® M, Hoods, Top entry 	1x M20 1x M25 1x M32	19 37 006 1440	19 37 006 0445 19 37 006 0446 19 37 006 0447		
Han® M, Hoods, Side entry 	1x M20 1x M25	19 37 006 1540	19 37 006 0545 19 37 006 0546		
Han® M, Bulkhead mounted housings 		09 37 006 0301			 <p>Panel cut out</p>

Housings

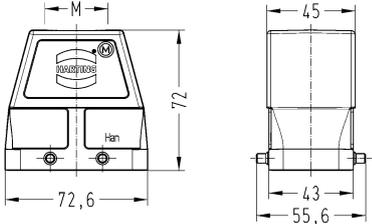
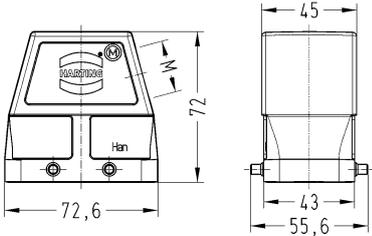
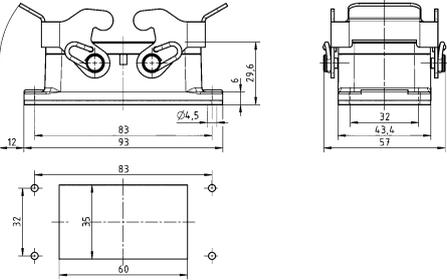
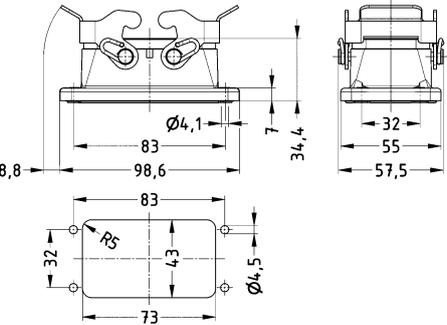
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M, Bulkhead mounted housings, Rear mounting, Pack contents: Mounting frame is included with- in the delivery 		09 37 006 0391		 <p>Panel cut out</p>
Han® M, Bulkhead mounted housings, With metal cover 		09 37 006 0318		
Han® M, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	2x M25		19 37 006 0296	
Han® M, Surface mounted housing, Side entry 	2x M20	19 37 006 1290		
Han® M, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal 		09 37 006 5405	09 37 006 5405	

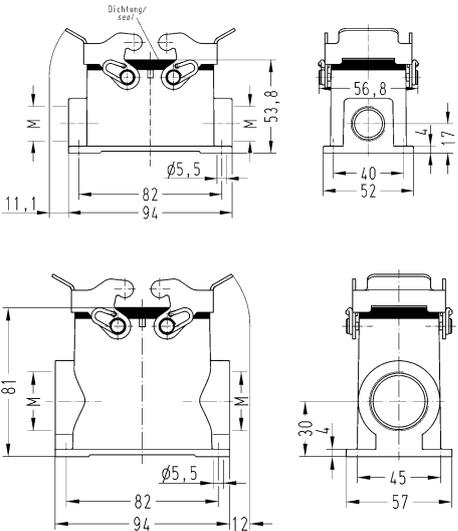
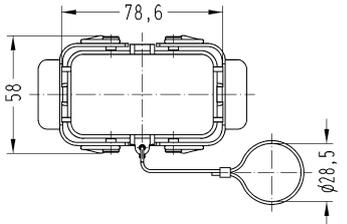
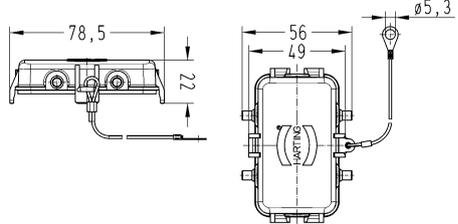
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M, Protection cover, for cable to cable housing, Metal		09 37 006 5407	09 37 006 5407	

Housings

Hoods/housings for rough environments
Double locking lever

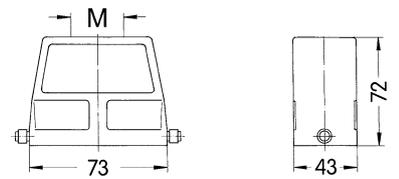
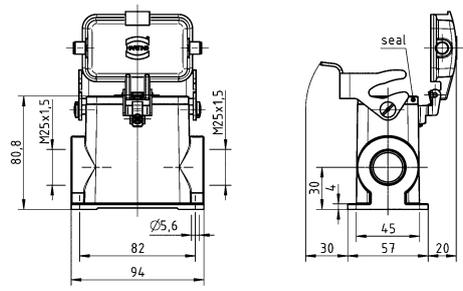
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M, Hoods, Top entry 	1x M20 1x M25 1x M32 2x M20	19 37 010 1420	19 37 010 0426 19 37 010 0427 19 37 010 0465	
Han® M, Hoods, Side entry 	1x M20 1x M25 1x M32 1x M40	19 37 010 1520	19 37 010 0526 19 37 010 0527 19 37 010 0528	
Han® M, Bulkhead mounted housings 		09 37 010 0301		 <p>Panel cut out</p>
Han® M, Bulkhead mounted housings, Rear mounting, Pack contents: Mounting frame is included with- in the delivery 		09 37 010 0391		 <p>Panel cut out</p>

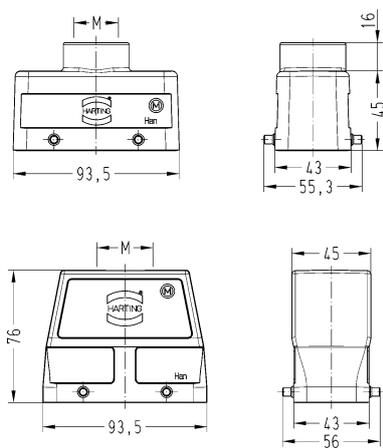
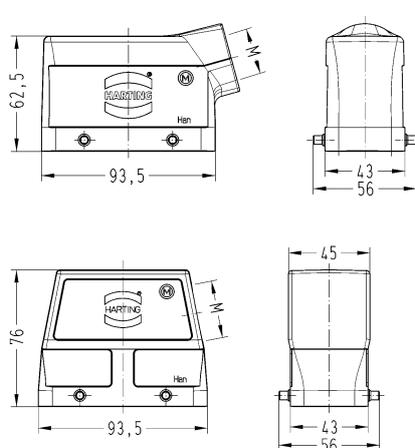
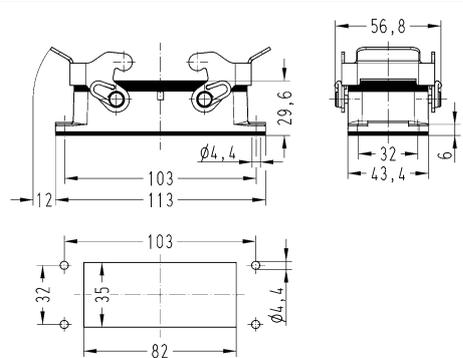
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
<p>Han® M, Surface mounted housing, Side entry</p> 	<p>2x M20 2x M32</p>	<p>19 37 010 1270</p>	<p>19 37 010 0272</p>	
<p>Han® M, Protection cover, for hoods, Metal, With fixing cord</p> 		<p>09 37 010 5403</p>	<p>09 37 010 5403</p>	
<p>Han® M, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		<p>09 37 010 5405</p>	<p>09 37 010 5405</p>	

Hoods/housings for rough environments
Single locking lever

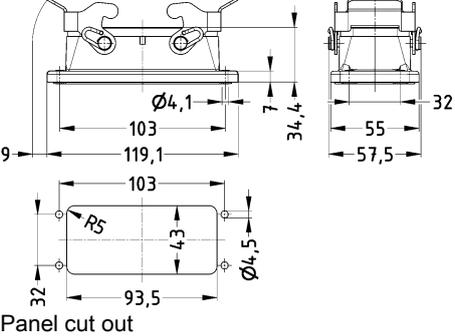
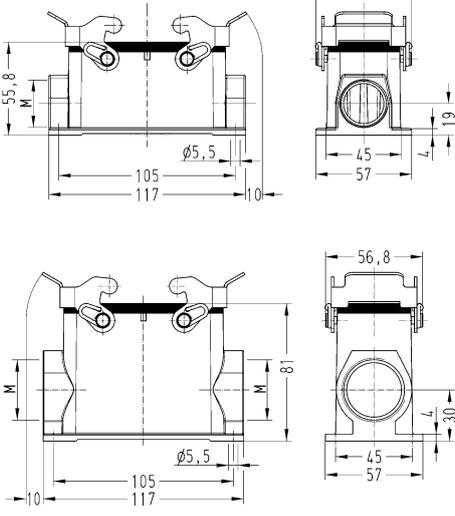
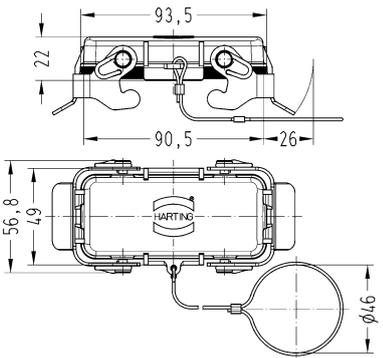
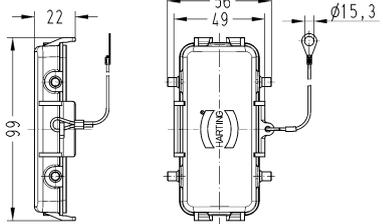
Housings

Identification	Cable entry	Part number High construction	Drawing (dimensions in mm)
Han® M, Hoods, Top entry 	1x M32	19 37 010 0447	
Han® M, Surface mounted housing, Side entry 	2x M25	19 37 010 0296	

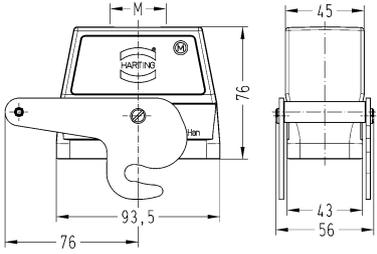
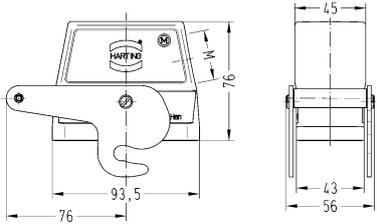
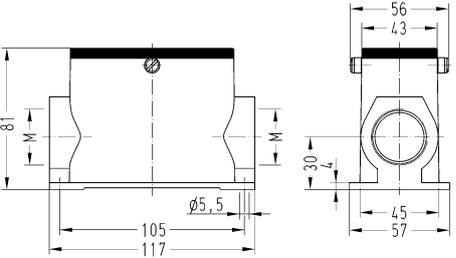
Hoods/housings for rough environments
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® M, Hoods, Top entry 	1x M25 1x M32 1x M40	19 37 016 1421	19 37 016 0427 19 37 016 0428		
Han® M, Hoods, Side entry 	1x M25 1x M32 1x M40	19 37 016 1521	19 37 016 0527 19 37 016 0528		
Han® M, Bulkhead mounted housings 		09 37 016 0301		 <p>Panel cut out</p>	

Housings

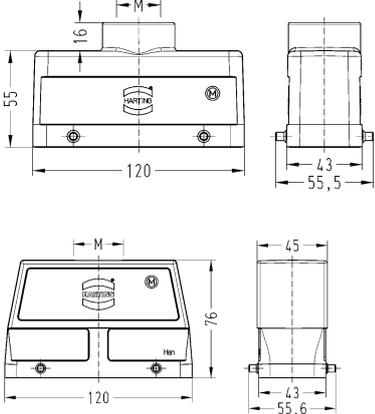
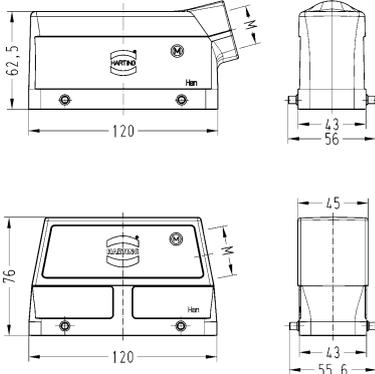
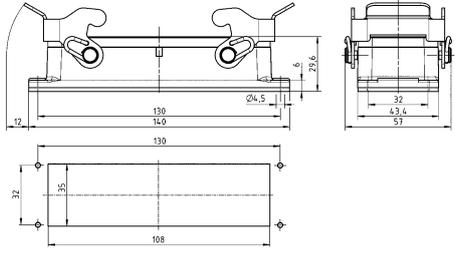
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
<p>Han® M, Bulkhead mounted housings, Rear mounting, Pack contents: Mounting frame is included with- in the delivery</p> 		09 37 016 0391		 <p>Panel cut out</p>
<p>Han® M, Surface mounted housing, Side entry</p> 	1x M25 2x M32 2x M40	19 37 016 1231	19 37 016 0272 19 37 016 0273	
<p>Han® M, Protection cover, for hoods, Metal, With fixing cord</p> 		09 37 016 5402	09 37 016 5402	
<p>Han® M, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		09 37 016 5405	09 37 016 5405	

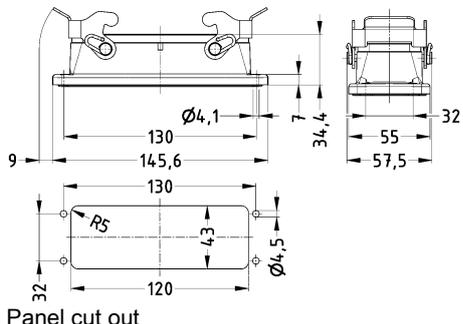
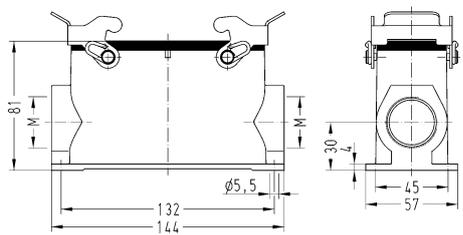
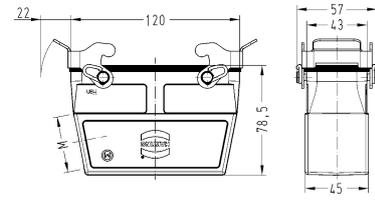
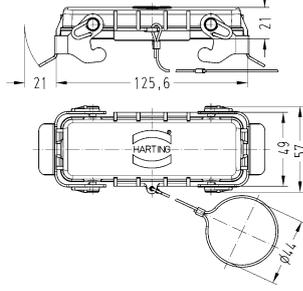
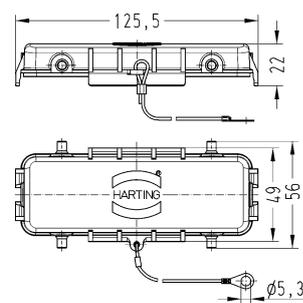
Hoods/housings for rough environments
Central locking lever (on the hood)

Identification	Cable entry	Part number High construction	Drawing (dimensions in mm)
Han® M, Hoods, Top entry 	1x M32	19 37 016 0487	
Han® M, Hoods, Side entry 	1x M32	19 37 016 0587	
Han® M, Surface mounted housing, Side entry 	2x M32	19 37 016 0282	

Hoods/housings for rough environments
Double locking lever

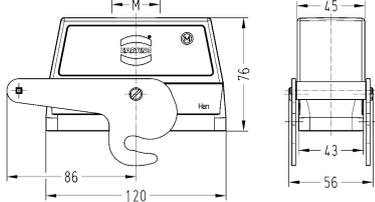
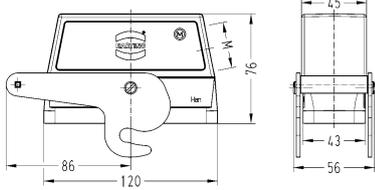
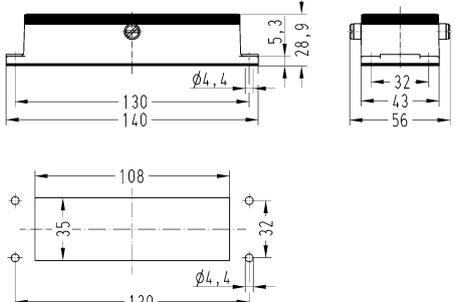
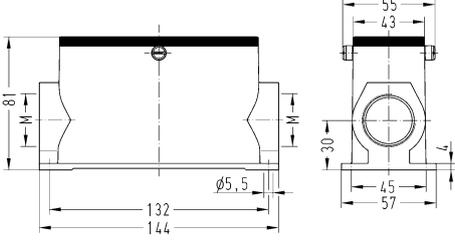
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M, Hoods, Top entry 	1x M25 1x M32 1x M40 2x M25 2x M32	19 37 024 1421	19 37 024 0427 19 37 024 0428 19 37 024 0466 19 37 024 0467	
Han® M, Hoods, Side entry 	1x M25 1x M32 1x M40	19 37 024 1521	19 37 024 0527 19 37 024 0528	
Han® M, Bulkhead mounted housings 		09 37 024 0301		 <p>Panel cut out</p>

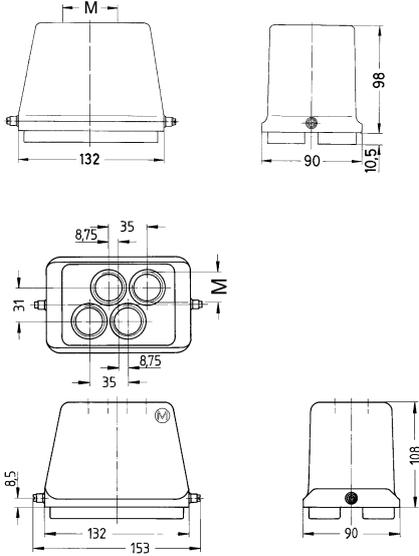
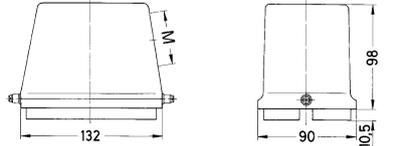
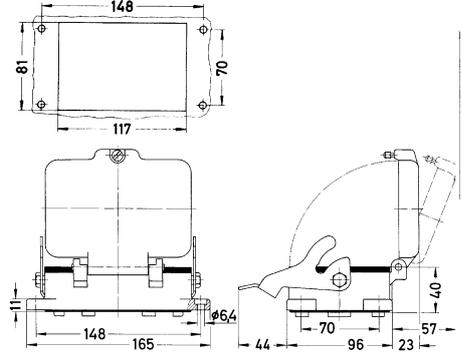
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
<p>Han® M, Bulkhead mounted housings, Rear mounting, Pack contents: Mounting frame is included with- in the delivery</p> 		09 37 024 0391		 <p>Panel cut out</p>
<p>Han® M, Surface mounted housing, Side entry</p> 	2x M32 2x M40		19 37 024 0272 19 37 024 0273	
<p>Han® M, Cable to cable housing, Side entry</p> 	1x M40		19 37 024 0733	
<p>Han® M, Protection cover, for hoods, Metal, With fixing cord</p> 		09 37 024 5402	09 37 024 5402	
<p>Han® M, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		09 37 024 5405	09 37 024 5405	

Hoods/housings for rough environments
Central locking lever (on the hood)

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M, Hoods, Top entry 	1x M32		19 37 024 0487	
Han® M, Hoods, Side entry 	1x M32		19 37 024 0587	
Han® M, Bulkhead mounted housings 		09 37 024 0381		 <p>Panel cut out</p>
Han® M, Surface mounted housing, Side entry 	2x M32		19 37 024 0282	

Hoods/housings for rough environments
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® M, Hoods, Top entry 	1x M40 1x M50 4x M25		19 37 048 0448 19 37 048 0449 19 37 048 0401		
Han® M, Hoods, Side entry 	1x M40 1x M50		19 37 048 0548 19 37 048 0549		
Han® M, Bulkhead mounted housings, With thermo-plastic cover 		09 37 048 0301			



Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M, Surface mounted housing, With metal cover, Side entry, Pack contents: Blind way for one cable entry 	2x M50		19 37 048 0299	

Features

- Hoods/Housings for higher EMC requirements
- Continuous shield connection using conductive surface and conductive seal
- Metal hoods / housings with high shielding efficiency
- Field of application: for sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
- Distinguishing feature: Electrically conductive surface, internal seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP65 / IP67, with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	PTFE, NBR
Material (locking)	Steel
Surface (locking)	Zinc plated
RoHS	compliant, compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight, 6c: Copper alloy containing up to 4 % lead by weight


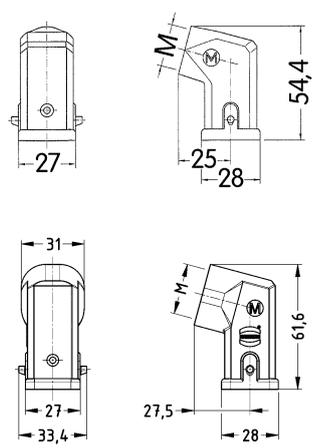
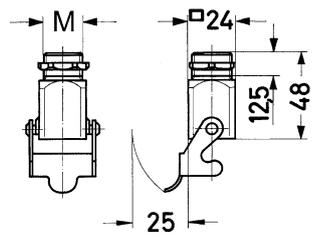
Specifications and approvals

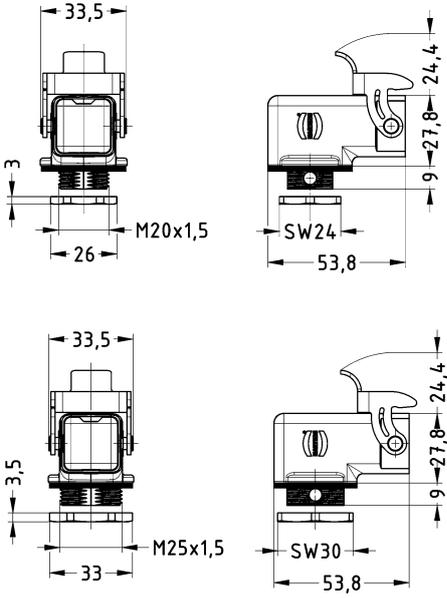
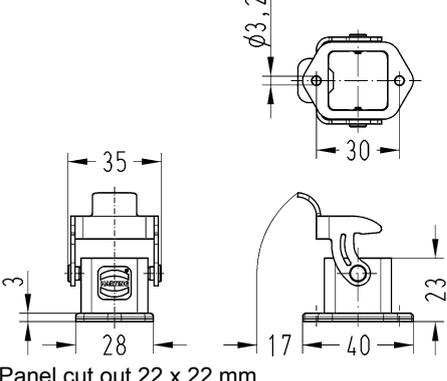
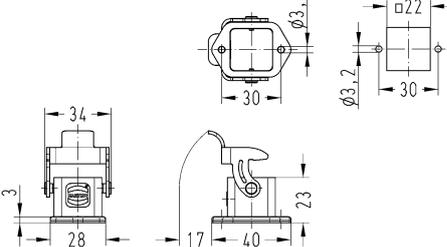
DNV GL

Housings

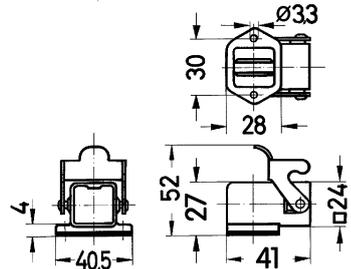
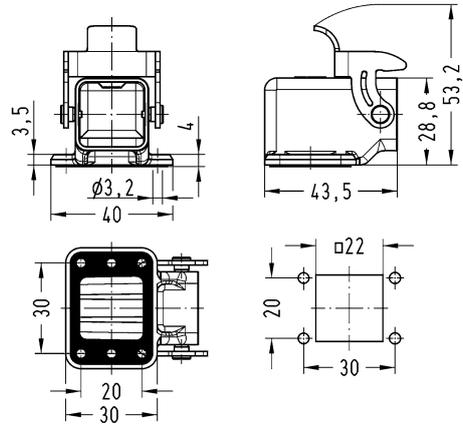
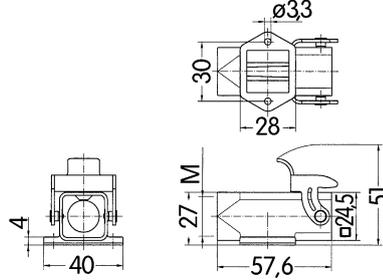
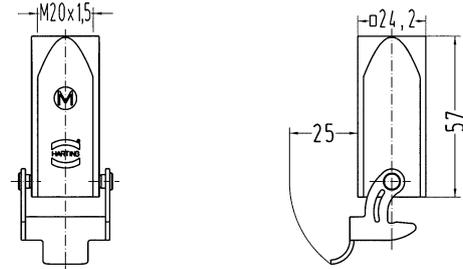
Hoods/Housings for higher EMC requirements
Single locking lever

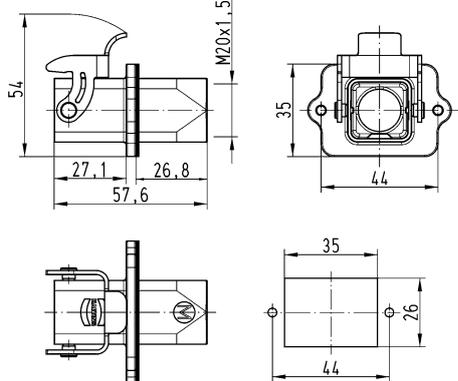
Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® EMC, Hoods, Top entry</p> 	<p>1x M20 1x M25</p>	<p>19 62 003 1440 19 62 003 1445</p>	
<p>Han® EMC, Hoods, Side entry</p> 	<p>1x M20 1x M25</p>	<p>19 62 003 1640 19 62 003 1645</p>	
<p>Han® EMC, Screw mounted housings, Straight</p> 	<p>1x M20</p>	<p>19 62 003 1150</p>	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® EMC, Screw mounted housings, Angled</p> 	<p>1x M20 1x M25</p>	<p>19 62 003 1160 19 62 003 1165</p>	
<p>Han® EMC, Bulkhead mounted housings, Straight</p> 		<p>09 62 003 0301</p>	 <p>Panel cut out 22 x 22 mm</p>
<p>Han® EMC, Bulkhead mounted housings, Straight, for PCB termination with Han® Q 5/0</p> 		<p>09 62 003 0304</p>	

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Bulkhead mounted housings, Angled 		09 62 003 0801	 <p>Panel cut out 22 x 22 mm</p>
Han® EMC, Bulkhead mounted housings, Angled, 4 fixing screws 		09 62 003 0810	
Han® EMC, Surface mounted housing, Top entry 	1x M20	19 62 003 1250	 <p>Panel cut out 22 x 22 mm</p>
Han® EMC, Surface mounted housing, Bottom closed, Top entry 	1x M20	19 62 003 1252	
Han® EMC, Cable to cable housing, Top entry 	1x M20 1x M25	19 62 003 1750 19 62 003 1755	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® EMC, Panel feed through housing, Top entry</p> 	<p>1x M20</p>	<p>19 62 003 1120</p>	 <p>Panel cut out</p>
<p>Han® EMC, Panel feed through housing, Fixing hole for M4 screw, Top entry</p> 	<p>1x M20</p>	<p>19 62 003 1121</p>	

Features

- Hoods/Housings for higher EMC requirements
- Continuous shield connection using conductive surface
- Metal hoods / housings with high shielding efficiency
- Field of application: for sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
- Distinguishing feature: Electrically conductive surface, internal seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Housings

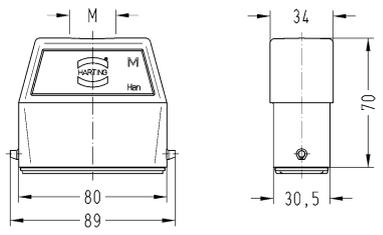
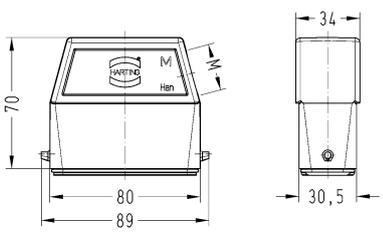
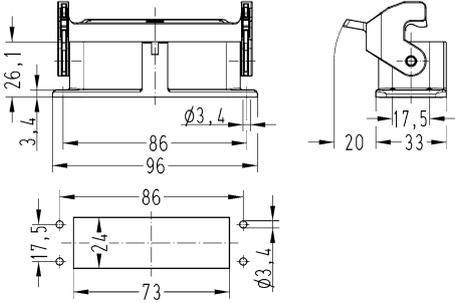
Hoods/Housings for higher EMC requirements
Single locking lever

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Hoods, Top entry 	1x M25	19 62 015 0446	
Han® EMC, Hoods, Side entry 	1x M25	19 62 015 0546	
Han® EMC, Bulkhead mounted housings, Han-Easy Lock® 		09 62 015 0301	<p>Panel cut out</p>

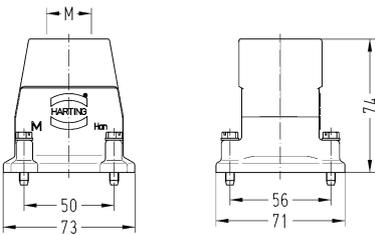
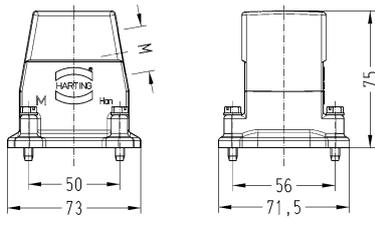
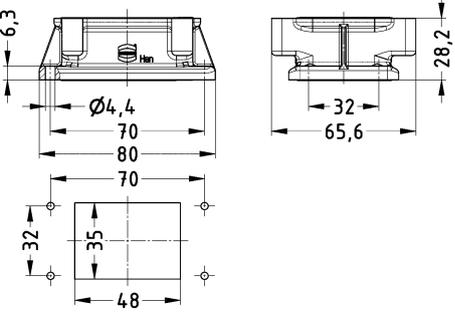
Hoods/Housings for higher EMC requirements
Single locking lever

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Hoods, Top entry 	1x M25	19 62 025 0446	
Han® EMC, Hoods, Side entry 	1x M25	19 62 025 0546	
Han® EMC, Bulkhead mounted housings, Han-Easy Lock® 		09 62 025 0301	 <p>Panel cut out</p>

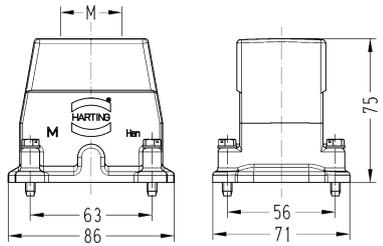
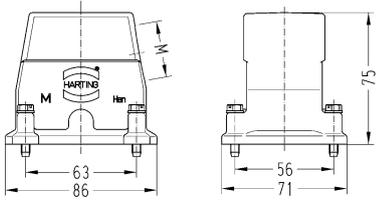
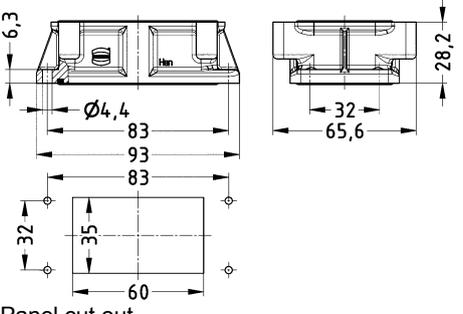
Hoods/Housings for higher EMC requirements
Screw locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Hoods, Top entry 	1x M25 1x M32	19 62 006 0441 19 62 006 0442	
Han® EMC, Hoods, Side entry 	1x M25 1x M32	19 62 006 0541 19 62 006 0542	
Han® EMC, Bulkhead mounted housings 		09 62 006 0301	 <p>Panel cut out</p>

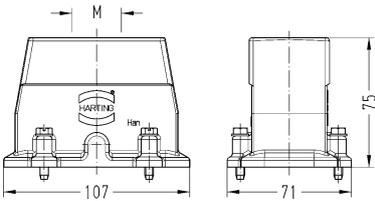
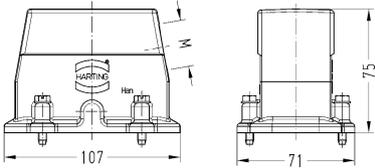
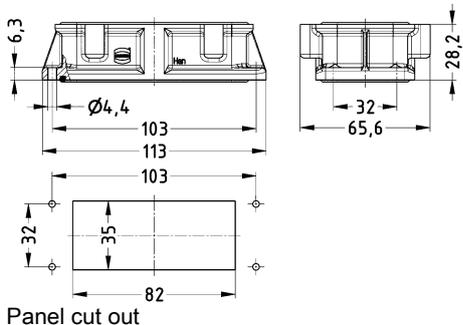
Hoods/Housings for higher EMC requirements
Screw locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Hoods, Top entry 	1x M32	19 62 010 0442	
Han® EMC, Hoods, Side entry 	1x M32 1x M40	19 62 010 0542 19 62 010 0543	
Han® EMC, Bulkhead mounted housings 		09 62 010 0301	 <p>Panel cut out</p>

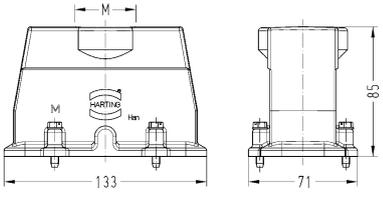
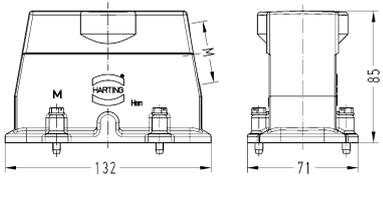
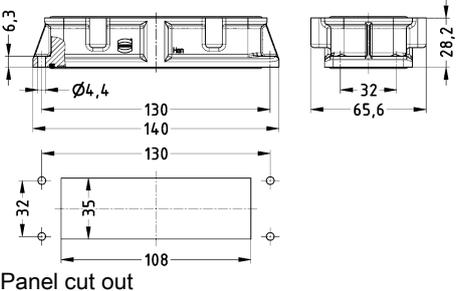
Hoods/Housings for higher EMC requirements
Screw locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® EMC, Hoods, Top entry</p> 	<p>1x M32 1x M40</p>	<p>19 62 040 0442 19 62 040 0443</p>	
<p>Han® EMC, Hoods, Side entry</p> 	<p>1x M32 1x M40</p>	<p>19 62 040 0542 19 62 040 0543</p>	
<p>Han® EMC, Bulkhead mounted housings</p> 		<p>09 62 040 0301</p>	 <p>Panel cut out</p>

Hoods/Housings for higher EMC requirements
Screw locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC, Hoods, Top entry 	1x M40	19 62 064 0443	
Han® EMC, Hoods, Side entry 	1x M40	19 62 064 0543	
Han® EMC, Bulkhead mounted housings 		09 62 064 0301	 <p>Panel cut out</p>

Features

- Hoods/Housings for higher EMC requirements
- Continuous shield connection using conductive surface
- Metal hoods / housings with high shielding efficiency
- Field of application: for sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
- Distinguishing feature: Electrically conductive surface, internal seal
- Locking levers: Han-Easy Lock®
- for front and rear wall mounting

Technical characteristics

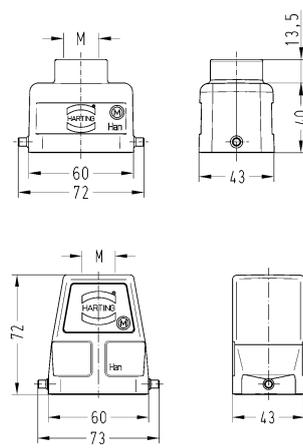
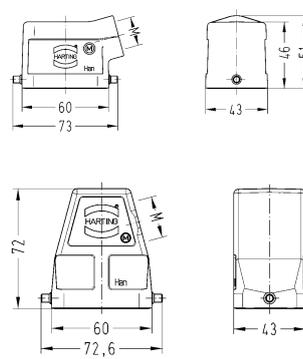
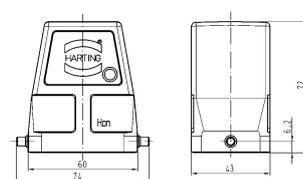
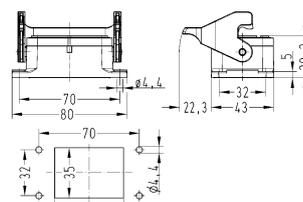
Limiting temperature	-40 ... +125 °C, -40 ... +200 °C With Han® High Temp components
Degree of protection acc. to IEC 60529	IP65, IP66
Type rating acc. to UL 50 / UL 50E	4, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material (accessories)	Polyamide, Stainless steel
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant

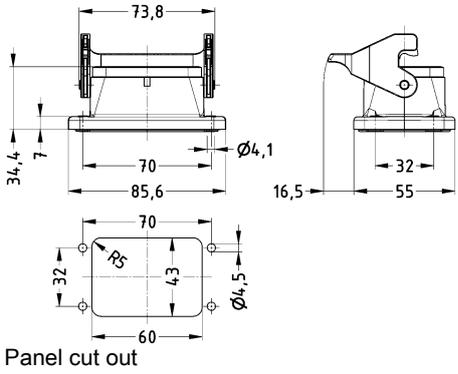
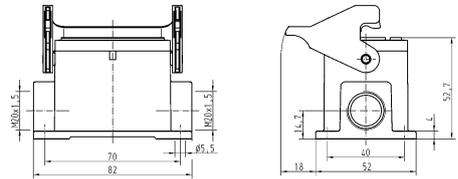
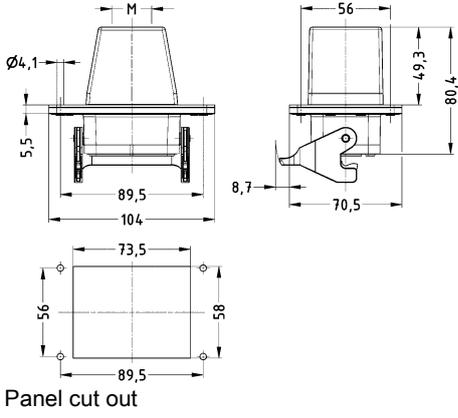
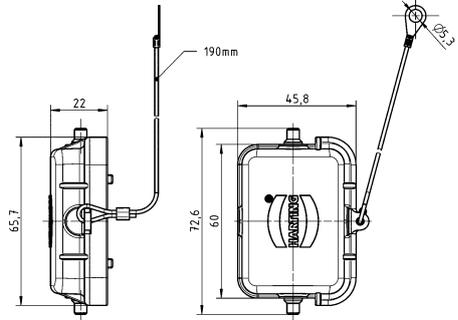
Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Single locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M20 1x M25 1x M32	19 62 806 1440	19 62 806 0446 19 62 806 0447		
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M20 1x M25 1x M32	19 62 806 1540 19 62 806 1541	19 62 806 0546 19 62 806 0547		
Han® EMC/B Han® High Temp, Hoods, Without cable entry 			09 62 806 0801		
Han® EMC/B, Bulkhead mounted housings, Han-Easy Lock® 		09 62 806 0301		 <p>Panel cut out</p>	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 62 806 0315		
Han® EMC/B, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M20	19 62 806 1290		
Han® EMC/B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 62 806 1121 19 62 806 1122	
Han® EMC/B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord 		09 62 806 5425	09 62 806 5425	



Hoods/Housings for higher EMC requirements
Single locking lever (on the hood)







Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Hoods, Han-Easy Lock®	1x M32		19 62 806 0557	
Han® EMC/B, Bulkhead mounted housings		09 62 806 0303		

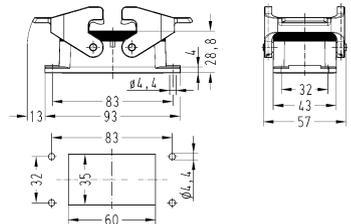
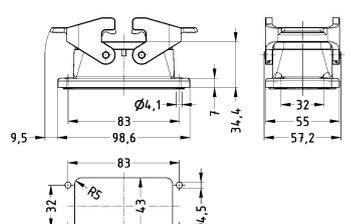
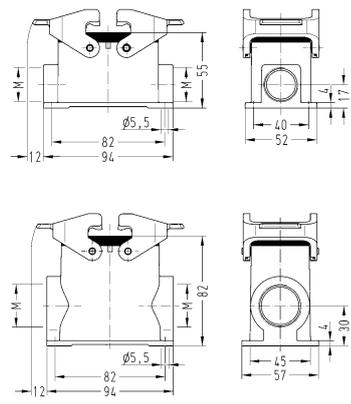
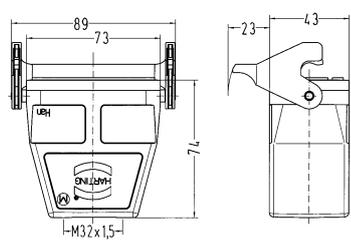


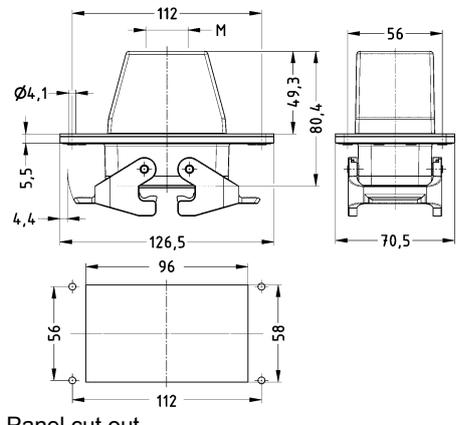
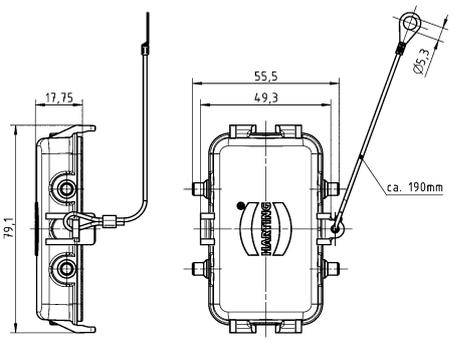
Double locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M20 1x M25 1x M32 1x M40	19 62 810 1420 19 62 810 1421	19 62 810 0426 19 62 810 0427 19 62 810 0428	 	
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M20 1x M25 1x M32	19 62 810 1520	19 62 810 0526 19 62 810 0527	 	
Han® EMC/B Han® High Temp, Hoods, Without cable entry 			09 62 810 0801	 	

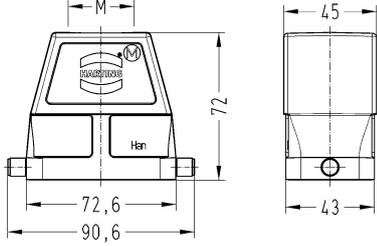
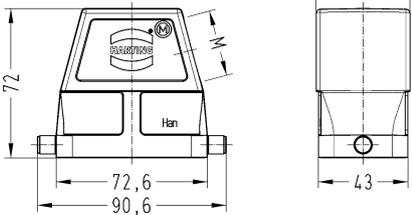
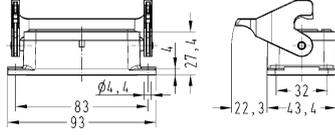

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Bulkhead mounted housings, Han-Easy Lock® 		09 62 810 0301		 Panel cut out
Han® EMC/B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 62 810 0315		 Panel cut out
Han® EMC/B, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25 2x M32	19 62 810 1271	19 62 810 0272	
Han® EMC/B, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 62 810 0766 19 62 810 0757	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 62 810 1121 19 62 810 1122	 <p>Panel cut out</p>
Han® EMC/B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord 		09 62 810 5425	09 62 810 5425	

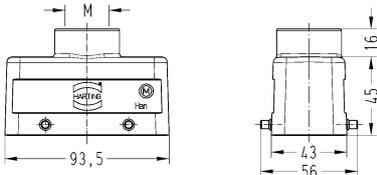
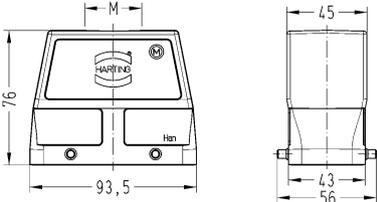
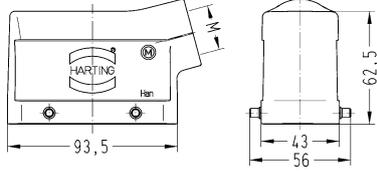
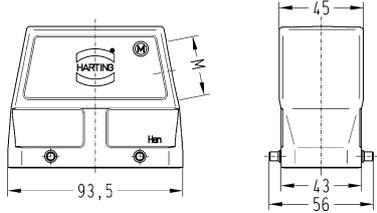
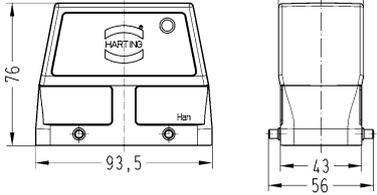
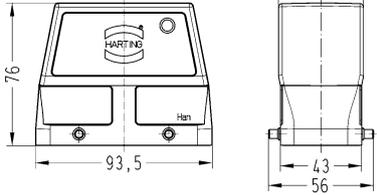
Hoods/Housings for higher EMC requirements
Single locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Hoods, Top entry 	1x M25 1x M32		19 62 810 0446 19 62 810 0447	
Han® EMC/B, Hoods, Side entry 	1x M25 1x M32		19 62 810 0546 19 62 810 0547	
Han® EMC/B, Bulkhead mounted housings, Han-Easy Lock® 		09 62 810 0305		  Panel cut out

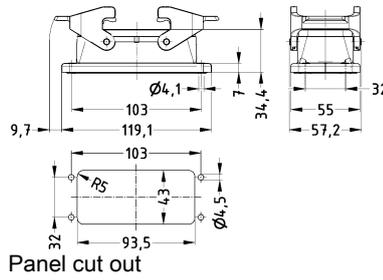
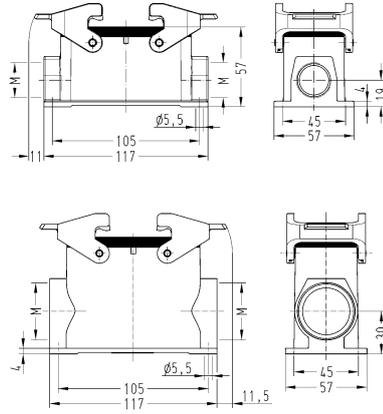
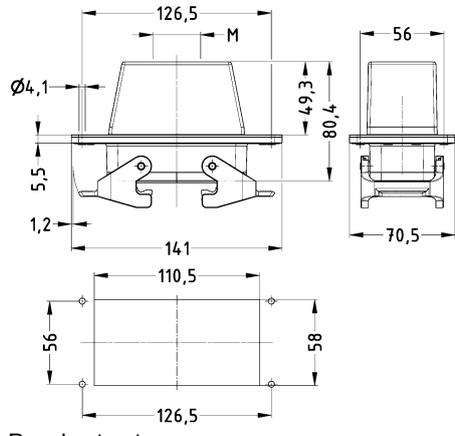
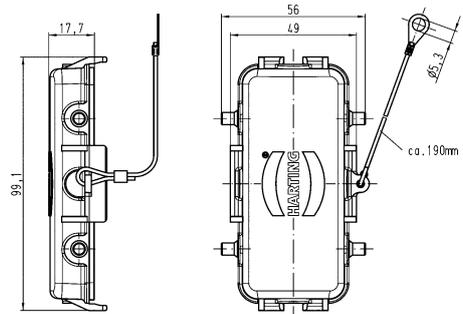
Double locking lever

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M25 1x M32 1x M40	19 62 816 1421	19 62 816 0427 19 62 816 0428		
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M25 1x M32 1x M40	19 62 816 1521	19 62 816 0527 19 62 816 0528		
Han® EMC/B Han® High Temp, Hoods, Without cable entry 			09 62 816 0801		



Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 62 816 0315		 <p>Panel cut out</p>
Han® EMC/B, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25 2x M40	19 62 816 1271	19 62 816 0273	
Han® EMC/B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M32 1x M40		19 62 816 1121 19 62 816 1122	 <p>Panel cut out</p>
Han® EMC/B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord 		09 62 816 5425	09 62 816 5425	



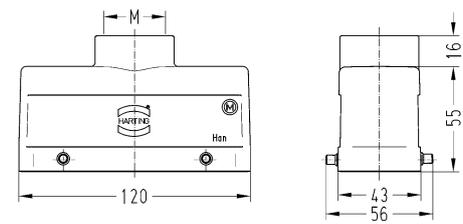
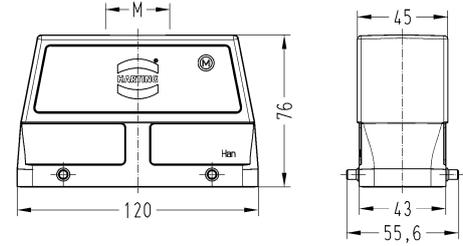
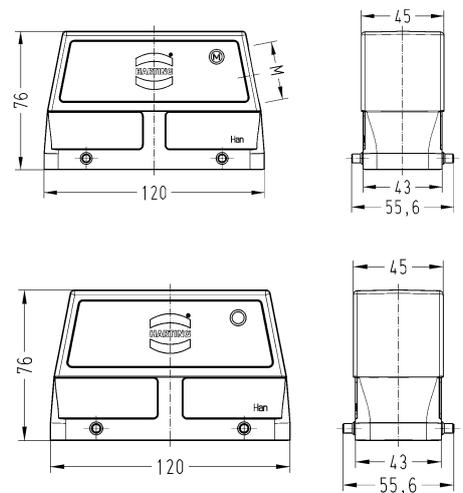
Hoods/Housings for higher EMC requirements
Double locking lever (on the hood)

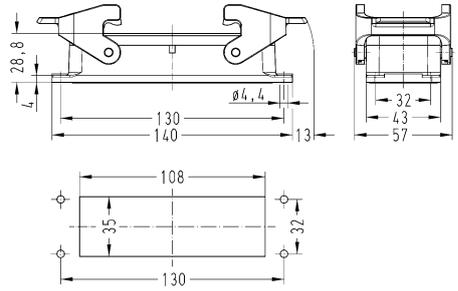
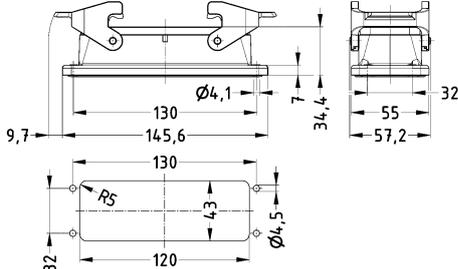
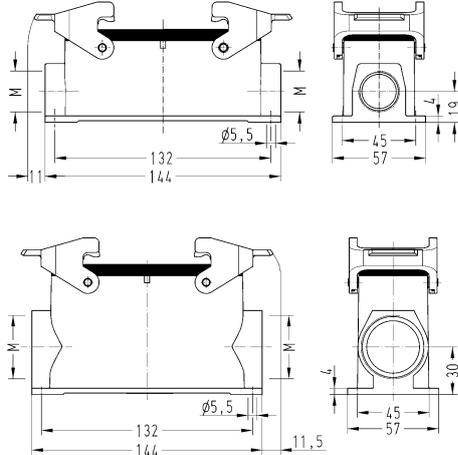
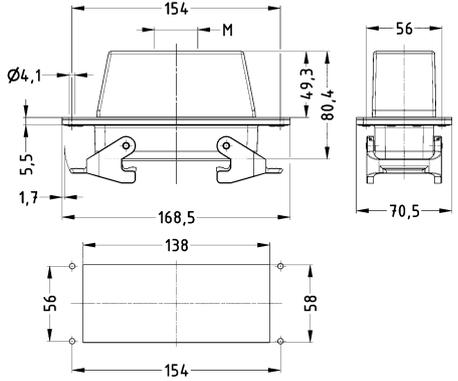
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Hoods, Side entry, Han-Easy Lock® 	1x M40		19 62 816 0538	
Han® EMC/B, Bulkhead mounted housings 		09 62 816 0303		

Double locking lever

Housings

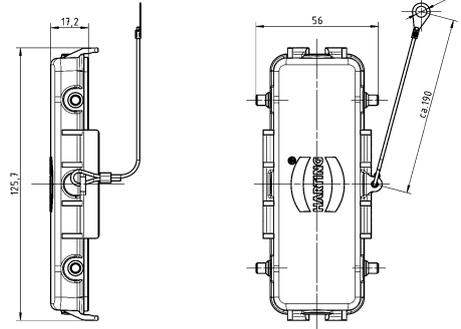
Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp, Hoods, Top entry 	1x M32 1x M40 1x M50	19 62 824 1422	19 62 824 0427 19 62 824 0428 19 62 824 0429		
Han® EMC/B Han® High Temp, Hoods, Side entry 	1x M25 1x M32 1x M40	19 62 824 1521	19 62 824 0527 19 62 824 0528		
Han® EMC/B Han® High Temp, Hoods, Without cable entry 			09 62 824 0801		

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Bulkhead mounted housings, Han-Easy Lock® 		09 62 824 0301		 <p>Panel cut out</p>
Han® EMC/B, Bulkhead mounted housings, Rear mounting, Han-Easy Lock®, Pack contents: Mounting frame is included with- in the delivery 		09 62 824 0315		 <p>Panel cut out</p>
Han® EMC/B, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25 2x M40	19 62 824 1271	19 62 824 0273	
Han® EMC/B, Panel feed through housing, Top entry, Han-Easy Lock® 	1x M32 1x M40		19 62 824 1121 19 62 824 1122	 <p>Panel cut out</p>



Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Protection cover, for bulkhead mounted housings, for surface mounted housings, Metal, With fixing cord		09 62 824 5425	09 62 824 5425	





Hoods/Housings for higher EMC requirements
Double locking lever (on the hood)

Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B, Hoods, Side entry, Han-Easy Lock® 	1x M40		19 62 824 0538	
Han® EMC/B, Bulkhead mounted housings 		09 62 824 0306		

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M4
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	2 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Chromated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR, FPM
Material (locking)	Stainless steel
RoHS	compliant

Specifications and approvals

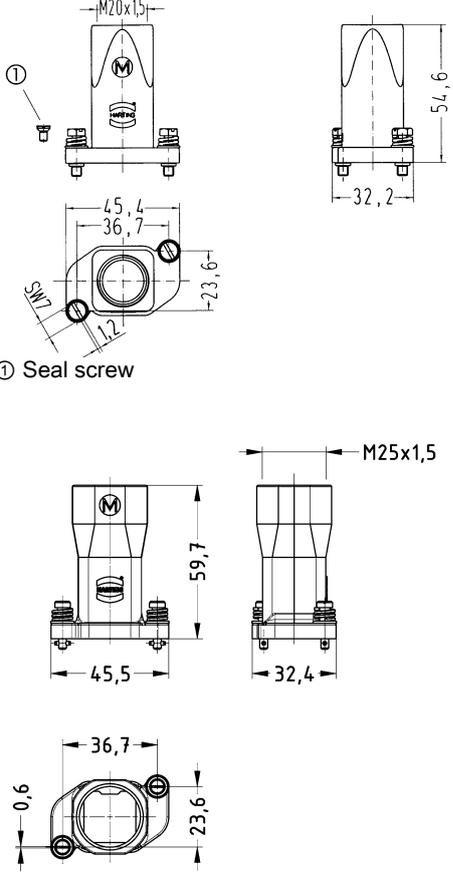
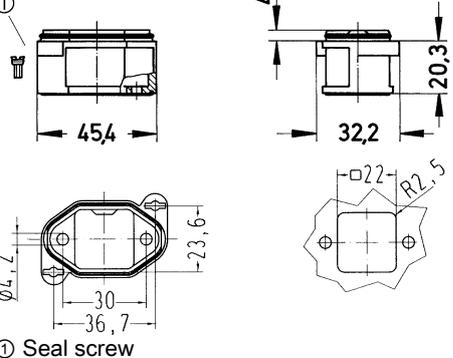
UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Details

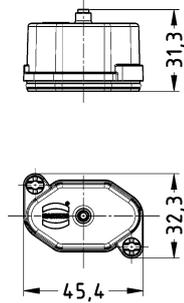
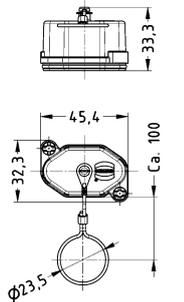
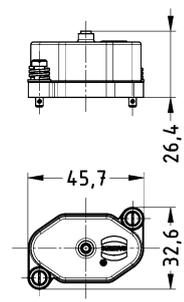
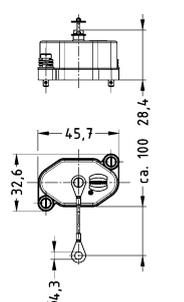
By using the inserts of Han® Q and Han A® series, the sealing on the insert has to be removed. The sealing screw of the insert must be replaced by the sealing screw of the hood/housing.

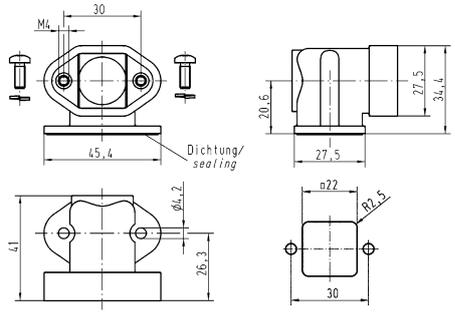
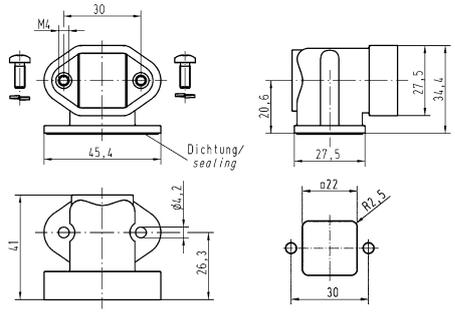
By using the angled bulkhead and surface mounted housings with through holes in the mounting flanges, it has to be ensured by the customer that the fixing screws appropriately sealed from the inside of the housing.

Hoods/housings for harsh outdoor environments
Toggle locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 703 0400 19 40 703 0401</p>	 <p>① Seal screw</p>
<p>Han® HPR, Bulkhead mounted housings, Straight, Pack contents: With seal screw</p> 		<p>09 40 703 0301</p>	 <p>① Seal screw</p>

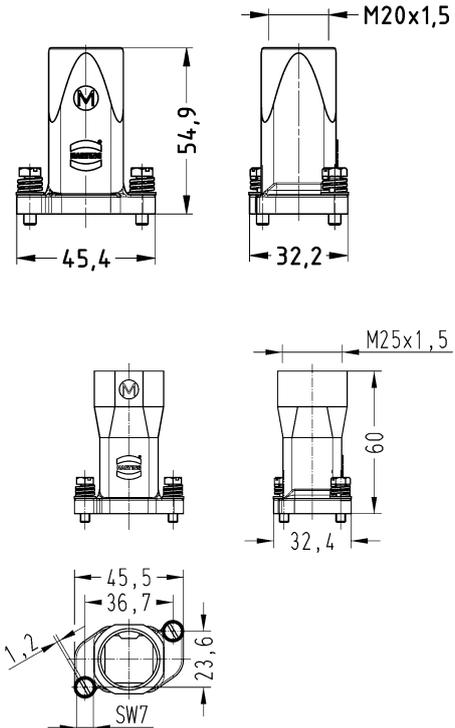
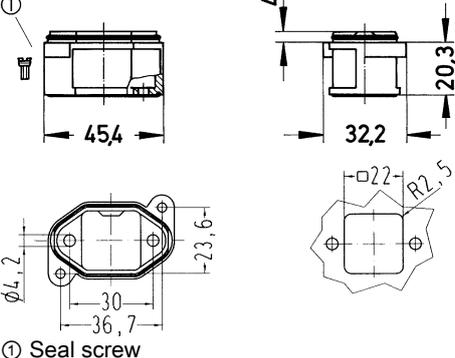
Housings

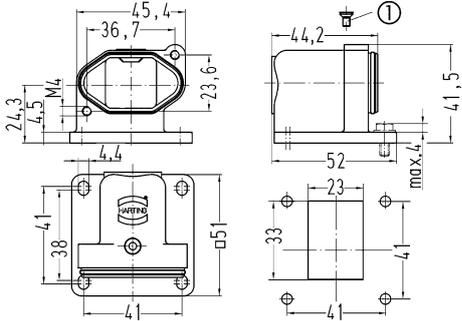
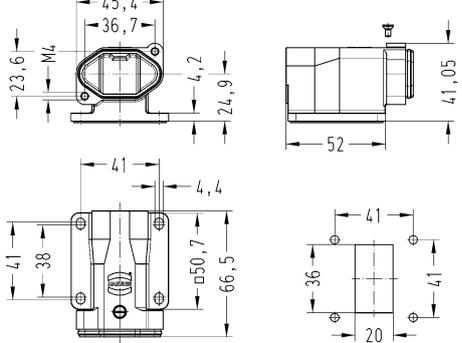
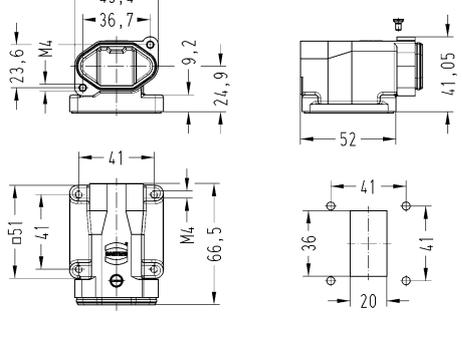
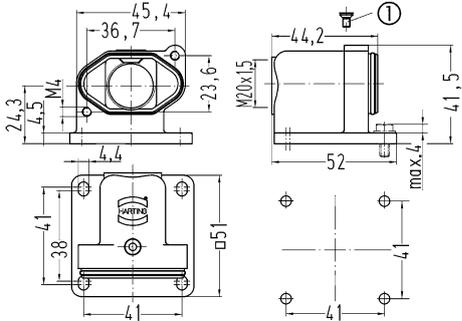
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for hoods</p> 		09 40 703 5403	
<p>Han® HPR, Protection cover, for hoods, With fixing cord</p> 		09 40 703 5404	
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		09 40 703 5401	
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings, With fixing cord</p> 		09 40 703 5402	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Top entry</p> 	<p>1x M20</p>	<p>19 40 703 0900</p>	
<p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position</p> 		<p>09 40 703 0902</p>	

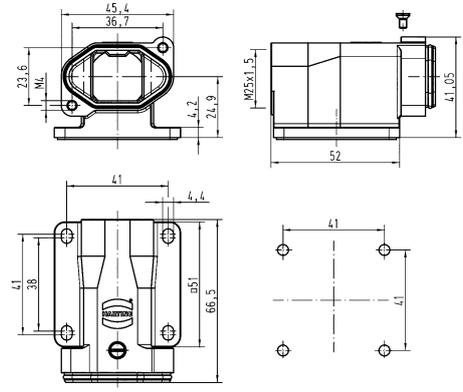
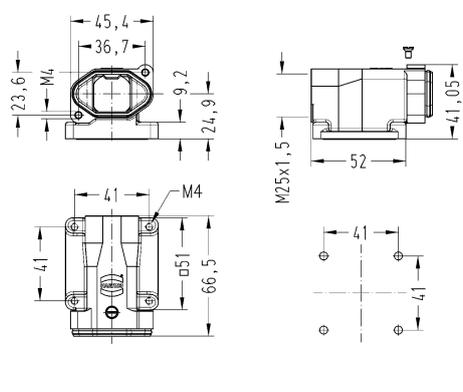


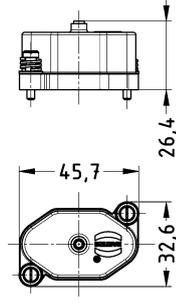
Hoods/housings for harsh outdoor environments
Screw locking

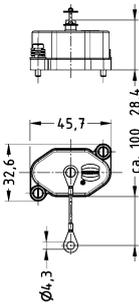
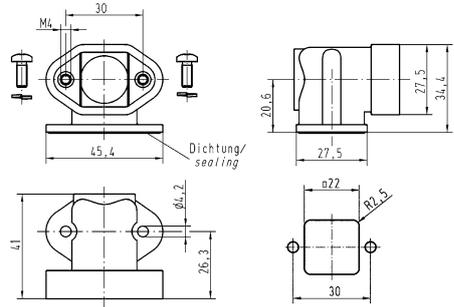
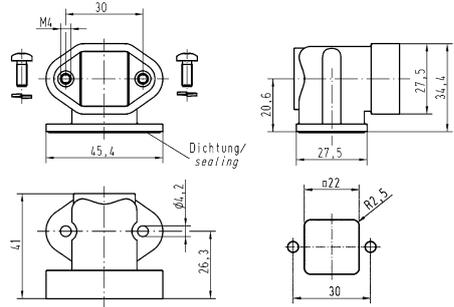
Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 703 0410 19 40 703 0411</p>	
<p>Han® HPR, Bulkhead mounted housings, Straight, Pack contents: With seal screw</p> 		<p>09 40 703 0311</p>	 <p>① Seal screw</p>

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Bulkhead mounted housings, Angled, Open bottom, Feed through hole for fixing screws, Pack contents: With seal screw</p> 		09 40 703 0950	 <p>① Seal screw</p>
<p>Han® HPR, Bulkhead mounted housings, Angled, Open bottom, Long version, Feed through hole for fixing screws, Pack contents: With seal screw</p> 		09 40 703 0951	
<p>Han® HPR, Bulkhead mounted housings, Angled, Open bottom, Long version, Tapped blind hole for fixing screws, Pack contents: With seal screw</p> 		09 40 703 0953	
<p>Han® HPR, Surface mounted housing, Angled, Bottom closed, Feed through hole for fixing screws, Top entry, Pack contents: With seal screw</p> 	1x M20	19 40 703 0950	 <p>① Seal screw</p>

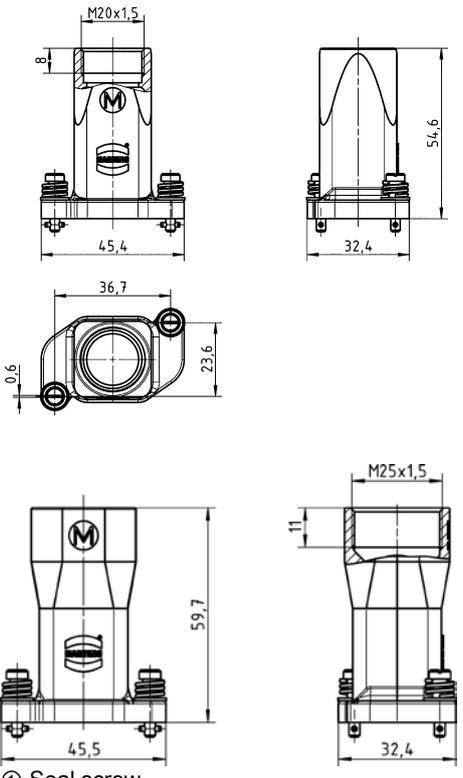
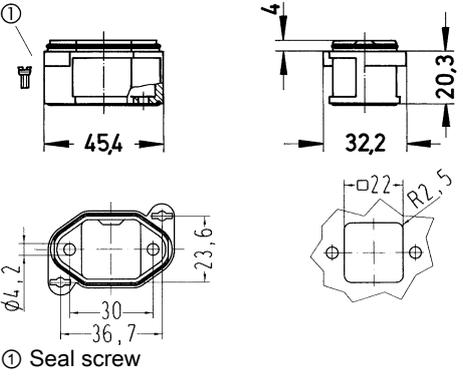
Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Surface mounted housing, Angled, Bottom closed, Long version, Bottom closed, Feed through hole for fixing screws, Top entry, Pack contents: With seal screw</p> 	<p>1x M25</p>	<p>19 40 703 0951</p>	
<p>Han® HPR, Surface mounted housing, Angled, Bottom closed, Long version, Bottom closed, Tapped blind hole for fixing screws, Top entry, Pack contents: With seal screw</p> 	<p>1x M25</p>	<p>19 40 703 0953</p>	
<p>Han® HPR, Protection cover, for hoods</p> 		<p>09 40 703 5413</p>	
<p>Han® HPR, Protection cover, for hoods, With fixing cord</p> 		<p>09 40 703 5414</p>	
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 703 5411</p>	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings, With fixing cord</p> 		09 40 703 5412	
<p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Top entry</p>  <p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position</p> 	1x M20	<p>19 40 703 0900</p> <p>09 40 703 0902</p>	 

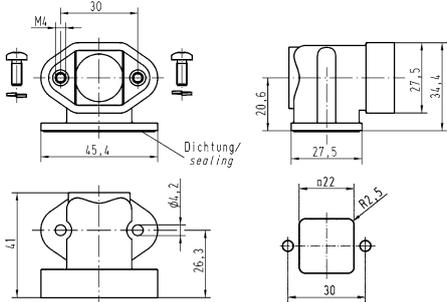
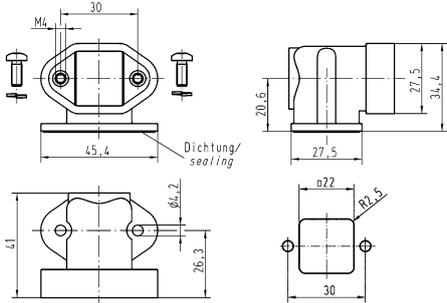
Hoods/housings for harsh outdoor environments
Toggle locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 003 0400 19 40 003 0401</p>	 <p>① Seal screw</p>
<p>Han® HPR, Bulkhead mounted housings, Straight, Pack contents: With seal screw</p> 		<p>09 40 003 0301</p>	 <p>① Seal screw</p>

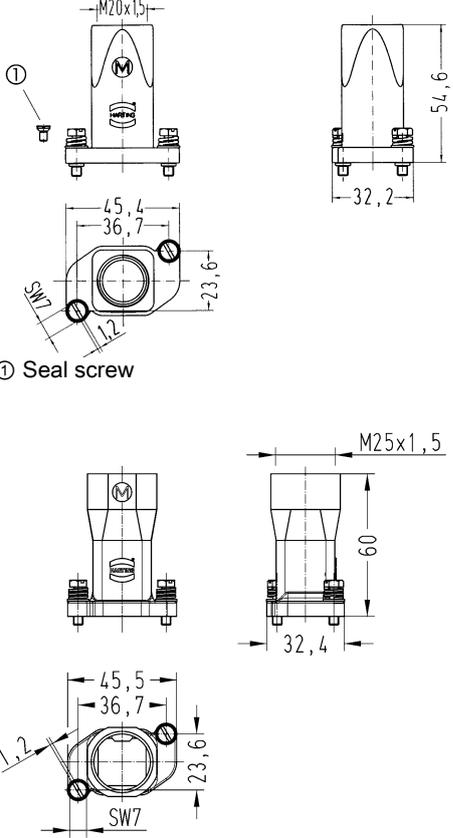
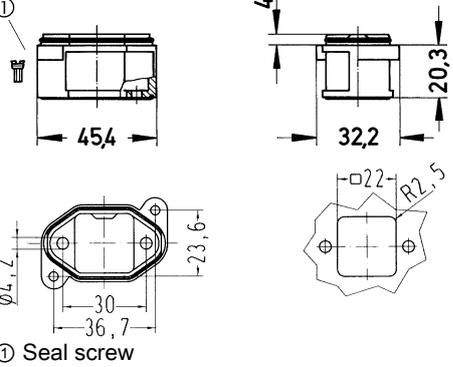
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Protection cover, for hoods		09 40 003 5403	
Han® HPR, Protection cover, for hoods, With fixing cord		09 40 003 5404	
Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings		09 40 003 5401	
Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings, With fixing cord		09 40 003 5402	

Housings

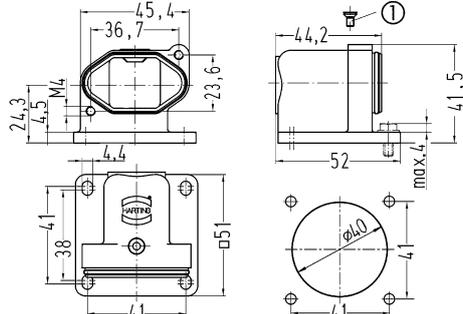
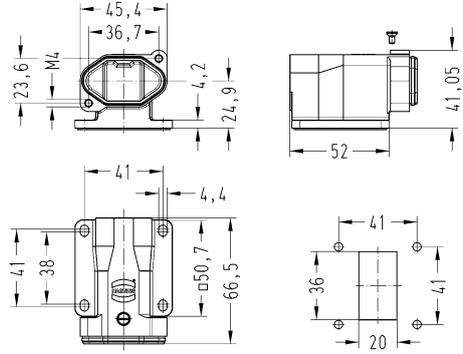
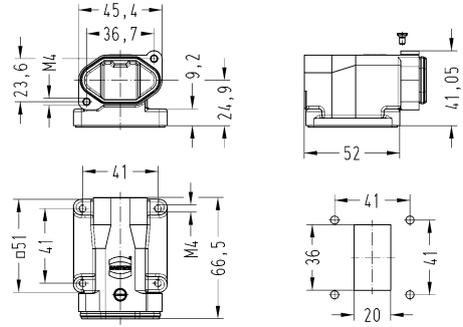
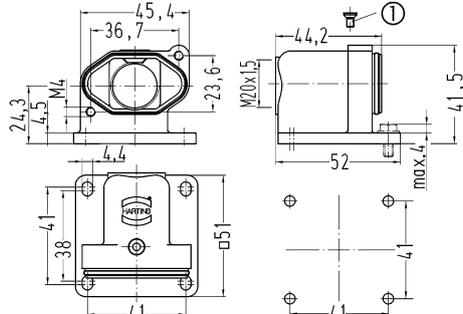
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulkhead mounted position, Top entry</p> 	<p>1x M20</p>	<p>19 40 003 0900</p>	
<p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulkhead mounted position</p> 		<p>09 40 003 0902</p>	

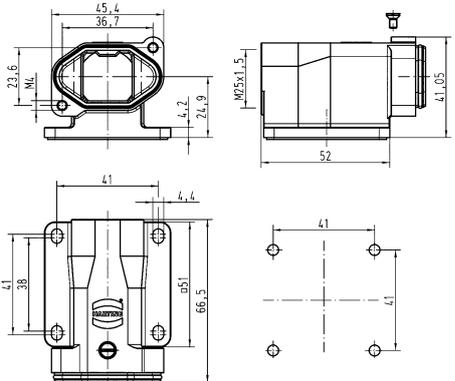
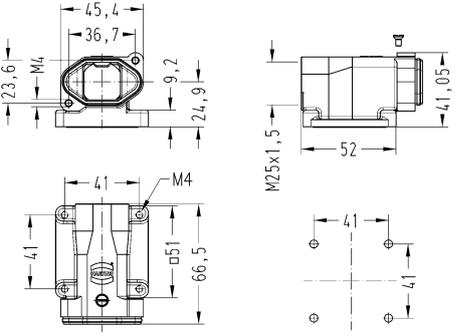
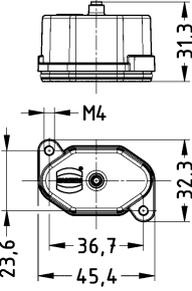
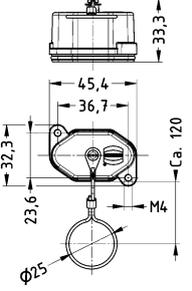
Hoods/housings for harsh outdoor environments
Screw locking

Housings

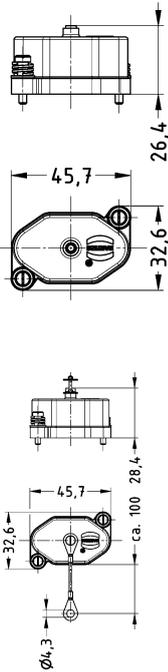
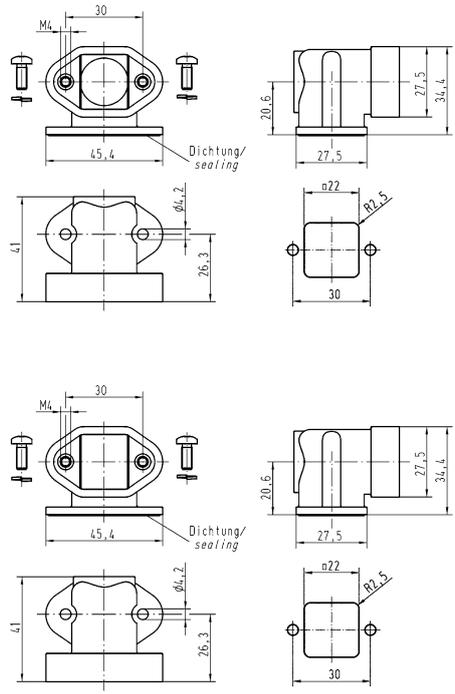
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry, Pack contents: With seal screw</p> 	<p>1x M20 1x M25</p>	<p>19 40 003 0410 19 40 003 0411</p>	 <p>① Seal screw</p>
<p>Han® HPR, Bulkhead mounted housings, Straight, Pack contents: With seal screw</p> 		<p>09 40 003 0311</p>	 <p>① Seal screw</p>

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han[®] HPR, Bulkhead mounted housings, Angled, Open bottom, Feed through hole for fixing screws, Pack contents: With seal screw</p> 		09 40 003 0950	 <p>① Seal screw</p>
<p>Han[®] HPR, Bulkhead mounted housings, Angled, Long version, Open bottom, Feed through hole for fixing screws, Pack contents: With seal screw</p> 		09 40 003 0951	
<p>Han[®] HPR, Bulkhead mounted housings, Angled, Long version, Open bottom, Tapped blind hole for fixing screws, Pack contents: With seal screw</p> 		09 40 003 0953	
<p>Han[®] HPR, Surface mounted housing, Bottom closed, Feed through hole for fixing screws, Top entry, Pack contents: With seal screw</p> 	1x M20	19 40 003 0950	 <p>① Seal screw</p>

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Surface mounted housing, Long version, Bottom closed, Feed through hole for fixing screws, Top entry, Pack contents: With seal screw</p> 	<p>1x M25</p>	<p>19 40 003 0951</p>	
<p>Han® HPR, Surface mounted housing, Long version, Bottom closed, Tapped blind hole for fixing screws, Top entry, Pack contents: With seal screw</p> 	<p>1x M25</p>	<p>19 40 003 0953</p>	
<p>Han® HPR, Protection cover, for hoods</p> 		<p>09 40 003 5413</p>	
<p>Han® HPR, Protection cover, for hoods, With fixing cord</p> 		<p>09 40 003 5414</p>	

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p>  <p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings, With fixing cord</p> 		<p>09 40 003 5411</p> <p>09 40 003 5412</p>	
<p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulkhead mounted position, Top entry</p>  <p>Han® HPR, Adapter, Open bottom, for assembly of bulkhead mounted bulkhead mounted position</p> 	<p>1x M20</p>	<p>19 40 003 0900</p> <p>09 40 003 0902</p>	

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

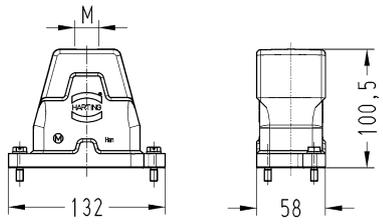
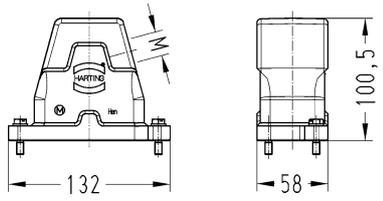
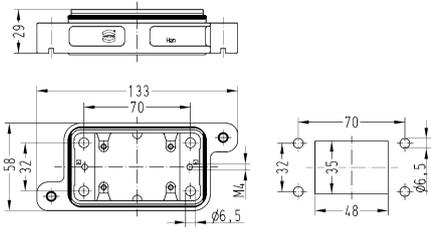
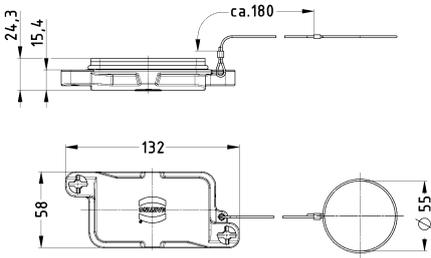
Limiting temperature	-40 ... +125 °C
Tightening torque (screw locking)	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69 / IPX9K acc. to ISO 20653
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

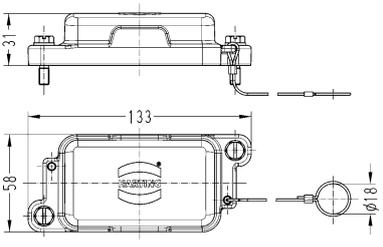
Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

Hoods/housings for harsh outdoor environments
Toggle locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry 	1x M25	19 40 006 0401	
Han® HPR, Hoods, Side entry 	1x M25	19 40 006 0501	
Han® HPR, Bulkhead mounted housings 		09 40 006 0301	
Han® HPR, Protection cover, for hoods 		09 40 006 5404	

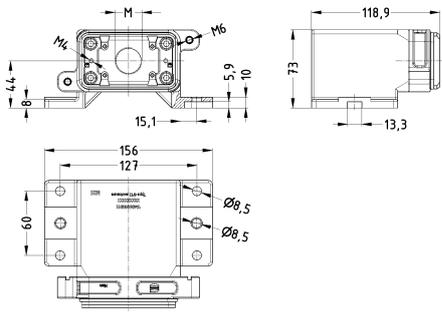
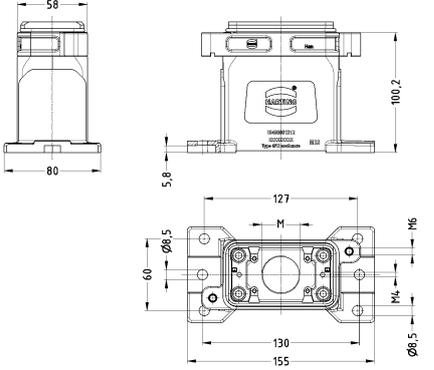
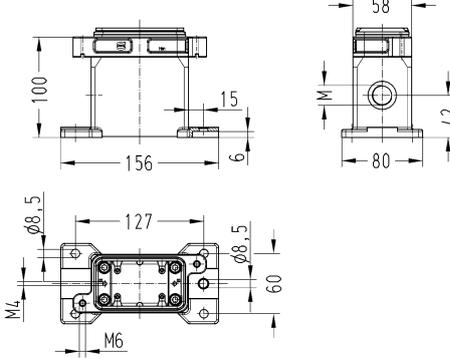
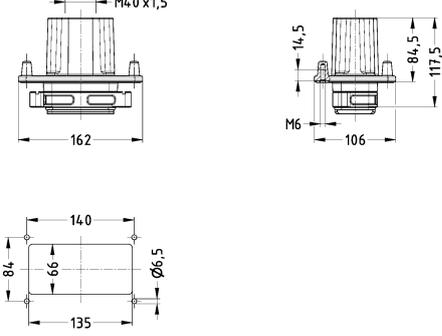
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 006 5401</p>	

Housings

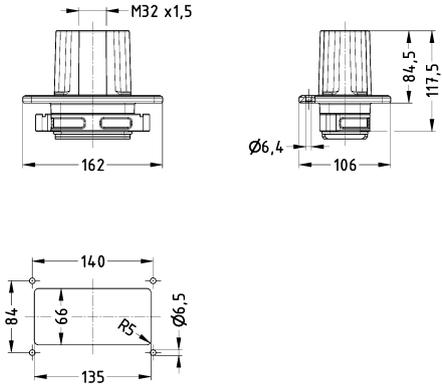
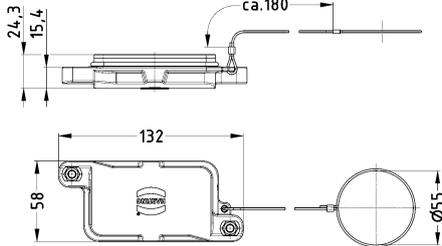
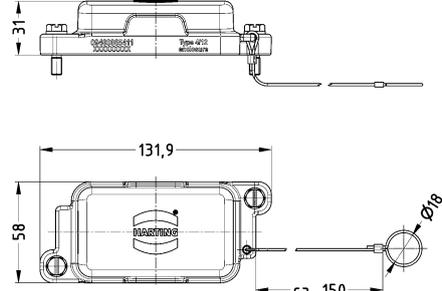
Hoods/housings for harsh outdoor environments
Screw locking

Housings

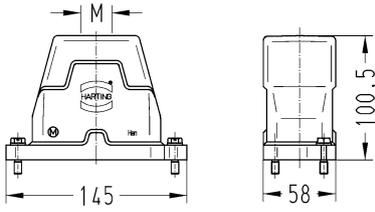
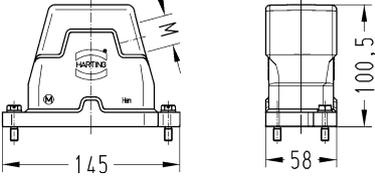
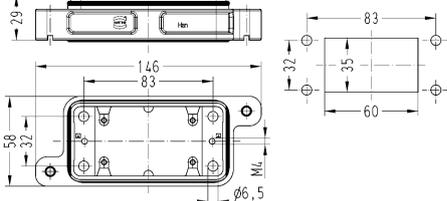
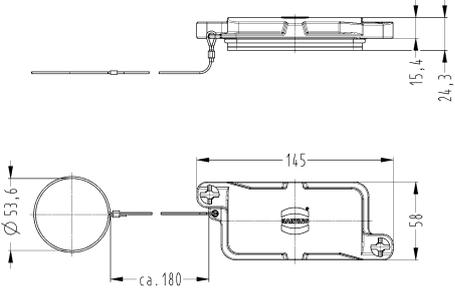
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry	1x M20 1x M25 1x M32 1x M40	19 40 006 0410 19 40 006 0411 19 40 006 0412 19 40 006 0413	
Han® HPR, Hoods, With adapter, Top entry	1x M40	19 40 006 0418	
Han® HPR, Hoods, Side entry	1x M20 1x M25 1x M32 1x M40	19 40 006 0510 19 40 006 0511 19 40 006 0512 19 40 006 0513	
Han® HPR, Hoods, Without cable entry		09 40 006 0811	
Han® HPR, Bulkhead mounted housings		09 40 006 0311	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Surface mounted housing, Horizontal version, Top entry</p> 	<p>1x M25 1x M40</p>	<p>19 40 006 0911 19 40 006 0913</p>	
<p>Han® HPR, Surface mounted housing, Top entry</p> 	<p>1x M32 1x M40</p>	<p>19 40 006 1212 19 40 006 1213</p>	
<p>Han® HPR, Surface mounted housing, Side entry</p>	<p>1x M20 1x M25 1x M32</p>	<p>19 40 006 1260 19 40 006 1261 19 40 006 1262</p>	
<p>Han® HPR, Panel feed through housing, for mounting from inside, Top entry</p> 	<p>1x M32 1x M40</p>	<p>19 40 006 1112 19 40 006 1113</p>	

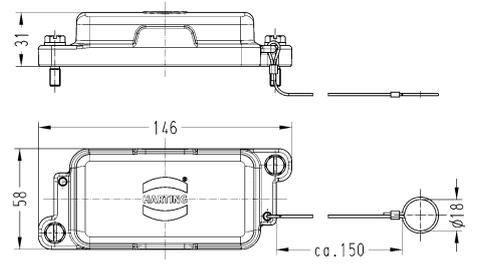
Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Panel feed through housing, for mounting from outside, Top entry</p>  <p>The fixing screws must be sealed separately to reach the given degree of protection.</p>	<p>1x M32 1x M40</p>	<p>19 40 006 1117 19 40 006 1118</p>	
<p>Han® HPR, Protection cover, for hoods</p>  <p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 006 5414</p> <p>09 40 006 5411</p>	 

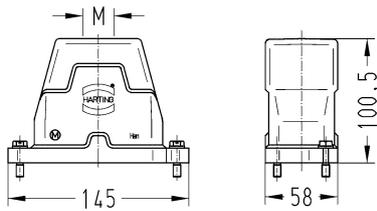
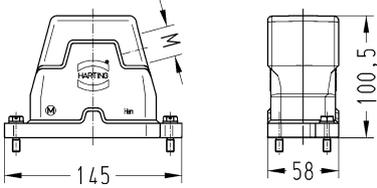
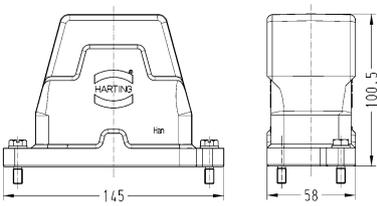
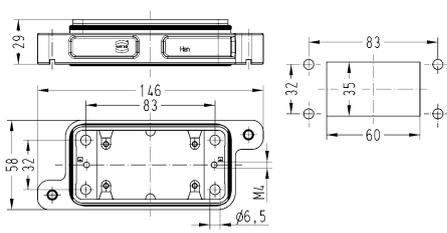
Hoods/housings for harsh outdoor environments
Toggle locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry 	1x M25	19 40 010 0401	
Han® HPR, Hoods, Side entry 	1x M25	19 40 010 0501	
Han® HPR, Bulkhead mounted housings 		09 40 010 0301	
Han® HPR, Protection cover, for hoods 		09 40 010 5404	

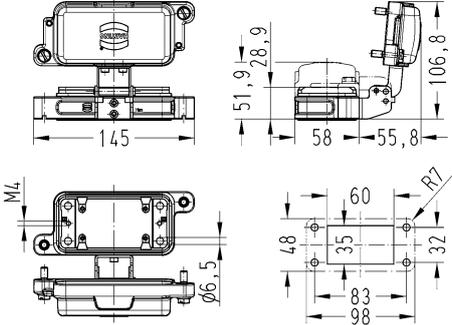
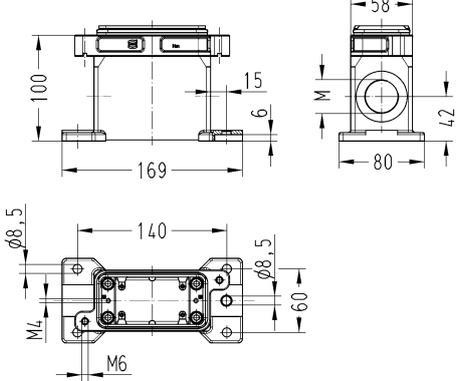
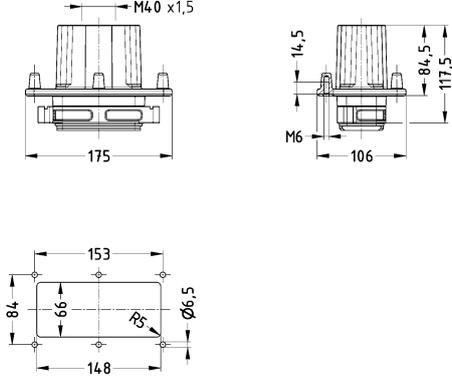
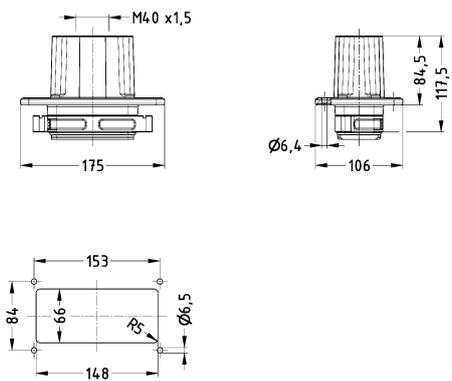
Housings

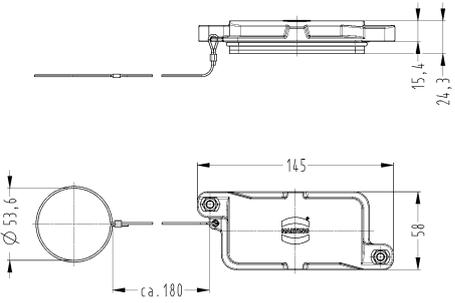
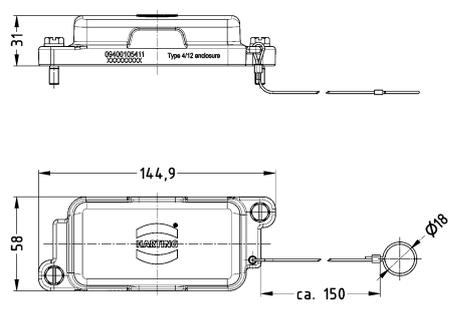
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 010 5401</p>	

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry</p> 	<p>1x M25 1x M32 1x M40 2x M20</p>	<p>19 40 010 0411 19 40 010 0412 19 40 010 0413 19 40 010 0430</p>	
<p>Han® HPR, Hoods, Side entry</p> 	<p>1x M25 1x M32 1x M40</p>	<p>19 40 010 0511 19 40 010 0512 19 40 010 0513</p>	
<p>Han® HPR, Hoods, Without cable entry</p> 		<p>09 40 010 0811</p>	
<p>Han® HPR, Bulkhead mounted housings</p> 		<p>09 40 010 0311</p>	

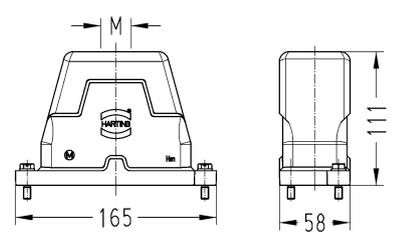
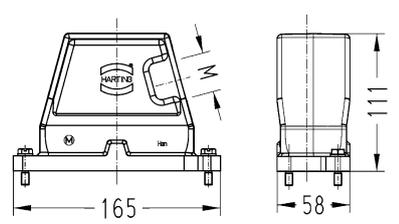
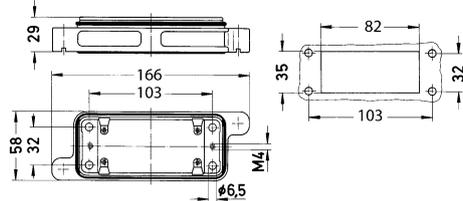
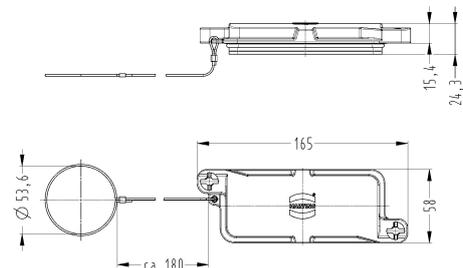
Housings

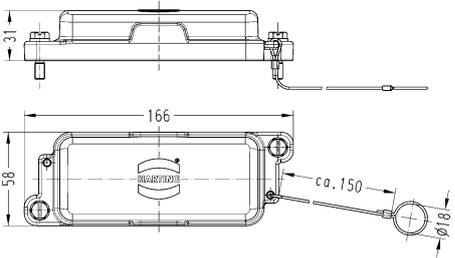
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Bulkhead mounted housings, With metal cover</p> 		09 40 010 0317	
<p>Han® HPR, Surface mounted housing, Side entry</p> 	<p>1x M20 1x M32 1x M40 2x M25 2x M32</p>	<p>19 40 010 1260 19 40 010 1262 19 40 010 1263 19 40 010 1271 19 40 010 1272</p>	
<p>Han® HPR, Panel feed through housing, for mounting from inside, Top entry</p> 	1x M40	19 40 010 1113	
<p>Han® HPR, Panel feed through housing, for mounting from outside, Top entry</p>  <p>The fixing screws must be sealed separately to reach the given degree of protection.</p>	1x M40	19 40 010 1118	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for hoods</p> 		09 40 010 5414	
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		09 40 010 5411	

Hoods/housings for harsh outdoor environments
Toggle locking

Housings

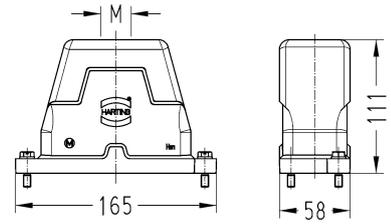
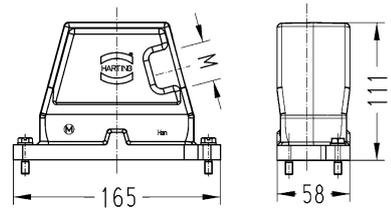
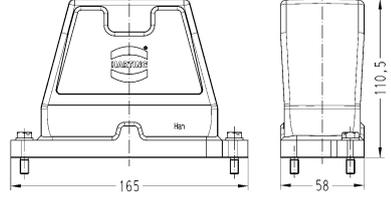
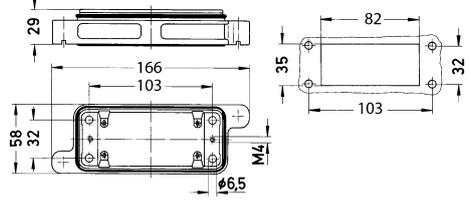
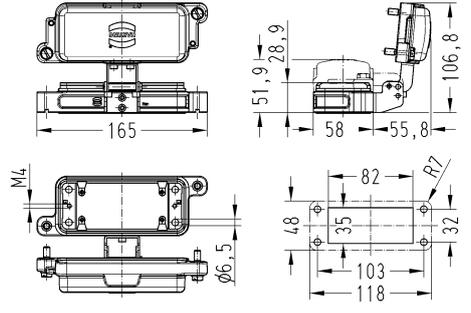
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Top entry 	1x M32	19 40 016 0402	
Han® HPR, Hoods, Side entry 	1x M32	19 40 016 0502	
Han® HPR, Bulkhead mounted housings 		09 40 016 0301	
Han® HPR, Protection cover, for hoods 		09 40 016 5404	

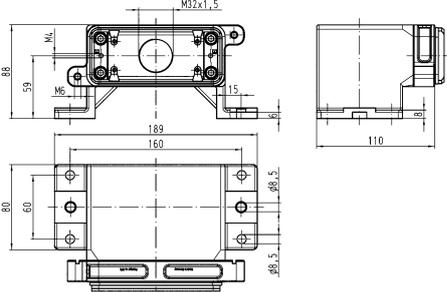
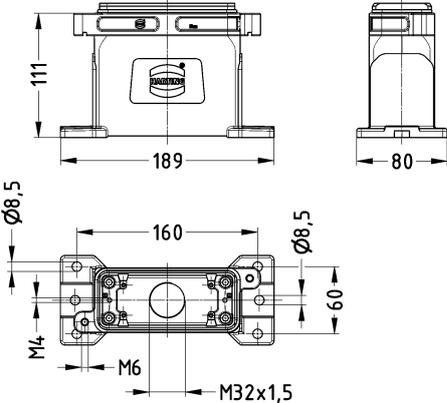
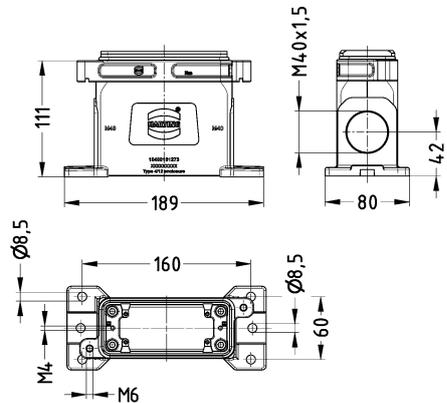
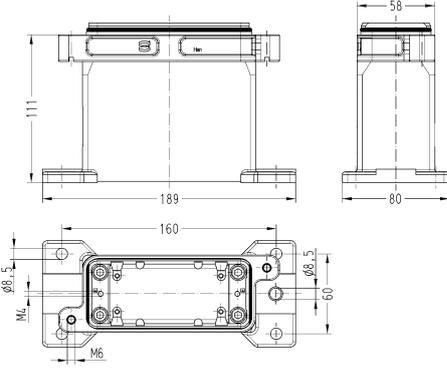
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 016 5401</p>	

Housings

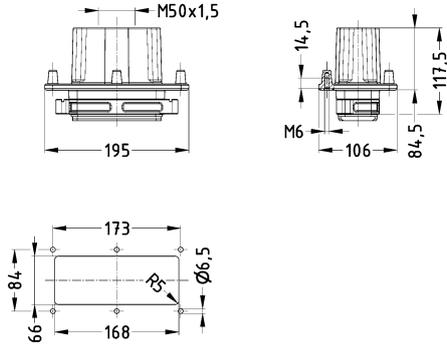
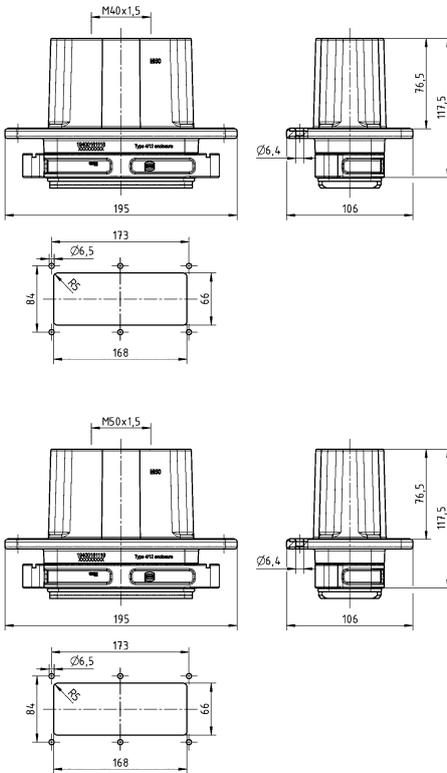
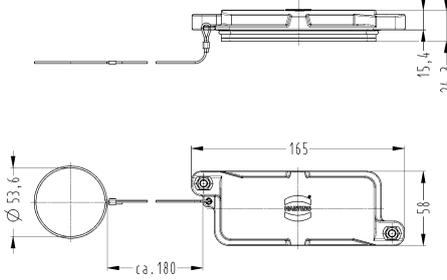
Hoods/housings for harsh outdoor environments
Screw locking

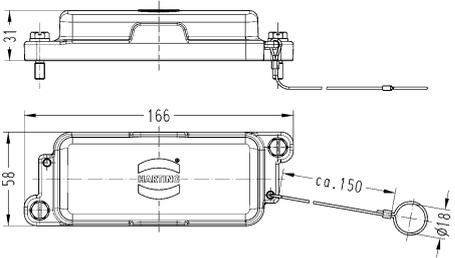
Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry</p> 	<p>1x M25 1x M32 1x M40 1x M50 2x M25</p>	<p>19 40 016 0411 19 40 016 0412 19 40 016 0413 19 40 016 0414 19 40 016 0431</p>	
<p>Han® HPR, Hoods, Side entry</p> 	<p>1x M20 1x M25 1x M32 1x M40 1x M50</p>	<p>19 40 016 0510 19 40 016 0511 19 40 016 0512 19 40 016 0513 19 40 016 0514</p>	
<p>Han® HPR, Hoods, Without cable entry</p> 		<p>09 40 016 0811</p>	
<p>Han® HPR, Bulkhead mounted housings</p> 		<p>09 40 016 0311</p>	
<p>Han® HPR, Bulkhead mounted housings, With metal cover</p> 		<p>09 40 016 0317</p>	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Surface mounted housing, Horizontal version, Top entry</p> 	<p>1x M32 2x M32</p>	<p>19 40 016 0912 19 40 016 0922</p>	
<p>Han® HPR, Surface mounted housing, Top entry</p> 	<p>1x M32 2x M32</p>	<p>19 40 016 1223 19 40 016 1222</p>	
<p>Han® HPR, Surface mounted housing, Side entry</p> 	<p>1x M25 1x M32 1x M40 2x M40</p>	<p>19 40 016 1261 19 40 016 1262 19 40 016 1263 19 40 016 1273</p>	
<p>Han® HPR, Surface mounted housing, Without cable entry</p> 		<p>09 40 016 1201</p>	

Housings

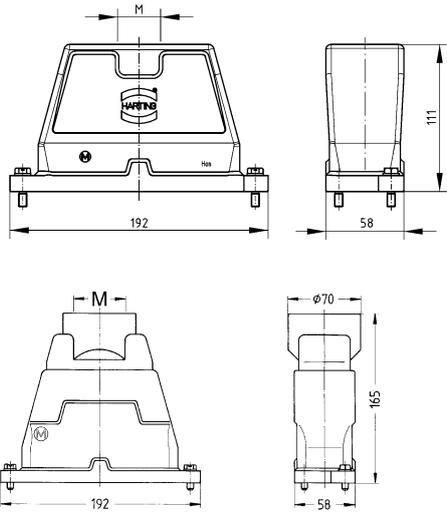
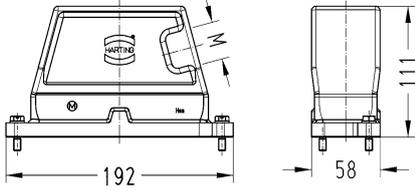
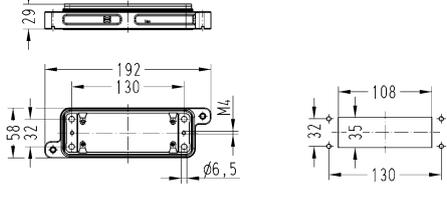
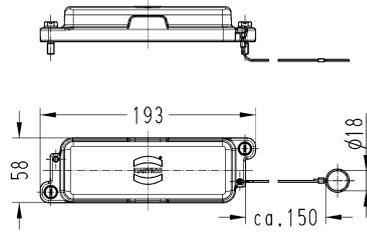
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Panel feed through housing, for mounting from inside, Top entry</p> 	<p>1x M40 1x M50</p>	<p>19 40 016 1113 19 40 016 1114</p>	
<p>Han® HPR, Panel feed through housing, for mounting from outside, Top entry</p>  <p>The fixing screws must be sealed separately to reach the given degree of protection.</p>	<p>1x M40 1x M50 2x M25</p>	<p>19 40 016 1118 19 40 016 1119 19 40 016 1134</p>	
<p>Han® HPR, Protection cover, for hoods</p> 		<p>09 40 016 5414</p>	

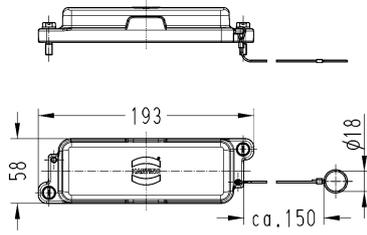
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 016 5411</p>	

Housings

Hoods/housings for harsh outdoor environments
Toggle locking

Housings

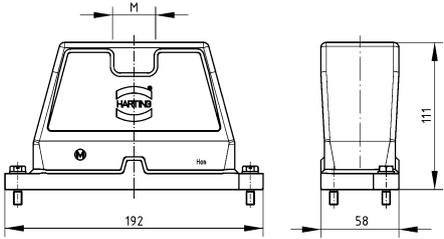
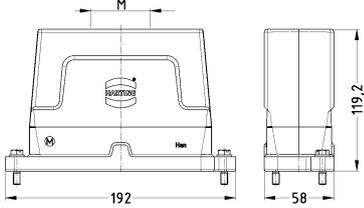
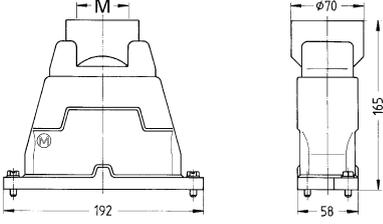
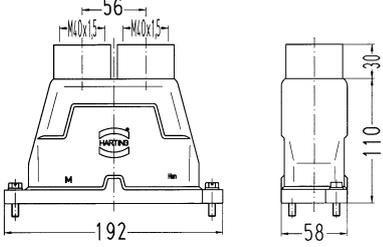
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry</p> 	<p>1x M32 1x M63</p>	<p>19 40 024 0402 19 40 024 0410</p>	
<p>Han® HPR, Hoods, Side entry</p> 	<p>1x M40</p>	<p>19 40 024 0503</p>	
<p>Han® HPR, Bulkhead mounted housings</p> 		<p>09 40 024 0301</p>	
<p>Han® HPR, Protection cover, for hoods</p> 		<p>09 40 024 5404</p>	

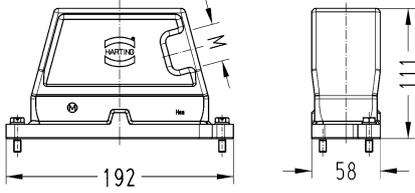
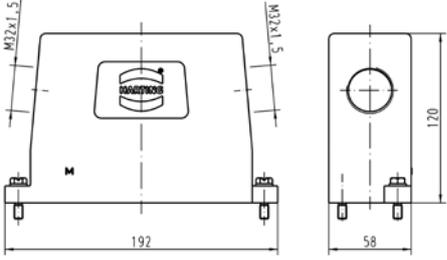
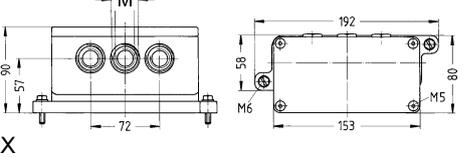
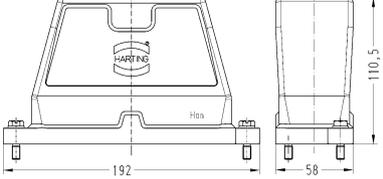
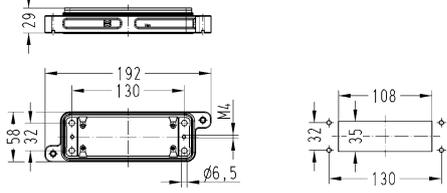
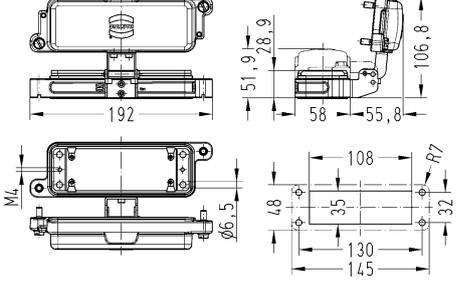
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 024 5401</p>	

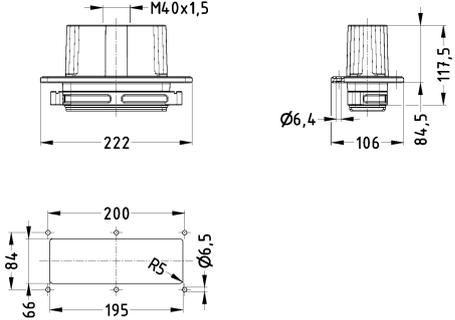
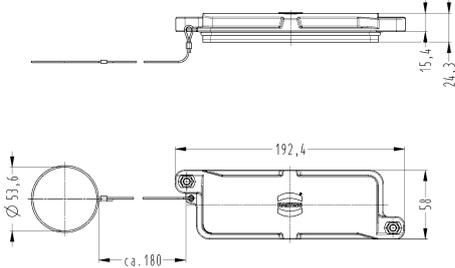
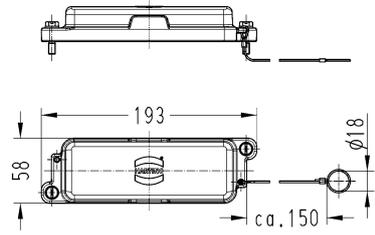
Housings

Hoods/housings for harsh outdoor environments
Screw locking

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Hoods, Top entry</p> 	<p>1x M32 1x M40 1x M50 2x M25 2x M32 2x M40 3x M25 3x M25, 1x M20 4x M20 4x M25</p>	<p>19 40 024 0412 19 40 024 0413 19 40 024 0414 19 40 024 0431 19 40 024 0432 19 40 024 0433 19 40 024 0461 19 40 024 0471 19 40 024 0473 19 40 024 0474</p>	
<p>Han® HPR, Hoods, Top entry, High construction</p> 	<p>1x M50 3x M32 4x M25</p>	<p>19 40 024 0419 19 40 024 0467 19 40 024 0477</p>	
<p>Han® HPR, Hoods, Special type, Top entry</p> 	<p>1x M63</p>	<p>19 40 024 0420</p>	
<p>Han® HPR, Hoods, With adapter, Top entry</p> 	<p>2x M40</p>	<p>19 40 024 0438</p>	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR, Hoods, Side entry 	1x M32 1x M40 1x M50	19 40 024 0512 19 40 024 0513 19 40 024 0514	
Han® HPR, Hoods, Side entry, High construction 	2x M32	19 40 024 0537	
Han® HPR, Hoods, Special type, Angled entry 	3x M25	19 40 024 0631	
Han® HPR, Hoods, Without cable entry 		09 40 024 0811	
Han® HPR, Bulkhead mounted housings 		09 40 024 0311	
Han® HPR, Bulkhead mounted housings, With metal cover 		09 40 024 0317	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han® HPR, Panel feed through housing, for mounting from outside, Top entry</p>  <p>The fixing screws must be sealed separately to reach the given degree of protection.</p>	<p>1x M40 1x M50 2x M32</p>	<p>19 40 024 1118 19 40 024 1119 19 40 024 1135</p>	
<p>Han® HPR, Protection cover, for hoods</p>  <p>Han® HPR, Protection cover, for bulkhead mounted housings, for surface mounted housings</p> 		<p>09 40 024 5414</p> <p>09 40 024 5411</p>	 

Features

- Hoods/housings for harsh environments
- Extremely resistant to chemicals and other aggressive influences
- Made completely from high-quality stainless steel
- Extremely resistant to corrosion

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP67, IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Stainless steel
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	NBR, FPM
Material (locking)	Stainless steel
RoHS	compliant


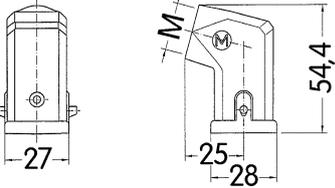
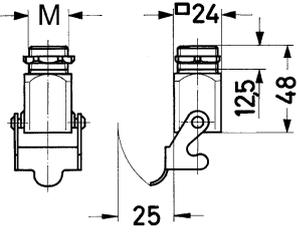
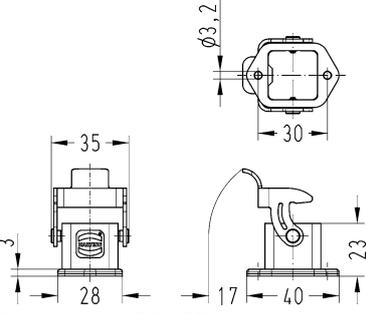
Specifications and approvals

UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076
 DNV GL

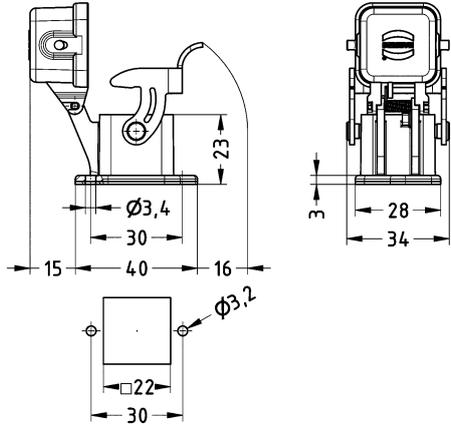
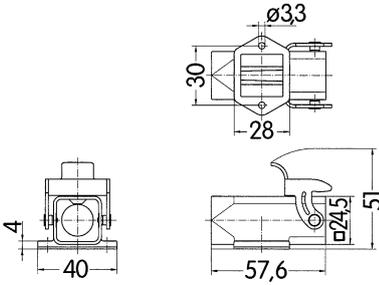
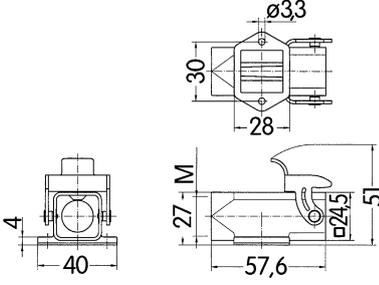
Housings

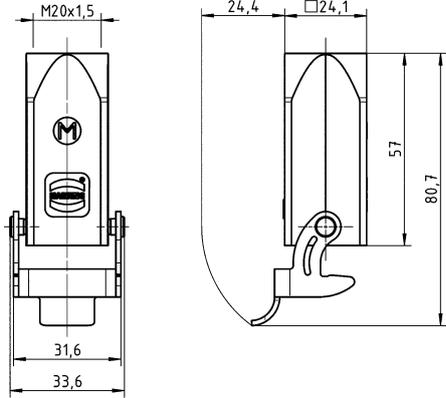
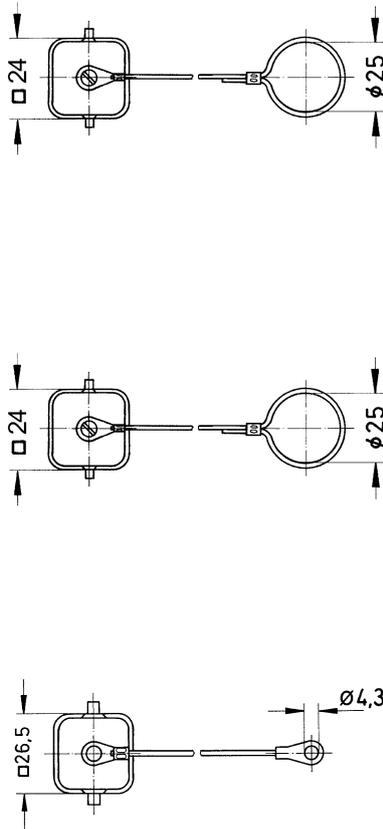
Hoods/housings for harsh environments
Single locking lever

Housings

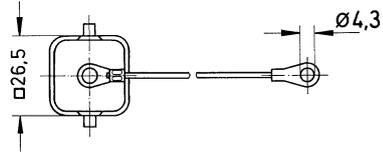
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-INOX®, Hoods, Top entry 	1x M20	19 44 003 1440	
Han-INOX®, Hoods, Side entry 	1x M20	19 44 003 1640	
Han-INOX®, Screw mounted housings, Top entry, Pack contents: 1x M20 stainless steel screw nut 	1x M20	19 44 003 1150	
Han-INOX®, Bulkhead mounted housings, Straight 		19 44 003 0301	 <p>Panel cut out 22 x 22 mm</p>

Housings

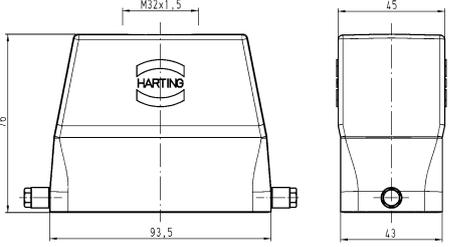
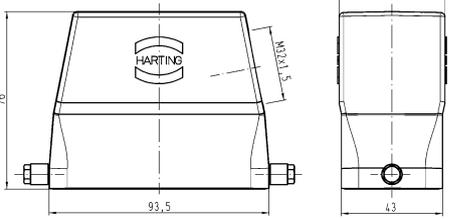
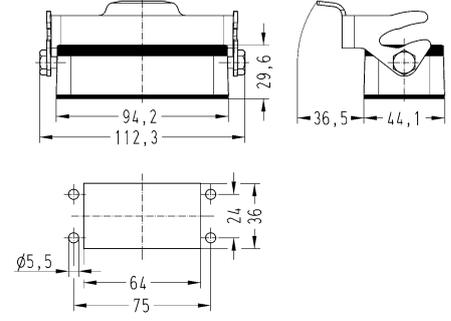
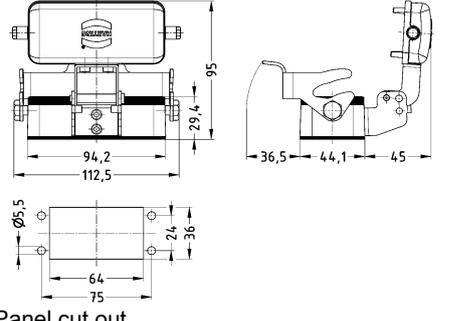
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-INOX®, Bulkhead mounted housings, Straight, With metal cover</p>  <p>for mounted male insert</p>		19 44 003 0305	 <p>Panel cut out 22 x 22 mm</p>
<p>Han-INOX®, Bulkhead mounted housings, Straight, With metal cover, With seal</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>		19 44 003 0306	
<p>Han-INOX®, Bulkhead mounted housings, Angled</p> 		19 44 003 0801	 <p>Panel cut out 22 x 22 mm</p>
<p>Han-INOX®, Surface mounted housing, Side entry</p> 	1x M20	19 44 003 1250	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-INOX®, Cable to cable housing, Top entry</p> 	<p>1x M20</p>	<p>19 44 003 1750</p>	
<p>Han-INOX®, Protection cover, for hoods, Metal, With fixing cord</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p> <p>Han-INOX®, Protection cover, for hoods, Metal, With fixing cord</p>  <p>for mounted male insert</p> <p>Han-INOX®, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p>  <p>for mounted female insert or for mounted Han-Brid® insert</p>		<p>19 44 003 5421</p> <p>19 44 003 5422</p> <p>19 44 003 5425</p>	

Housings

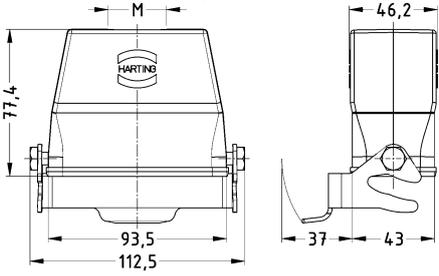
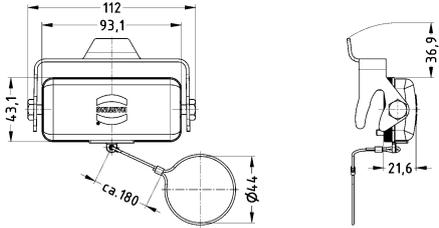
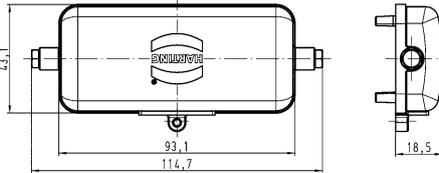
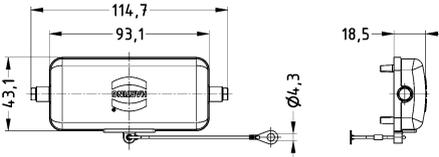
Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-INOX®, Protection cover, for bulkhead mounted housings, for surface mounted housings, for cable to cable housing, Metal, With fixing cord</p>  <p>for mounted male insert</p>		<p>19 44 003 5426</p>	

Hoods/housings for harsh environments
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-INOX®, Hoods, Top entry 	1x M32	19 44 310 0447	
Han-INOX®, Hoods, Side entry 	1x M20 1x M25 1x M32	19 44 310 0545 19 44 310 0546 19 44 310 0547	
Han-INOX®, Bulkhead mounted housings 		19 44 310 0305 19 44 310 0306	 <p>Panel cut out</p>
Han-INOX®, Bulkhead mounted housings, With metal cover 		19 44 310 0303	 <p>Panel cut out</p>



Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
<p>Han-INOX®, Cable to cable housing, Top entry</p> 	<p>1x M32</p>	<p>19 44 310 0757</p>	
<p>Han-INOX®, Protection cover, for hoods, Metal, With fixing cord</p> 		<p>19 44 310 5422</p>	
<p>Han-INOX®, Protection cover, for bulkhead mounted housings, for cable to cable housing, Metal</p> 		<p>19 44 310 5421</p>	
<p>Han-INOX®, Protection cover, for bulkhead mounted housings, for cable to cable housing, Metal, With fixing cord</p> 		<p>19 44 310 5423</p>	

Technical characteristics

Material (seal) NBR
 Colour (seal) Black

Technical characteristics

Material (cable glands) Metal
 Material (clamping ring) Polyamide compliant
 RoHS

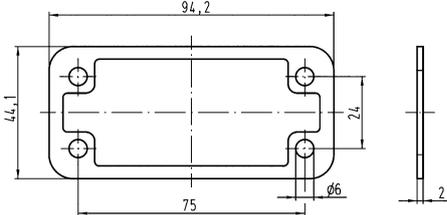
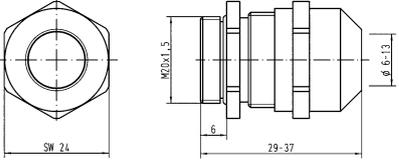
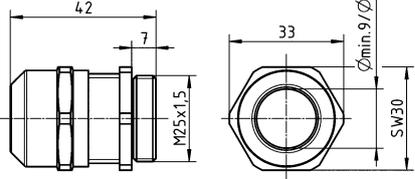
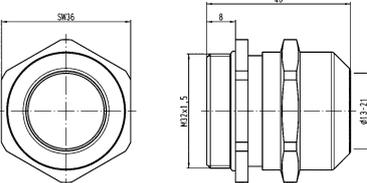
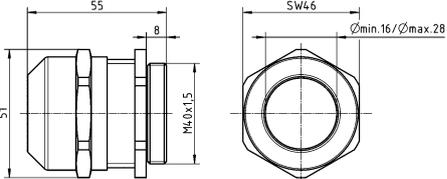
Identification	Size	Clamping range (mm)	Size	Part number	Drawing (dimensions in mm)
Han-INOX®, Flange gasket 			10 B	19 44 000 9902	
Han-INOX®, Cable gland 	M20 M25 M32 M40	6 ... 13 9 ... 17 13 ... 21 16 ... 28		19 44 000 5082 19 44 000 5083 19 44 000 5084 19 44 000 5085	   



Photo courtesy: MAN Diesel & Turbo SE

Contents	Page
Han D [®] crimp contacts	Han 41.2
Han E [®] crimp contacts	Han 41.3
Han A [®] screw termination.....	Han 41.4
Han E [®] screw termination	Han 41.6

Features

- Suitable for Han D[®] / DD[®] inserts
- Can be combined with standard crimp contacts in one connector if needed
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Iron, Constantan compliant
RoHS	

Specifications and approvals



EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D [®] , Crimp contact, Iron Contact surface: Gold plated 	0.14 ... 0.37	09 15 000 6171	09 15 000 6271	 <p>Stripping length 8 mm</p>
Han D [®] , Crimp contact, Constantan 	0.14 ... 0.37	09 15 000 6161	09 15 000 6261	 <p>Stripping length 8 mm</p>

Features

- Suitable for Han E[®], Han[®] EE / EEE, Han[®] Q and Han A[®] inserts
- Can be combined with standard crimp contacts in one connector if needed
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Iron, Constantan compliant
RoHS	

Specifications and approvals



EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E [®] , Crimp contact, Iron Contact surface: Gold plated 	0.14 ... 0.37 0.5	09 33 000 6173 09 33 000 6172	09 33 000 6273 09 33 000 6272	 <p>Stripping length 7.5 mm</p>
Han E [®] , Crimp contact, Constantan 	0.14 ... 0.37 0.5	09 33 000 6163 09 33 000 6162	09 33 000 6263 09 33 000 6262	 <p>Stripping length 7.5 mm</p>

Features

- Connector for temperature measurement conductors - suitable for injection moulding machines
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Number of contacts	16
Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

Number of contacts

16+

16 A 250 V 4 kV 3

Ther-
mo

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Thermocouple, Han A®, Screw termination 	1 ... 2.5	09 20 016 2691	09 20 016 2891	<p>1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm</p> <ul style="list-style-type: none"> ◆ Fe ○ CuNi <p>Panel cut out for use without Hoods/Housings</p>

Features

- Connector for temperature measurement conductors - suitable for injection moulding machines
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Number of contacts	10, 16, 24
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
DNV GL

Details

Tightening torque 0.5 Nm

Tightening torque PE screw 1.2 Nm

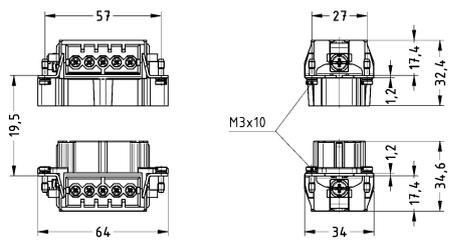
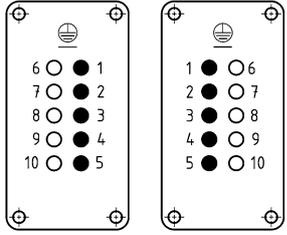
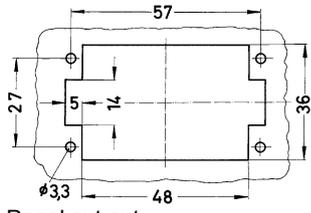
Ther-
mo

Number of contacts

10+

16 A 400 V 6 kV 3

Ther-
mo

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han [®] Thermocouple, Han E [®] , Screw termination, With wire protection 	1 ... 2.5	09 33 010 2691	09 33 010 2791	 <p>1) distance for contact max. 21 mm</p>  <ul style="list-style-type: none"> ◆ Fe ○ CuNi  <p>Panel cut out</p>

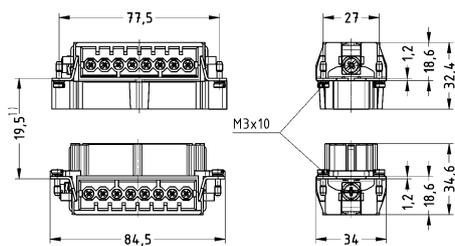

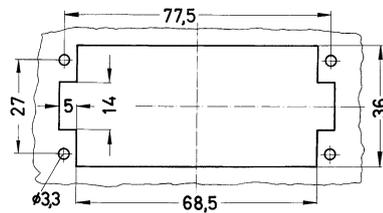


Number of contacts

16+

16 A 400 V 6 kV 3

Ther-
mo

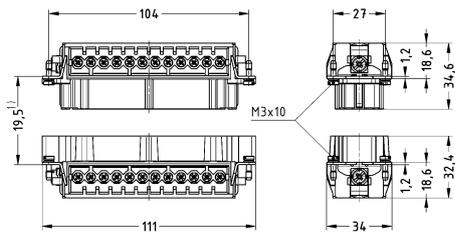


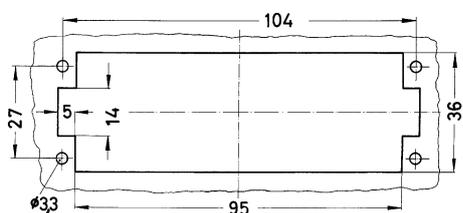
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han [®] Thermocouple, Han E [®] , Screw termination, With wire protection 	1 ... 2.5	09 33 016 2691	09 33 016 2791	 <p>1) distance for contact max. 21 mm</p>  <ul style="list-style-type: none"> ◆ Fe ○ CuNi  <p>Panel cut out</p>

Number of contacts

24+

16 A 400 V 6 kV 3

Ther-
mo

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han[®] Thermocouple, Han E[®], Screw termination, With wire protection</p>  <p>Also suitable for standard contacts</p>	1 ... 2.5	09 33 024 2689	09 33 024 2789	 <p>1) distance for contact max. 21 mm</p>  <p>Standard contacts ◆ Fe ○ CuNi</p>
<p>Han[®] Thermocouple, Han E[®], Screw termination, With wire protection</p> 	1 ... 2.5	09 33 024 2691	09 33 024 2791	 <p>◆ Fe ○ CuNi</p>  <p>Panel cut out</p>

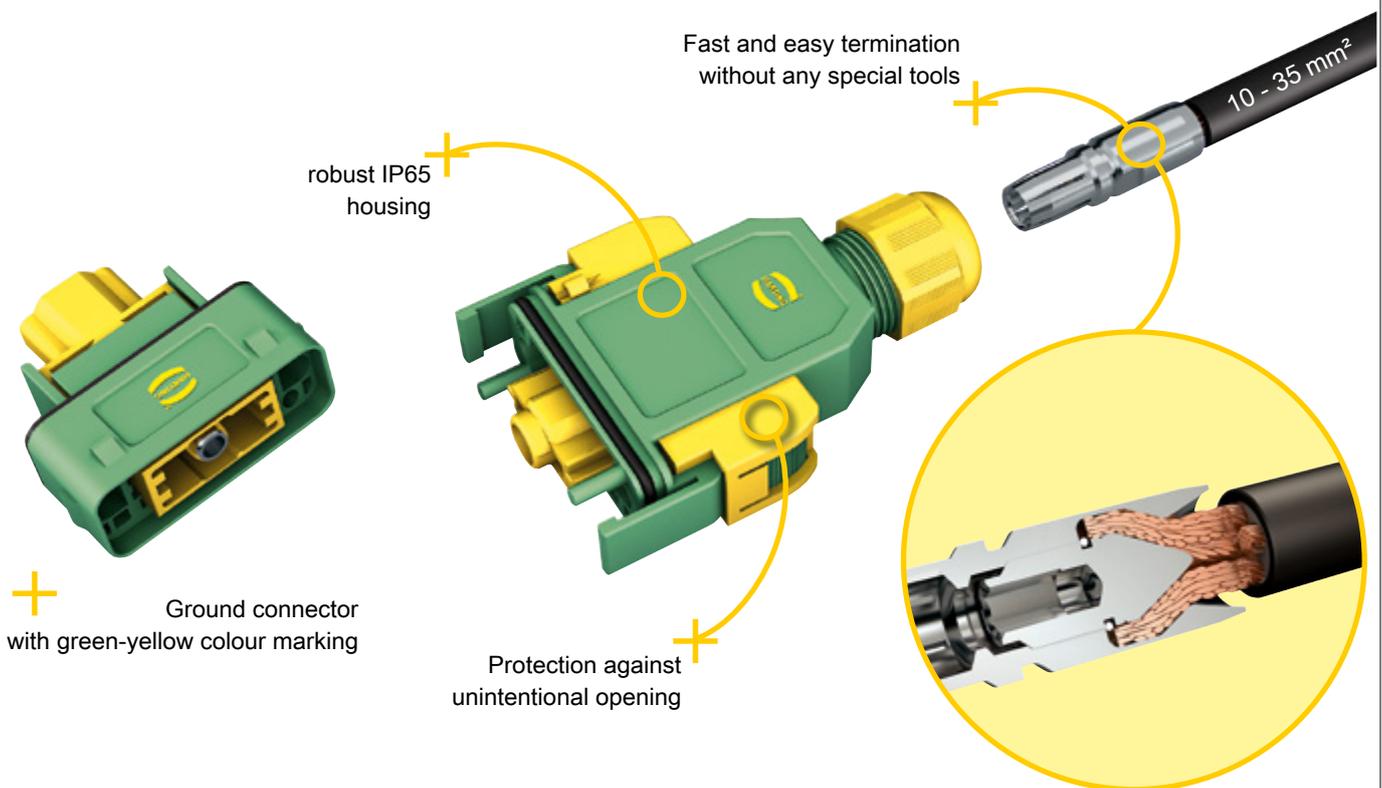
Contents	Page
Modules	Han 42.5
Hoods/Housings	Han 42.7

Han® GND – Mateable Potential Equalization

The new Han® GND series now enables pluggable grounding systems.

Han® GND (Han® Ground) is the innovative HARTING solution for potential equalization. The new connector series makes it possible to execute grounding systems in a pluggable design for the first time.

The use of connectors has been well-established in the electrical cabling of machines and systems for many years. The advantage is quick and error-free commissioning. Potential equalization lines are still being permanently connected, which is relatively time-consuming and can be subject to errors. HARTING's remedy: the Han® GND. The single-pole connector in the robust IP65 plastic housing is designed for stranded wires from 10 - 35 mm² and is optionally available in crimp or axial screw termination. The latter has the advantage that the lines can be connected without a special tool. A simple screwdriver is all it takes to achieve a quick and easy reliable connection. Extra connector mating security can be provided by the use of additional locking elements that prevent unintentional opening.



Assembly and construction

Assembly

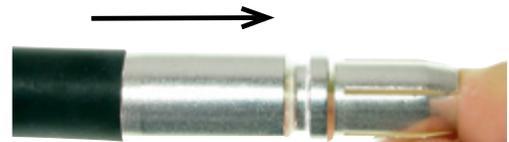
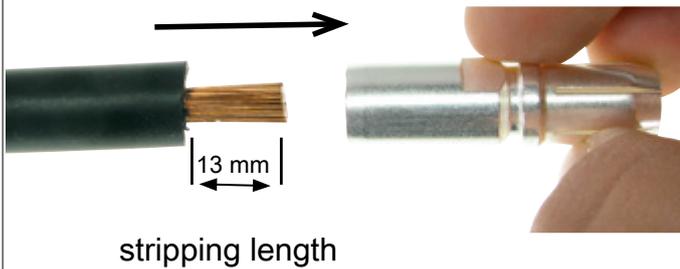
Please use fine stranded wire (Class 5) which is recommend for the axial screw termination.



Do not twist the stripped wire!

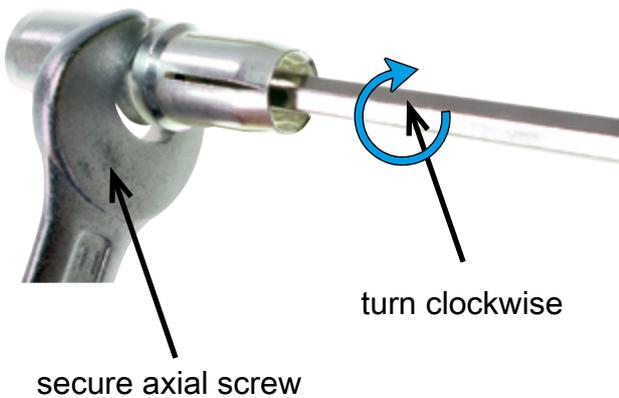
1.

Please strip the wire. All suitable wire gauges have to be stripped with a length of 13 mm (acc. to Class 5). Insert stripped wire into the terminal and push fully inside. Pay attention that all fine stranded wires are inserted in the contact chamber.



2.

Please insert suitable torque key (SW 4) into the contact from mating side and turn the axial screw clockwise. For that purpose secure the axial screw with a spanner (SW 11). Tighten the screw to the specified torque value.



Assembly and construction

Han
GND

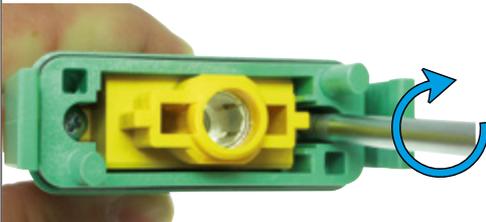
3.

Insert the installed cable through the cable gland into the Han® GND housing! Push the axial screw contact into the module until you hear an audible click, which is the indicator that the contact snaps into position.



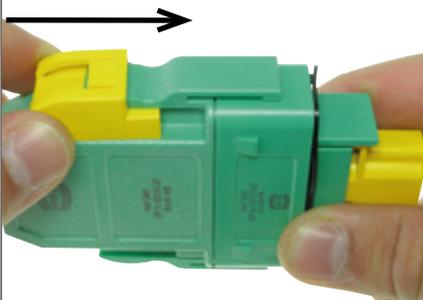
4.

Push the module back into the housing and turn the cable gland clockwise.



5.

Mount the module in the housing with the enclosed screws.



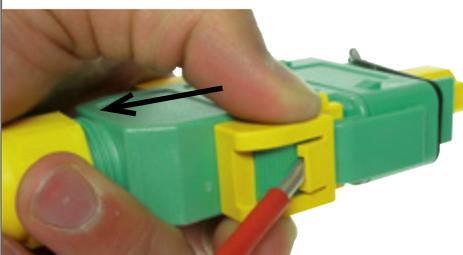
Protection against unintentional opening (option)

1.

Push the unlocking protection over the opening latches to prevent an unintentional opening (the connector can only be unmated with a separate tool).

2.

The removal of the unlocking protection can be done with a screwdriver for slotted screws (e.g. size 0.8 x 4.0). Insert the screwdriver in the unlocking protection slot and release the plastic latch until you are able to remove the unlocking protection with your fingers.



Features

- First connector for potential equalisation
- Slim, space saving construction type
- Low cost plastic hoods and housings
- Colours: green and yellow
- Crimp or axial screw termination available

Technical characteristics

Number of contacts	1
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	Yellow
Material (contacts)	Copper alloy
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight, 6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Hex key (A/F 4) see chapter 90

For more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

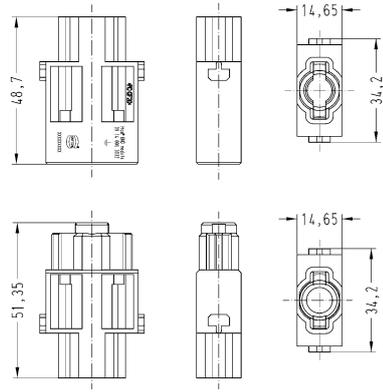
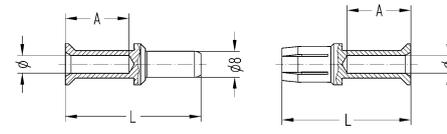
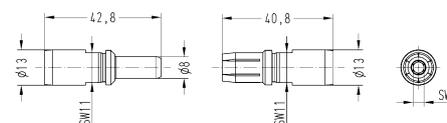
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

Han
GND

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han® GND, Crimp termination, Axial screw termination  Please order contacts separately.	10 ... 35	09 14 001 3032	09 14 001 3132																
TC 100, Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length A</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>4.3</td> <td>19 mm</td> </tr> <tr> <td>16 mm²</td> <td>5.5</td> <td>19 mm</td> </tr> <tr> <td>25 mm²</td> <td>7</td> <td>19 mm</td> </tr> <tr> <td>35 mm²</td> <td>8.2</td> <td>16 mm</td> </tr> </tbody> </table> for stranded wire according to IEC 60 228 Class 5	Wire gauge	Ø	Stripping length A	10 mm ²	4.3	19 mm	16 mm ²	5.5	19 mm	25 mm ²	7	19 mm	35 mm ²	8.2	16 mm
Wire gauge	Ø	Stripping length A																	
10 mm ²	4.3	19 mm																	
16 mm ²	5.5	19 mm																	
25 mm ²	7	19 mm																	
35 mm ²	8.2	16 mm																	
TC 100, Axial screw contact, Contact surface: Silver plated 	10 ... 25 16 ... 35	09 11 000 6112 09 11 000 6113	09 11 000 6212 09 11 000 6213	 Stripping length 13 mm <table border="1"> <thead> <tr> <th colspan="5">Tightening torque</th> </tr> <tr> <th>mm²</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>Nm</td> <td>6</td> <td>6</td> <td>7</td> <td>8</td> </tr> </tbody> </table>	Tightening torque					mm ²	10	16	25	35	Nm	6	6	7	8
Tightening torque																			
mm ²	10	16	25	35															
Nm	6	6	7	8															

Features

- First connector for potential equalisation
- Slim, space saving construction type
- Low cost plastic hoods and housings
- Colours: green and yellow

Technical characteristics

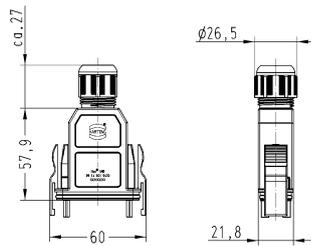
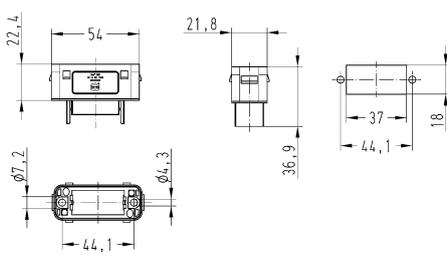
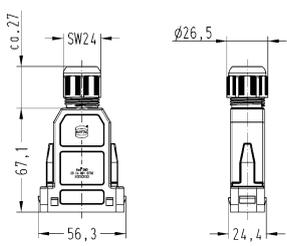
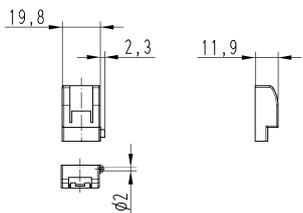
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	Green, Yellow
Material (seal)	NBR
Material (cable glands)	Polyamide
Material flammability class acc. to UL 94	V-0
RoHS	compliant, compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

EN 60664-1
IEC 61984

Snap-in latches

Han
GND

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han® GND, Hoods, Top entry 	1x Integrated	7.5 ... 14	09 14 001 0430	
Han® GND, Bulkhead mounted housings 			09 14 001 0330	
Han® GND, Cable to cable housing, Top entry 	1x Integrated	7.5 ... 14	09 14 001 0730	
Han® GND, Adapter, Male / male 			09 14 001 9901	
Han® GND, Unlocking protection 			09 14 000 9938	

Contents	Page
D-Sub adapter	Han 80.2
Locking levers.....	Han 80.8
Seals.....	Han 80.10
Han® Hood Link.....	Han 80.12
Panel feed through housings.....	Han 80.13
Accessories for flat cable entry.....	Han 80.17
Cable glands.....	Han 80.18
Shielding frame.....	Han 80.23
Grip frames.....	Han 80.26
Coding of inserts in hoods/housings.....	Han 80.29
Han® docking frame	Han 80.33
PE Multiple ground connection.....	Han 80.34
Strain relief clamp.....	Han 80.35
Special insert fixing screws	Han 80.36
Screws.....	Han 80.37
Bearing pedestal and covers.....	Han 80.40
Further accessories.....	Han 80.41

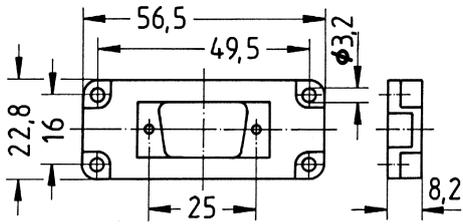
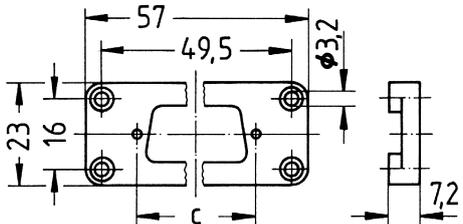


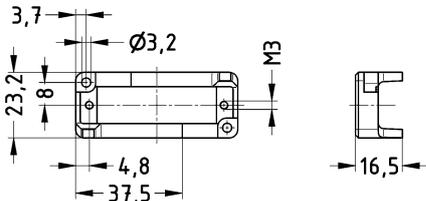
Technical characteristics

Material (accessories) Thermoplastic, Metal compliant
RoHS

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
<p>D-Sub 1, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p> 	09 20 000 9932	 <p>D-Sub 1</p>
<p>D-Sub 2, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p> 	09 20 000 9928	 <p>D-Sub 2 c= 33.3 mm D-Sub 3 c= 47 mm</p>
<p>D-Sub 3, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p> 	09 20 000 9929	

Identification	Part number	Drawing (dimensions in mm)
<p>D-Sub 3 in the Han® 10 A, D-Sub 4 in the Han® 16 A, Adapter plate, for 1 x D-Sub, Metal,</p> <p>Pack contents: Two-piece adapter, 2 fixing screws for adapter, 2 fixing screws for D-Sub connector</p> 	<p>09 20 000 9925</p>	

Accessories

Accessories

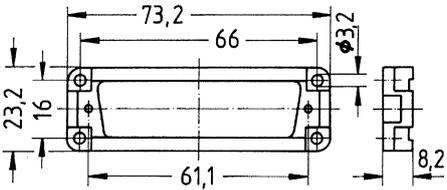
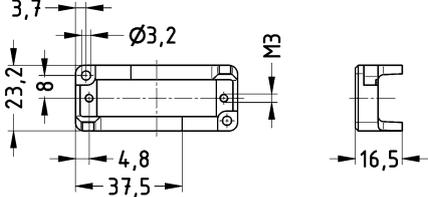


Technical characteristics

Material (accessories) Thermoplastic, Metal compliant
RoHS

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
<p>D-Sub 5, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p> 	<p>09 20 000 9931</p>	
<p>D-Sub 3 in the Han® 10 A, D-Sub 4 in the Han® 16 A, Adapter plate, for 1 x D-Sub, Metal, Pack contents: Two-piece adapter, 2 fixing screws for adapter, 2 fixing screws for D-Sub connector</p> 	<p>09 20 000 9925</p>	



Accessories

Technical characteristics

Material (accessories)
RoHS

Thermoplastic
compliant

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
<p>D-Sub 1, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p>	<p>09 30 000 9965</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 1: a=44; b=51.5; c=25 D-Sub 2: a=44; b=51.5; c=33.3</p>
<p>D-Sub 2, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p>	<p>09 30 000 9966</p>	
<p>D-Sub 1, Adapter plate, for 2x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector</p> 	<p>09 30 000 9970</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 1: a=44; b=51.5; c=25 D-Sub 2x 2: a=44; b=51.5; c=33.3</p>
<p>D-Sub 2, Adapter plate, for 2x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector</p>	<p>09 30 000 9971</p>	



Technical characteristics

Material (accessories) Thermoplastic
RoHS compliant

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
<p>D-Sub 3, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p>	<p>09 30 000 9967</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 3: a=57; b=64.5; c=47</p>
<p>D-Sub 3, Adapter plate, for 2x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector</p> 	<p>09 30 000 9972</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 3: a=57; b=64.5; c=47</p>



Accessories

Technical characteristics

Material (accessories) Thermoplastic
RoHS compliant

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
<p>D-Sub 4, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p>	<p>09 30 000 9968</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 4: a=77.5; b=85; c=63.5 D-Sub 5: a=77.5; b=85; c=61.1</p>
<p>D-Sub 5, Adapter plate, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector</p>	<p>09 30 000 9969</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 4: a=77.5; b=85; c=63.5 D-Sub 2x 5: a=77.5; b=85; c=61.1</p>
<p>D-Sub 4, Adapter plate, for 2x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector</p>	<p>09 30 000 9973</p>	<p>① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 4: a=77.5; b=85; c=63.5 D-Sub 2x 5: a=77.5; b=85; c=61.1</p>
<p>D-Sub 5, Adapter plate, for 2x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector</p>	<p>09 30 000 9974</p>	



Double locking lever

Accessories

Technical characteristics

Material (accessories) Polycarbonate, Stainless steel
 Colour (accessories) RAL 7037 (dust grey)

Technical characteristics

Material flammability class acc. to UL 94 (locking levers) V-0
 RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
----------------	------	-------------	----------------------------

Han A®,
 Han-Easy Lock®,
 Locking levers,
 RAL 7037 (dust grey)



32 A

09 00 000 5223

Han® B,
 Han-Easy Lock®,
 Locking levers,
 RAL 7037 (dust grey)



10/16/24 B
 32 B

09 00 000 5221
 09 00 000 5231

Single locking lever

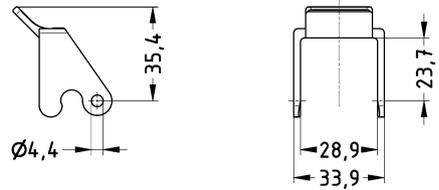
Accessories

Technical characteristics

Material (accessories) Thermoplastic, Polycarbonate, Stainless steel
 Colour (accessories) RAL 7032 (pebble grey), Black, RAL 7037 (dust grey)

Technical characteristics

Material flammability class acc. to UL 94 (locking levers) V-0
 RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
Locking levers, RAL 7032 (pebble grey)	3 A	09 00 000 5241	
			
Locking levers, Black	3 A	09 00 000 5242	
			
Locking levers, Han® Q 8/0, Black	Han-Compact®	09 00 000 5244	
Han A®, Han-Easy Lock®, Locking levers, RAL 7037 (dust grey)	10 A 16 A	09 00 000 5224 09 00 000 5225	
			
Han® B, Han-Easy Lock®, Locking levers, RAL 7037 (dust grey)	06 B 10 B 16 B 24 B	09 00 000 5222 09 00 000 5228 09 00 000 5229 09 00 000 5230	
			



Technical characteristics

Material (seal) NBR, FPM

Technical characteristics

Colour (seal) Black, Light grey
RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
Han A®, Flange gasket	03 A	09 20 000 9991	
	10 A	09 20 000 9992	
	16 A	09 20 000 9993	
	32 A	09 20 000 9994	
Han® B, Flange gasket	06 B	09 30 000 9991	
	10 B	09 30 000 9992	
	16 B	09 30 000 9993	
	24 B	09 30 000 9994	
Han® B, Flange gasket, Self-retaining	06 B	09 30 000 9801	
	10 B	09 30 000 9802	
	16 B	09 30 000 9803	
	24 B	09 30 000 9804	
Flange gasket	48 HPR	09 30 000 9996	
	Han-Drive®	09 30 000 9903	
	Modular Compact	09 14 000 9940	
Flange gasket, Han® HPR	03 HPR	09 40 000 9980	
	06 HPR	09 40 000 9801	
	10 HPR	09 40 000 9802	
	16 HPR	09 40 000 9803	
	24 HPR	09 40 000 9804	
Han A®, Flange gasket, FPM	03 A	09 37 000 9912	
Han® M, Flange gasket, FPM	06 B	09 37 000 9946	
	10 B	09 37 000 9947	
	16 B	09 37 000 9948	
	24 B	09 37 000 9949	

Technical characteristics

Material (seal) NBR, FPM

Technical characteristics

Colour (seal) Black, RAL 7001 (silver-grey)
RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
Han A®, Profile gasket	03 A	09 70 000 9991	
	10 A	09 20 000 9996	
	16 A	09 20 000 9997	
Han® B, Profile gasket	06 B	09 30 000 9941	
	10 B	09 30 000 9942	
	16 B	09 30 000 9943	
	24 B	09 30 000 9944	
	32 B	09 30 000 9963	
	48 B	09 30 000 9995	
O-ring rubber seal, Han® HPR	03 HPR	09 40 000 9910	
	06 HPR	09 40 000 9911	
	10 HPR	09 40 000 9912	
	16 HPR	09 40 000 9913	
	24 HPR	09 40 000 9914	
L-seal	06 B	09 30 000 9936	
	10 B	09 30 000 9935	
	16 B	09 30 000 9934	
	24 B	09 30 000 9933	
Profile gasket, FPM	03 A	09 21 000 9906	
	06 B	09 30 000 9951	
	10 B	09 30 000 9952	
	16 B	09 30 000 9953	
	24 B	09 30 000 9954	

Accessories

Features

- Cable to cable connection simple to realise and easy to mount
- Resistant elastomer
- Locking as well as seal combined in one system
- for two lever locking system

Technical characteristics

Limiting temperature	-40 ... +85 °C
Degree of protection acc. to IEC 60529	IP65, in locked position
Colour (hood/housing)	Black
RoHS	compliant

Identification

Part number

Drawing
(dimensions in mm)

Locking element,
for hoods

09 30 016 9901



Standard hoods/housings for industrial connectors
Double locking lever



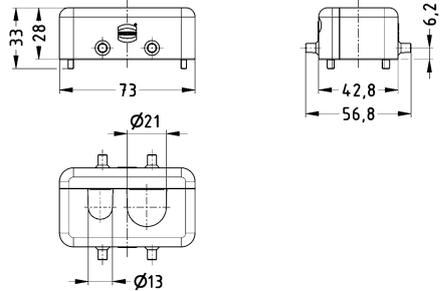
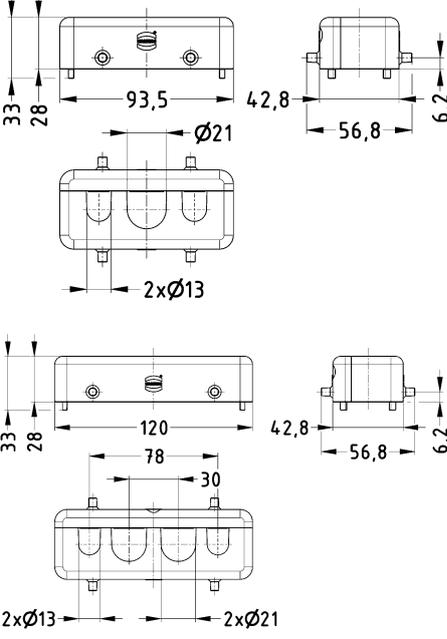
Accessories

Features

- Allows the entry of pre-assembled cables into a switch cabinet
- Robust design
- High pole cable entry seals for up to 10 different cables
- For sealing and feed through of pre-assembled cables

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Aluminium die-cast
Material (seal)	NBR

Identification	Cable entry	Size	Part number High construction	Drawing (dimensions in mm)
Han® B, Panel feed through housing, Top entry, Pack contents: 2 split hood halves, 2x M4 screw  Please order cable entry seals separately.	2x 3x	10 B 16 B	09 30 010 0498 09 30 016 0498	
Han® B, Panel feed through housing, Top entry, Pack contents: 2 split hood halves, 3x M4 screw  Please order cable entry seals separately.	4x	24 B	09 30 024 0498	

Technical characteristics

Material (accessories) NBR

Technical characteristics

Colour (accessories) Black

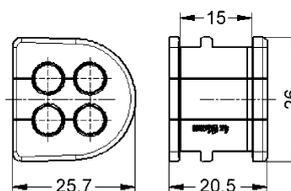
Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
----------------	---------------------	-------------	----------------------------

Cable entry seal,
4 cable entries,
Wide version



... 6

09 00 000 6004

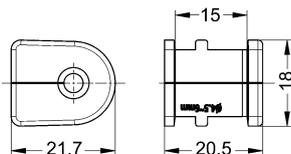


Cable entry seal,
1 cable entry,
Narrow version



4.5 ... 6
6 ... 7.5
7.5 ... 9

09 00 000 6005
09 00 000 6006
09 00 000 6007

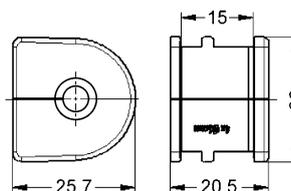


Cable entry seal,
1 cable entry,
Wide version



9 ... 10.5
10.5 ... 12
12 ... 13.5
13.5 ... 15
15 ... 16

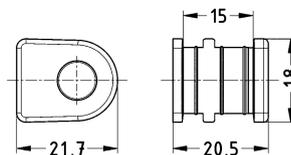
09 00 000 6008
09 00 000 6009
09 00 000 6010
09 00 000 6011
09 00 000 6012



Dummy plugs,
Narrow version



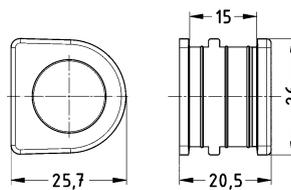
09 00 000 6101



Dummy plugs,
Wide version



09 00 000 6102



Standard hoods/housings for industrial connectors
Double locking lever



Accessories

Features

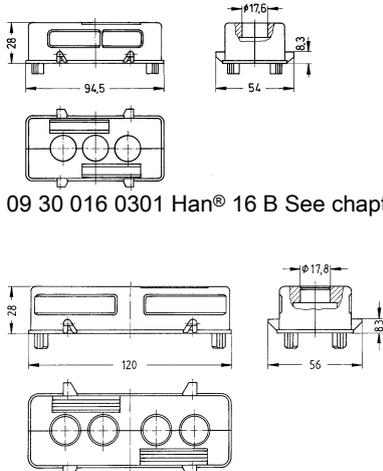
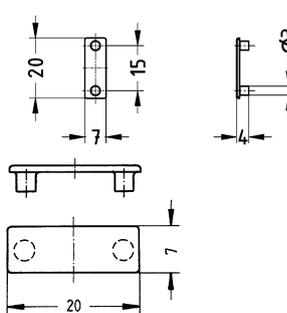
- Allows the entry of pre-assembled cables into a switch cabinet
- Use of identification strips is possible
- No special tools required
- Standard screw driver (5 x 1 mm) necessary to open split hood
- IP54 due to continuous contoured seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP54, when mounted vertically, IP65
Type rating acc. to UL 50 / UL 50E	4, 4X, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7037 (dust grey)
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076

Identification	Cable entry	Cable diameter (mm)	Size	Part number	Drawing (dimensions in mm)
Han® B, Panel feed through housing, Top entry, Pack contents: 2 split hood halves  Please order cable entry seals separately.	3x Integrated 4x Integrated	17.6 17.8	16 B 24 B	09 30 016 0408 09 30 024 0408	 09 30 016 0301 Han® 16 B See chapter 31 09 30 024 0301 Han® 24 B See chapter 31
Han-Snap®, Identification strip, Pack contents: Single 				09 33 000 9981	

Technical characteristics

Material (accessories) Thermoplastic, NBR

Technical characteristics

Colour (accessories) Black
RoHS compliant

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Cable entry seal	3 ... 4	09 00 000 5351	
	4 ... 5	09 00 000 5352	
	5 ... 6	09 00 000 5353	
	6 ... 7	09 00 000 5354	
	7 ... 8	09 00 000 5355	
	8 ... 9	09 00 000 5356	
	9 ... 10	09 00 000 5357	
Cable entry seal, Additional strain relief can be provided by cable ties (max. width 8 mm)	10 ... 11	09 00 000 5358	
	11 ... 12	09 00 000 5359	
	12 ... 13	09 00 000 5360	
	13 ... 14	09 00 000 5361	
	14 ... 15	09 00 000 5362	
	15 ... 16	09 00 000 5363	
Cable entry seal, for ASI cable		09 00 000 5364	
Dummy plugs		09 00 000 5350	
Dummy plugs, for part number 09 00 000 6004		09 00 000 6103	

Technical characteristics

Material (seal) NBR

Technical characteristics

Colour (seal) Black
RoHS compliant

Identification

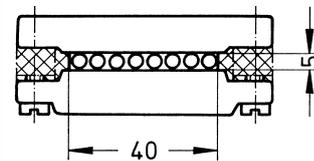
Part number

Drawing (dimensions in mm)

Set of seals for ribbon cable entry,
With strain relief clamp,
for 1 flat cable



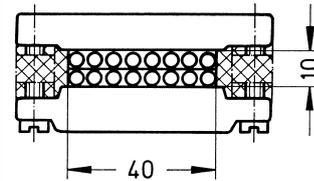
09 00 000 5315



Set of seals for ribbon cable entry,
With strain relief clamp,
for 2 flat cables



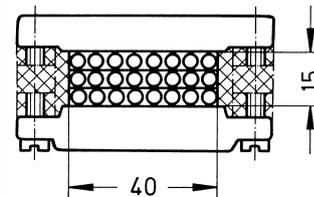
09 00 000 5316



Set of seals for ribbon cable entry,
With strain relief clamp,
for 3 flat cables



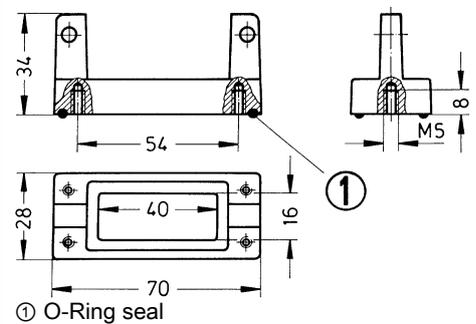
09 00 000 5317



Holder for ribbon cable entry,
for separate mounting



09 00 000 5325



Technical characteristics

Limiting temperature	-40 ... +100 °C
Degree of protection acc. to IEC 60529	IP68, IP69 / IPX9K acc. to ISO 20653
Material (seal)	NBR
Material (cable glands)	Polyamide
Colour (accessories)	RAL 5012 (light blue), RAL 9005 (jet black), RAL 7032 (pebble grey), RAL 7035 (light grey)

Technical characteristics

Material flammability class acc. to UL 94 V-0
 RoHS compliant

Specifications and approvals


DNV GL
 UL 514B QCRV.E479780
 CSA-C22.2 No. 18.3 QCRV7.E479780

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
----------------	------	---------------------	-------------	----------------------------

Han® CGM-Ex i,
 Cable gland,
 Intrinsically safe electric circuits
 Blue

M20	5 ... 9
M20	6 ... 12
M25	9 ... 16
M32	13 ... 20
M40	22 ... 32

19 00 000 7101
19 00 000 7102
19 00 000 7104
19 00 000 7106
19 00 000 7109



Han® CGM-P,
 Cable gland,
 Grey



M20	5 ... 9
M20	6 ... 12
M20	10 ... 14
M25	9 ... 16
M25	13 ... 18
M32	13 ... 18
M32	18 ... 25
M40	20 ... 26
M40	22 ... 32

19 00 000 5180
19 00 000 5182
19 00 000 5184
19 00 000 5190
19 00 000 5192
19 00 000 5194
19 00 000 5196
19 00 000 5197
19 00 000 5198

Clamping range Ø	SW	E	Nm
5 ... 9 mm	24	26.4	4.5
6 ... 12 mm	24	26.4	4.5
10 ... 14 mm	27	29.8	4.5
9 ... 16 mm	33	33.5	5
13 ... 18 mm	33	36.5	5
13 ... 20 mm	42	46.8	6.5
18 ... 25 mm	42	46.8	6.5
20 ... 26 mm	53	58.8	10
22 ... 32 mm	53	58.8	10

Han® CGM-P,
 Cable gland,
 Black



M20	5 ... 9
M20	6 ... 12
M20	10 ... 14
M25	9 ... 16
M25	13 ... 18
M32	13 ... 20
M32	18 ... 25
M40	20 ... 26
M40	22 ... 32

19 00 000 5181
19 00 000 5183
19 00 000 5185
19 00 000 5191
19 00 000 5193
19 00 000 5186
19 00 000 5187
19 00 000 5188
19 00 000 5189

Technical characteristics

Limiting temperature	-40 ... +100 °C
Degree of protection acc. to IEC 60529	IP68, IP69 / IPX9K acc. to ISO 20653
Material (seal)	NBR
Material (cable glands)	Brass, nickel plated
Material (clamping ring)	Polyamide
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight

Specifications and approvals

UL 514B QCRV.E479780
 CSA-C22.2 No. 18.3 QCRV7.E479780
 DNV GL

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)																																																												
Han® CGM-M, Cable gland	M20	5 ... 9	19 00 000 5080	<table border="1"> <thead> <tr> <th>Outer cable Ø</th> <th>SW</th> <th>E</th> <th>Nm</th> </tr> </thead> <tbody> <tr><td>5 ... 9 mm</td><td>22</td><td>24.4</td><td>10</td></tr> <tr><td>5 ... 12 mm</td><td>22</td><td>24.4</td><td>10</td></tr> <tr><td>6 ... 12 mm</td><td>22</td><td>24.4</td><td>10</td></tr> <tr><td>10 ... 14 mm</td><td>24</td><td>26.4</td><td>10</td></tr> <tr><td>9 ... 16 mm</td><td>30</td><td>33.5</td><td>12</td></tr> <tr><td>9 ... 18 mm</td><td>30</td><td>33.5</td><td>12</td></tr> <tr><td>13 ... 18 mm</td><td>30</td><td>33.5</td><td>12</td></tr> <tr><td>13 ... 20 mm</td><td>40</td><td>44</td><td>15</td></tr> <tr><td>13 ... 25 mm</td><td>40</td><td>44</td><td>15</td></tr> <tr><td>18 ... 25 mm</td><td>40</td><td>44</td><td>15</td></tr> <tr><td>20 ... 26 mm</td><td>50</td><td>55</td><td>15</td></tr> <tr><td>22 ... 32 mm</td><td>50</td><td>55</td><td>15</td></tr> <tr><td>20 ... 32 mm</td><td>50</td><td>55</td><td>15</td></tr> <tr><td>32 ... 38 mm</td><td>57</td><td>60</td><td>24</td></tr> </tbody> </table>	Outer cable Ø	SW	E	Nm	5 ... 9 mm	22	24.4	10	5 ... 12 mm	22	24.4	10	6 ... 12 mm	22	24.4	10	10 ... 14 mm	24	26.4	10	9 ... 16 mm	30	33.5	12	9 ... 18 mm	30	33.5	12	13 ... 18 mm	30	33.5	12	13 ... 20 mm	40	44	15	13 ... 25 mm	40	44	15	18 ... 25 mm	40	44	15	20 ... 26 mm	50	55	15	22 ... 32 mm	50	55	15	20 ... 32 mm	50	55	15	32 ... 38 mm	57	60	24
	Outer cable Ø	SW	E		Nm																																																											
	5 ... 9 mm	22	24.4		10																																																											
	5 ... 12 mm	22	24.4		10																																																											
	6 ... 12 mm	22	24.4		10																																																											
	10 ... 14 mm	24	26.4		10																																																											
	9 ... 16 mm	30	33.5		12																																																											
	9 ... 18 mm	30	33.5		12																																																											
	13 ... 18 mm	30	33.5		12																																																											
	13 ... 20 mm	40	44		15																																																											
	13 ... 25 mm	40	44		15																																																											
	18 ... 25 mm	40	44		15																																																											
	20 ... 26 mm	50	55		15																																																											
	22 ... 32 mm	50	55		15																																																											
	20 ... 32 mm	50	55		15																																																											
	32 ... 38 mm	57	60		24																																																											
	M20	5 ... 12	19 00 000 5081																																																													
	M20	6 ... 12	19 00 000 5082																																																													
	M20	10 ... 14	19 00 000 5084																																																													
	M25	9 ... 16	19 00 000 5090																																																													
M25	9 ... 18	19 00 000 5091																																																														
M25	13 ... 18	19 00 000 5092																																																														
M32	13 ... 20	19 00 000 5094																																																														
M32	13 ... 25	19 00 000 5095																																																														
M32	18 ... 25	19 00 000 5096																																																														
M40	20 ... 26	19 00 000 5097																																																														
M40	20 ... 32	19 00 000 5099																																																														
M40	22 ... 32	19 00 000 5098																																																														
M50	32 ... 38	19 00 000 5086																																																														





Technical characteristics

Degree of protection acc. to IEC IP68
60529
Material (cable glands) Metal

Technical characteristics

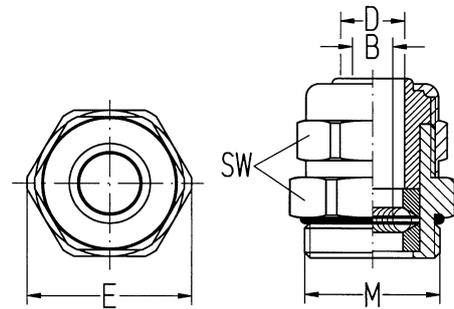
RoHS compliant with exemption
RoHS exemptions **6c**: Copper alloy containing up to 4 % lead by weight

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
----------------	------	---------------------	-------------	----------------------------

Cable gland,
EMC version

M20	4 ... 6.5	19 62 000 5081
M20	6.5 ... 9.5	19 62 000 5080
M20	7 ... 10.5	19 62 000 5082
M20	9 ... 13	19 62 000 5084
M25	6.5 ... 9.5	19 62 000 5090
M25	9 ... 13	19 62 000 5092
M32	11.5 ... 15.5	19 62 000 5094
M32	14 ... 18	19 62 000 5096
M40	17 ... 20.5	19 62 000 5097
M40	20 ... 25	19 62 000 5098

cable-Ø D	SW	E	shield-Ø B
6.5 ... 9.5	22	24.4	3,5 ... 8,5
4 ... 6.5	22	24.4	2,5 ... 6,5
7 ... 10.5	22	24.4	6,5 ... 10,5
9 ... 13	22	24.4	6,5 ... 10,5
6.5 ... 9.5	22	31.2	3 ... 8
9 ... 13	28	31.2	4,8 ... 8
11.5 ... 15.5	35	38.5	8 ... 13,5
14 ... 18	35	38.5	9 ... 14,5
17 ... 20.5	43	47.3	15 ... 20
20 ... 25	43	47.3	15 ... 20

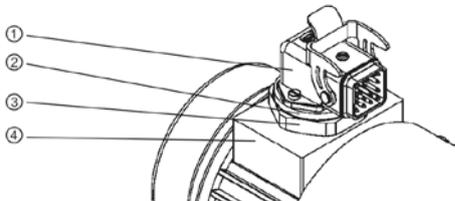
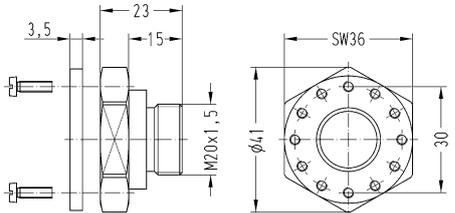



Technical characteristics


Material (accessories) Thermoplastic, Metal
 Colour (accessories) Black

Technical characteristics

RoHS compliant with exemption, compliant
 RoHS exemptions **6c**: Copper alloy containing up to 4 % lead by weight

Identification	Size	Reduced size	Part number	Drawing (dimensions in mm)
Han A®, Adapter, for motor connection 	M20		19 20 000 9962	 <p>① Han® 3 A ② Seal ③ Adapter Han® 3 A ④ Housing for motor applications</p>  <p>3,5 23 15 M20x1,5 SW36 30 4,1</p>
Dummy plugs 	M32 M40		19 00 000 5172 19 00 000 5173	  <p>M32: Ø 35 mm M40: Ø 46.2 mm</p>
Reduced size 	M20 M32 M32	M16 M20 M25	19 00 000 5060 19 00 000 5067 19 00 000 5068	

Accessories

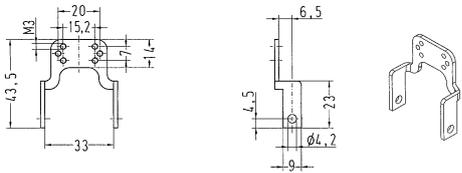
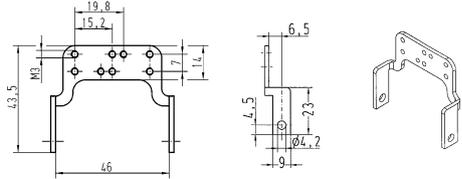
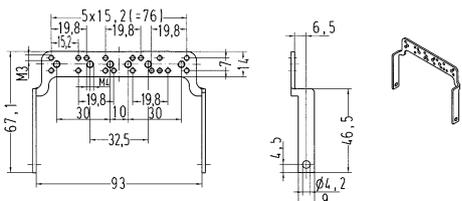
Identification	Size	Reduced size	Part number	Drawing (dimensions in mm)
Reduced size, With O-ring	M32 M32	M20 M25	19 00 000 5066 19 00 000 5069	
Dummy plugs, With O-ring	M20 M25 M32 M40		19 00 000 5070 19 00 000 5071 19 00 000 5072 19 00 000 5073	  <p>M20: SW 22; E 25.4 M25: SW 28; E 32.3 M32: SW 35; E 40.4 M40: SW 44; E 50.8</p>

Technical characteristics

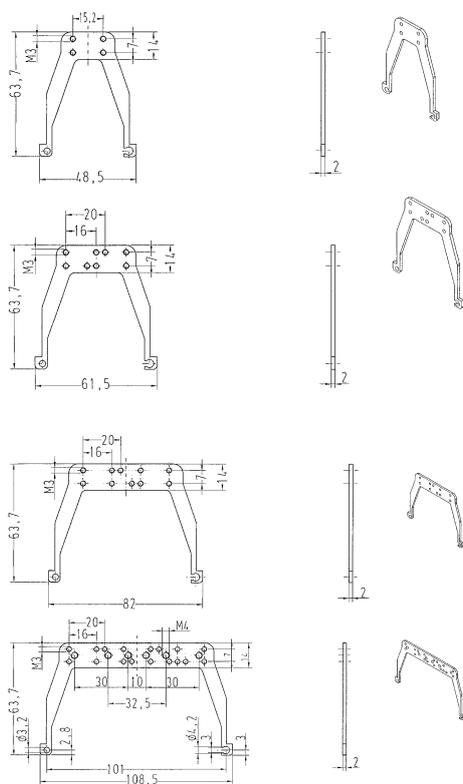
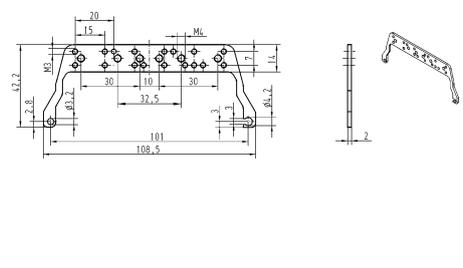
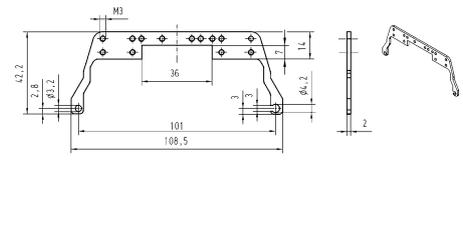
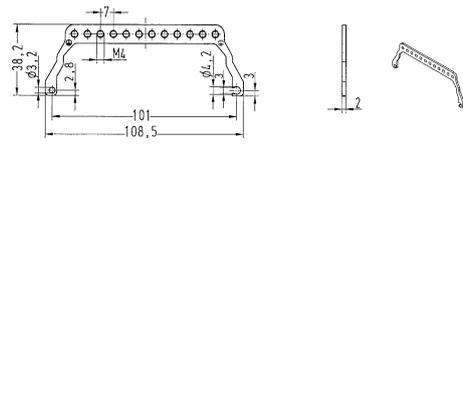
Material (accessories) Steel, zinc plated

Technical characteristics

RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
Han E® Han® EE Han DD® Han-Snap®, Shielding frame, for bulkhead mounted housings, for hoods, high construction, Pack contents: Ground terminal frame with M4 screws for fixing at insert 	06 B	09 00 000 5206	
	10 B	09 00 000 5207	
	16 B	09 00 000 5208	
Han E® Han® EE Han DD® Han-Snap®, Shielding frame, for bulkhead mounted housings, for hoods, high construction, 24 B, Pack contents: Ground terminal frame with M4 screws for fixing at insert 	24 B	09 00 000 5210	
	24 B	09 00 000 5280	
	24 B	09 00 000 5280	
Han E® Han® EE Han DD® Han-Snap®, Shielding frame, for bulkhead mounted housings, for hoods, high construction, 24 B, Pack contents: Ground terminal frame with M4 screws for fixing at insert 	24 B	09 00 000 5210	
	24 B	09 00 000 5280	
	24 B	09 00 000 5280	

Accessories

Identification	Size	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Shielding frame, for bulkhead mounted housings</p> 	<p>06 B 10 B 16 B 24 B</p>	<p>09 00 000 5256 09 00 000 5257 09 00 000 5258 09 00 000 5211</p>	
<p>Han-Modular®, Shielding frame, for bulkhead mounted housings, for hoods, high construction</p> 	<p>24 B</p>	<p>09 00 000 5298</p>	
<p>Han-Quintax®, Shielding frame, for bulkhead mounted housings, for hoods, high construction</p> 	<p>24 B</p>	<p>09 00 000 5235</p>	
<p>Han-Modular®, PE bracket, for bulkhead mounted housings, for hoods, high construction</p> 	<p>24 B</p>	<p>09 00 000 5209</p>	

Technical characteristics

Material (accessories) Steel, zinc plated

Technical characteristics

RoHS compliant


Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
----------------	---------------------	-------------	----------------------------

Clamp, for shield frames




5
10

09 00 000 5341
09 00 000 5342



Cable diameter 5 mm



Cable diameter 10 mm

Accessories

Technical characteristics

Material (accessories) Metal

Technical characteristics

Surface (accessories) Zinc plated
RoHS compliant

Identification Size Part number Drawing (dimensions in mm)

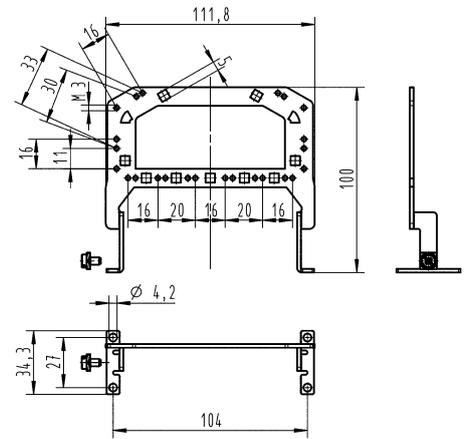
Grip frame



Can only be used with screw adapter!

16 B
24 B

09 00 016 5603
09 00 024 5601

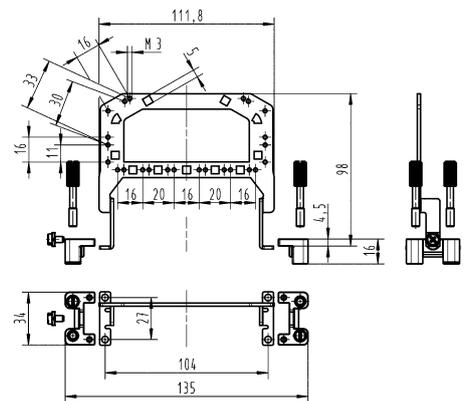


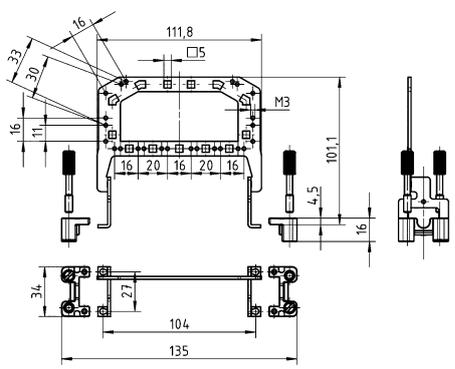
Grip frame,
With screw adapter and screw to use in
connection with 09 00 000 5602



16 B
24 B

09 00 016 5612
09 00 024 5611



Identification	Size	Part number	Drawing (dimensions in mm)
<p>Han-Modular®, Grip frame, With screw adapter and screw to use in connection with 09 00 000 5602</p> 	<p>06 B 10 B 16 B 24 B</p>	<p>09 00 006 5605 09 00 010 5605 09 00 016 5605 09 00 024 5605</p>	

Accessories

Features

- Grip frame suitable for Han® 64 D / Han® 108 DD / Han® 24 E / Han® 24 ES / Han® 24 ESS / Han® 46 EE
- Multiple shield connections via grip frame
- Cable can be fixed with clamps or cable tie

Technical characteristics

Material (accessories) Zinc die-cast
 Surface (accessories) Copper-plated, Nickel plated
 RoHS compliant

Identification

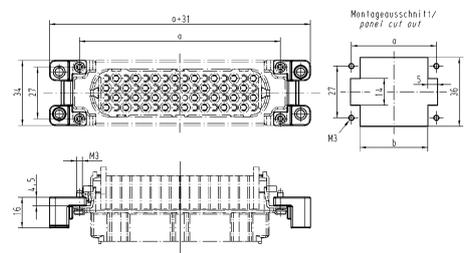
Screw adapter,
Bulkhead mounting



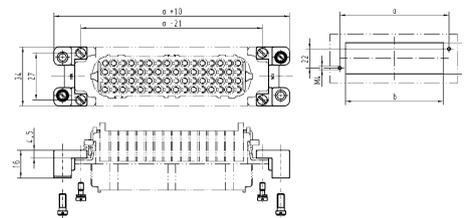
Part number

09 00 000 5602
 09 00 000 5603

Drawing (dimensions in mm)



	a	b
6 B	44	35
10 B	57	48
16 B	77,5	68,5
24 B	104	95



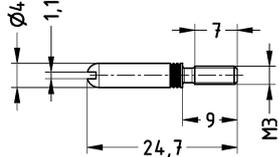




Technical characteristics

RoHS compliant with exemption

Technical characteristics

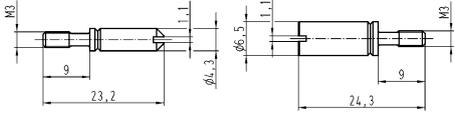
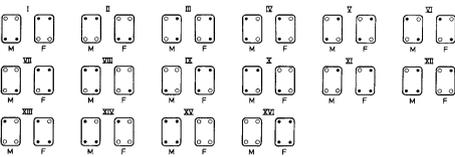
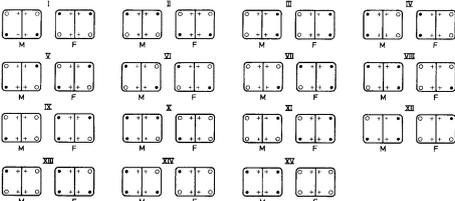
RoHS exemptions

6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Coding, With guide pins/bushes, for application "insert with screw adapter" with/ without grip frame</p> 	09 33 000 9808	09 33 000 9809	  
<p>Coding, With guide pins/bushes, for application "insert in hood/housing"</p> 	09 33 000 9908	09 33 000 9909	 
<p>Han-Modular®, Coding, With guide pins/bushes, for application "insert with screw adapter" with/ without grip frame</p>  <p>Please order 4 pieces for one connector.</p>	09 14 000 9981	09 14 000 9982	

Coding of inserts in hoods/housings



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
<p>Accessories</p> <p>Han-Modular®, Coding, With guide pins/bushes, for application "insert in hood/housing"</p>  <p>Please order 4 pieces for one connector.</p>	09 14 000 9908	09 14 000 9909	  <p>for hoods/housings with one insert/one frame</p>  <p>for hoods/housings with two inserts/two frames</p> <ul style="list-style-type: none">♦ Guide pin○ Bush+ Fixing screwM - male insertF - female insert

Technical characteristics

RoHS compliant with exemption

Technical characteristics

RoHS exemptions **6a:** Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight


Identification

Part number

Drawing (dimensions in mm)

Coding,
With code pins,
Han® B


09 30 000 9901



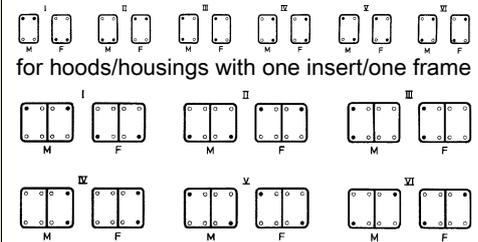
Please order 4 pieces for one connector.

Han-Modular®,
Coding,
With code pins

09 14 000 9901



Please order 4 pieces for one connector.



for hoods/housings with the inserts/two frames

- ◆ Code pin
- + Fixing screw
- M - male insert
- F - female insert

Accessories

Technical characteristics

Material (accessories) Thermoplastic compliant
RoHS

Details

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

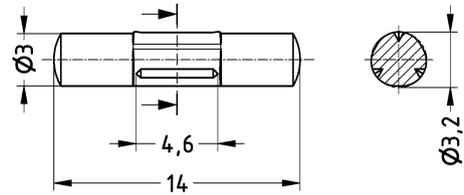
Identification	Part number Female	Drawing (dimensions in mm)
----------------	-----------------------	-------------------------------

Han D®
Han DD®,
Coding pin



Only for crimp termination
With loss of one contact

09 33 000 9915




Han E®
Han® EE
Han® EEE,
Coding pin



for crimp inserts only
With loss of one contact

09 33 000 9954



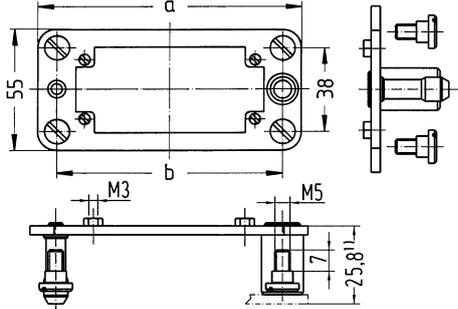
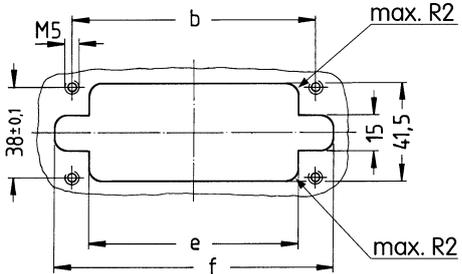


Features

- Suitable for all inserts of the series Han E®, Han E® HMC, Han EE®, Han EE® HMC, Han EEE®, Han EEE® HMC, Han ES, Han D® (size B), Han D® HMC, Han DD®, Han DD® HMC, Han-Com®, Han® HsB, Han-Modular®
- Due to the floating system of the docking frame the PE connection of the mounting base has to be installed separately.
- Inserts are protected against mechanical damage

Technical characteristics

Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (accessories)	Stainless steel
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Identification	Size	Part number	Drawing (dimensions in mm)
Docking frame, Pack contents: 1 frame, 4 cheese head shoulder screws (Steel, zinc plated) to fix the docking frame  Pull-in-range x-axis: ± 1.5 mm Pull-in-range y-axis: ± 1.5 mm	06 B 10 B 16 B 24 B	09 30 006 1704 09 30 010 1704 09 30 016 1704 09 30 024 1704	 Distance for electrical and FO contacts max. 27 mm; for Han-Modular® series max. 26.5 mm 6 B: a=86; b=69 10 B: a=99; b=82 16 B: a= 119.5 ; b= 102.5 24 B: a=146; b=129  6 B: b= 69; e= 54.5; f= 84 10 B: b= 82; e= 67.5; f= 97 16 B: b= 102.5; e= 88; f= 117.5 24 B: b= 129; e= 114.5; f= 144

Number of contacts

3+

Accessories



Features

- 3 PE-terminations
- Screws with ± head
- Self lifting washer
- Suitable for use with all inserts of the Han® 6 B to 24 B size (except Han® ESS-inserts)
- Suitable in hoods high construction

Technical characteristics

Number of contacts	3
Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
RoHS	compliant

Details

The PE-multiple ground connection may be used to terminate three PE-wires on one connector. Each PE-wire can be terminated and removed separately.

(acc. VDE 0113 DIN EN 60204 Pt. 14.1.1)

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
PE Multiple ground connection, Pack contents: Distributor, Fixing screw M4 with washer Contact surface: Nickel plated	0.5 ... 2.5	09 33 000 9992	

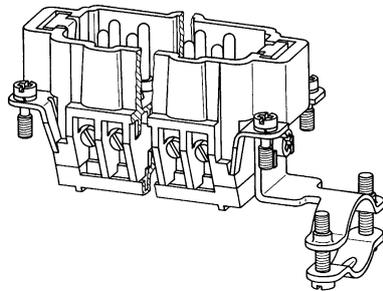
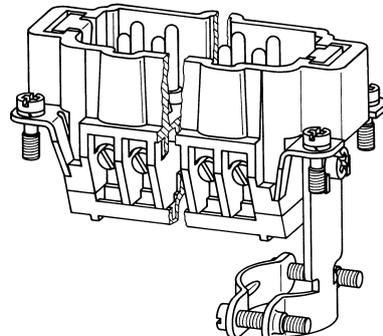


Technical characteristics

RoHS compliant

Details

When using inserts without hoods or housings and requiring a strain relief this system is suitable for all rectangular connectors of series Han DD®, Han® 40-64 D, Han E®, Han® ES, Han Hv E®, Han® Hv ES, Han® EE, Han® K 8/24.
Fitted at the opposite end to the PE-termination.

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
<p>Strain relief clamp, Angled, Pack contents: Strain relief clamp with 2 screws M3, Fixing screw M4 with washer</p> 	9 ... 19	09 00 000 5339	
<p>Strain relief clamp, Straight, Pack contents: Strain relief clamp with 2 screws M3, Fixing screw M4 with washer</p> 	9 ... 19	09 00 000 5340	

Features

- Useable for inserts without hoods or housings and requiring a strain relief
- Suitable for all rectangular connectors of the Han® series Han® 6 B, 10 B, 16 B, 24 B

Technical characteristics

RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Details

When using inserts without hoods or housings and requiring a locking facility this system is suitable for all rectangular connectors of the Han® series size 6 ... 24 B. For each connector we recommend two screw pins and two bushes as shown which are fitted diagonally to the inserts instead of the ordinary fixing screws. Holes for fixing to be drilled as shown.

Identification	Part number	Drawing (dimensions in mm)
Bush Order 2 pieces for one connector.	09 33 000 9912	
Knurled screw Order 2 pieces for one connector.	09 33 000 9910	<p>Mounting example</p>

Technical characteristics

Material (accessories)
RoHS

Stainless steel
compliant, compliant with
exemption

Technical characteristics

RoHS exemptions

6c: Copper alloy containing up to 4 % lead by weight

Identification		Size	Part number	Drawing (dimensions in mm)
Han-Modular® Compact, Fixing screws		ST 2.9x9.5 F-H	09 12 000 9921	
Fixing screws		M3	09 16 000 9903	
Fixing screws, With seal, Han® 3 A		M3	09 20 000 9918	
Fixing screws, Han® 3 A		M3	09 20 000 9995	
Toggle locking screw, Han® 6/10/16/24 HPR			09 40 000 9931	
Toggle locking screw, 3 HPR			09 40 000 9933	

Accessories

Identification	Size	Part number	Drawing (dimensions in mm)
Contact screw, Han A® 		09 30 000 9997	
for PE in Han® Q 5/0, Q 7/0 PE screw, Han-Modular® hinged frames 	M3 M4	09 14 000 9953 09 14 000 9954	
PE screw, Han A®, Han® 15 D, Han® 25 D 	M3.5	09 20 000 9919	
PE screw 	M4	09 33 000 9925	
PE screw, Han-Com®, Han® HsB 	M5	09 33 000 9926	
Countersunk flat 		09 70 000 9902	
Countersunk flat, With seal 		09 70 000 9905	

Identification	Size	Part number	Drawing (dimensions in mm)
Locking screw, 3 HPR 	M4	09 40 000 9929	
Locking screw, Han® 6/10/16/24 HPR 	M6	09 40 000 9932	
Locking screw, 48 HPR 	M6	09 40 000 9937	

Accessories

Accessories

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Material (accessories)	Steel, zinc plated, Thermoplastic, Metal

Technical characteristics

RoHS	compliant, compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0.35 % lead by weight

Identification	Size	Part number	Drawing (dimensions in mm)
----------------	------	-------------	----------------------------

Bearing pedestal, for Han® 10 A, 16 A, 32 A, 6 B, 10 B, 16 B, 24 B



09 30 000 9964

Han A®, Protection cover, for bearing pedestal, Thermoplastic



10 A
16 A

09 20 010 5410
09 20 016 5410

Han® B, Protection cover, for bearing pedestal, Metal



06 B
10 B
16 B
24 B

09 30 006 5403
09 30 010 5404
09 30 016 5404
09 30 024 5404

Han® B, Protection cover, for bearing pedestal, Thermoplastic



06 B
10 B
16 B
24 B

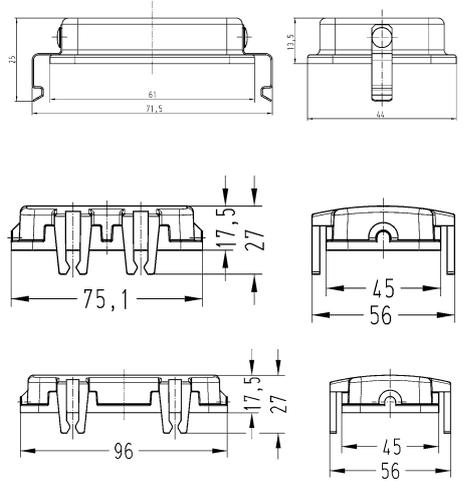
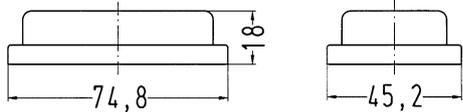
09 30 006 5410
09 30 010 5410
09 30 016 5410
09 30 024 5410

Technical characteristics

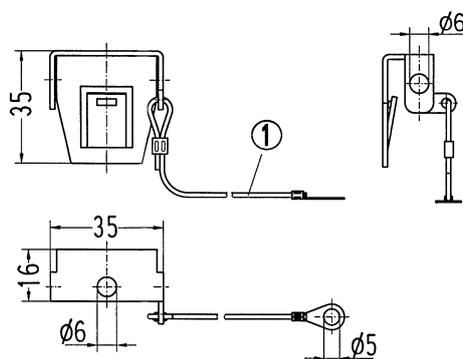
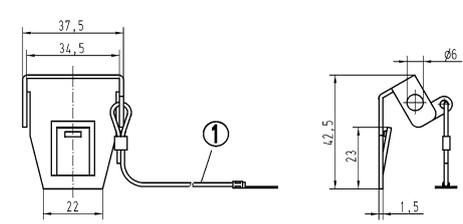
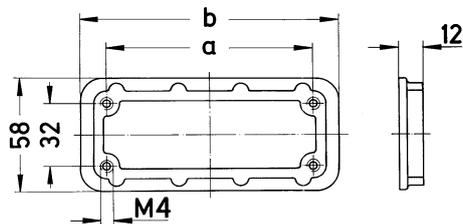
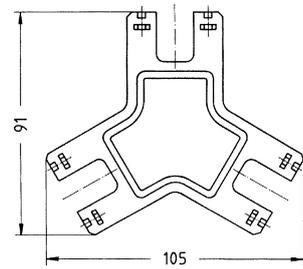
Material (accessories) Metal, Thermoplastic

Technical characteristics

RoHS compliant

Identification	Size	Part number	Drawing (dimensions in mm)
<p>Han® B, Dust protection cover, for hoods, With board locks</p> 	<p>06 B 10 B 16 B</p>	<p>09 30 006 5401 09 30 010 5401 09 30 016 5401</p>	
<p>Han® B, Dust protection cover, for housings</p> 	<p>10 B 16 B 24 B</p>	<p>09 30 010 5406 09 30 016 5406 09 30 024 5406</p>	
<p>Han® HPR, Dust protection cover, for housings</p> 	<p>03 HPR 06 HPR 10 HPR 16 HPR 24 HPR</p>	<p>09 40 003 5406 09 40 006 5406 09 40 010 5406 09 40 016 5406 09 40 024 5406</p>	

Accessories

Identification	Size	Part number	Drawing (dimensions in mm)
<p>Locking element, With cord, for Han® 10/16/24 B housings bulkhead mounting with Han-Easy Lock® double levers</p> 		09 30 000 9986	 <p>① Length 120 mm</p>
<p>Locking element, With cord, for Han® 10/16/24 B with double metal levers</p> 		09 30 000 9987	 <p>① Length 120 mm</p>
<p>Mounting frames, for standard hoods/housings</p> 	06 B 10 B 16 B 24 B	09 40 000 9921 09 40 000 9922 09 40 000 9923 09 40 000 9924	 <p>6 B: a=70; b=96 10 B: a=83; b=109 16 B: a=103; b=129 24 B: a=130; b=156</p>
<p>Frame, for custom test adapters, Pack contents: 2 assembly plates, 12 nuts for insertion</p> 		09 38 000 9901	
<p>Label, According to CSA-approval, Pack contents: 50 labels per sheet</p> 		09 30 000 9958	

Identification	Size	Part number	Drawing (dimensions in mm)
<p>Contact lubricant DvDA, for Han® contacts, Pack contents: Vaporizer (40 ml), Handling instruction</p>  <p>Applicable onto Han® contacts to reduce mating and unmating forces. Content: Preperation of perfluorpolyethers</p>		09 99 000 0829	

Accessories

Contents	Page
Hand crimping tools for Han® standard contacts.....	Han 90.4
Hand crimping tools for fibre optic contacts.....	Han 90.9
Hand crimping tools for Han-Fast® Lock contacts.....	Han 90.10
Hand crimping tools for wire end ferrules.....	Han 90.11
Hand crimping tools for D-Sub contacts.....	Han 90.12
Hand crimping tools for coaxial contacts.....	Han 90.13
Pneumatic crimping tool.....	Han 90.15
Hydraulic crimping tools for Han® TC high current contacts.....	Han 90.16
Crimping machine TC-C01.....	Han 90.18
Crimping machine TK-M.....	Han 90.20
Crimping machine BK.....	Han 90.22
Panel punch.....	Han 90.24
Assembly tools.....	Han 90.25
Removal tools.....	Han 90.29
Stripping tools.....	Han 90.32

Overview Han® crimping tools



Tools

Crimp contacts Series	Part number				mm ²	AWG	Crimping tools						Tools
	male contact silver plated	female contact silver plated	male contact gold plated	female contact gold plated			09 99 000 0888	09 99 000 0110	09 99 000 0021	09 99 000 0001	09 99 000 0377	20 99 000 1035	
Han D® Signal contacts 09 15 000 	6107	6207	6127	6227	0.14 - 0.25	26 - 24	x			x			09 99 000 0012
	6104	6204	6124	6224				x	x				
	6107	6207	6127	6227	0.37	22	x			x			
	6104	6204	6124	6224			x	x	x	x			
	6103	6203	6123	6223	0.5	20	x	x	x	x			
	6105	6205	6125	6225	0.75	18	x	x	x	x			
	6102	6202	6122	6222	1.0	18	x	x	x	x			
	6101	6201	6121	6221	1.5	16	x	x	x	x			
6106	6206	6126	6226	2.5	14	x			x				
Han D® F.O. contacts 20 10 001	Male contact 3211 3212 / 3213		Female contact 3221 3222		1 mm POF							x	
Han E® Power contacts 09 33 000 	6127	6227	6117	6217	0.14 - 0.37	26 - 22	x			x			09 99 000 0319
	6121	6220	6122	6222	0.5	20	x	x	x	x			
	6114	6214	6115	6215	0.75	18	x	x	x	x			
	6105	6205	6118	6218	1.0	18	x	x	x	x			
	6104	6204	6116	6216	1.5	16	x	x	x	x			
	6102	6202	6123	6223	2.5	14	x	x	x	x			
	6106	6206			3.0	12	x	x		x			
	6107	6207	6119	6221	4.0	12	x	x		x			
Han E® F.O. contacts 20 10 001	Male contact 3311		Female contact 3321		1 mm POF							x	
Han® C Power contacts 09 32 000 	6104	6204			1.5	16	x	x		x			09 99 000 0305 09 99 000 0381
	6105	6205			2.5	14	x	x		x			
	6107	6207			4.0	12	x	x		x	x		
	6108	6208			6.0	10					x		
	6109	6209			10.0	8					x		
Han-Yellock® Power contacts 11 05 000 	6101	6201	6121	6221	0.14 - 0.37	26 - 22	x			x			09 99 000 0319
	6102	6202	6122	6222	0.5	20	x	x	x	x			
	6103	6203	6123	6223	0.75	18	x	x	x	x			
	6104	6204	6124	6224	1.0	18	x	x	x	x			
	6105	6205	6125	6225	1.5	16	x	x	x	x			
	6106	6206	6126	6226	2.5	14	x	x	x	x			
	6107	6207	6127	6227	3.0	12	x	x		x			
	6108	6208	6128	6228	4.0	12	x	x		x			
Description													
Locator Han D®	09 99 000 0311									x			
Locator Han E®	09 99 000 0310									x			
Locator Han® C	09 99 000 0308									x			
Locator Han-Yellock®	09 99 000 0341							x					
	09 99 000 0343								x				
	09 99 000 0342										x		

Overview Han® crimping tools



Crimp contacts Series	Part number				mm ²	AWG	Crimping machines									
	male contact silver plated	female contact silver plated	male contact gold plated	female contact gold plated			09 99 000 0314	09 99 000 0307	09 98 000 6901 1)	09 98 000 6902 1)	09 98 000 6903 1)	09 98 000 6907 1)	09 98 000 9001	09 98 000 9002	09 98 000 9003	
Han D® Signal contacts 09 15 000 	6107	6207	6127	6227	0.14 - 0.25	26 - 24	x		x ²⁾				x			
	6104	6204	6124	6224												
	6107	6207	6127	6227	0.37	22	x		x				x			
	6104	6204	6124	6224							x				x	
	6103	6203	6123	6223	0.5	20	x		x				x			
	6105	6205	6125	6225	0.75	18	x		x				x			
	6102	6202	6122	6222	1.0	18	x		x				x			
	6101	6201	6121	6221	1.5	16	x		x				x			
6106	6206	6126	6226	2.5	14			x				x				
Han E® Power contacts 09 33 000 	6127	6227	6117	6217	0.14 - 0.37	26 - 22	x			x ²⁾					x	
	6121	6220	6122	6222	0.5	20	x			x					x	
	6114	6214	6115	6215	0.75	18	x			x					x	
	6105	6205	6118	6218	1.0	18	x			x					x	
	6104	6204	6116	6216	1.5	16	x			x					x	
	6102	6202	6123	6223	2.5	14	x			x					x	
	6106	6206			3.0	12	x			x					x	
	6107	6207	6119	6221	4.0	12	x			x					x	
Han-Yellock® Power contacts 11 05 000 	6101	6201	6121	6221	0.14 - 0.37	26 - 22								x		
	6102	6202	6122	6222	0.5	20								x		
	6103	6203	6123	6223	0.75	18								x		
	6104	6204	6124	6224	1.0	18								x		
	6105	6205	6125	6225	1.5	16								x		
	6106	6206	6126	6226	2.5	14								x		
	6107	6207	6127	6227	3.0	12								x ³⁾		
	6108	6208	6128	6228	4.0	12								x ³⁾		
Han® C Power contacts 09 32 000 	6104	6204			1.5	16	x	x				x				x
	6105	6205			2.5	14	x	x				x				x
	6107	6207			4.0	12	x	x				x				x
	6108	6208			6.0	10		x				x				x
	6109	6209			10.0	8		x								x

Tools

1) TK-M basic machine 09 98 000 6900 is required
 2) depending on the wire
 3) only with modification 09 98 503 6900

Tools

Details	Details
The high end tool with best performance.	for wire gauges from 0.14 und 0.25 mm ² please use the contacts 09 15 000 6107, 6207, 6127 or 6227.

Identification	Part number	
Crimping tool, Han D®: 0.14 ... 2.5 mm ² , Han E®: 0.14 ... 4 mm ² , Han- <i>Yellock</i> ®: 0.14 ... 4 mm ² , Han® C: 1.5 ... 4 mm ² , Pack contents: incl. locator, Handling instruction	09 99 000 0888	
Check gauge, for crimping tool 09 99 000 0888, for optional testing	09 99 000 0889	
Locator, Spare part, for crimping tool 09 99 000 0888	09 99 000 0887	

Details

for wire gauges from 0.14 und 0.25 mm² please use the contacts 09 15 000 6107, 6207, 6127 or 6227.

Identification	Conductor cross-section (mm ²)	Part number	
Crimping tool, Han D®: 0.14 ... 2.5 mm ² , Han E®: 0.14 ... 4 mm ² , Han- <i>Yellowlock</i> ®: 0.14 ... 4 mm ² , Han® C: 1.5 ... 4 mm ² Please order locator separately.	0.14 ... 4	09 99 000 0001	
Locator, Han D®	0.14 ... 2.5	09 99 000 0311	
Locator, Han E®	0.14 ... 4	09 99 000 0310	
Locator, Han® C	1.5 ... 4	09 99 000 0308	
Locator, Han E®, Relay contacts	0.14 ... 4	09 99 000 0345	
Adjustment gauge, Adjustment gauge for four-indent crimping tools, Han D®, Han E®, Han® C, Han- <i>Yellowlock</i> ®		09 99 000 0379	

Details

Robust allrounder with very good performance.

Identification	Conductor cross-section (mm ²)	Part number
<p>Crimping tool, Han D®: 0.14 ... 1.5 mm², Han E®: 0.5 ... 4 mm², Han-<i>Yellowlock</i>®: 0.5 ... 4 mm², Han® C: 1.5 ... 4 mm², Pack contents: incl. locator, Han D®, Han E®, Han® C, Please order Han-<i>Yellowlock</i>® separately.</p>	0.14 ... 4	09 99 000 0110
<p>Locator, Han-<i>Yellowlock</i>®</p>		09 99 000 0341
<p>Locator, Spare part, Han D®, Han E®, Han® C</p>		09 99 000 0376



Details

The service tool for on-site maintenance.

Identification	Conductor cross-section (mm ²)	Part number
----------------	--	-------------

Service crimping tool, Han D®: 0.14 ... 1.5 mm ² , Han E®: 0.5 ... 2.5 mm ² , Han- <i>Yellock</i> ®: 0.5 ... 2.5 mm ² , Pack contents: incl. locator, Please order Han- <i>Yellock</i> ® separately.	0.14 ... 2.5	09 99 000 0021
Locator, Han- <i>Yellock</i> ®		09 99 000 0343
Locator, Spare part, Han D®, Han E®		09 99 000 0022



Details

The professional tool for big cross-sections.

Identification	Conductor cross-section (mm ²)	Part number
Crimping tool, Han® C: 4 ... 10 mm ² , Pack contents: incl. locator	4 ... 10	09 99 000 0377
Locator, Spare part, Han® C: 4 ... 10 mm ²		09 99 000 0963



Identification

Part number

Crimping tool,
for FO connector (glass fibre),
SC, F-SMA F-ST,
A/F 3.8 mm, A/F 4.3 mm, A/F 4.95 mm
for crimping of the strain relief

20 99 000 1031



Crimping tool,
for FO connector (plastic fibre),
SC, F-SMA F-ST,
A/F 3 mm, A/F 4.95 mm, A/F 6.5 mm
for crimping of the strain relief

20 99 000 1033



Crimping tool,
for following 1 mm POF contacts,
Han D®, Han E®, DIN 41626, Ferrule, F-SMA, -ST

20 99 000 1035



Hand crimping tools for Han-Fast® Lock contacts



Tools

Identification	Conductor cross-section (mm ²)	Part number	
Crimping tool, Angled, for Han-Fast® Lock single contact	1.5 ... 2.5 4 ... 10	09 99 000 0876 09 99 000 0877	
Crimping tool, for Han-Fast® Lock single contact, incl. locator	1.5 ... 2.5 4 ... 10	09 99 000 0881 09 99 000 0831	

Details

The tool for the professional processing of wire end ferrules according to DIN 46228.

Identification	Conductor cross-section (mm ²)	Part number	
Crimping tool, for wire end ferrules, acc. to DIN 46228	0.14 ... 2.5 4 ... 16	09 99 000 0970 09 99 000 0971	

Tools

Identification	Conductor cross-section (mm ²)	Part number	
Crimping tool, for 500 bandoliered standard contacts	0.09 ... 0.56	09 99 000 0169	
Crimping tool, for single stamped D-Sub contact	0.09 ... 0.56	09 99 000 0175	
Crimping tool, for turned male and female contact, 4 indent crimp in acc. to MIL 22 520/2-01	0.09 ... 0.82	09 99 000 0501	
Locator, for single D-Sub standard contacts		09 99 000 0531	
Locator, for single D-Sub standard contacts, 09 93 000 5576 + 09 93 000 5476		09 99 000 0897	

Identification	Conductor cross-section (mm ²)	Part number	
Crimping tool, for turned male and female contact, 4 indent crimp in acc. to MIL 22 520/2-01	0.09 ... 0.82	09 99 000 0501	
D-Sub, Locator, for inner contact die		09 99 000 0507	 <p data-bbox="989 1232 1340 1310"> Contacts 09 69 182 x140 + 09 69 282 x140 09 69 182 x230 + 09 69 282 x230 </p>

Tools

Identification	Part number	
<p>Crimping tool, for coaxial contact, acc. to DIN 41626, for outer ferrule Please order crimp dies separately.</p>	<p>09 99 000 0503</p>	
<p>Crimp die, for D-Sub</p>	<p>09 99 000 0508</p>	 <p>Contacts 09 69 182 x140 + 09 69 282 x140 09 69 182 x230 + 09 69 282 x230 09 69 181 x140 + 09 69 281 x140 09 69 181 x141 + 09 69 281 x141 09 69 181 x230 + 09 69 281 x230</p>
<p>Crimp die, for D-Sub mixed</p>	<p>09 99 000 0515</p>	 <p>Contacts 09 69 181 x143 + 09 69 281 x143</p>
<p>Crimping tool, Crimp die included, for coaxial contact, acc. to DIN 41626</p>	<p>09 99 000 0194</p>	 <p>Contacts 09 14 000 6211 + 09 14 000 6111 09 14 000 6221 + 09 14 000 6121</p>

Identification	Part number	
<p>Pneumatic crimping tool, Han D[®]: 0.14 ... 2.5 mm², Han E[®]: 0.14 ... 4 mm², Han[®] C: 1.5 ... 4 mm², Pack contents: In plastic case, Locator Han[®] C, Locator Han E[®], Locator Han D[®], Adjustment gauge, Pneumatic tube, Operating instructions</p>	<p>09 99 000 0314</p>	
<p>Pneumatic crimping tool, Han[®] C: 1.5 ... 10 mm², Pack contents: In plastic case, Locator Han[®] C, Pneumatic tube, Operating instructions</p>	<p>09 99 000 0307</p>	
<p>Table fixing, for part number 09 99 000 0307 and 09 99 000 0314</p>	<p>09 99 000 0309</p>	
<p>Foot switch, for part number 09 99 000 0307 and 09 99 000 0314</p>	<p>09 99 000 0347</p>	

Tools

Specifications and approvals

DIN 46235

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
----------------	--	-------------	----------------------------

Battery hydraulic tool,
Pressing force 60 kN,
Crimp die acc. to DIN 46235 with pressing
width 9 mm

10 ... 70

09 99 000 0850



Hydraulic handtool,
Pressing force 60 kN,
Crimp die acc. to DIN 46235 with pressing
width 9 mm

10 ... 70

09 99 000 0851



Crimp die,
for 60 kN tool,
Pack contents:
Supplied as a pair

10
16
25
35
50
70

09 99 000 0852
09 99 000 0853
09 99 000 0854
09 99 000 0855
09 99 000 0856
09 99 000 0857



Cross-section	Pressing width	Identification	Contacts
10 mm ²	9 mm	6	TC 70, TC 100, TC 250
16 mm ²	9 mm	8	TC 70, TC 100, TC 200, TC 250
25 mm ²	9 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350
35 mm ²	9 mm	12	TC 100, TC 200, TC 250, TC 350
50 mm ²	9 mm	14	TC 200, TC 250, TC 350
70 mm ²	9 mm	16	TC 200, TC 250, TC 350, TC 650

Specifications and approvals

DIN 46235

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)																																																
Battery hydraulic tool, Pressing force 120 kN, Crimp die acc. to DIN 46235 with pressing width 10 ... 14 mm	10 ... 240	09 99 000 0860																																																	
Hydraulic handtool, Pressing force 120 kN, Crimp die acc. to DIN 46235 with pressing width 10 ... 14 mm	10 ... 240	09 99 000 0861																																																	
Crimp die, for 120 kN tool, Pack contents: Supplied as a pair	10 16 25 35 50 70 95 120 150 185 240	09 99 000 0862 09 99 000 0863 09 99 000 0864 09 99 000 0865 09 99 000 0866 09 99 000 0867 09 99 000 0868 09 99 000 0869 09 99 000 0870 09 99 000 0871 09 99 000 0872	 <table border="1" data-bbox="997 1608 1445 1821"> <thead> <tr> <th>Cross-section</th> <th>Pressing width</th> <th>Identification</th> <th>Contacts</th> </tr> </thead> <tbody> <tr> <td>10 mm²</td> <td>10 mm</td> <td>6</td> <td>TC 70, TC 100, TC 250</td> </tr> <tr> <td>16 mm²</td> <td>10 mm</td> <td>8</td> <td>TC 70, TC 100, TC 200, TC 250</td> </tr> <tr> <td>25 mm²</td> <td>10 mm</td> <td>10</td> <td>TC 70, TC 100, TC 200, TC 250, TC 350</td> </tr> <tr> <td>35 mm²</td> <td>10 mm</td> <td>12</td> <td>TC 100, TC 200, TC 250, TC 350</td> </tr> <tr> <td>50 mm²</td> <td>13 mm</td> <td>14</td> <td>TC 200, TC 250, TC 350</td> </tr> <tr> <td>70 mm²</td> <td>13 mm</td> <td>16</td> <td>TC 200, TC 250, TC 350, TC 650</td> </tr> <tr> <td>95 mm²</td> <td>14 mm</td> <td>18</td> <td>TC 350, TC 650</td> </tr> <tr> <td>120 mm²</td> <td>14 mm</td> <td>20</td> <td>TC 350, TC 650</td> </tr> <tr> <td>150 mm²</td> <td>10 mm</td> <td>22</td> <td>TC 650</td> </tr> <tr> <td>185 mm²</td> <td>10 mm</td> <td>25</td> <td>TC 650</td> </tr> <tr> <td>240 mm²</td> <td>10 mm</td> <td>28</td> <td>TC 650</td> </tr> </tbody> </table>	Cross-section	Pressing width	Identification	Contacts	10 mm ²	10 mm	6	TC 70, TC 100, TC 250	16 mm ²	10 mm	8	TC 70, TC 100, TC 200, TC 250	25 mm ²	10 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350	35 mm ²	10 mm	12	TC 100, TC 200, TC 250, TC 350	50 mm ²	13 mm	14	TC 200, TC 250, TC 350	70 mm ²	13 mm	16	TC 200, TC 250, TC 350, TC 650	95 mm ²	14 mm	18	TC 350, TC 650	120 mm ²	14 mm	20	TC 350, TC 650	150 mm ²	10 mm	22	TC 650	185 mm ²	10 mm	25	TC 650	240 mm ²	10 mm	28	TC 650
Cross-section	Pressing width	Identification	Contacts																																																
10 mm ²	10 mm	6	TC 70, TC 100, TC 250																																																
16 mm ²	10 mm	8	TC 70, TC 100, TC 200, TC 250																																																
25 mm ²	10 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350																																																
35 mm ²	10 mm	12	TC 100, TC 200, TC 250, TC 350																																																
50 mm ²	13 mm	14	TC 200, TC 250, TC 350																																																
70 mm ²	13 mm	16	TC 200, TC 250, TC 350, TC 650																																																
95 mm ²	14 mm	18	TC 350, TC 650																																																
120 mm ²	14 mm	20	TC 350, TC 650																																																
150 mm ²	10 mm	22	TC 650																																																
185 mm ²	10 mm	25	TC 650																																																
240 mm ²	10 mm	28	TC 650																																																

Features

- Basic unit of compact construction for pre-stripped wires (stranded wire)
- Easy handling due to well-arranged design
- for individual, turned male and female contacts
- Selective processing of male and female contacts
- Automatic contact feed
- Reproducible, top quality gas-tight crimp connections
- Non-slip, anti-vibration adjustable feet for setting the height
- Low noise level
- With carrying handle
- Removable electric and pneumatic supply connections
- Maintenance interval counter
- Minimal setup effort
- Stepless adjustment of the crimping depth
- Low follow-up costs for maintenance and repair
- Easy replacement of wearing components

Details

Nominal voltage, max. 230 V
Nominal frequency 50 Hz
Power consumption ca.0.2 kW
Pressure ca.6 bar
Control system PLC
Work cycle trigger Footswitch
Work cycle 1 s
Noise level ca.62 dB
Crimp type Four-point crimping
Contact feed Vibratory bowl feed
Stroke counters Resettable daily counter and permanent counter
Dimensions 345 x 230 x 400 mm
Weight ≥ 24 kg

Pack contents:
2.0 m connection cable and grounding plug,
2.0 m pneumatic hose,
quick-release coupling and N6 plugin nipple,
footswitch,
carrying handle,
operating instructions,
declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Crimping machine TC-C01, for Han D [®] contact	0.14 ... 2.5	09 98 000 9001	
Crimping machine TC-C01, for Han E [®] contact	0.14 ... 4	09 98 000 9002	
Crimping machine TC-C01, for Han [®] C contact	1.5 ... 10	09 98 000 9003	
Maintenance unit, Optional accessory		09 98 336 6851	

Features

- Basic unit of compact construction
- Fast stripping and crimping in one operating step
- Easy handling due to well-arranged design
- Touchscreen controlling
- for individual, turned male and female contacts
- Selective processing of male and female contacts
- Contact magazine with filling control
- Reproducible, top quality gas-tight crimp connections
- Infinitely variable adjustment parameters (stripping depth, stripping length, crimping depth, crimp contact feed rate)
- Rotatable vibration feeder and actuator in basic unit
- Low noise level
- for oil-free compressed air
- Minimal setup effort
- Low maintenance costs

Details

Drive electro-pneumatic
Nominal voltage, max. 230 V
Nominal frequency 50 Hz
Power consumption ca.0.75 kW
Pressure ca.6 bar
Compressed air connection 3 dm³ / work cycle
Control system PLC
Work cycle trigger sensor
Work cycle 1.5 s
Noise level <70 dB
Crimp type Four-point crimping
Contact feed Vibratory bowl feed
Stroke counters Resettable daily counte, total counter, operating hours, maintenance counter and quantity preselection
Dimensions 580 x 470 x 470 mm
Weight <60 kg

Pack contents:
one mounted interchangeable unit,
2.0 m connection cable and grounding plug,
2.0 m pneumatic hose with plug-in nipple N6,
plug gauges for setting the crimping,
centering bush for positioning the plug gauges,
draw for insulation remains,
drawer for holding the contacts when the magazine is emptied,
tool set for setting,
1 set of stripping blades,
operating instructions,
declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	
Crimping machine TK-M, Basic machine without interchangeable unit, Pack contents: Tool set for setting, 1 set of stripping blades, Operating instructions, Declaration of Conformity		09 98 000 6900	
Interchangeable unit, Han D [®]	0.14 ... 2.5	09 98 000 6901	
Interchangeable unit, Han E [®]	0.14 ... 4	09 98 000 6902	
Interchangeable unit, Han [®] C	1.5 ... 6	09 98 000 6903	
Interchangeable unit, D-Sub	0.09 ... 0.82	09 98 000 6904	
Interchangeable unit, Han- <i>Yellowlock</i> [®]	0.14 ... 2.5	09 98 000 6907	

Features

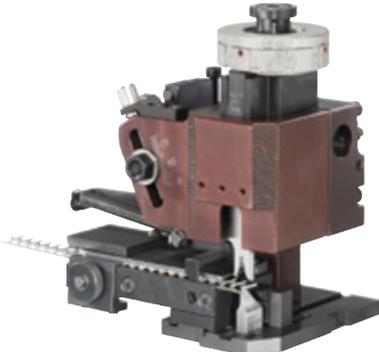
- Fast stripping and crimping in one operating step
- Easy handling due to quick change tool and stripper
- Suitable for standard D-Sub crimp contacts
- Selective processing of male and female contacts
- Hand wheel for manual adjustments
- Maintenance-friendly through needle bearing rail
- Automatic exhaust of the isolation remainders
- Reproducible, top quality gas-tight crimp connections
- With crimp force monitor
- Setting parameters with raster rotary button (depth of insulation stripping, length of insulation stripping, crimping height on wire, crimping height on insulation, wire retainer position, band thrust and wire position in the crimp contact)
- Non slip and anti-vibration feet
- Low noise level
- for oil-free compressed air
- Low maintenance costs
- V-blades for special wires on request

Details

Drive electro-pneumatic
Nominal voltage, max. 230 V
Nominal frequency 50 Hz
Power consumption 0.75 kW
Pressure 6 bar
Control system PLC
Stripping device type 514
Suction apparatus 2000.0900.20
Work cycle trigger sensor
Work cycle 0.35 s
Noise level 85 dB
Illumination integrated tool light 20001326
Motor speed 440 –2000 rpm
Stroke counters Resettable daily counter and permanent counter
Dimensions 690 (with a contact reel: 1400) x 420 x 430 mm
Weight <72 kg

Pack contents:

with role owner and guide plate,
2.0 m connection cable and grounding plug,
2.0 m pneumatic hose with plug-in nipple N9,
oiler bottle for the lubricating of the crimping contacts,
tool set for setting,
1 set of stamps for wire and isolation-crimp,
1 anvil one-piece for wire and isolation-crimp,
1 set of stripping blades,
1 litre of contact oil,
operating instructions,
declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	
<p>Crimping machine BK, Pack contents: With role owner and guide plate, Tool set for setting, 1 set of stripping blades, Operating instructions, Declaration of Conformity</p>		09 98 000 5000	
<p>Quick change tool, D-Sub</p>	<p>0.09 ... 0.25 0.25 ... 0.5</p>	<p>09 98 000 3008 09 98 000 3010</p>	

Technical characteristics

RoHS compliant

Identification	Size	Part number	
Battery hydraulic panel punch, To produce panel cut outs for connectors, Punching pressure: 60 kN, Pack contents: In plastic case, Lithium-Ion battery 18 V, 3 Ah, Charging set, Accessories		09 99 000 0900	
Hydraulic hand panel punch, To produce panel cut outs for connectors, Punching pressure: 60 kN, Pack contents: In plastic case, Accessories		09 99 000 0901	
Punch units for hydraulic punch drivers, max. plate thickness (structural grade carbon steel): 2.0 mm	3 HPR Han-Eco® 10 A Han-Eco® 16 A Han-Yellock® 10 Han-Yellock® 30 Han-Yellock® 60 Modular Compact	09 99 000 0906 09 99 000 0914 09 99 000 0915 09 99 000 0910 11 99 300 0001 11 99 600 0001 09 99 000 0912	
Han-Eco® B, Punch units for hydraulic punch drivers, max. plate thickness (structural grade carbon steel): 2.0 mm	06 B 10 B 16 B 24 B	09 99 000 0916 09 99 000 0917 09 99 000 0918 09 99 000 0919	
Han A®, Punch units for hydraulic punch drivers, max. plate thickness (structural grade carbon steel): 2.0 mm	03 A 10 A 16 A	09 99 000 0907 09 99 000 0908 09 99 000 0909	
Han® B, Punch units for hydraulic punch drivers, max. plate thickness (structural grade carbon steel): 2.0 mm	06 B 10 B 16 B 24 B	09 99 000 0902 09 99 000 0903 09 99 000 0904 09 99 000 0905	

Identification	Part number	
<p>Torque set, for High Current axial screw contact, incl. reversing blade (A/F 4.0 + A/F 5.0), Tightening torque: 5 ... 14 Nm, Pack contents: High quality metal box, Variable tightening torque tool TorqueVario®-STplus, Setting tool: torque-setter, HARTING optimised interchangeable blades hexagonal A/F 4, HARTING optimised interchangeable blades hexagonal A/F 5</p>	09 99 000 0833	
<p>Torque set, for power contact, incl. reversing blade (A/F 2.0 + A/F 2.5 + PH2), + different bits, + adapter blade, Tightening torque: 1 ... 5 Nm, Pack contents: High quality metal box, Variable tightening torque tool TorqueVario®-S, Setting tool: torque-setter, HARTING optimised interchangeable blades hexagonal A/F 2, HARTING optimised interchangeable blades hexagonal A/F 2.5, HARTING optimised interchangeable blades PH2, Torque bit universal holder, Bits: A/F3, A/F4, PH0, PH1, PH2, T10, T15, T20, slot 0.6 x 4.5, slot 0.8 x 5.5</p>	09 99 000 0834	
<p>Torque set, for HARTING screw contacts and fixing screws, Tightening torque: 0.5 ... 1.2 Nm, Pack contents: High quality metal box, Two pre-set tightening torque screwdrivers TorqueFix®, Interchangeable blades PH1, PH2, slot 0.5 x 3.0</p>	09 99 000 0835	

Identification

Part number

Insertion tool for crimp contacts,
Small cross-section,
Variable length of blade,
Han D[®],
Han E[®],
Han-Yellock[®]

09 99 000 0847



Replacement-tip,
for part number 09 99 000 0847

09 99 000 0848

Assembly tool,
for Han[®] ES insert

09 99 000 0367



Torque set,
for guiding pins and bushes,
Tightening torque: 0.5 Nm,
incl. 1/4" Bit,

09 99 000 0840



Pack contents:
Torque bit universal holder 1/4",
1 HARTING guiding pins and bushes bit,
Product comes already pre-assembled in practical plastic packaging

Torque tool,
Han[®] 3 A,
Han[®] 4 A,
Han[®] Q 5/0,
Staf[®]

09 99 000 0875



Bit 1/4" as a spare part for guiding pins and bushes

09 99 000 0841



Hexagonal driver for axial screw,
With grip,
A/F 4 (e. g. Han[®] 100 A Axial module)

09 99 000 0363



Hexagonal driver for axial screw,
With grip,
A/F 5 (e. g. Han[®] 200 A Axial module)

09 99 000 0364



Hexagonal driver for axial screw,
Bit 1/4",
40 A contact (A/F 2)

09 99 000 0369



Identification	Part number	
Hexagonal driver for axial screw, Adapter 3/8", A/F 4 (e. g. Han® 100 A Axial module)	09 99 000 0370	
Hexagonal driver for axial screw, Adapter 3/8", A/F 5 (e. g. Han® 200 A Axial module)	09 99 000 0371	
Hexagonal driver for axial screw, Adapter 3/8", A/F 8 (e. g. Han® HC Modular 650)	09 99 000 0372	
Hexagonal driver for axial screw, Bit 1/4", 70 A contact (A/F 2.5)	09 99 000 0375	
Han® VDE Screw Driver Set, The standard set, Pack contents: Slim bit screw driver 0.4 x 2.5, Slim bit screw driver 0.5 x 3.0, Slim bit screw driver 0.6 x 3.5, Slim bit screw driver 1.0 x 4.5, Phillips screw driver PH1 (191 x 30 mm), Phillips screw driver PH2 (218 x 23 mm)	09 99 000 0836	
Screw driver set Slimline, Insolated blade for slim assembly, Pack contents: Slim bit screw driver 0.6 x 3.5, Slim bit screw driver 0.8 x 4.5, Phillips screw driver PH1 (191 x 30 mm), Phillips screw driver PH2 (218 x 36 mm)	09 99 000 0844	

Technical characteristics

RoHS compliant

Identification	Part number	Drawing (dimensions in mm)
Polishing paper, for POF grain size 1000, Pack contents: Each part number means 5 pieces	20 80 001 9911	
Polishing paper, for GI 9 μ-grain size, Pack contents: Each part number means 5 pieces	20 80 001 9912	
Polishing paper, for GI 1 μ-grain size, Pack contents: Each part number means 5 pieces	20 80 001 9913	
Polishing tool, DIN 41612	20 99 000 1092	
Polishing tool, POF cable 2.2 mm diameter	20 99 000 1093	
Polishing tool, SC	20 99 000 1097	

Identification	Conductor cross-section (mm ²)	Part number	
Removal tool, Han D®	1.5 ... 6 10	09 99 000 0012	
Replacement-tip, for part number 09 99 000 0012		09 99 000 0004	
Removal tool, Han E®		09 99 000 0319	
Removal tool, Han® C		09 99 000 0305 09 99 000 0381	
Removal tool, Han® C module, 09 14 003 3001 / 09 14 003 3101		09 99 000 0315	
Insertion / removal tools, Han-Modular®, for D-Sub crimp contact		09 99 000 0368	
Removal tool, Han-Quintax®, for Quintax contact		09 99 000 0323	
Removal tool, for contacts in the multi module		09 99 000 0328	
Removal tool, Han D®, Service		09 99 000 0052	
Removal tool, Han-Fast® Lock, for easier removal of the Fast-Lock contact from the printed circuit board		09 99 000 0837	

Tools

Identification	Conductor cross-section (mm ²)	Part number	
Removal tool, for LC contact in the Han® LC module		09 99 000 0843	
Removal tool, for pneumatic contacts		09 99 000 0899	
Removal tool, Han-Modular®, Han-Eco®, Han-Yellock®, for single modules, Metal		09 99 000 0828	
Removal tool, Han-Modular®, for double modules		09 99 000 0842	
Removal tool, for all Han-Modular® modules in plastic frames You need 2 pieces for the removal of a single module and 4 pieces for the double module.		09 99 000 0331	
Removal tool, Han-Modular®		09 99 000 0335	
Removal tool, for the Han® 100 A crimp module		09 99 000 0383	
Removal tool, for the Han® 200 A crimp module Insert from mating side.		09 99 000 0820	
Removal tool, for the Han® 100 A single module, for Han® GND		09 99 000 0827	
Removal tool, Han® Megabit module		09 99 000 0880	

Identification	Conductor cross-section (mm ²)	Part number	
Removal tool, for locking sleeves in the HV module,		09 99 000 0327	
Removal tool, for Han- <i>Yellock</i> [®] modules and frames, Thermoplastic		11 99 000 0001	
Removal tool, for Han- <i>Yellock</i> [®] modules and frames, Metal		11 99 000 0002	
Removal tool, for Han [®] HC Modular 250 Crimp, for unlocking the fixing plate Insert from mating side.		09 99 000 0332	
Removal tool, Han [®] EasyCon, for assembly and disassembly of shielding clamps		09 99 000 0334	

Technical characteristics

RoHS compliant

Identification	Conductor cross-section (mm ²)		Part number	
Stripping tool, Self-adjusting	0.03 ... 10		09 99 000 0808	
Stripping tool	0.08 ... 10		09 99 000 0159	
Fibre stripper		0.18/0.3 mm 0.3 mm 1 mm	20 99 000 1046 20 99 000 1041 20 99 000 1045	

Altanium Temperature Controllers and Ultra Hot Runners provide superior melt delivery for the Plastics Industry.

Husky Hot Runner Systems with HARTING Han® 24 E connectors providing power and signal – quality connections resulting in highest reliability and minimum down time in molding systems.

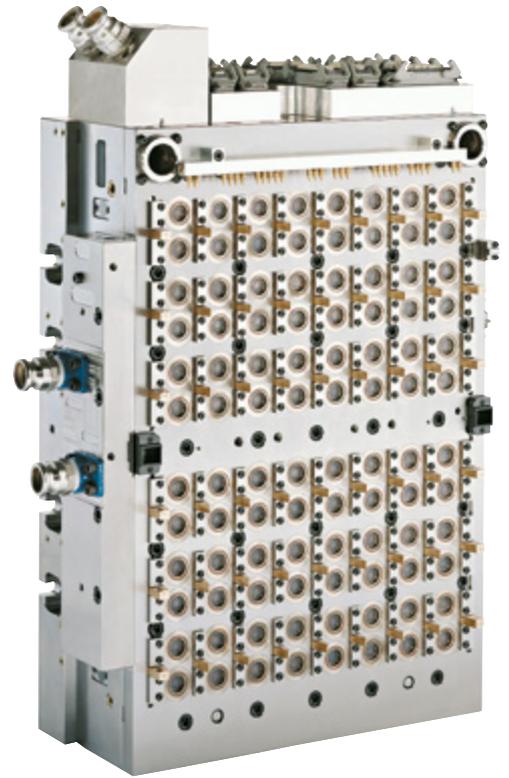


Photo courtesy:
Husky Injection Molding
Systems, Bolton, Ontario,
Canada



Pushing Performance

HARTING.com –
the gateway to your
country website.
